


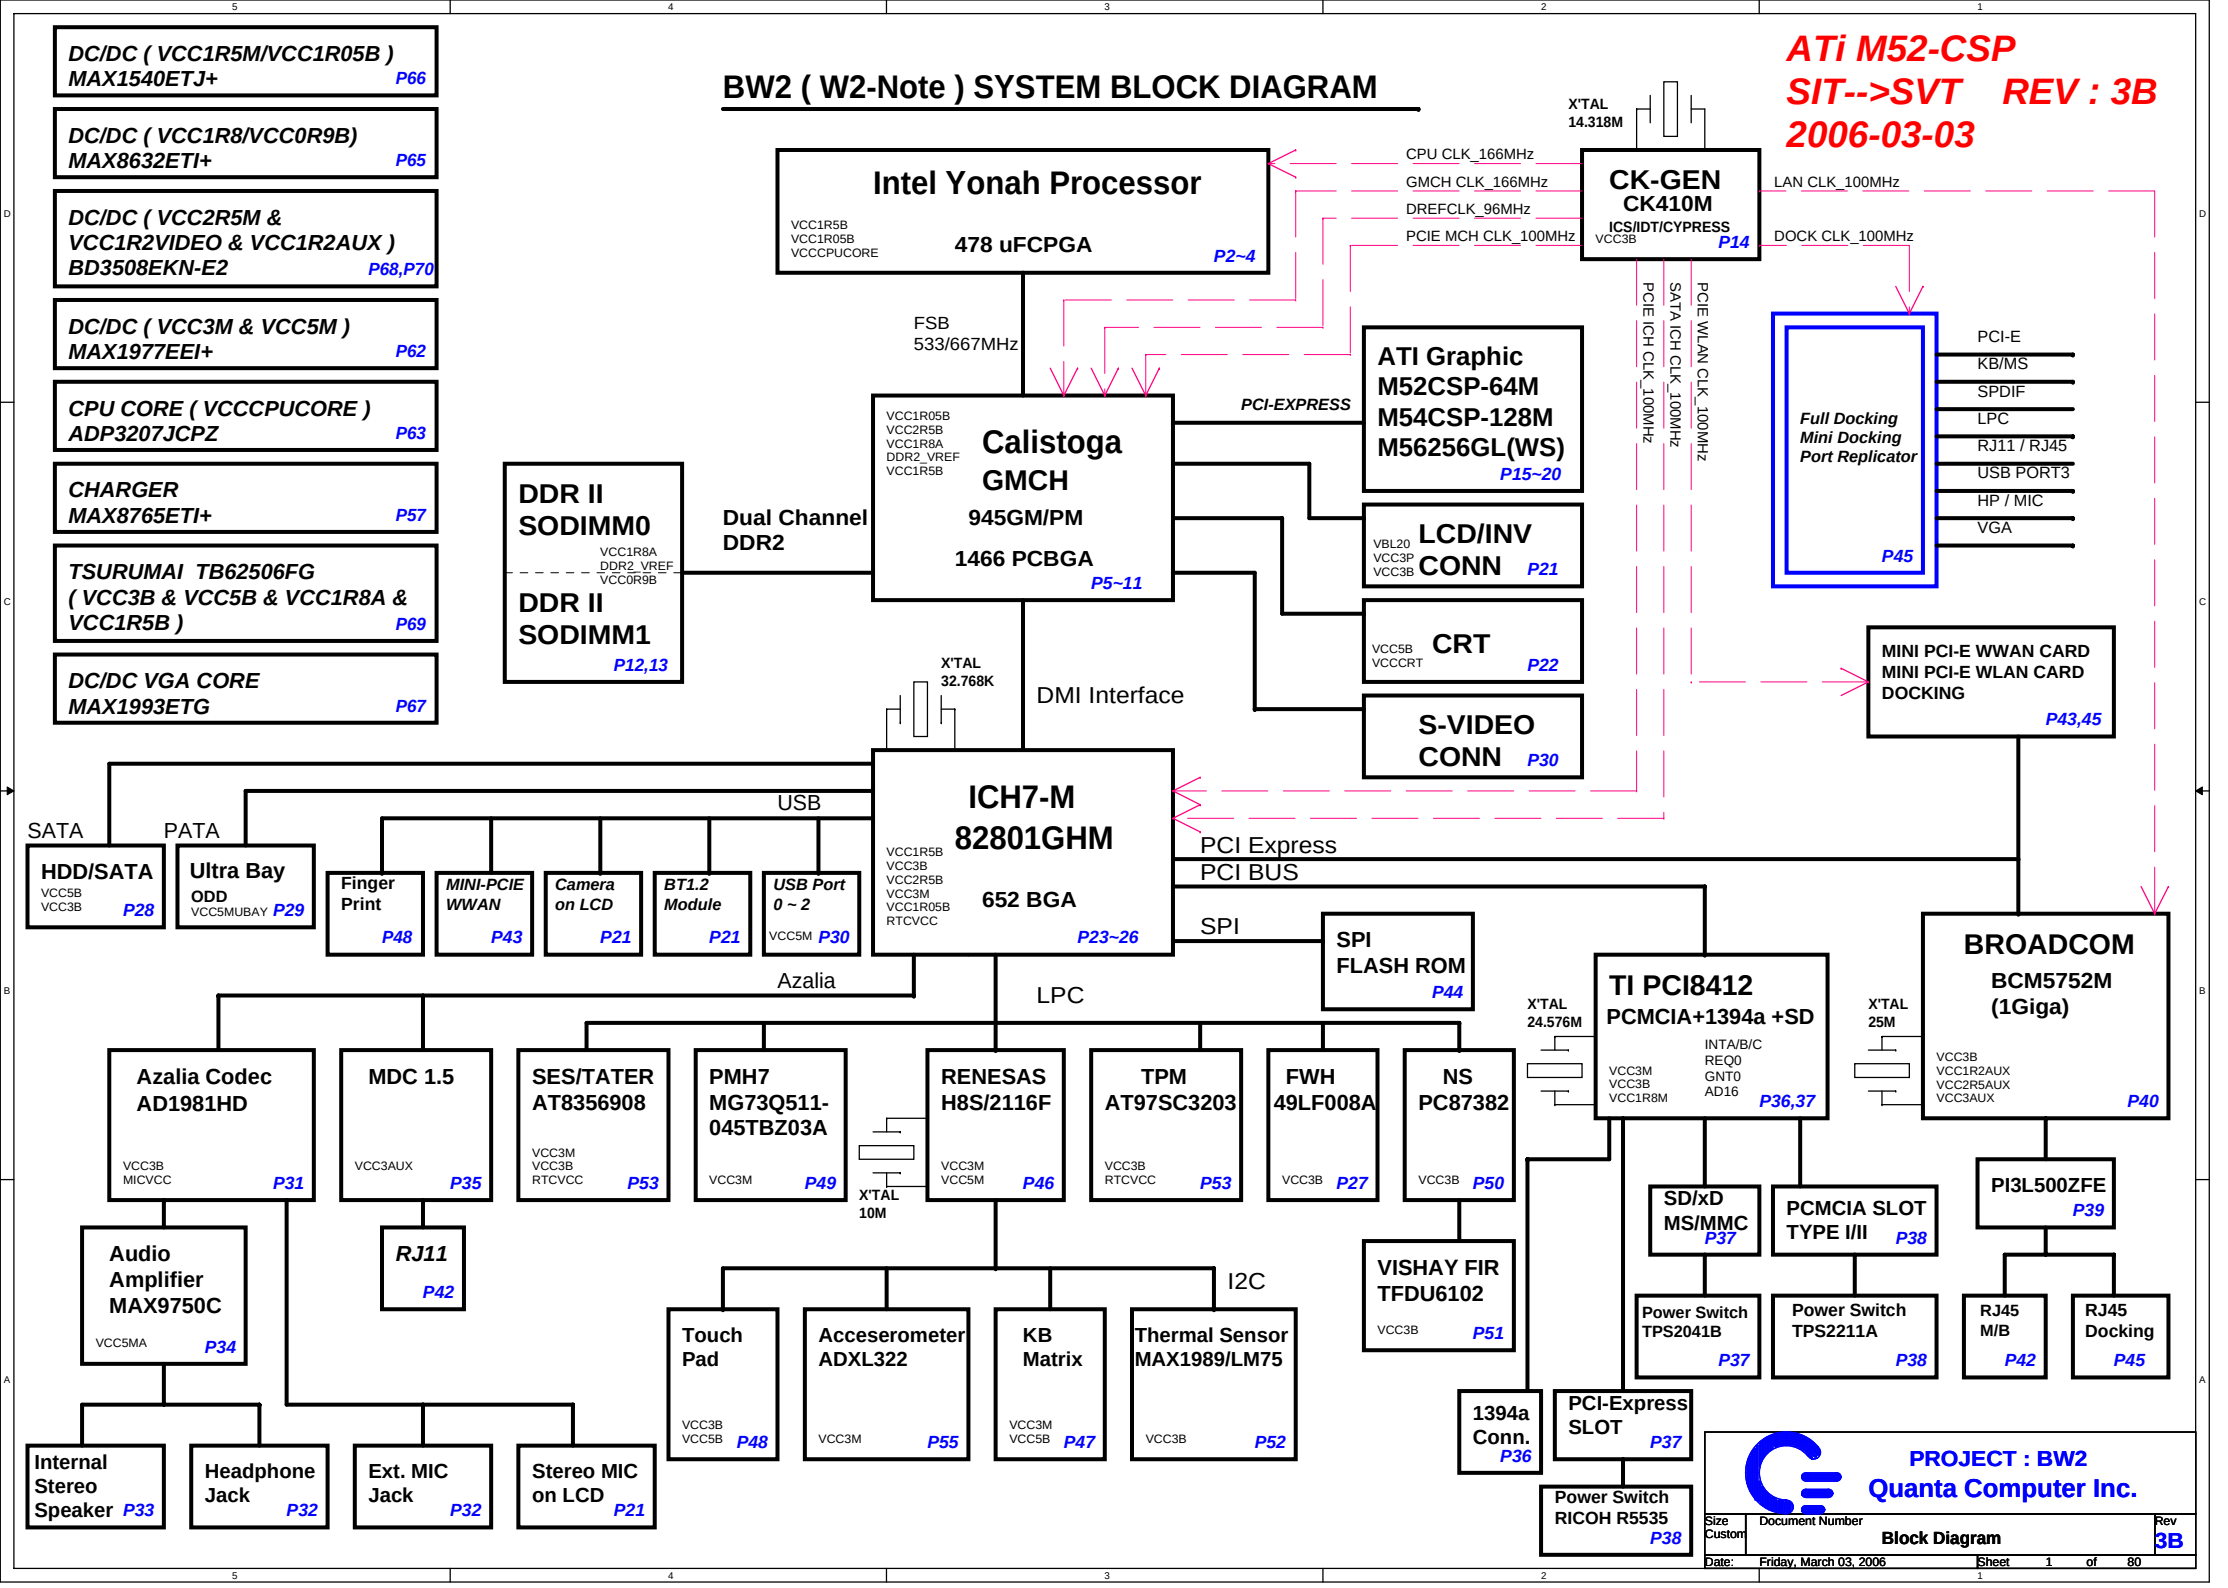


BW2 (W2-Note) SYSTEM BLOCK DIAGRAM

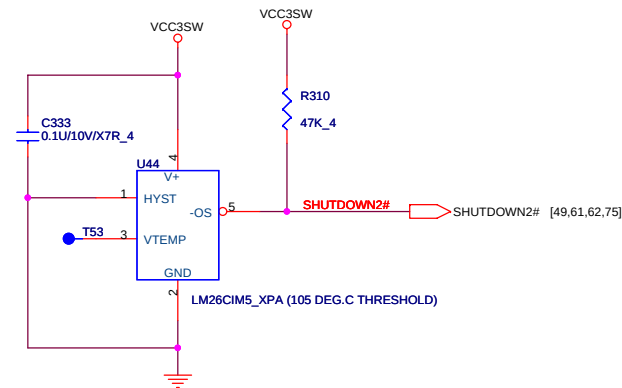

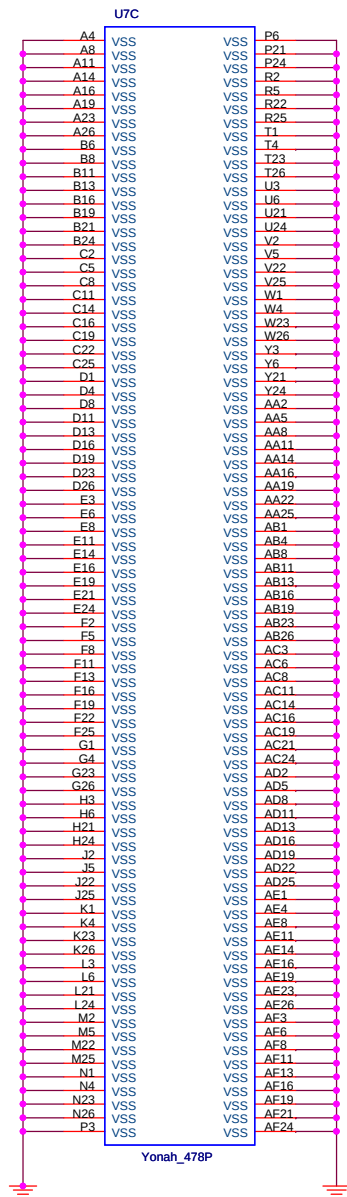

ITP CONNECTOR

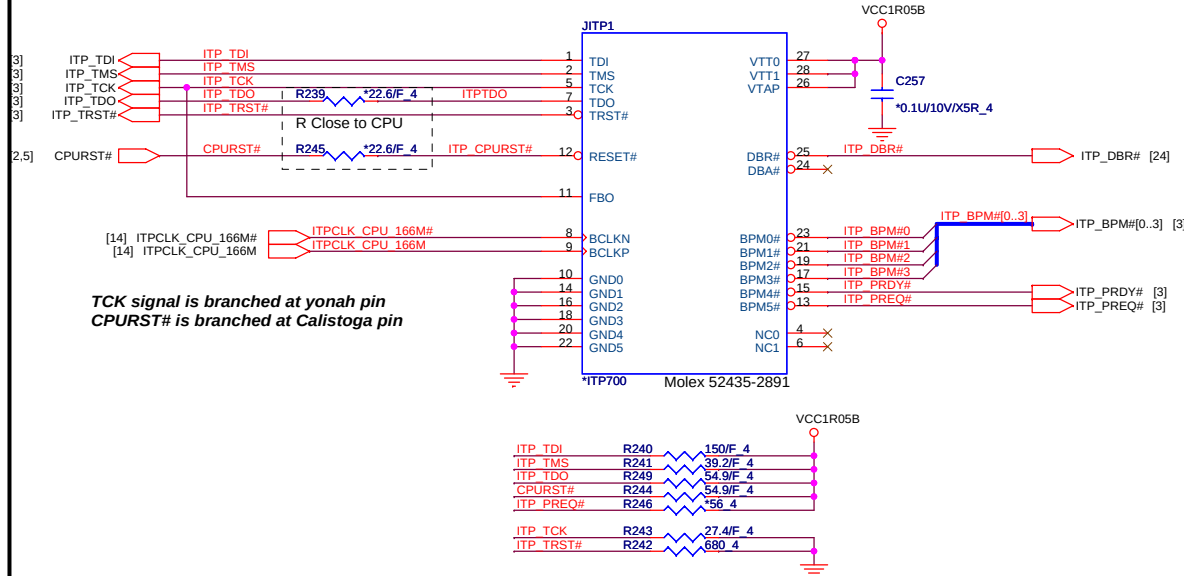



PAD3
*TESTPAD


SHUTDOWN2#
test pad for SHUTDOWN#
on bottom side



PROJECT : BW2
Quanta Computer Inc.

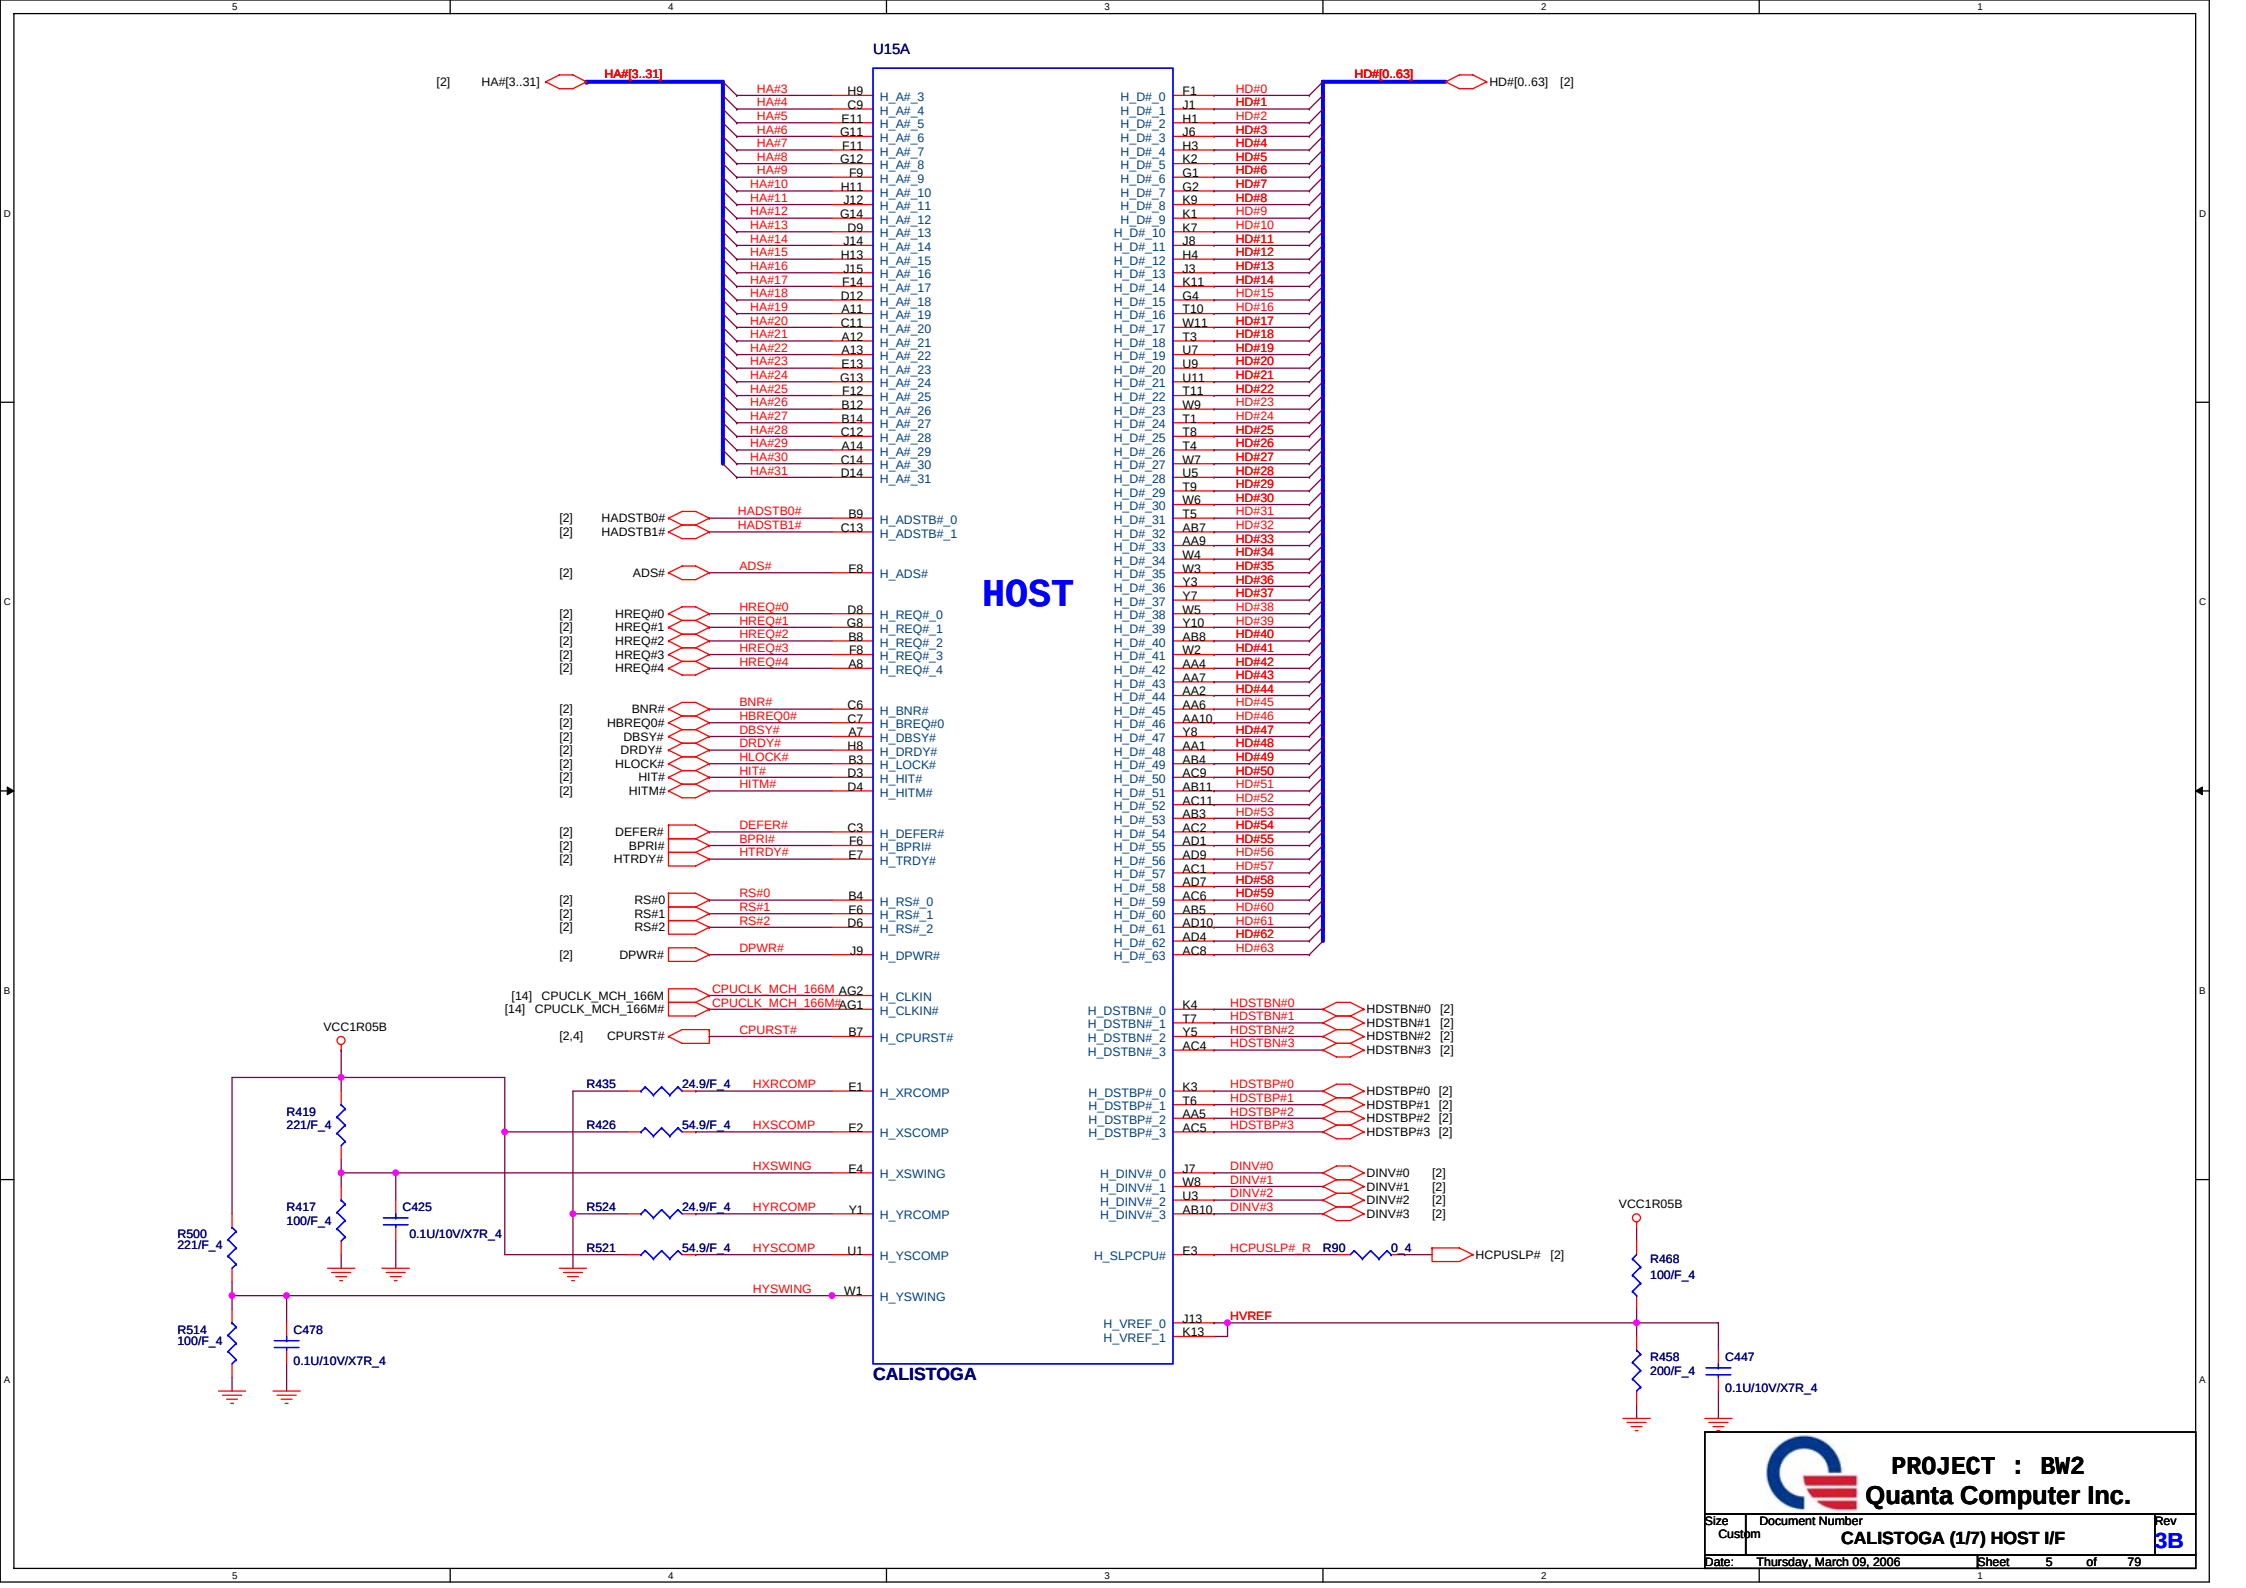


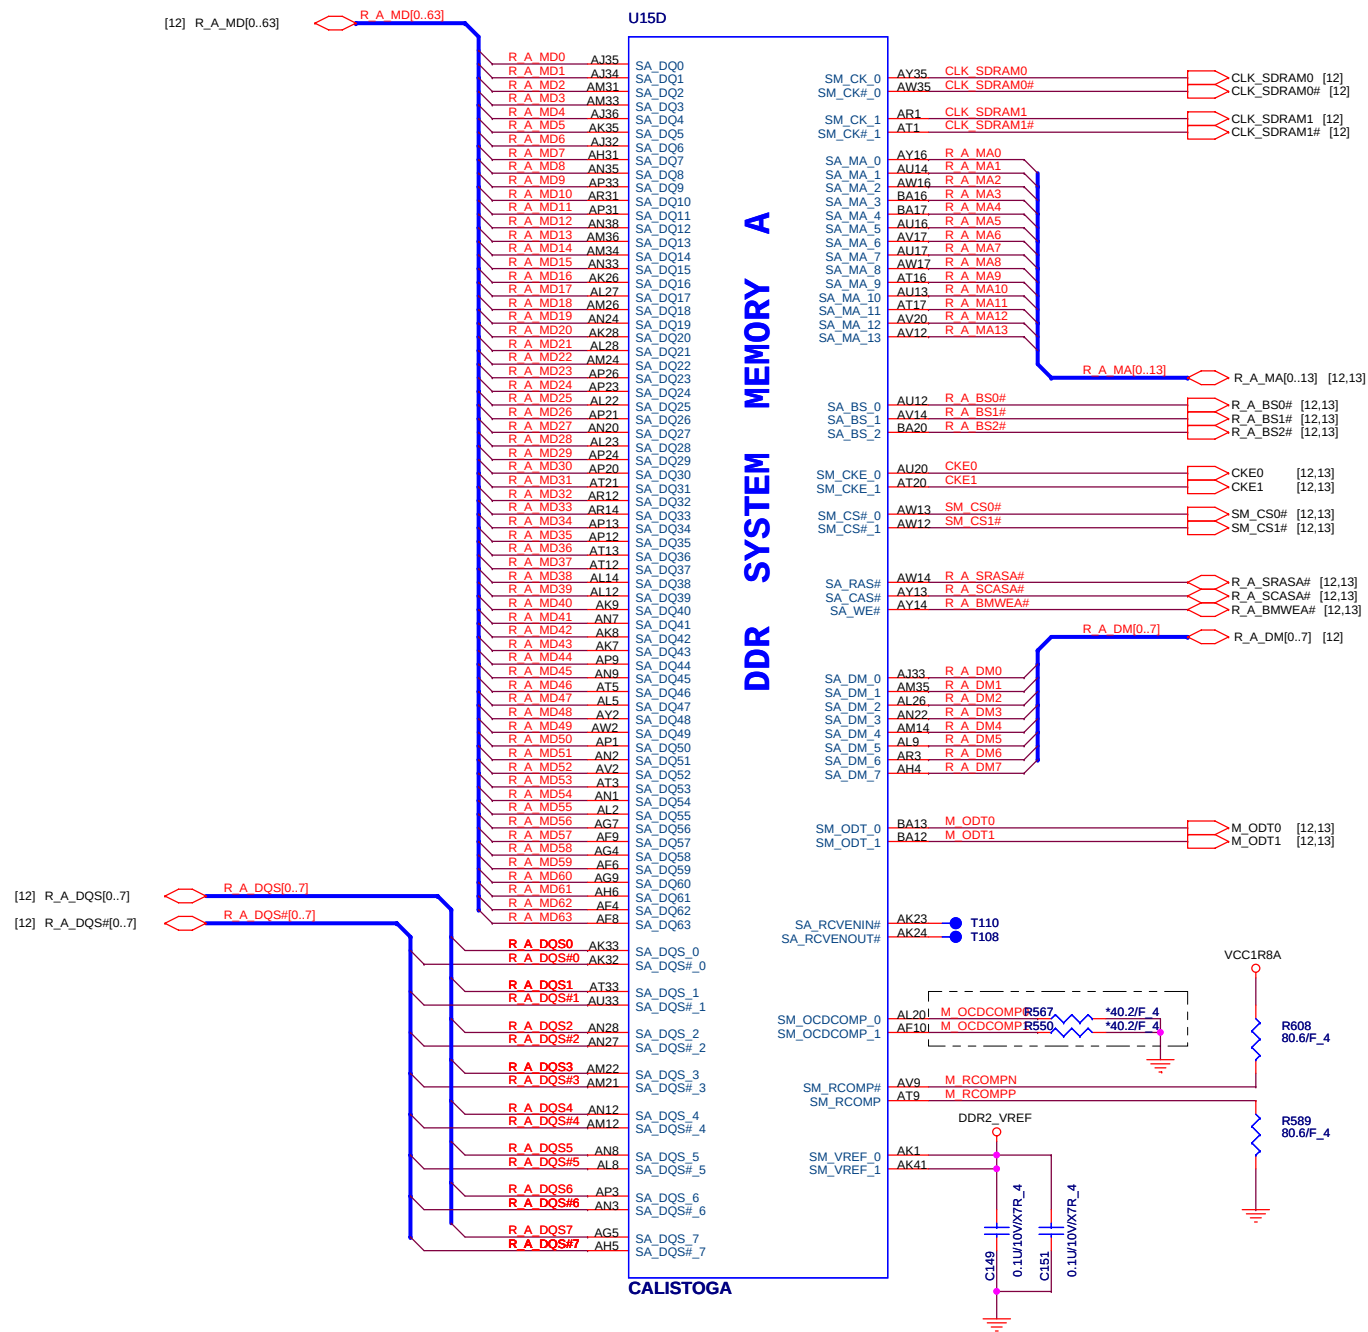

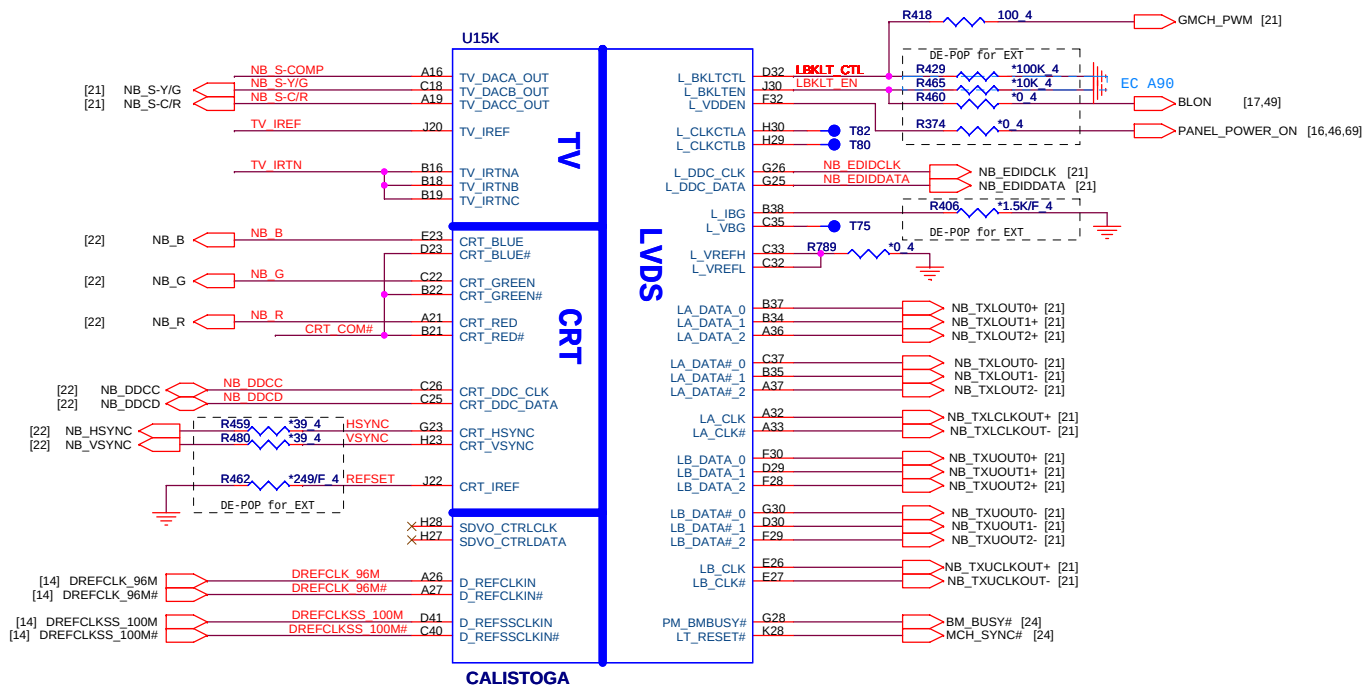


For Entry Model

	945GM	945PM/955XM
R480	39 ohm	DE-POP
R459	39 ohm	DE-POP
R462	249/F ohm	DE-POP
R429	100K ohm	DE-POP
R460	0 ohm	DE-POP
R465	10K ohm	DE-POP
R374	0 ohm	DE-POP
R406	1.5K/F ohm	DE-POP
R436	10K ohm	DE-POP
R440	10K ohm	DE-POP
R366	DE-POP	0 ohm
R368	DE-POP	0 ohm
R367	DE-POP	0 ohm
R365	DE-POP	0 ohm
R392	150/F ohm	DE-POP
R413	150/F ohm	DE-POP
R431	150/F ohm	DE-POP
R408	0 ohm	DE-POP
R461	DE-POP	0 ohm
R467	DE-POP	0 ohm
R449	DE-POP	0 ohm
R81	75/F ohm	DE-POP
R412	150/F ohm	DE-POP
R402	150/F ohm	DE-POP
R456	4.99K/F ohm	DE-POP
R410	0 ohm	DE-POP
R404	DE-POP	0 ohm
R479	DE-POP	0 ohm
R369	DE-POP	0 ohm
R379	DE-POP	0 ohm
R80	DE-POP	0 ohm

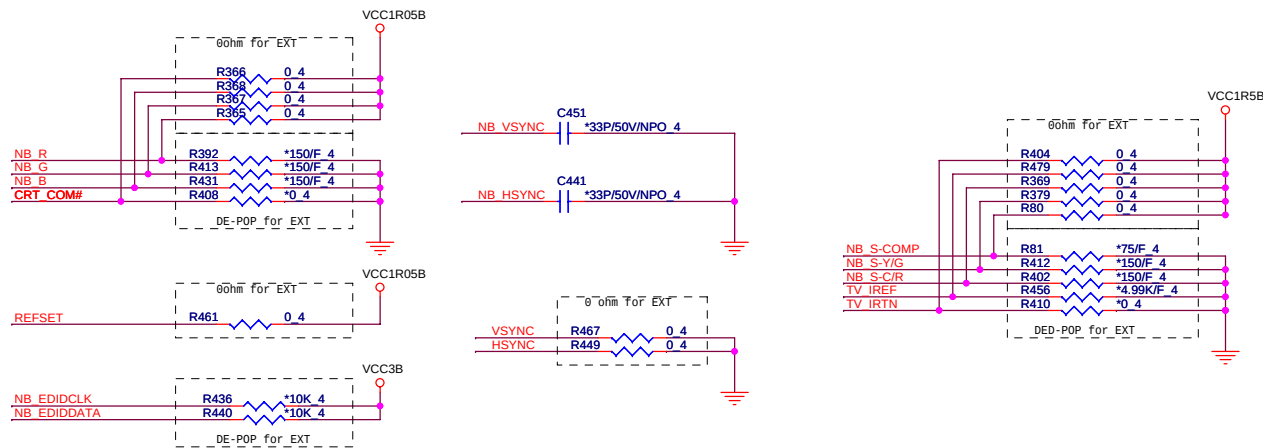


PROJECT : BW2
Quanta Computer Inc.

NOTE : CAPS USED IN VCCA
CRTDAC0/1 SHOULD BE PLACE
WITHIN 250 MILS EDGE OF
GMCH




EC A01



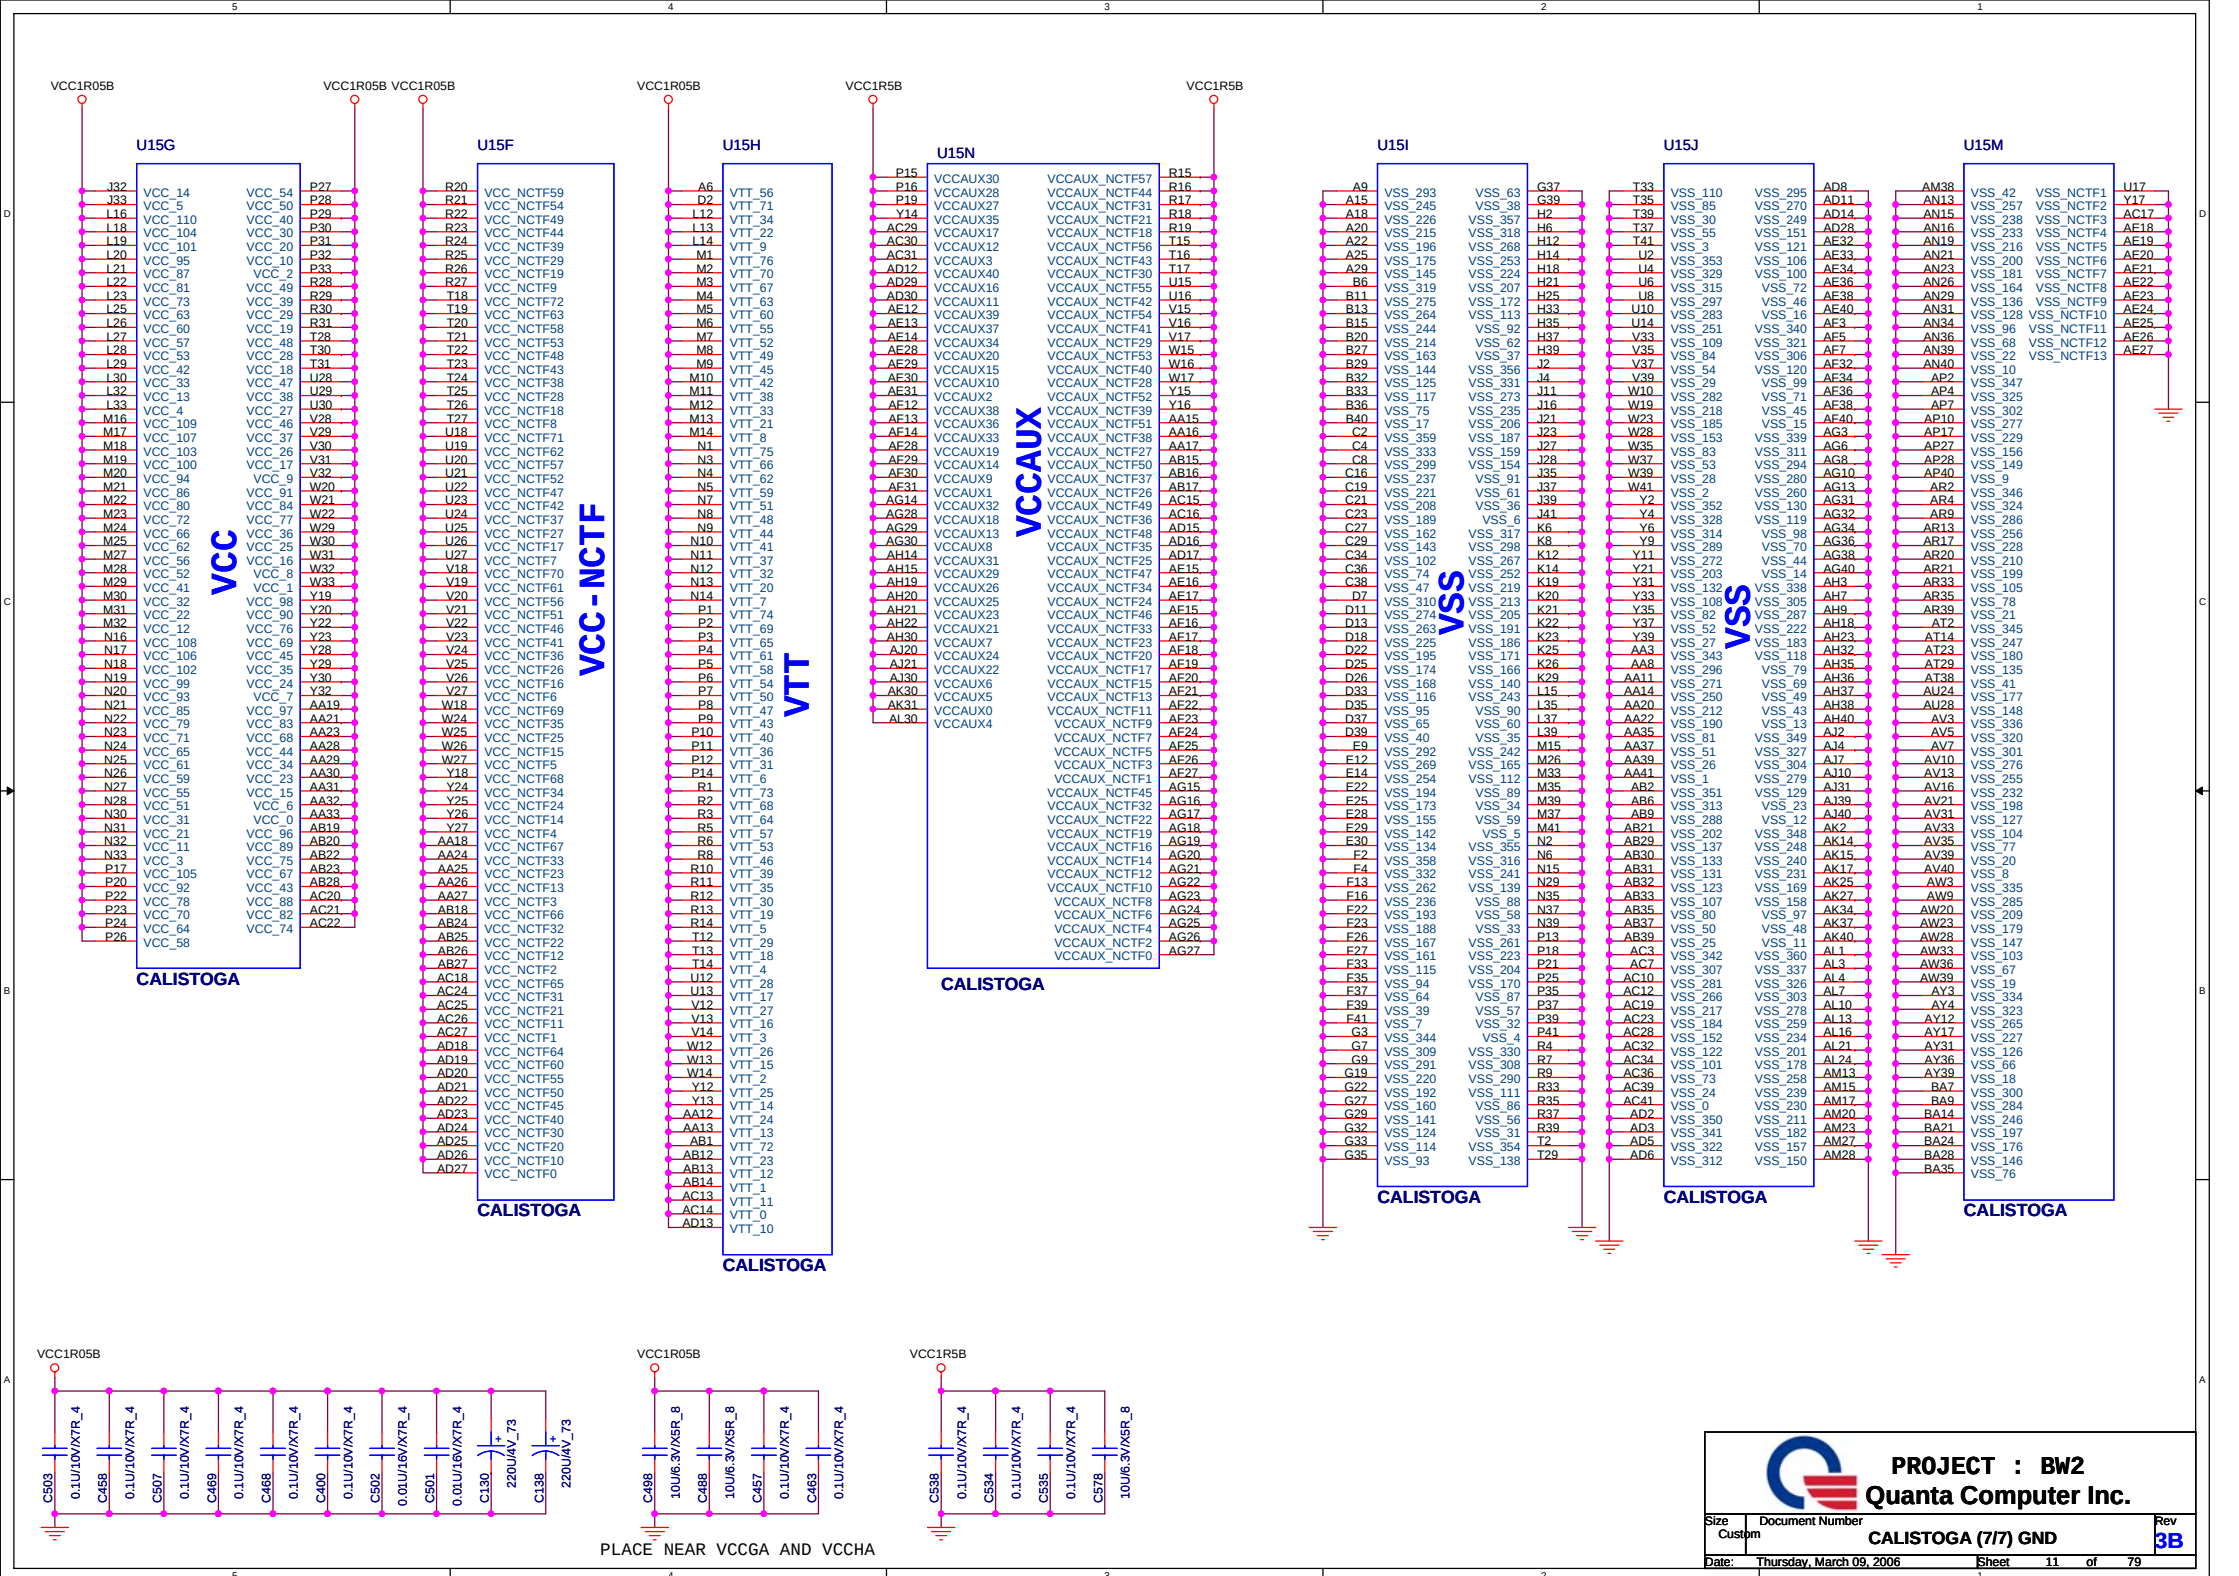


DDRII DUAL CHANNEL A, B.




DDRII A CHANNEL

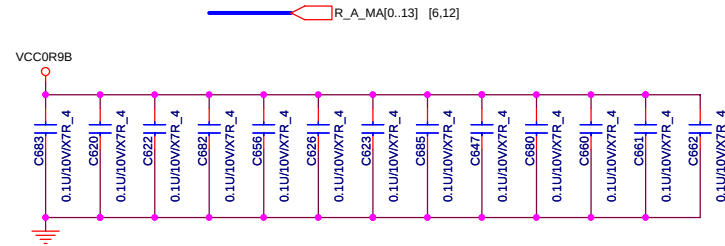



DDRII B CHANNEL

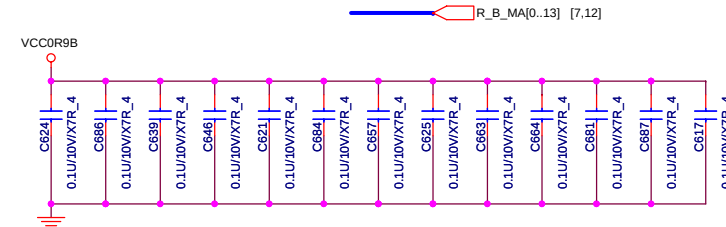


Layout note: Place one cap close to every 2 pullup resistors terminated to SMDDR_VTERM

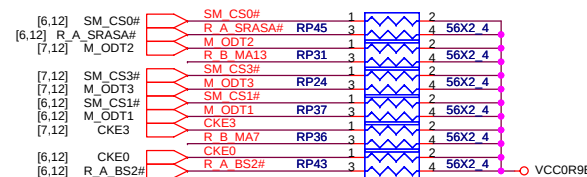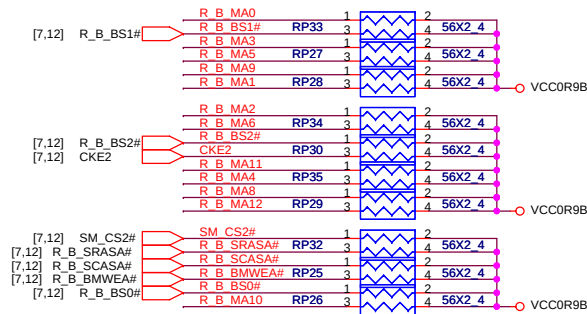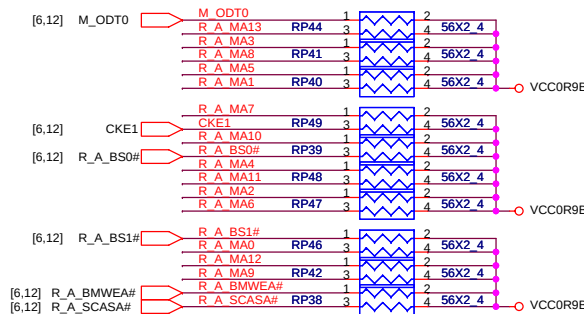

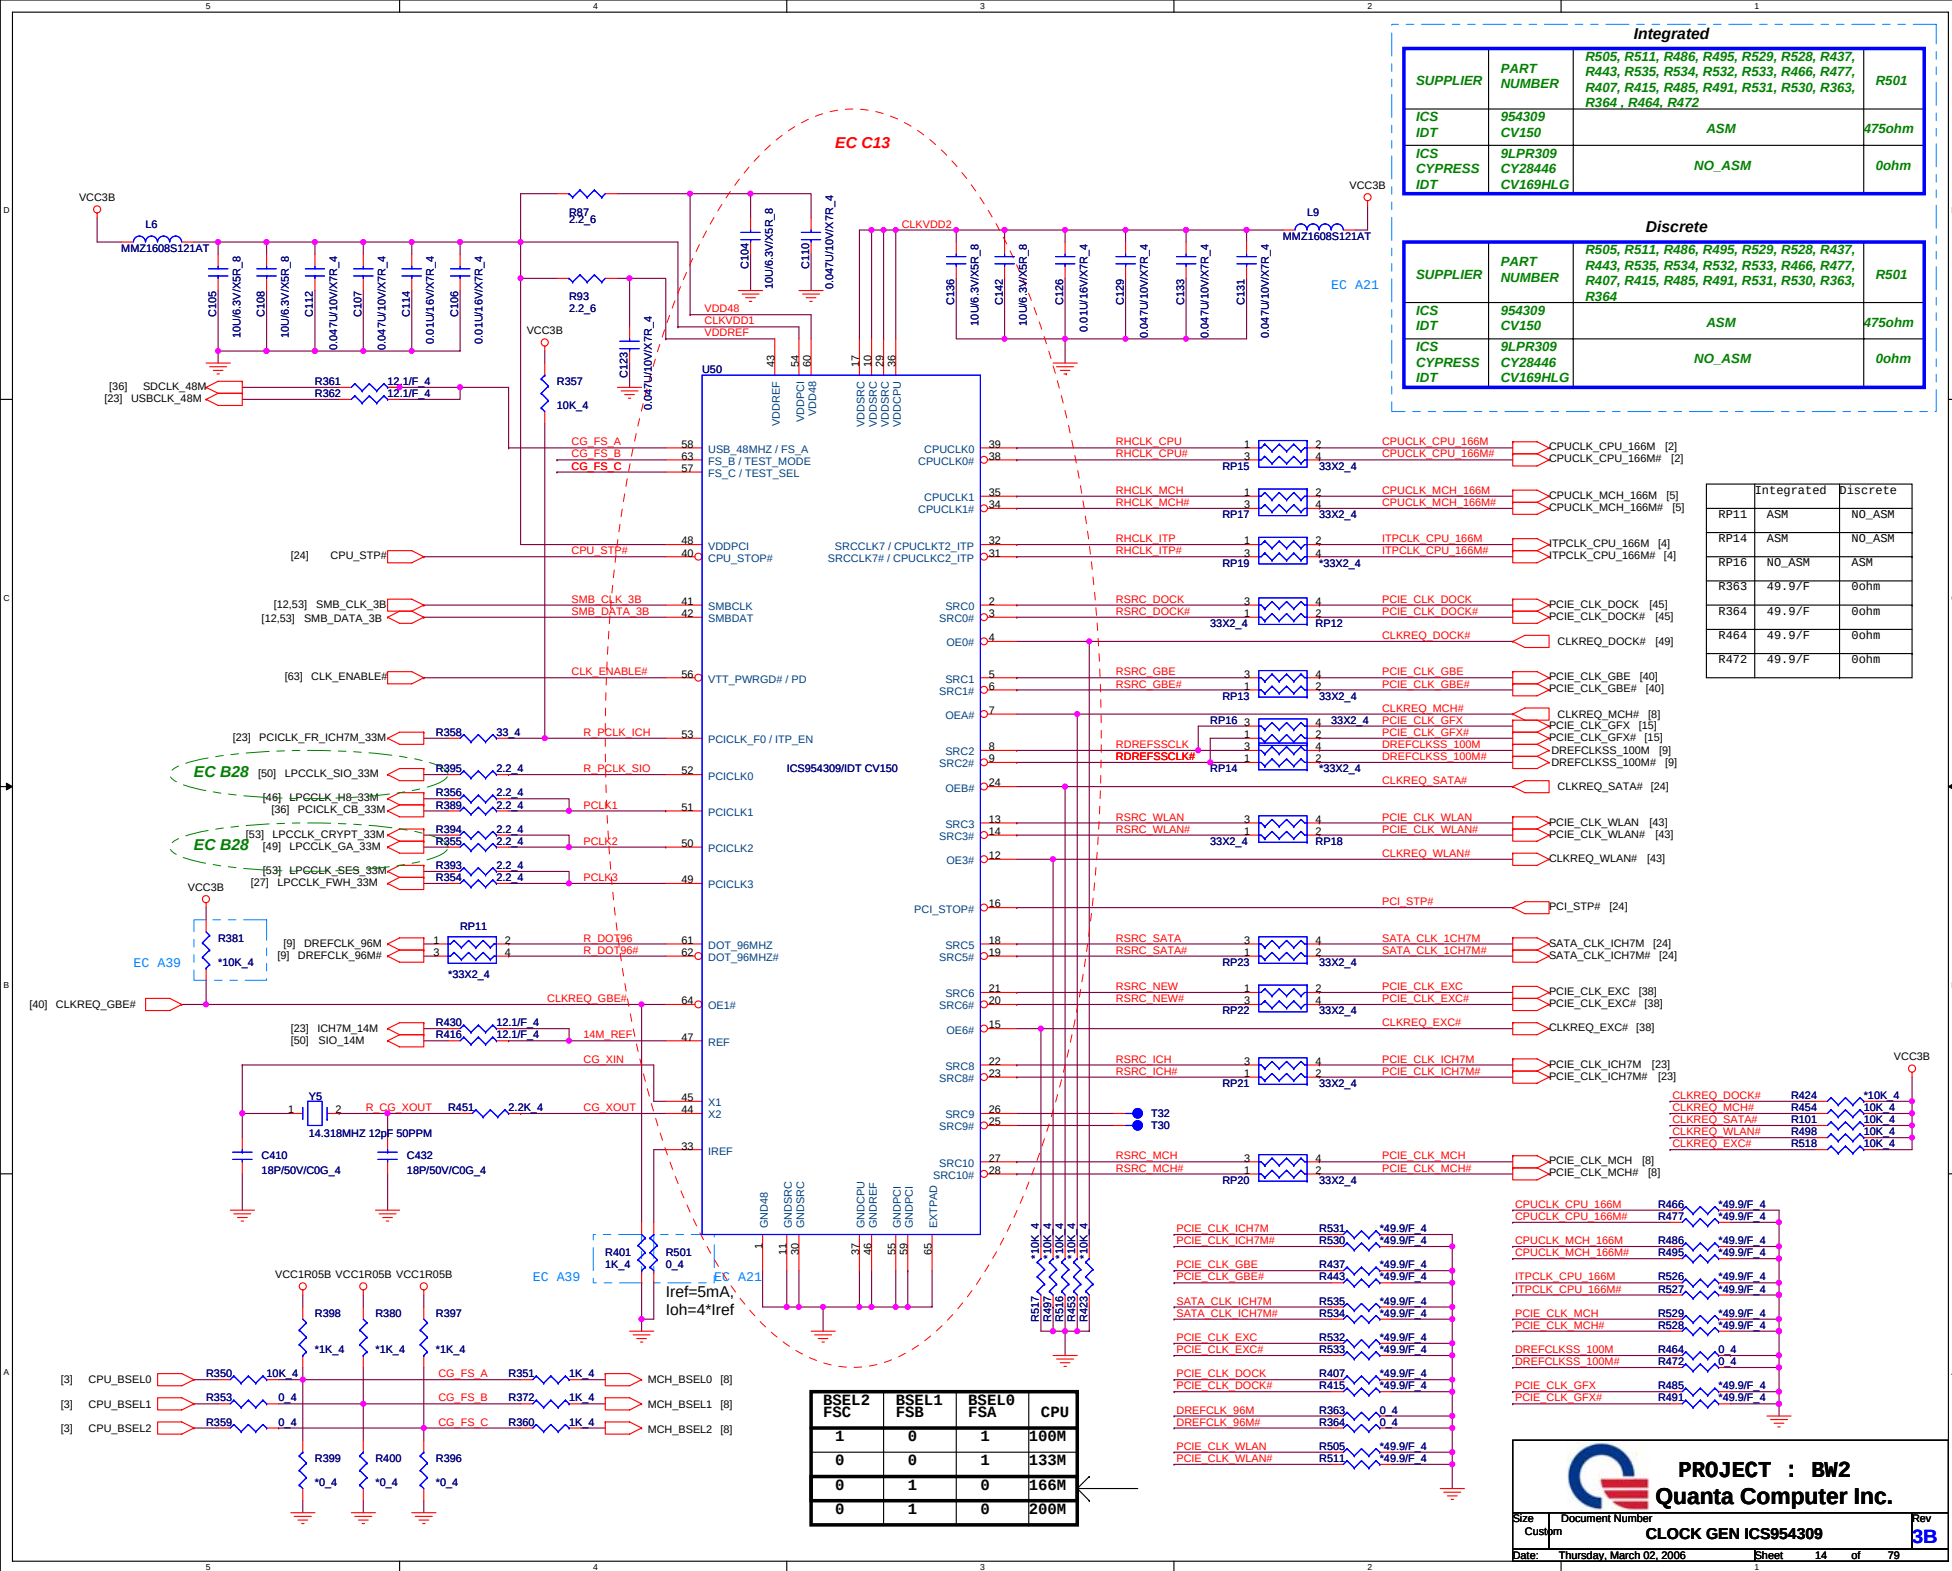




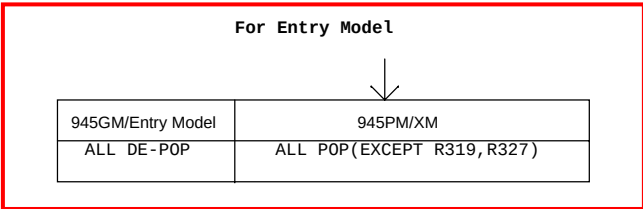


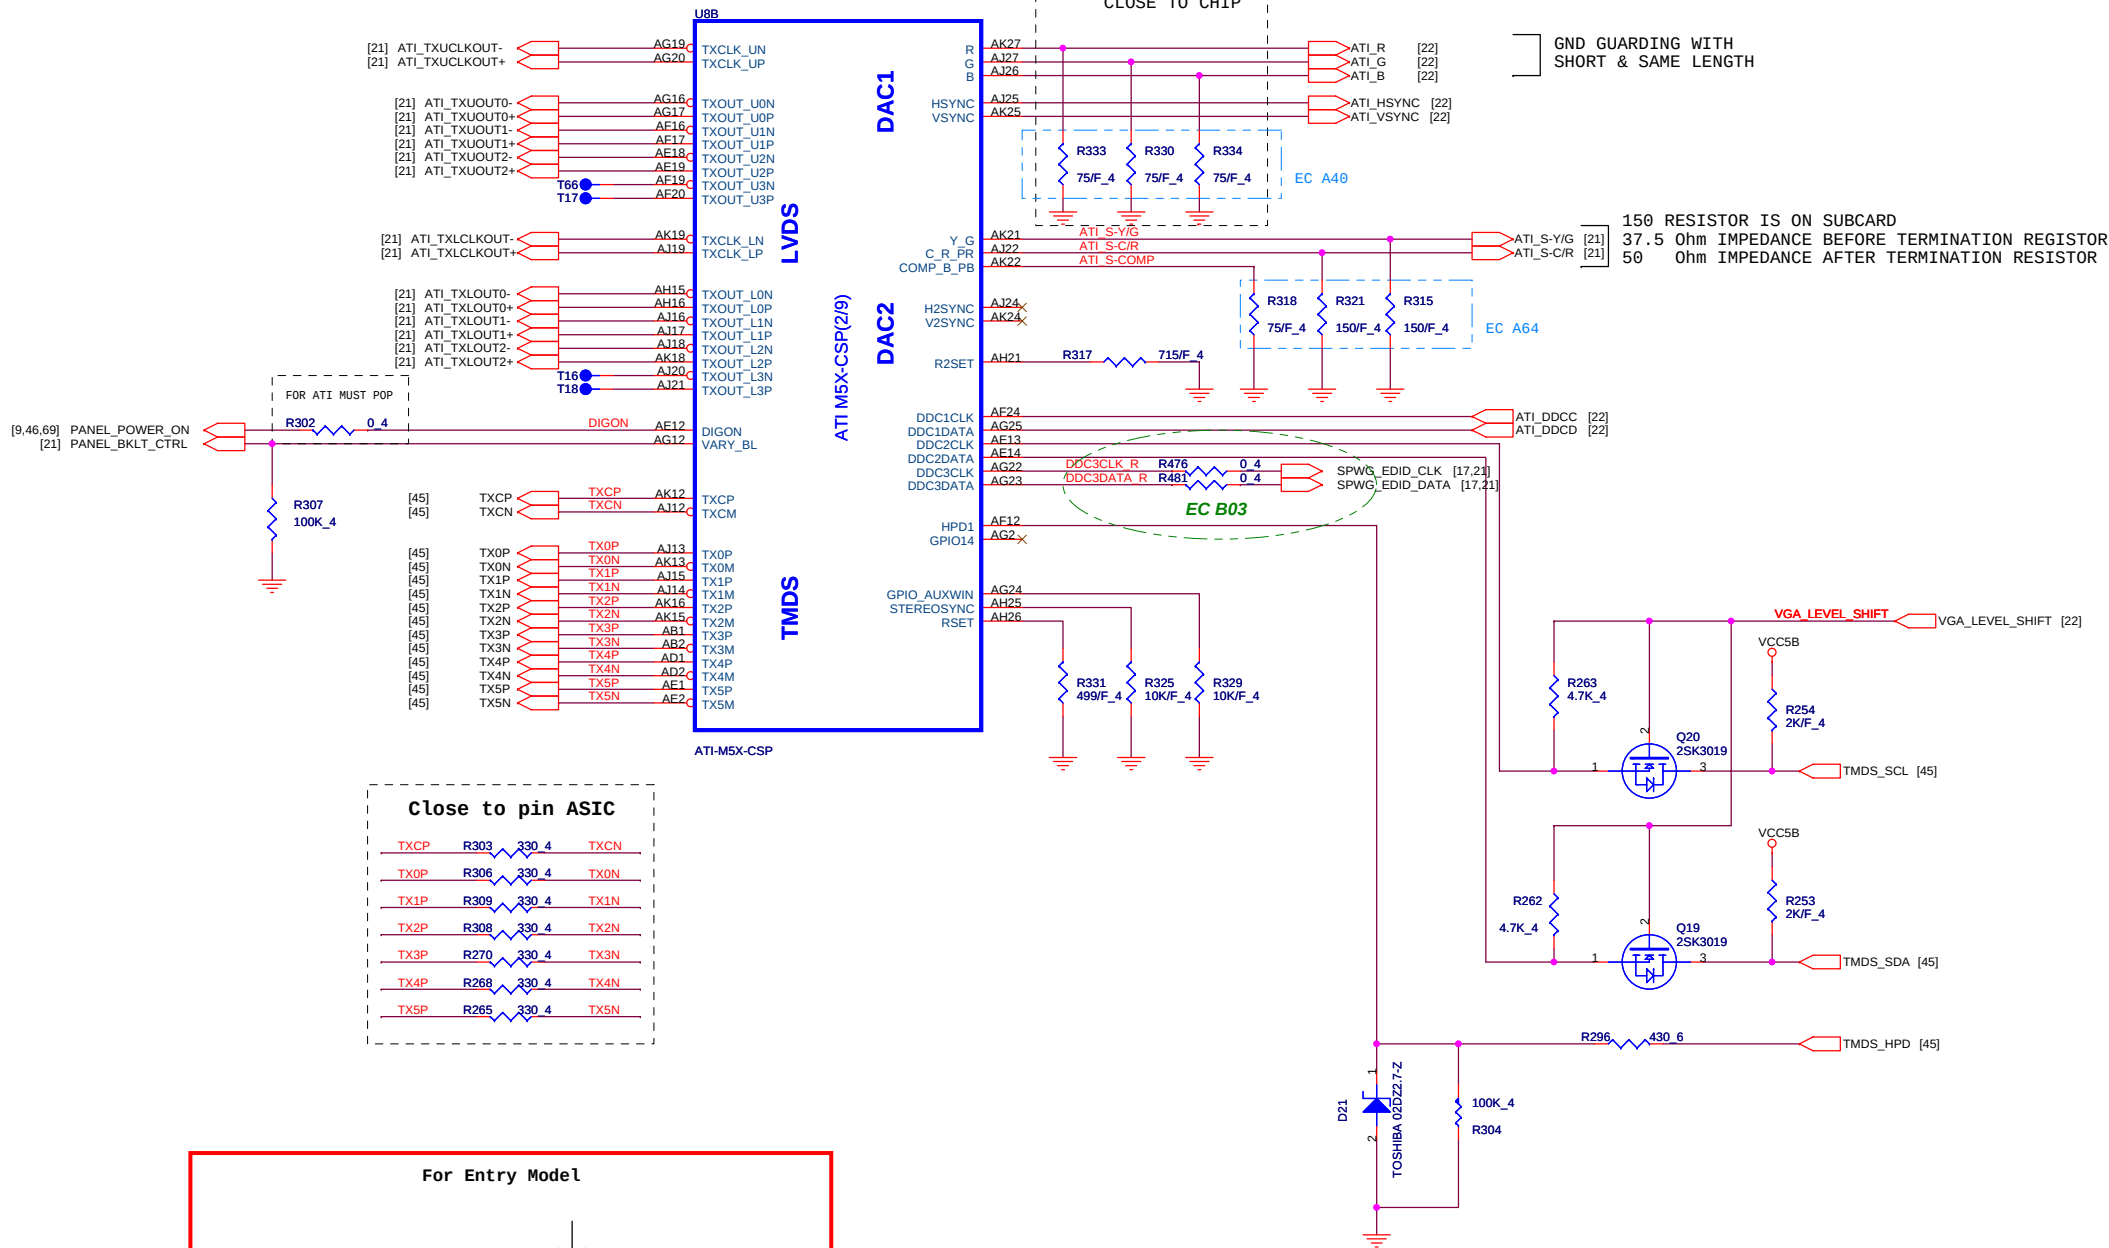


945GM/Entry Model	945PM/XM
ALL DE-POP	ALL POP (Except C347,C350,Y3,R341,R577,R739, R259,R274,R282,R280,R276,R269, R264,R273,R257,R482,R490)




EC B33

	SS DISABLE	SS ENABLE
Y7	DE-POP	POP
R577	DE-POP	DE-POP
R553	DE-POP	POP
R739	DE-POP	DE-POP
R757	DE-POP	POP
C588	DE-POP	POP
C632	DE-POP	POP
Y3	POP	DE-POP
R341	POP	DE-POP
C347	POP	DE-POP
C350	POP	DE-POP

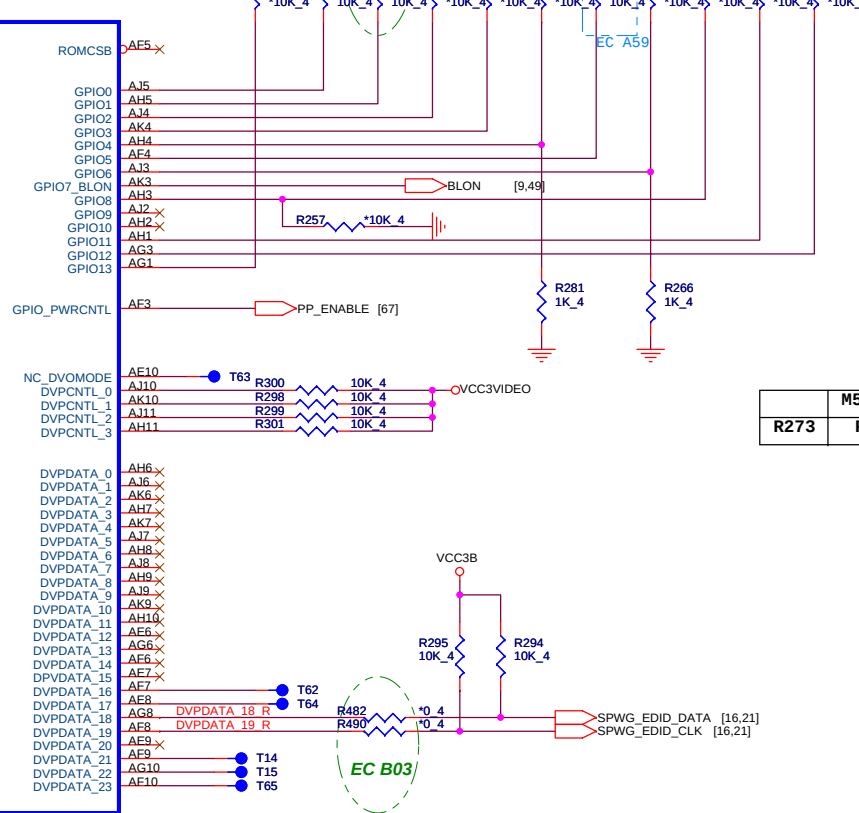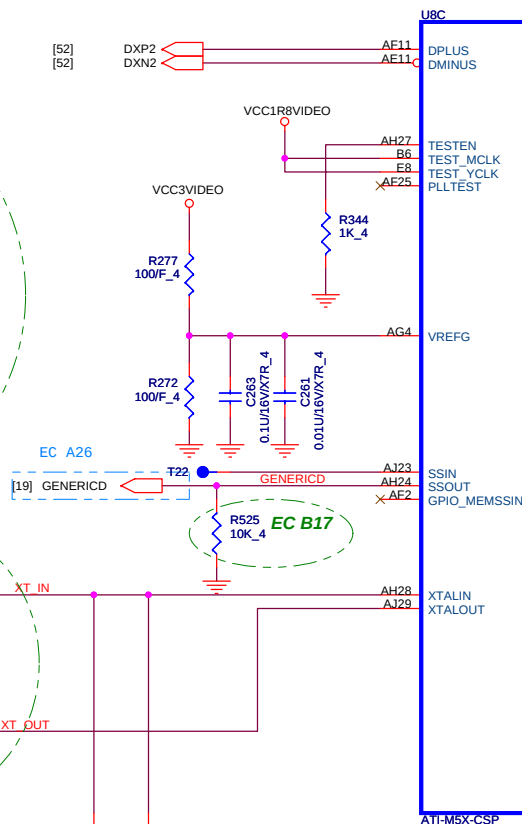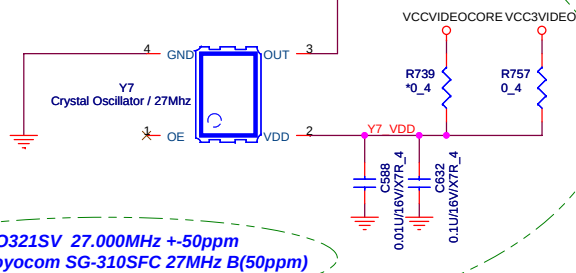

	M56 - CSP	M52/M54
R273	POP	DE-POP

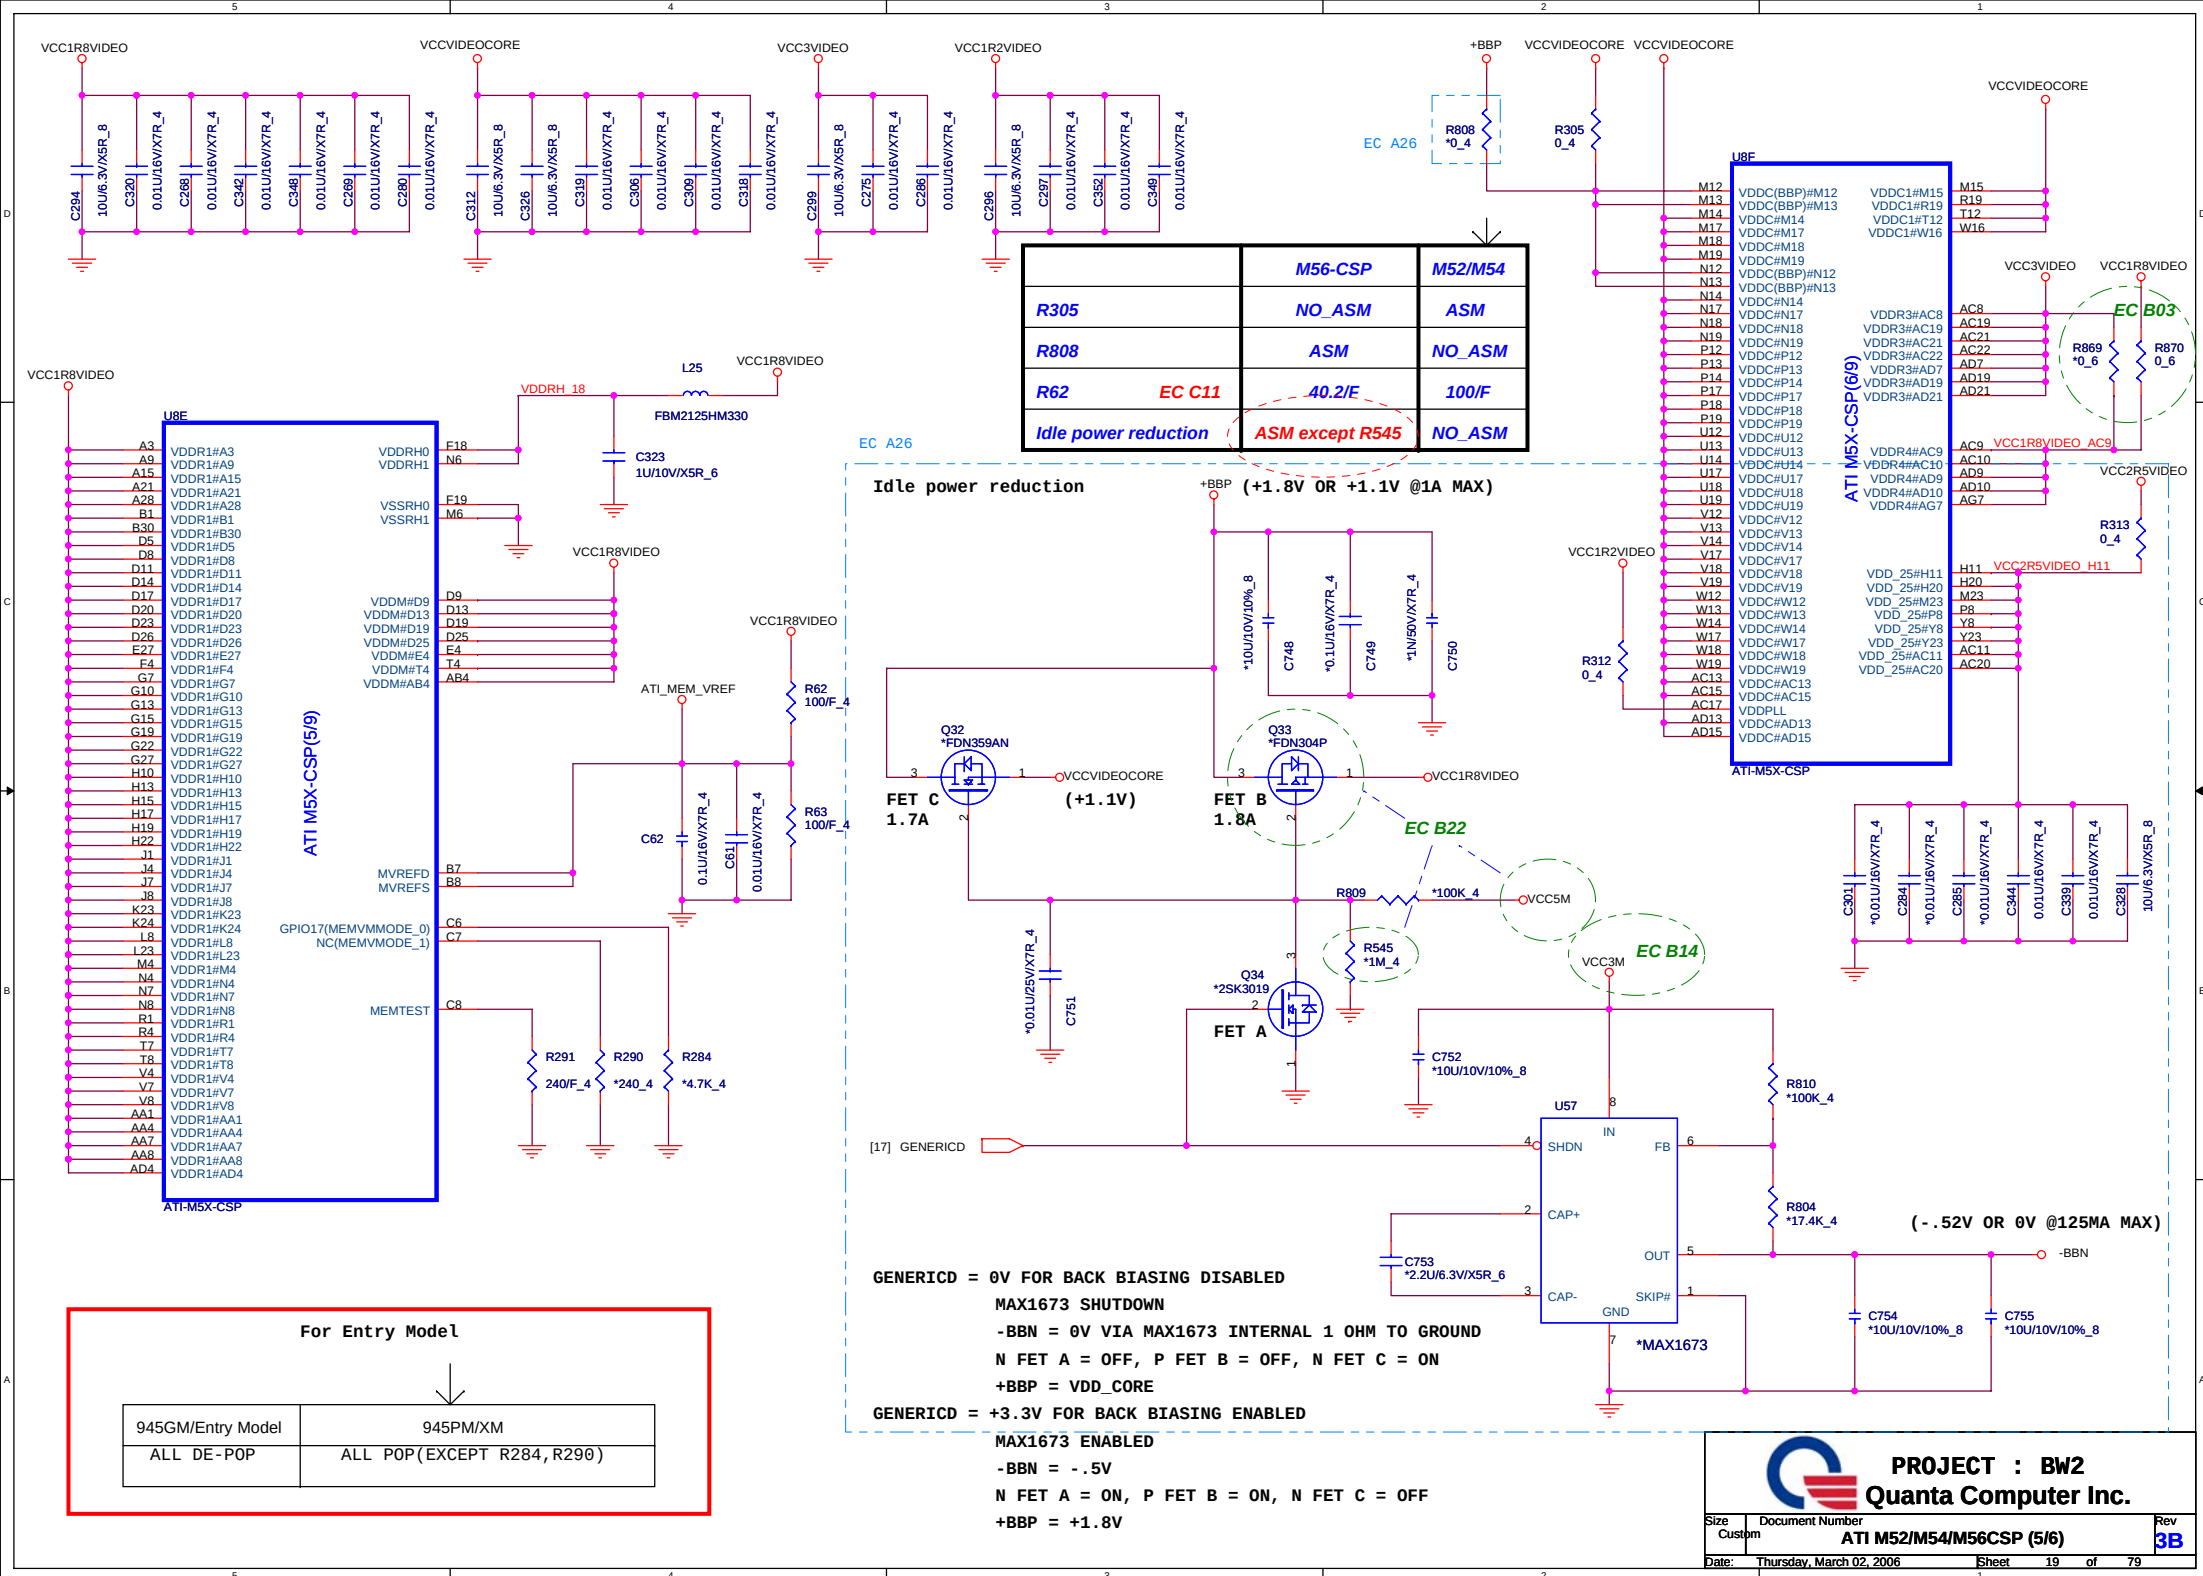

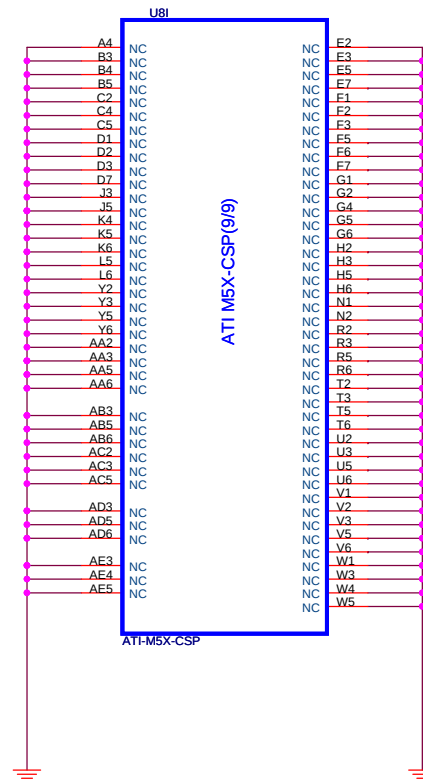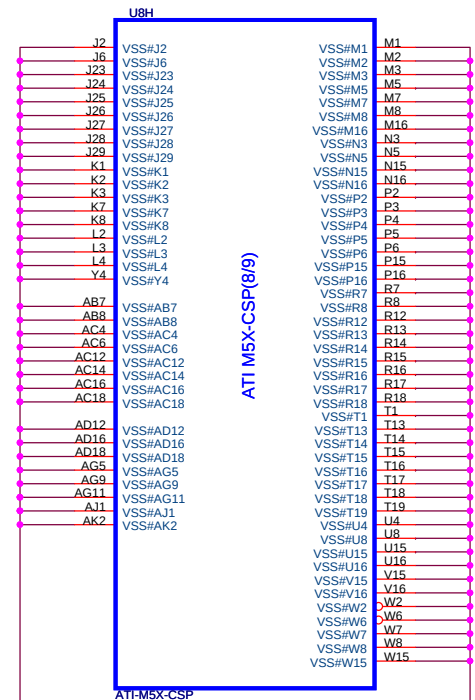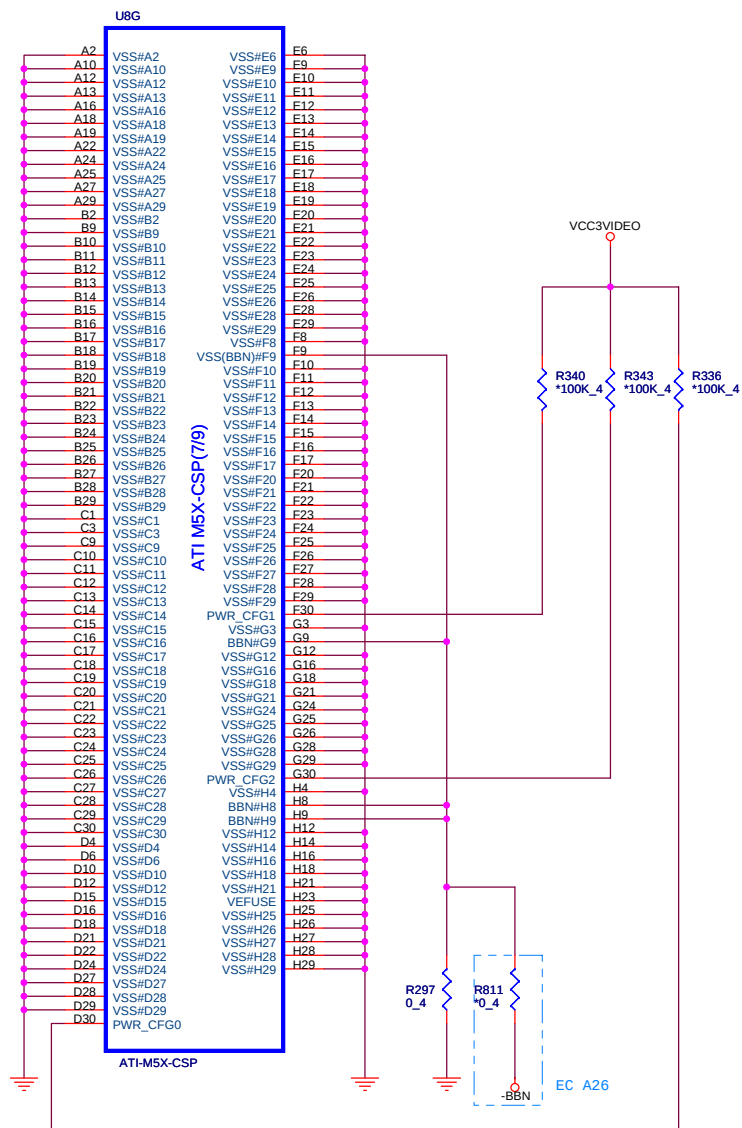

	M56 - CSP	M52/M54
R297	NO_ASM	ASM
R811	ASM	NO_ASM

For Entry Model


945GM/Entry Model	945PM/XM
ALL DE-POP	ALL POP(EXCEPT R340,R343,R336)

LCD CONNECTOR


ATI : POP 0 OHM
INTEL : DE-POP

	945GM	945PM/955XM
R12	DE-POP	0 ohm
RN2	DE-POP	0 ohm
RN3	DE-POP	0 ohm
RN4	DE-POP	0 ohm
RN5	DE-POP	0 ohm
RN6	DE-POP	0 ohm
RN7	DE-POP	0 ohm
RN8	DE-POP	0 ohm
RN9	DE-POP	0 ohm
RN10	DE-POP	0 ohm
RN26	DE-POP	0 ohm
R13	0 ohm	DE-POP
RN11	0 ohm	DE-POP
RN12	0 ohm	DE-POP
RN13	0 ohm	DE-POP
RN14	0 ohm	DE-POP
RN15	0 ohm	DE-POP
RN16	0 ohm	DE-POP
RN17	0 ohm	DE-POP
RN18	0 ohm	DE-POP
RN19	0 ohm	DE-POP
RN27	0 ohm	DE-POP

ATI : DE-POP
INTEL : POP 0 OHM

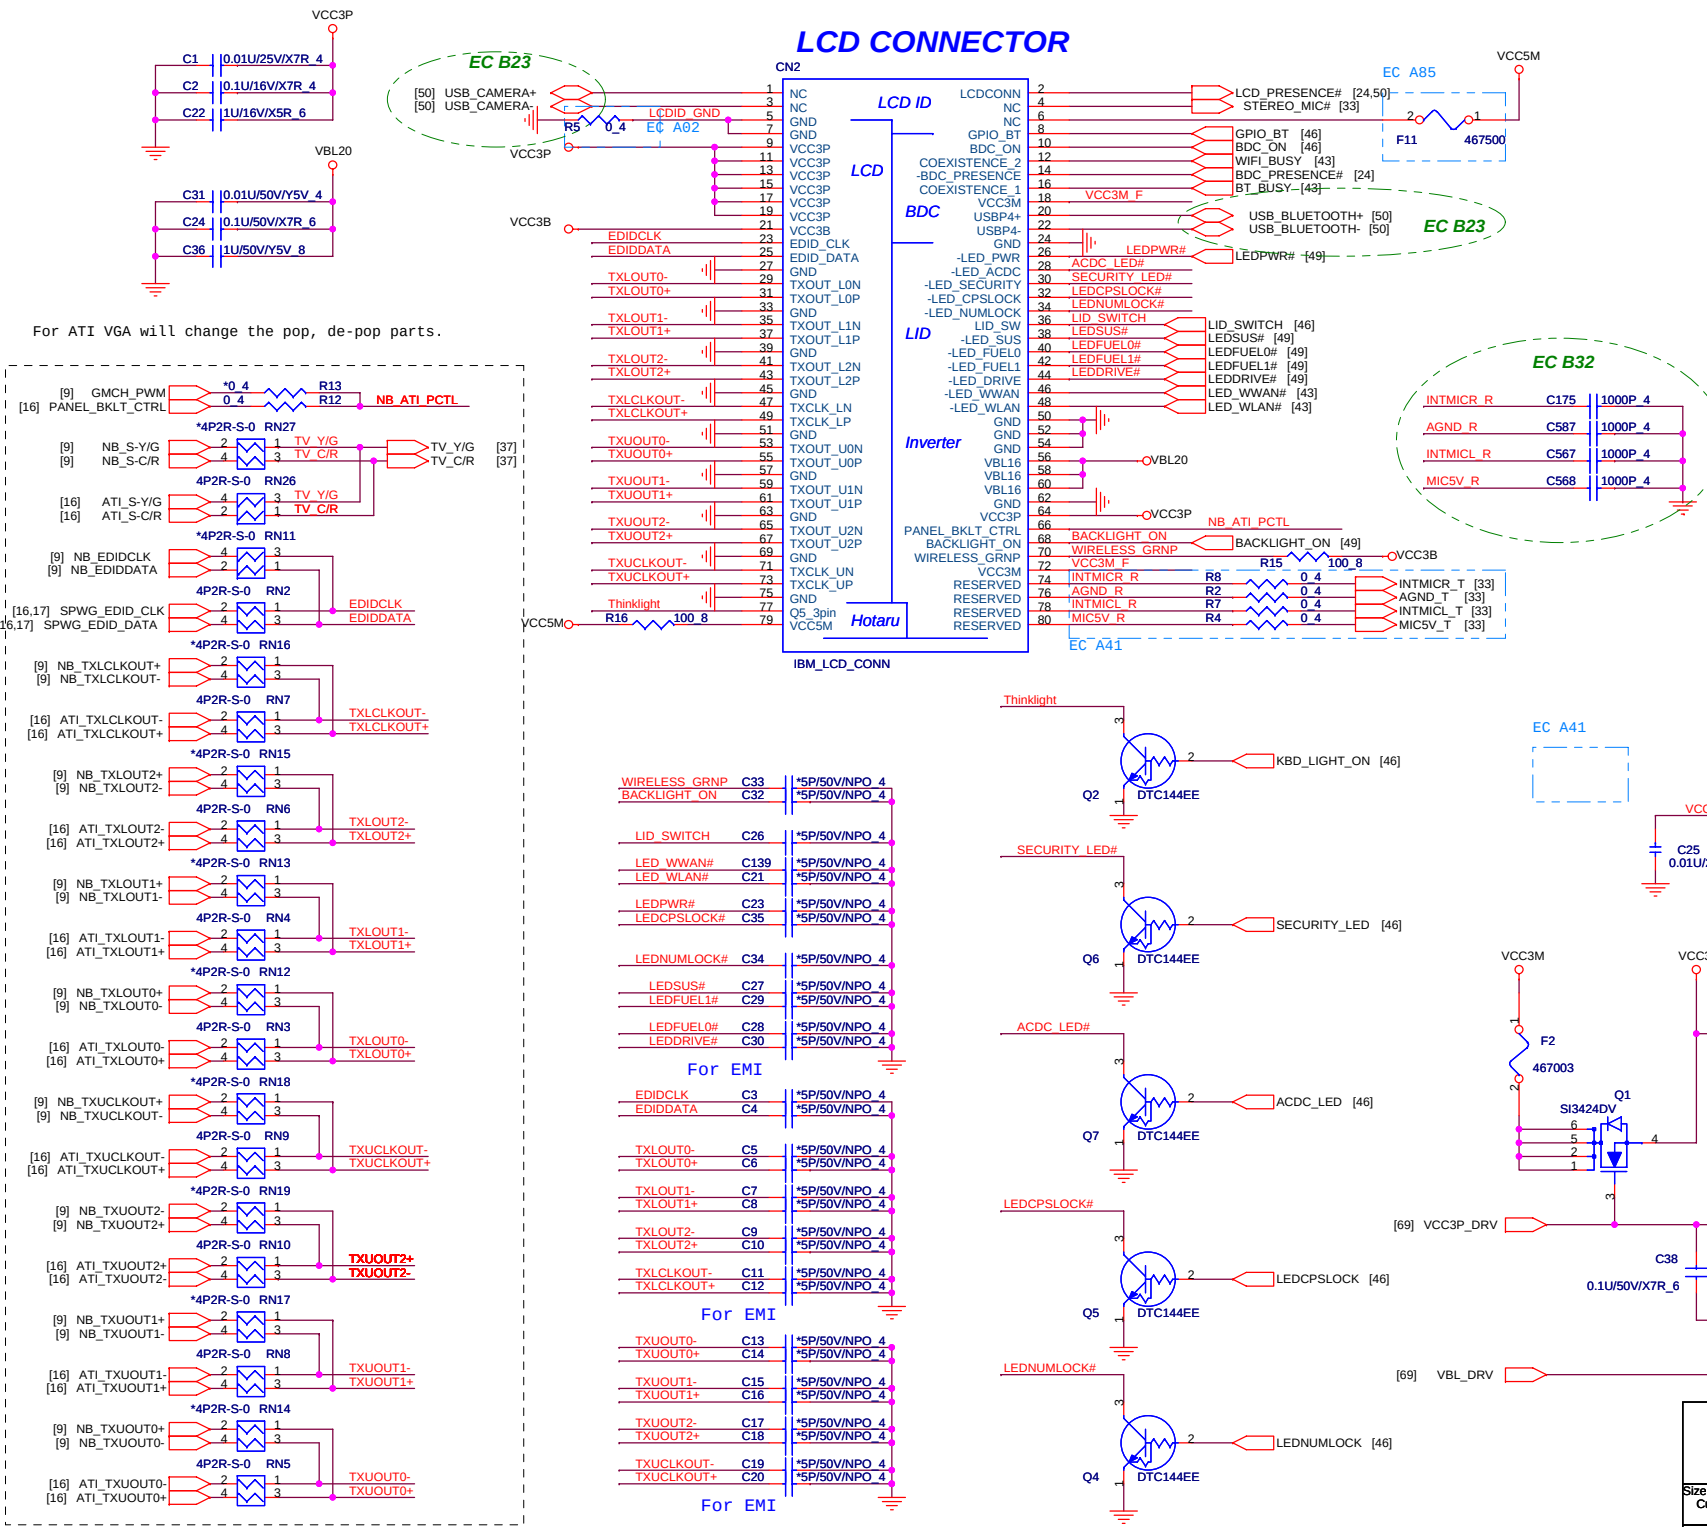


CRT PORT

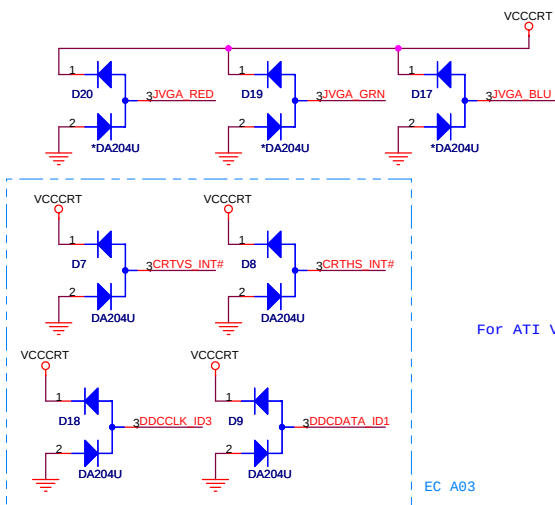

For ATI VGA should de-pop

EC A03

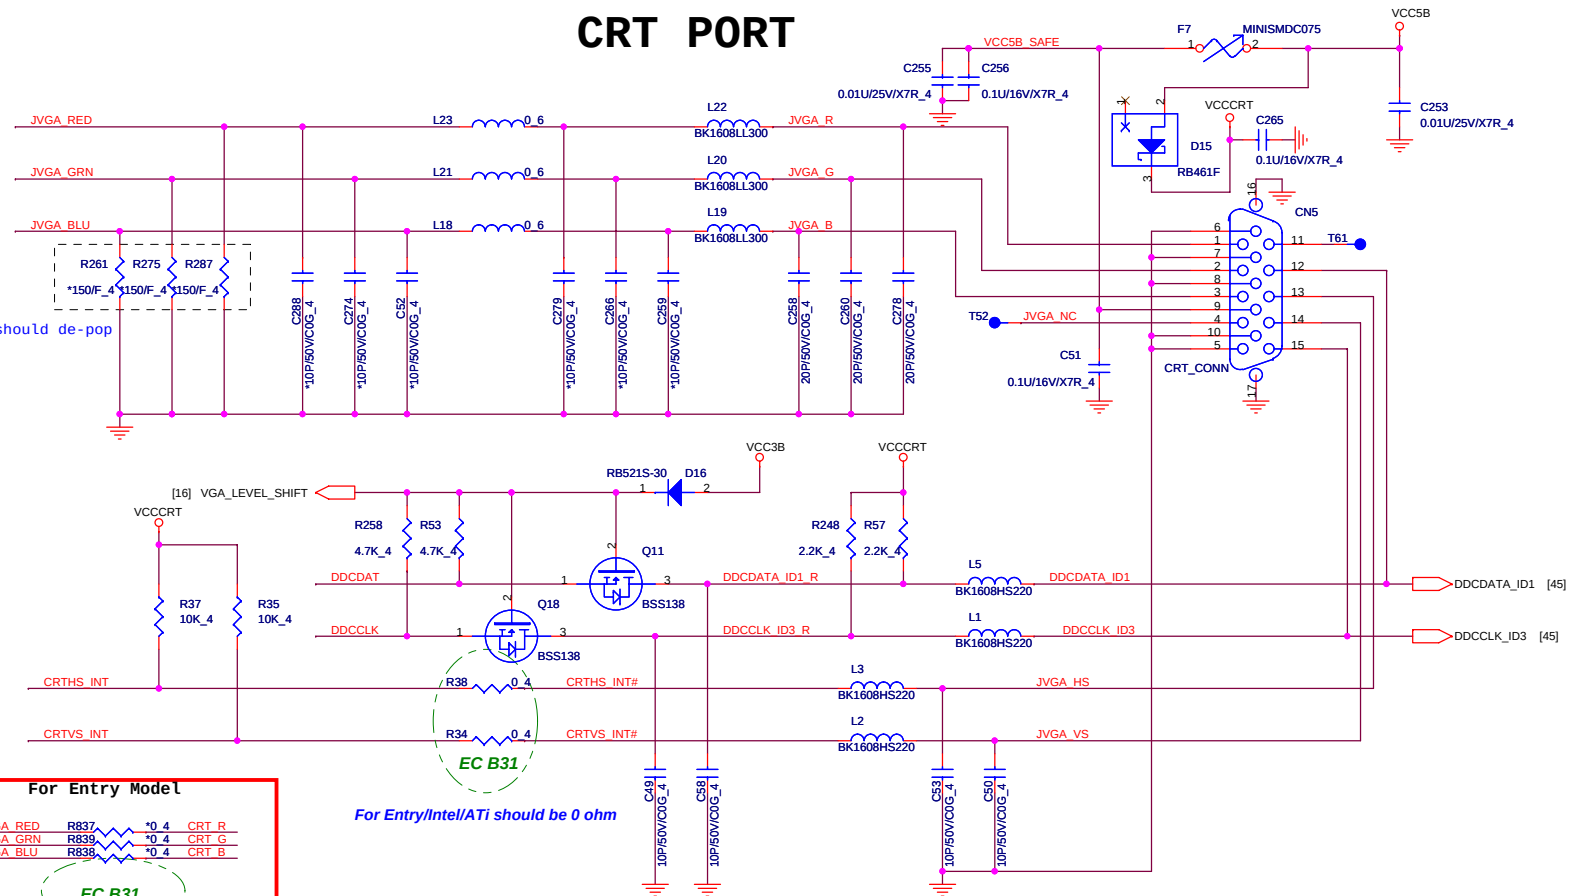


For Entry Model

JVG_A RED R837 0.4 CRT_R
JVG_A GRN R839 0.4 CRT_G
JVG_A BLU R838 0.4 CRT_B

EC B31

To port - replicator C.R.T

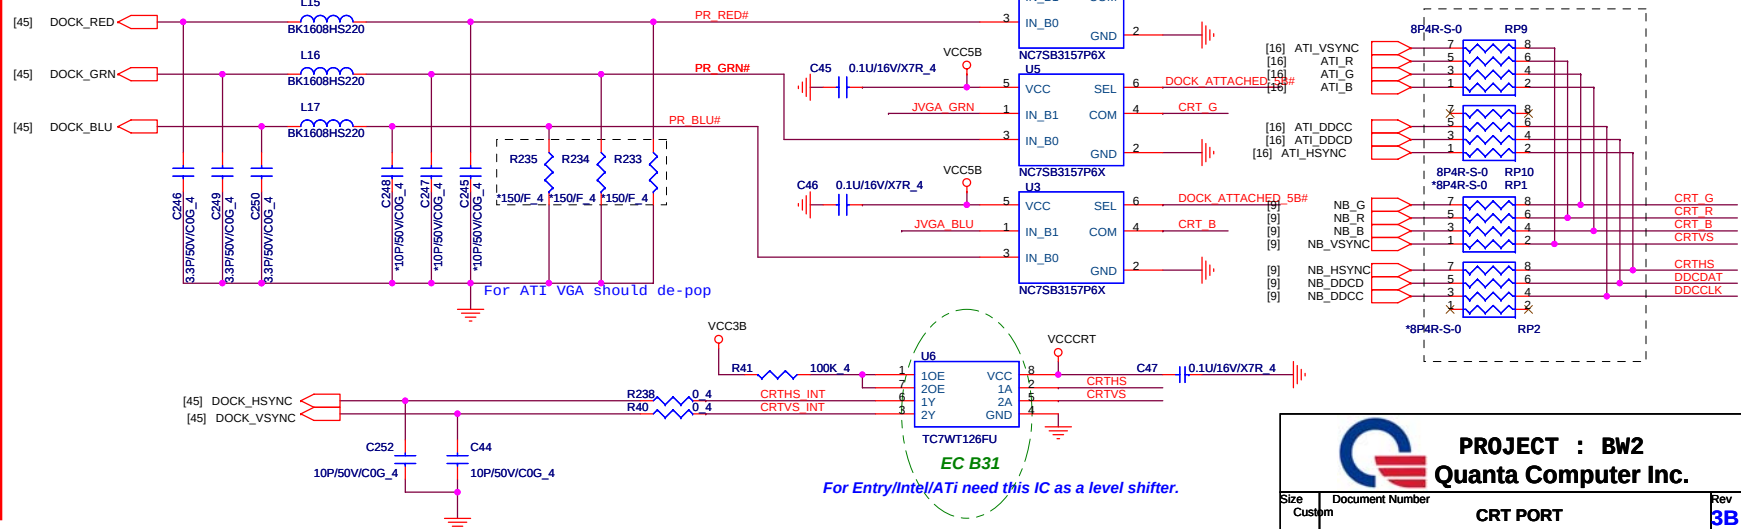


For Entry/Intel/ATI need this IC as a level shifter.

For Entry Model

	Entry Model	945GM	945PM/955XM
R261	POP	POP	DE-POP
R275	POP	POP	DE-POP
R287	POP	POP	DE-POP
R233	POP	POP	DE-POP
R234	POP	POP	DE-POP
R235	POP	POP	DE-POP
RP1	POP	POP	DE-POP
RP2	POP	POP	DE-POP
RP9	DE-POP	DE-POP	POP
RP10	DE-POP	DE-POP	POP
L15	DE-POP	POP	POP
L16	DE-POP	POP	POP
L17	DE-POP	POP	POP
C246	DE-POP	POP	POP
C249	DE-POP	POP	POP
C250	DE-POP	POP	POP
C43	DE-POP	POP	POP
C45	DE-POP	POP	POP
C46	DE-POP	POP	POP
U3	DE-POP	POP	POP
U4	DE-POP	POP	POP
U5	DE-POP	POP	POP
U6	DE-POP	POP	POP
C44	DE-POP	POP	POP
C252	DE-POP	POP	POP
R238	DE-POP	POP	POP
R40	DE-POP	POP	POP
R837	POP	DE-POP	DE-POP
R839	POP	DE-POP	DE-POP
R838	POP	DE-POP	DE-POP
R841	DE-POP	DE-POP	DE-POP
R840	DE-POP	DE-POP	DE-POP




EC B31

PCI Pullups




BIOS ROM SELEC


	FWH	PCI	SPI
R130	DE-POP	POP	DE-POP
R561	DE-POP	DE-POP	POP

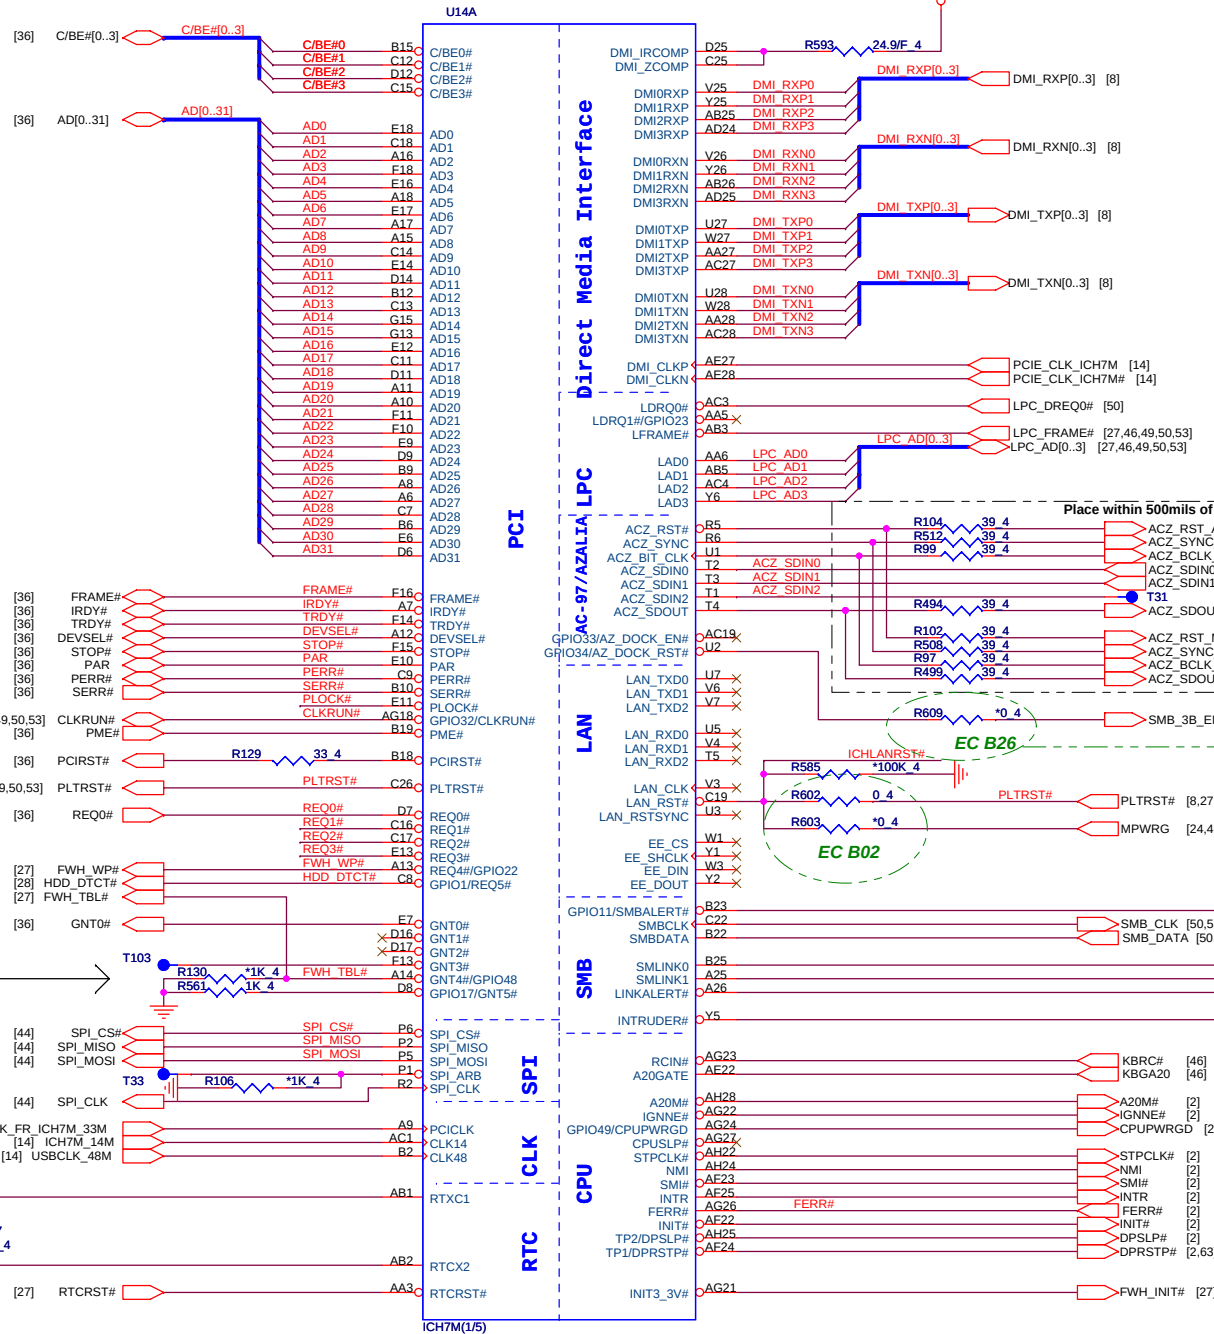

GPIO in Entry Model


Signal	Normal model	Entry model
SMB_3B_EN	SIO GPIO3	ICH7 GPIO34
LCD_PRESENCE#	SIO GPIO23	ICH7 GPIO21
Normal : NOASM Entry model : ASM		



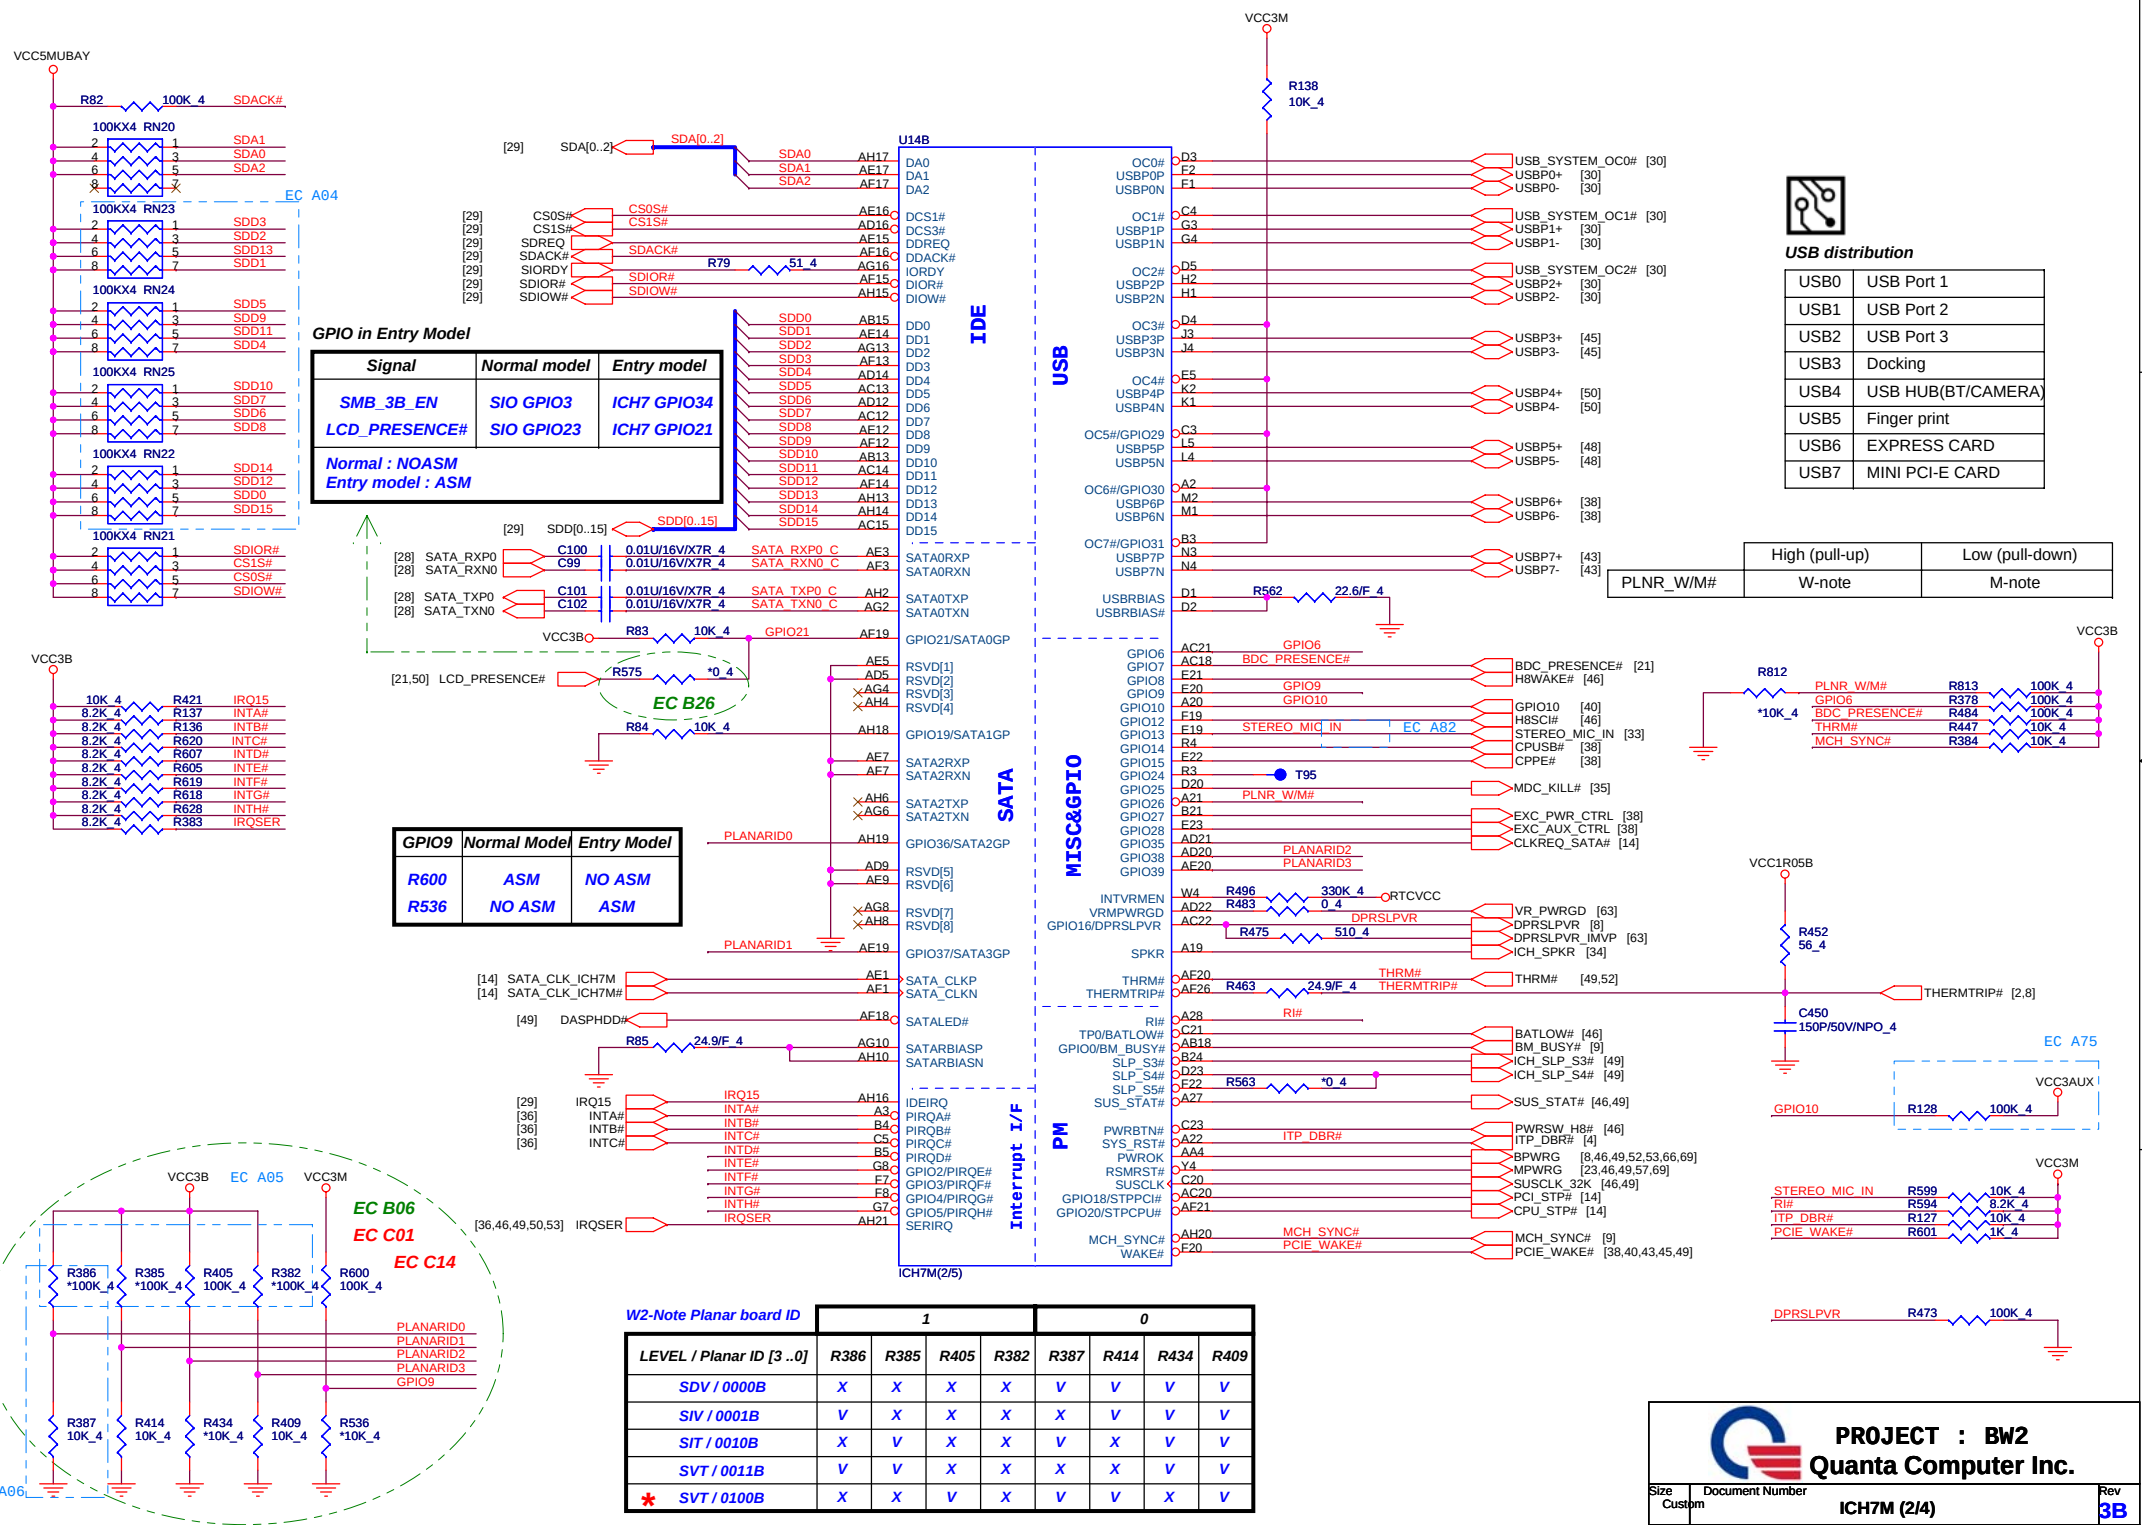

PCIE distribution


PCIE0	Enthernet Controller
PCIE1	PCIE WLAN
PCIE2	EXPRESS CARD
PCIE3	Docking

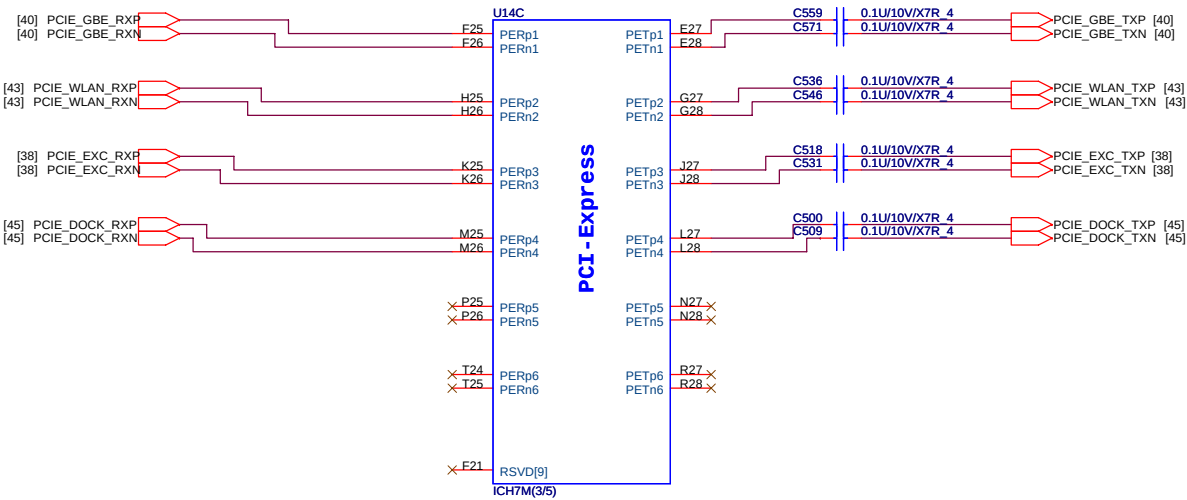




EC A30



PROJECT : BW2
Quanta Computer Inc.

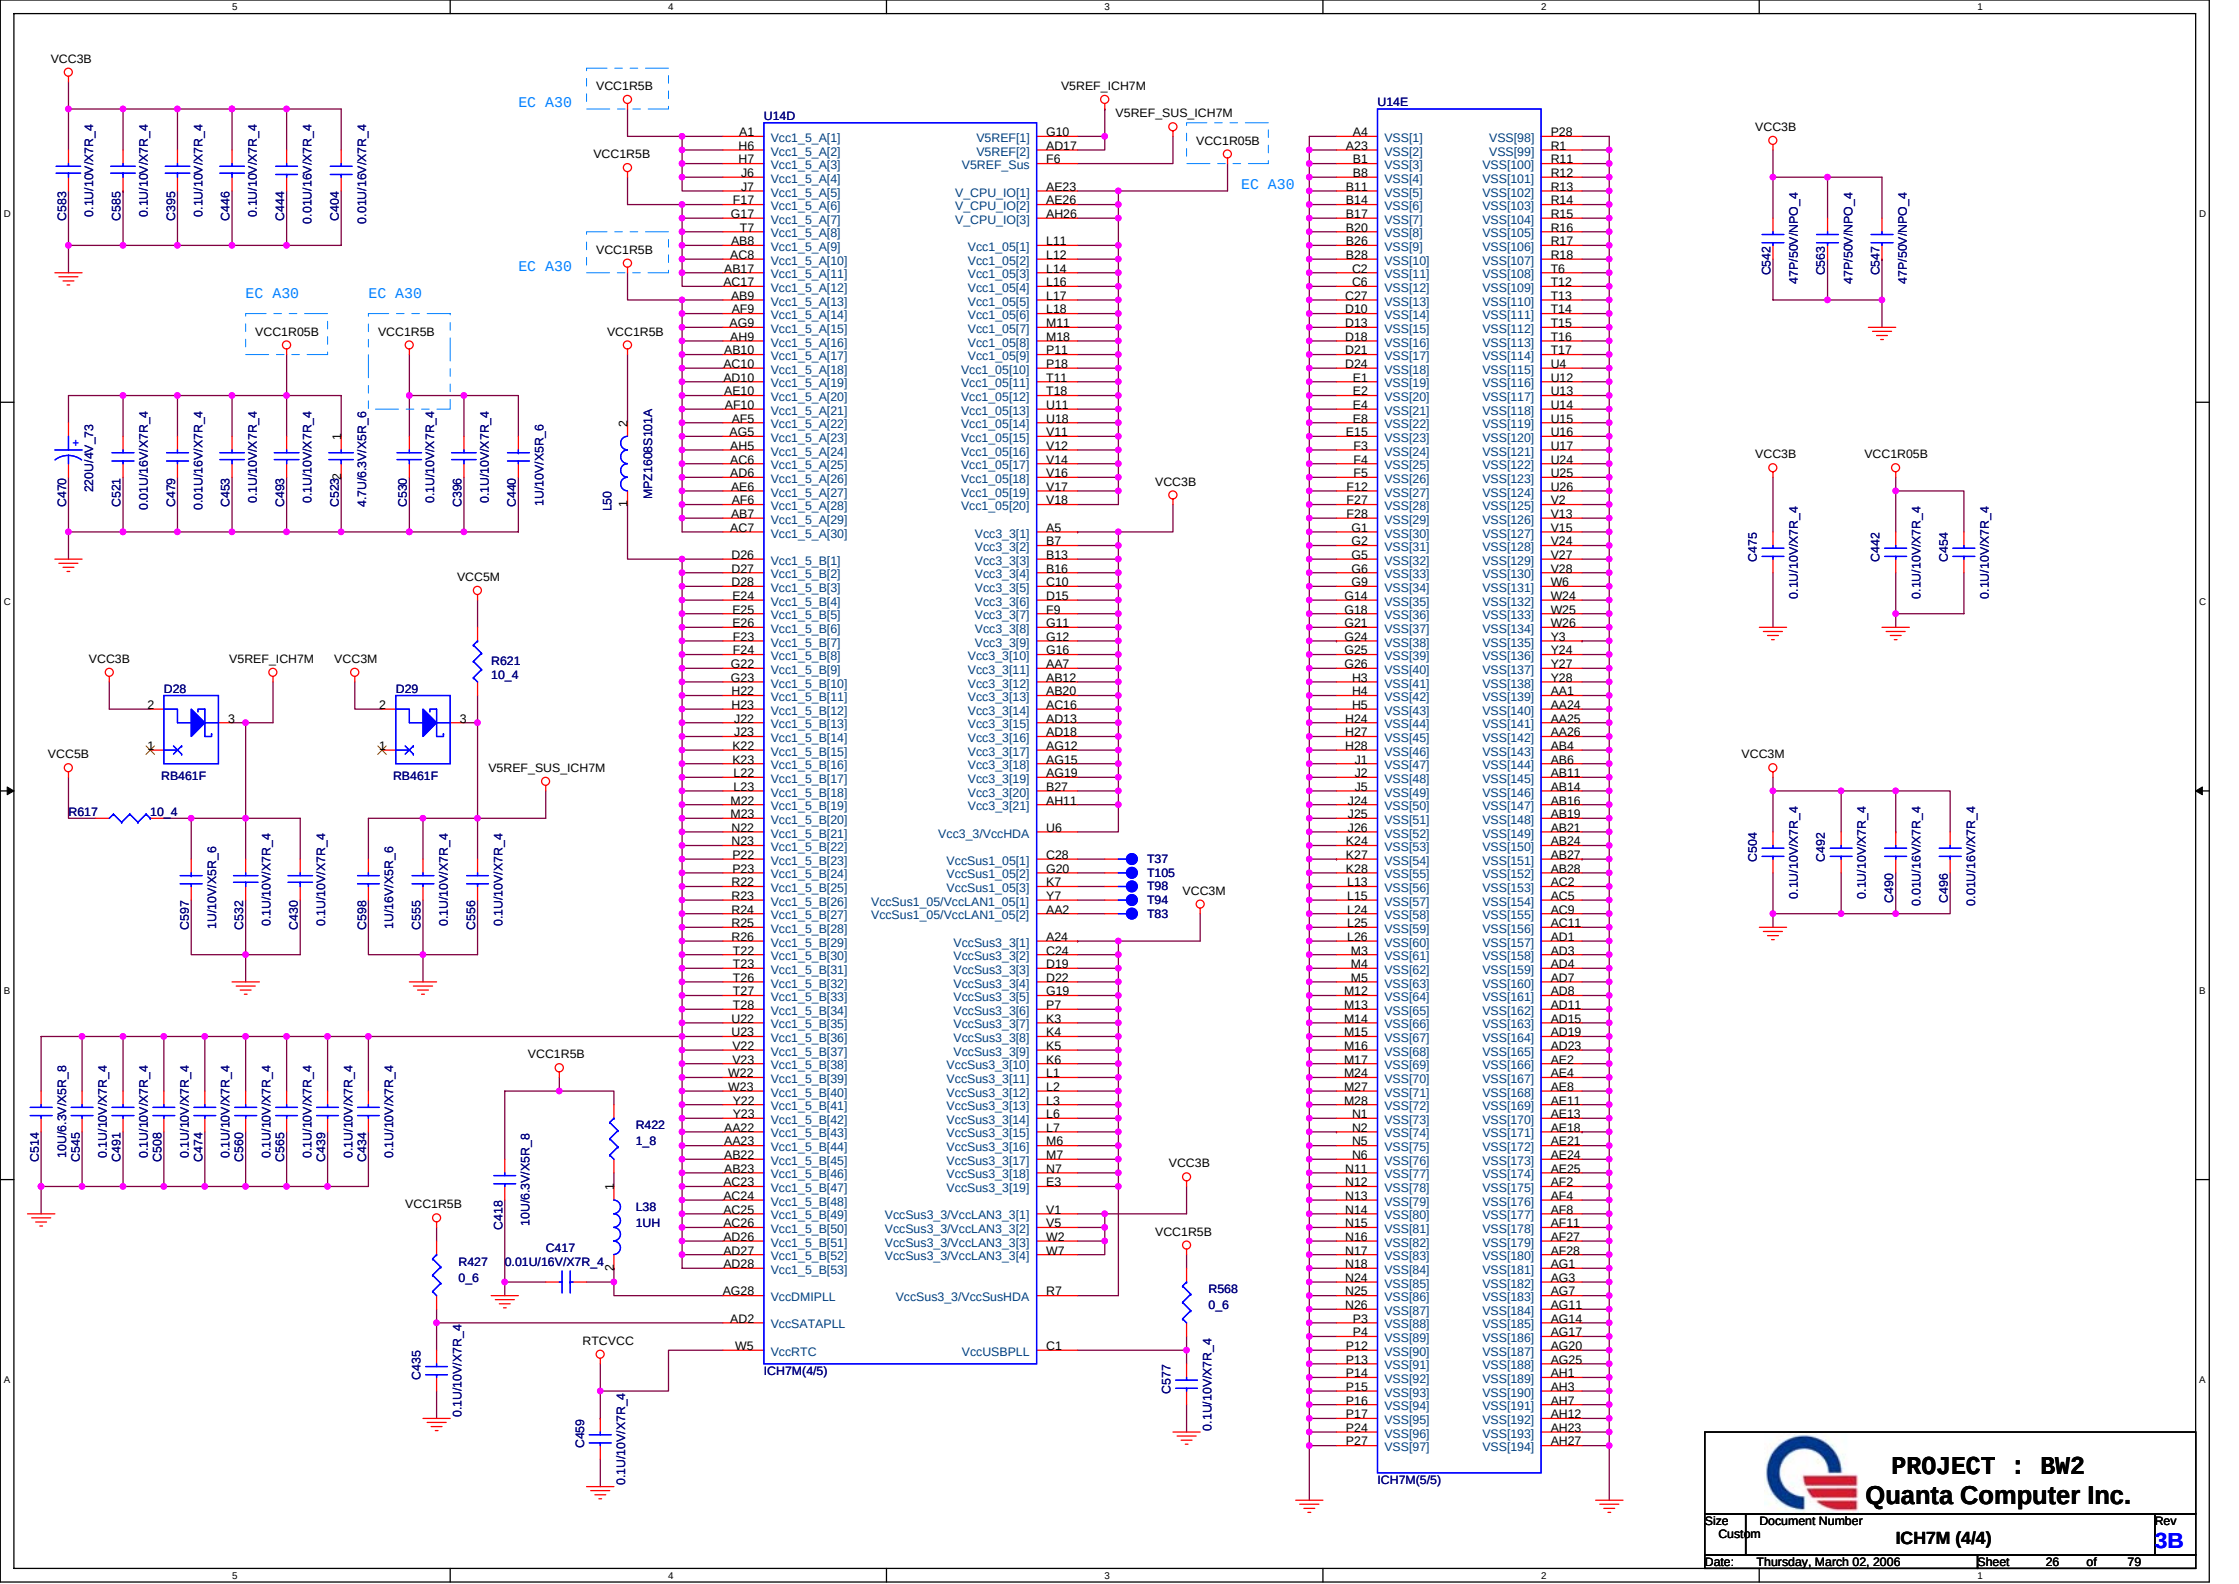


RTC

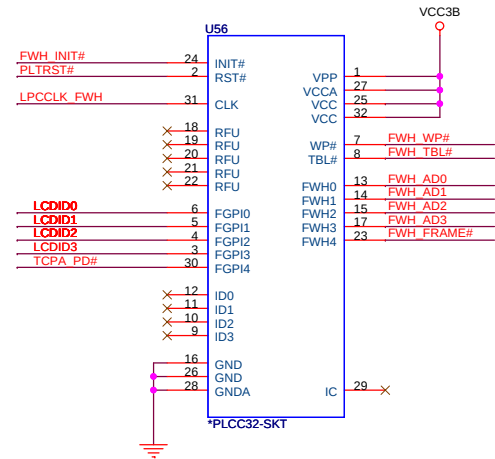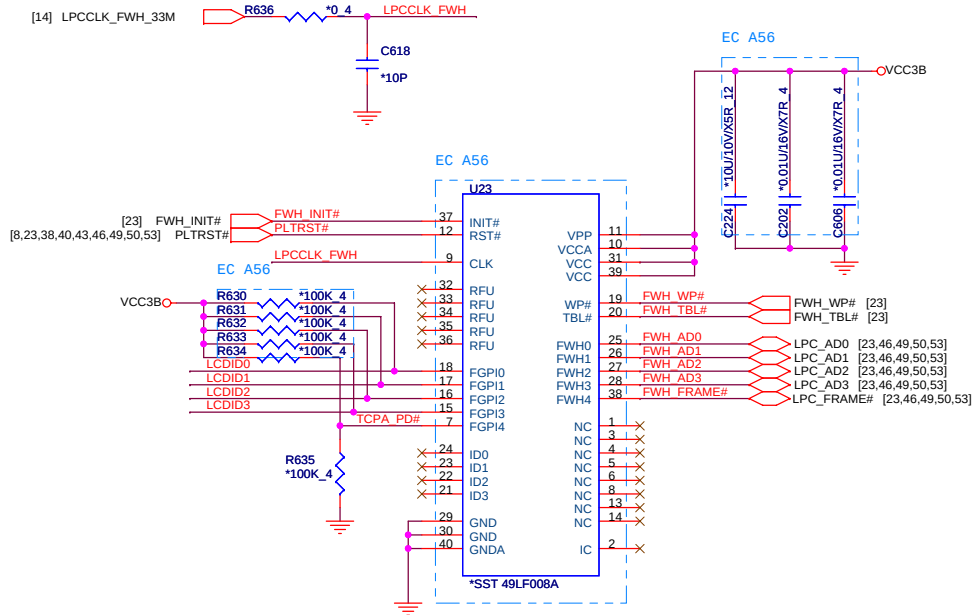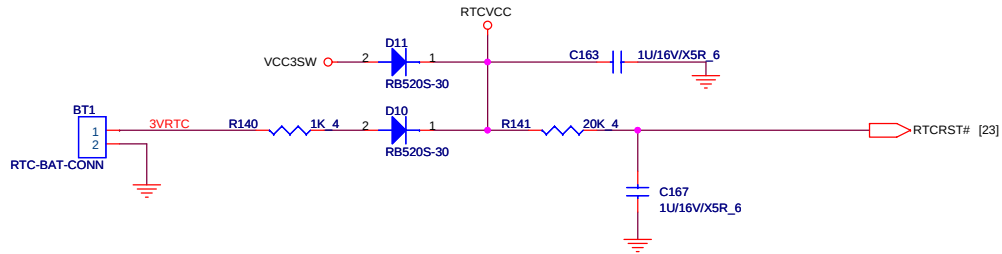


PROJECT : BW2
Quanta Computer Inc.


Size Custom	Document Number FWH, RTC BATTERY	Rev 3B
Date: Thursday, March 02, 2006	Sheet 27 of 79	

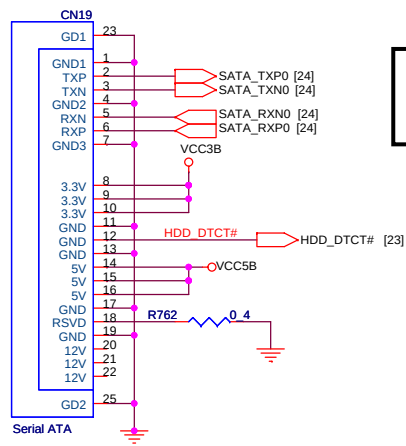




SATA Signal can't put
the Test PAD for
impedance

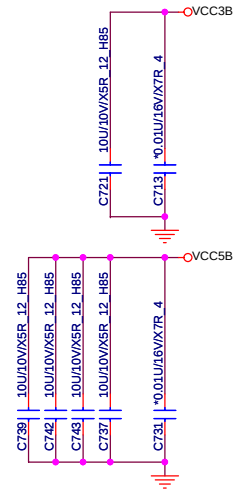



ODD CONNECTOR


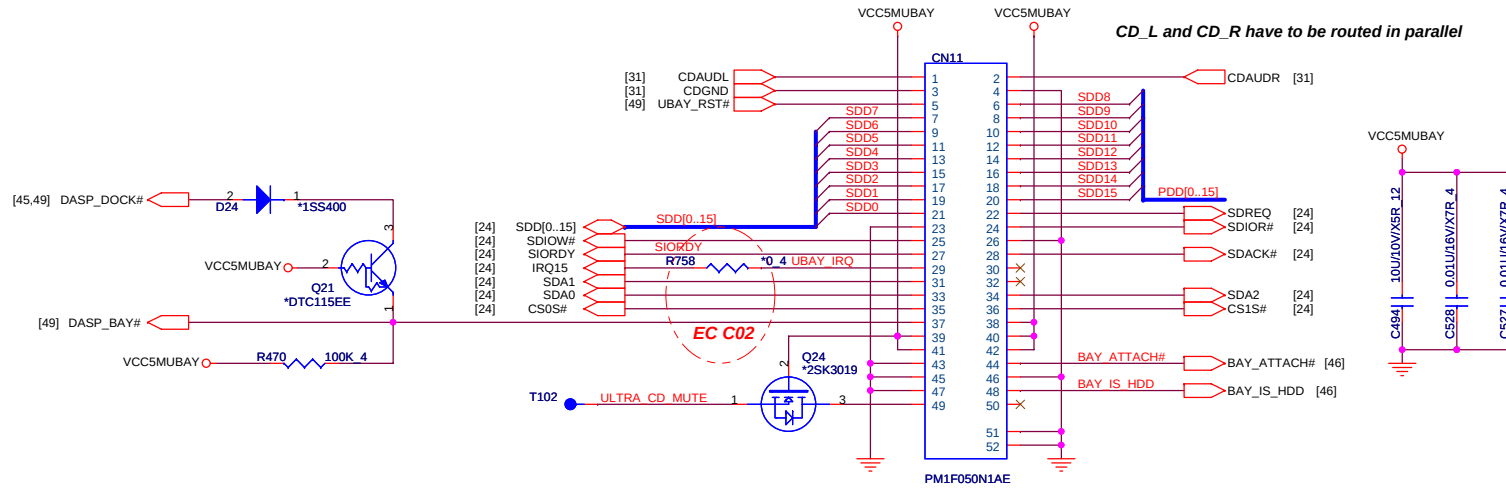


	BAY_ATTACH#	BAY_IS_HDD
NO_DEVICE	H	Don't care
OPTICAL	L	L
HDD	L	H


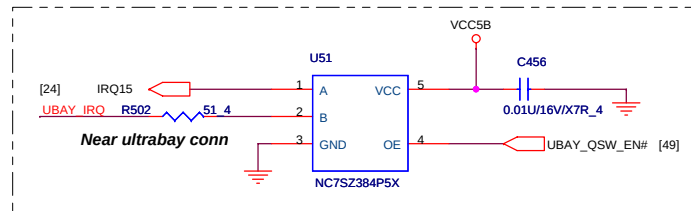




	Entry Model	Normal Model
R758	POP	DE-POP
U51	DE-POP	POP
C456	DE-POP	POP
R502	DE-POP	POP

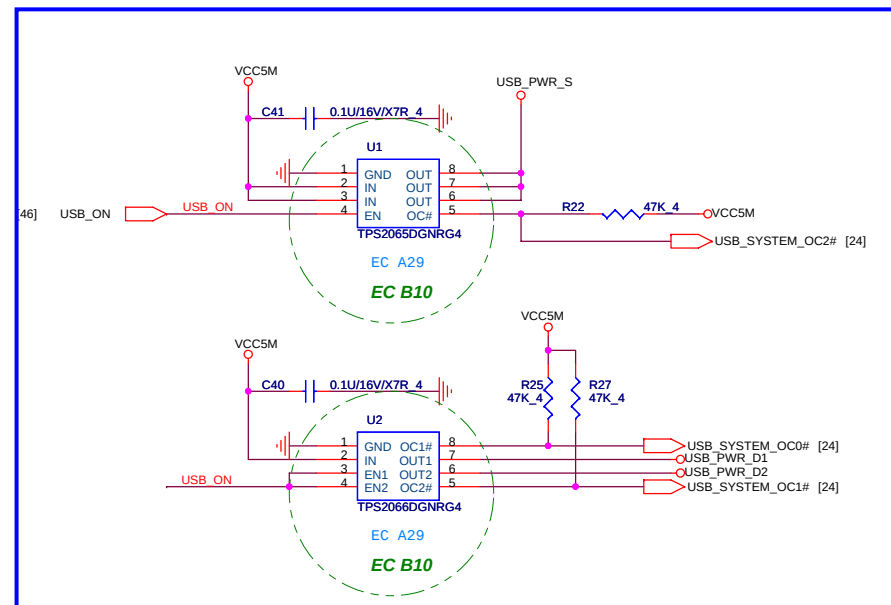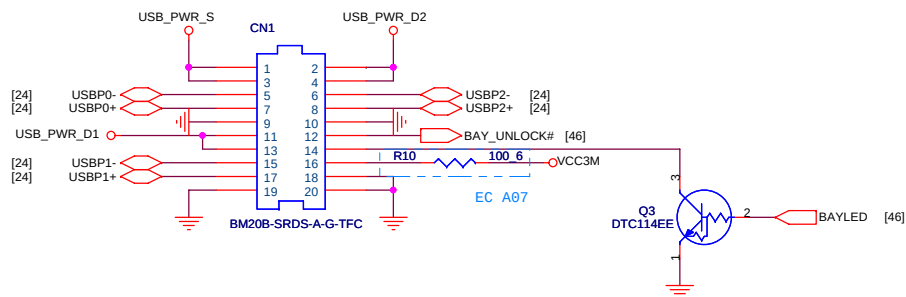


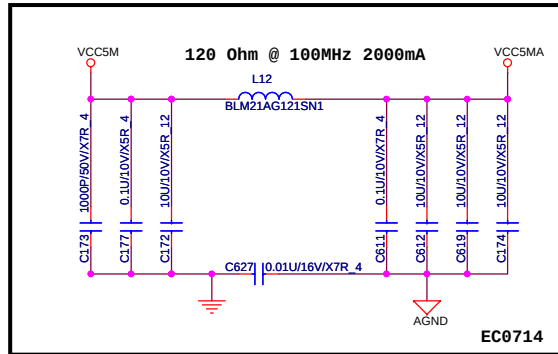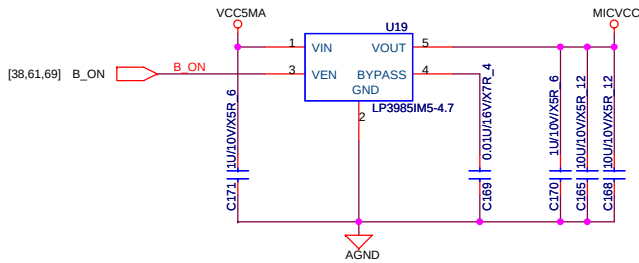


[29] CDAUDL
[29] CDAUDR
[29] CDGND

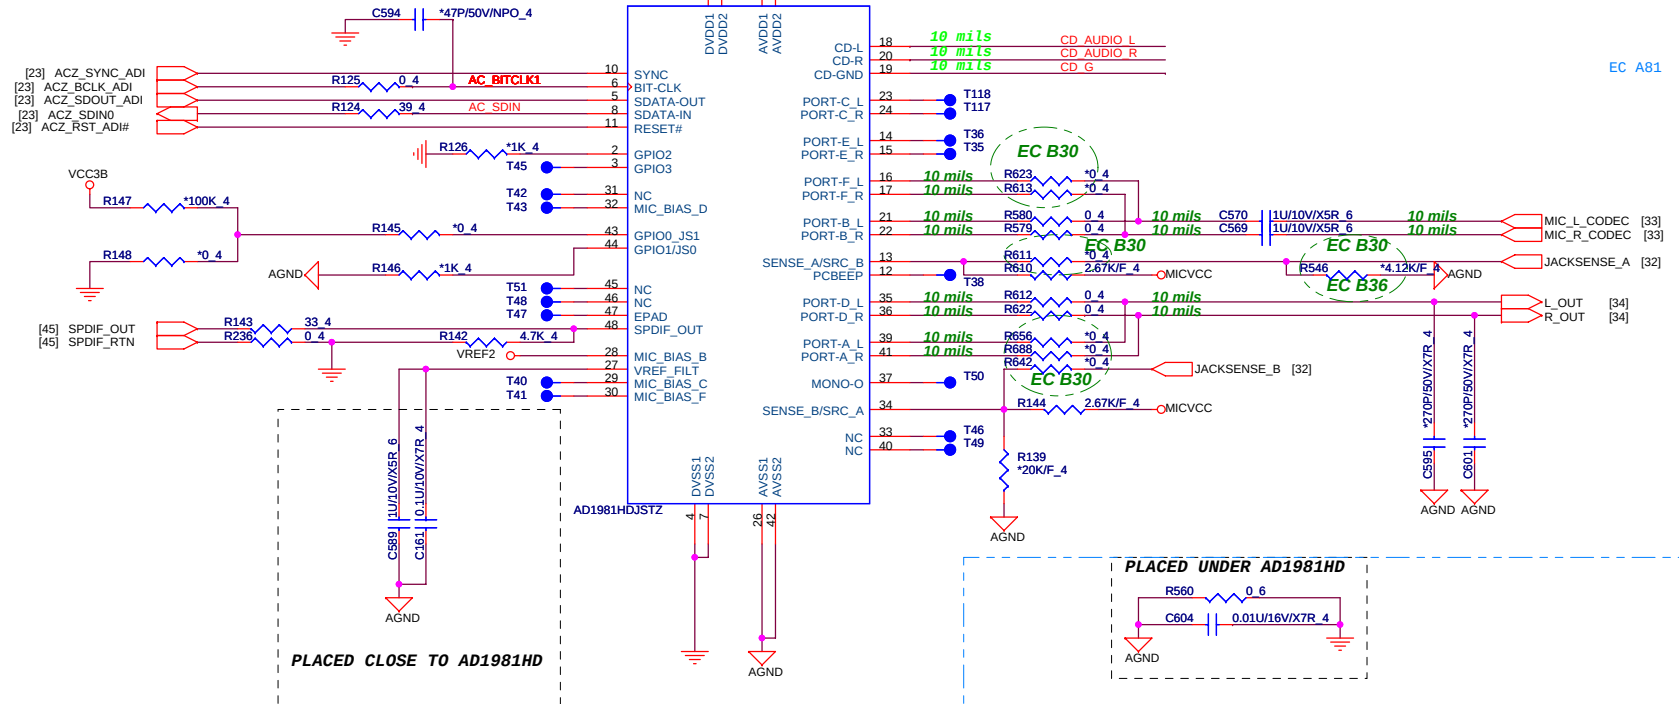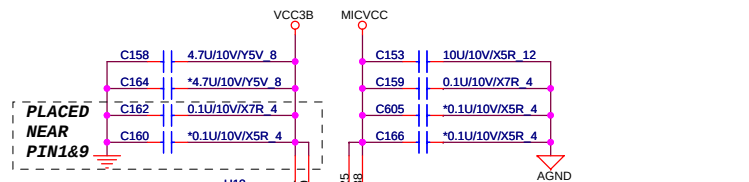
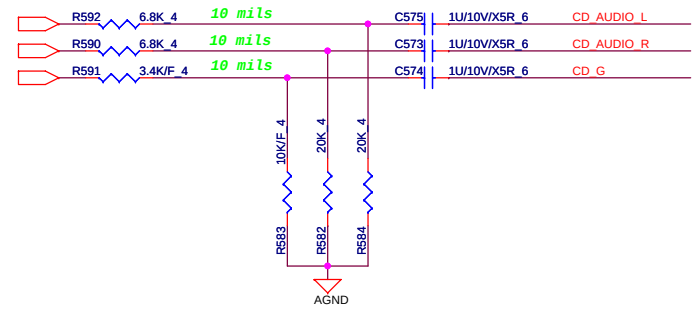




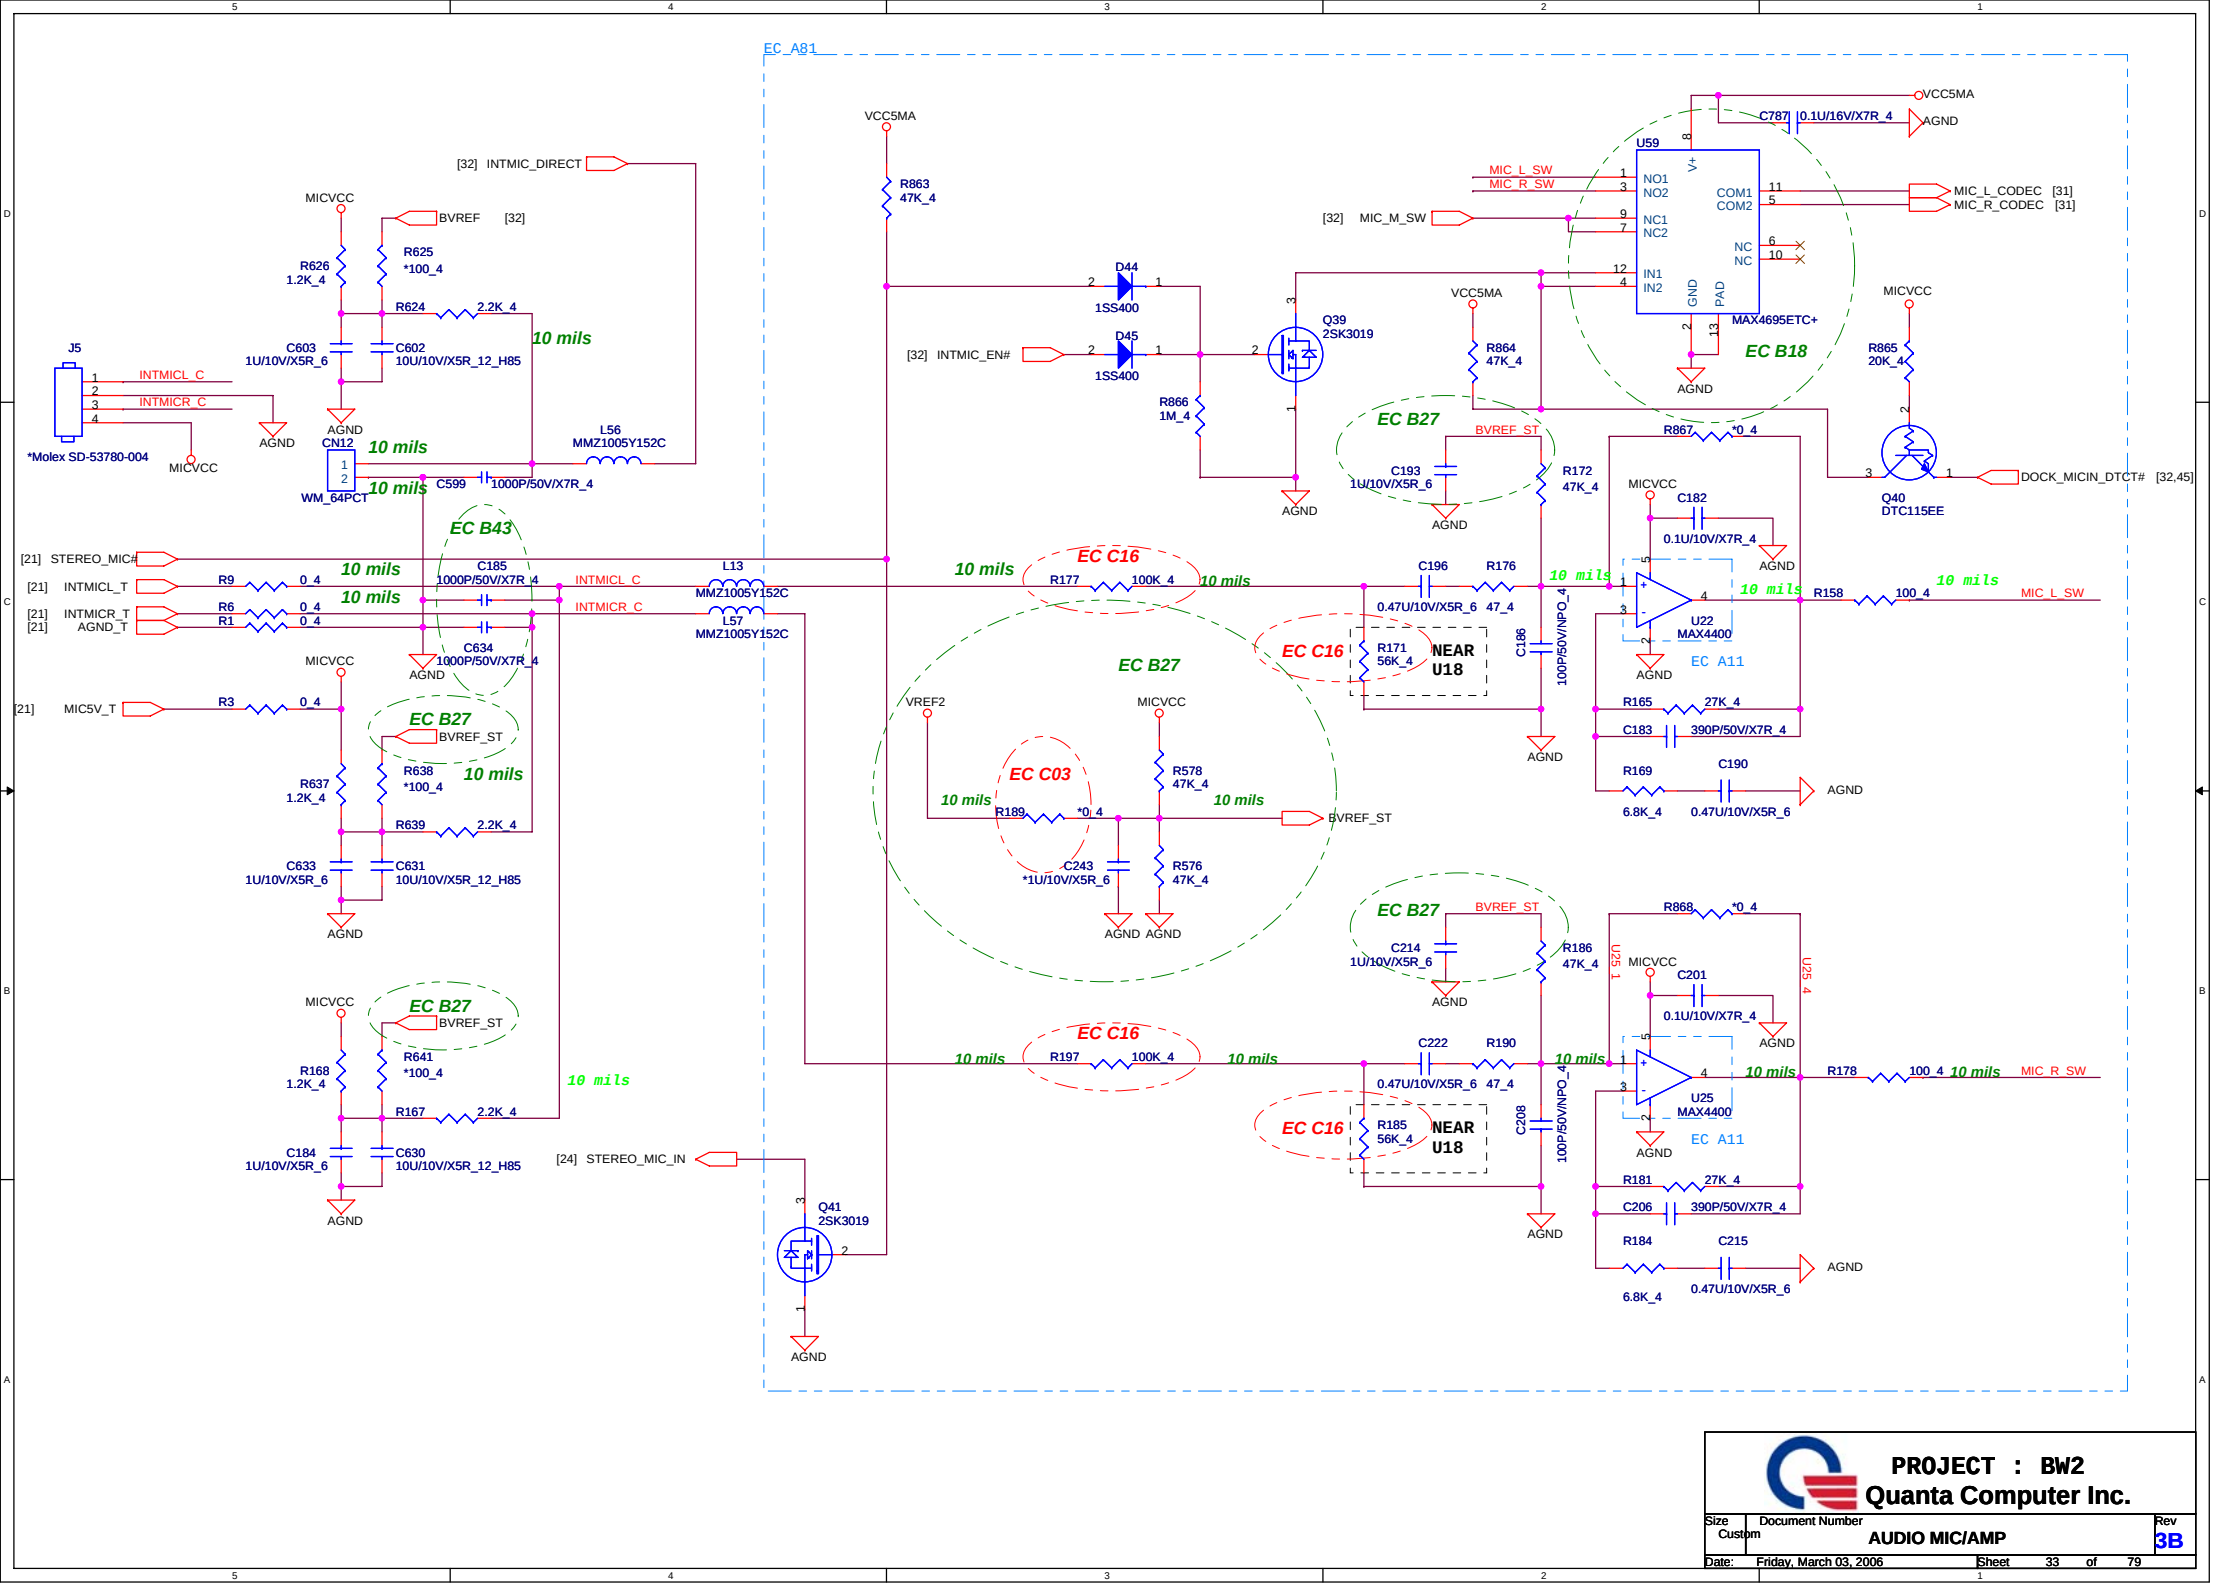


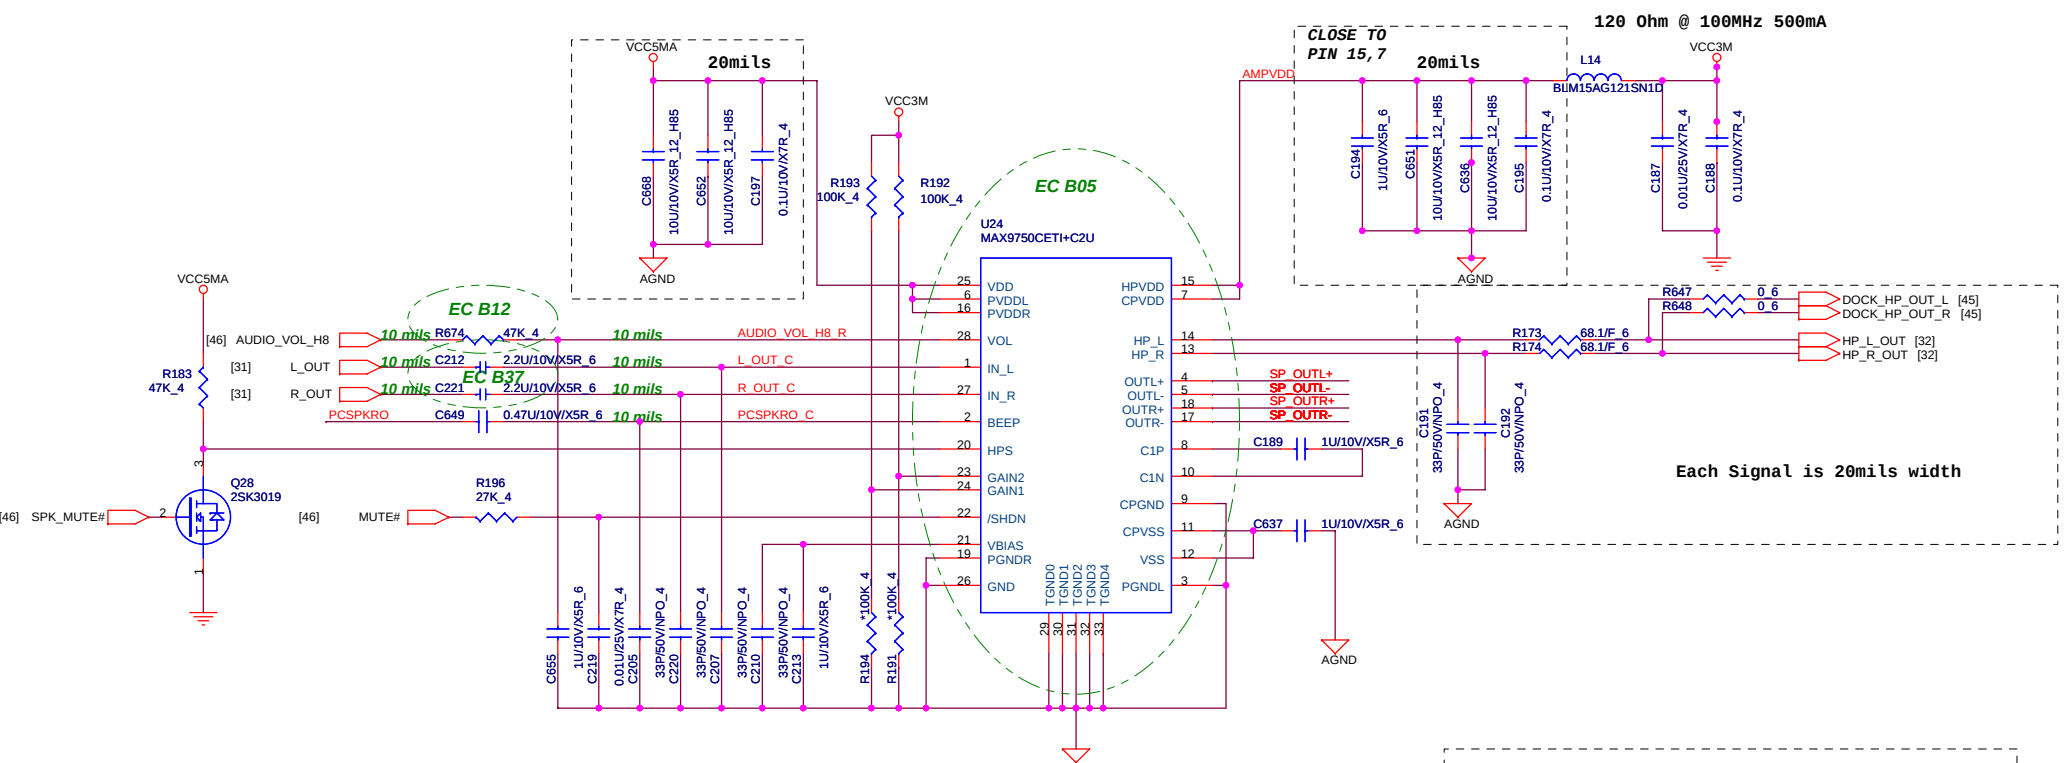


GAIN2	GAIN1	SPKR MODE	HP MODE
0	0	6	0
0	1	7.5	
1	0	9	3
1	1	10.5	


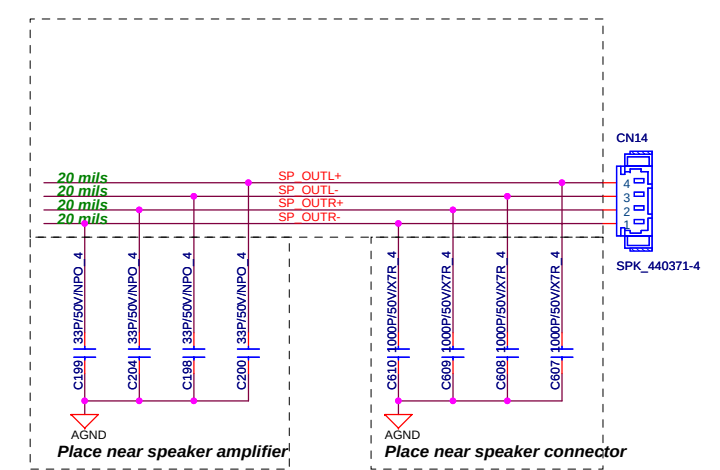
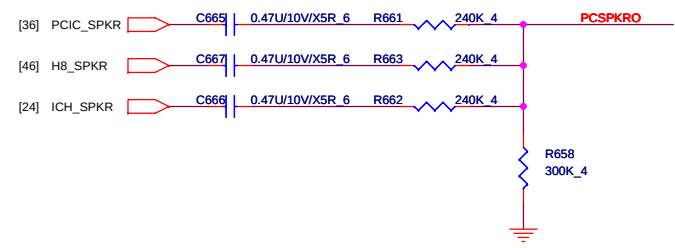



MDC1.5 CONNECTOR

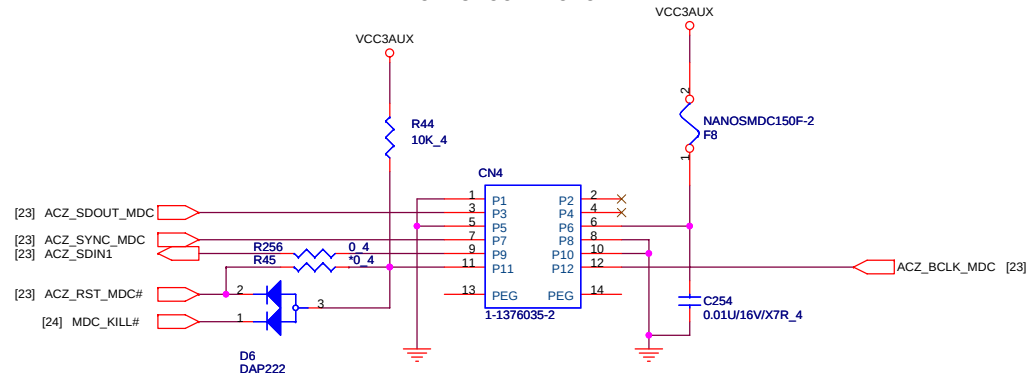

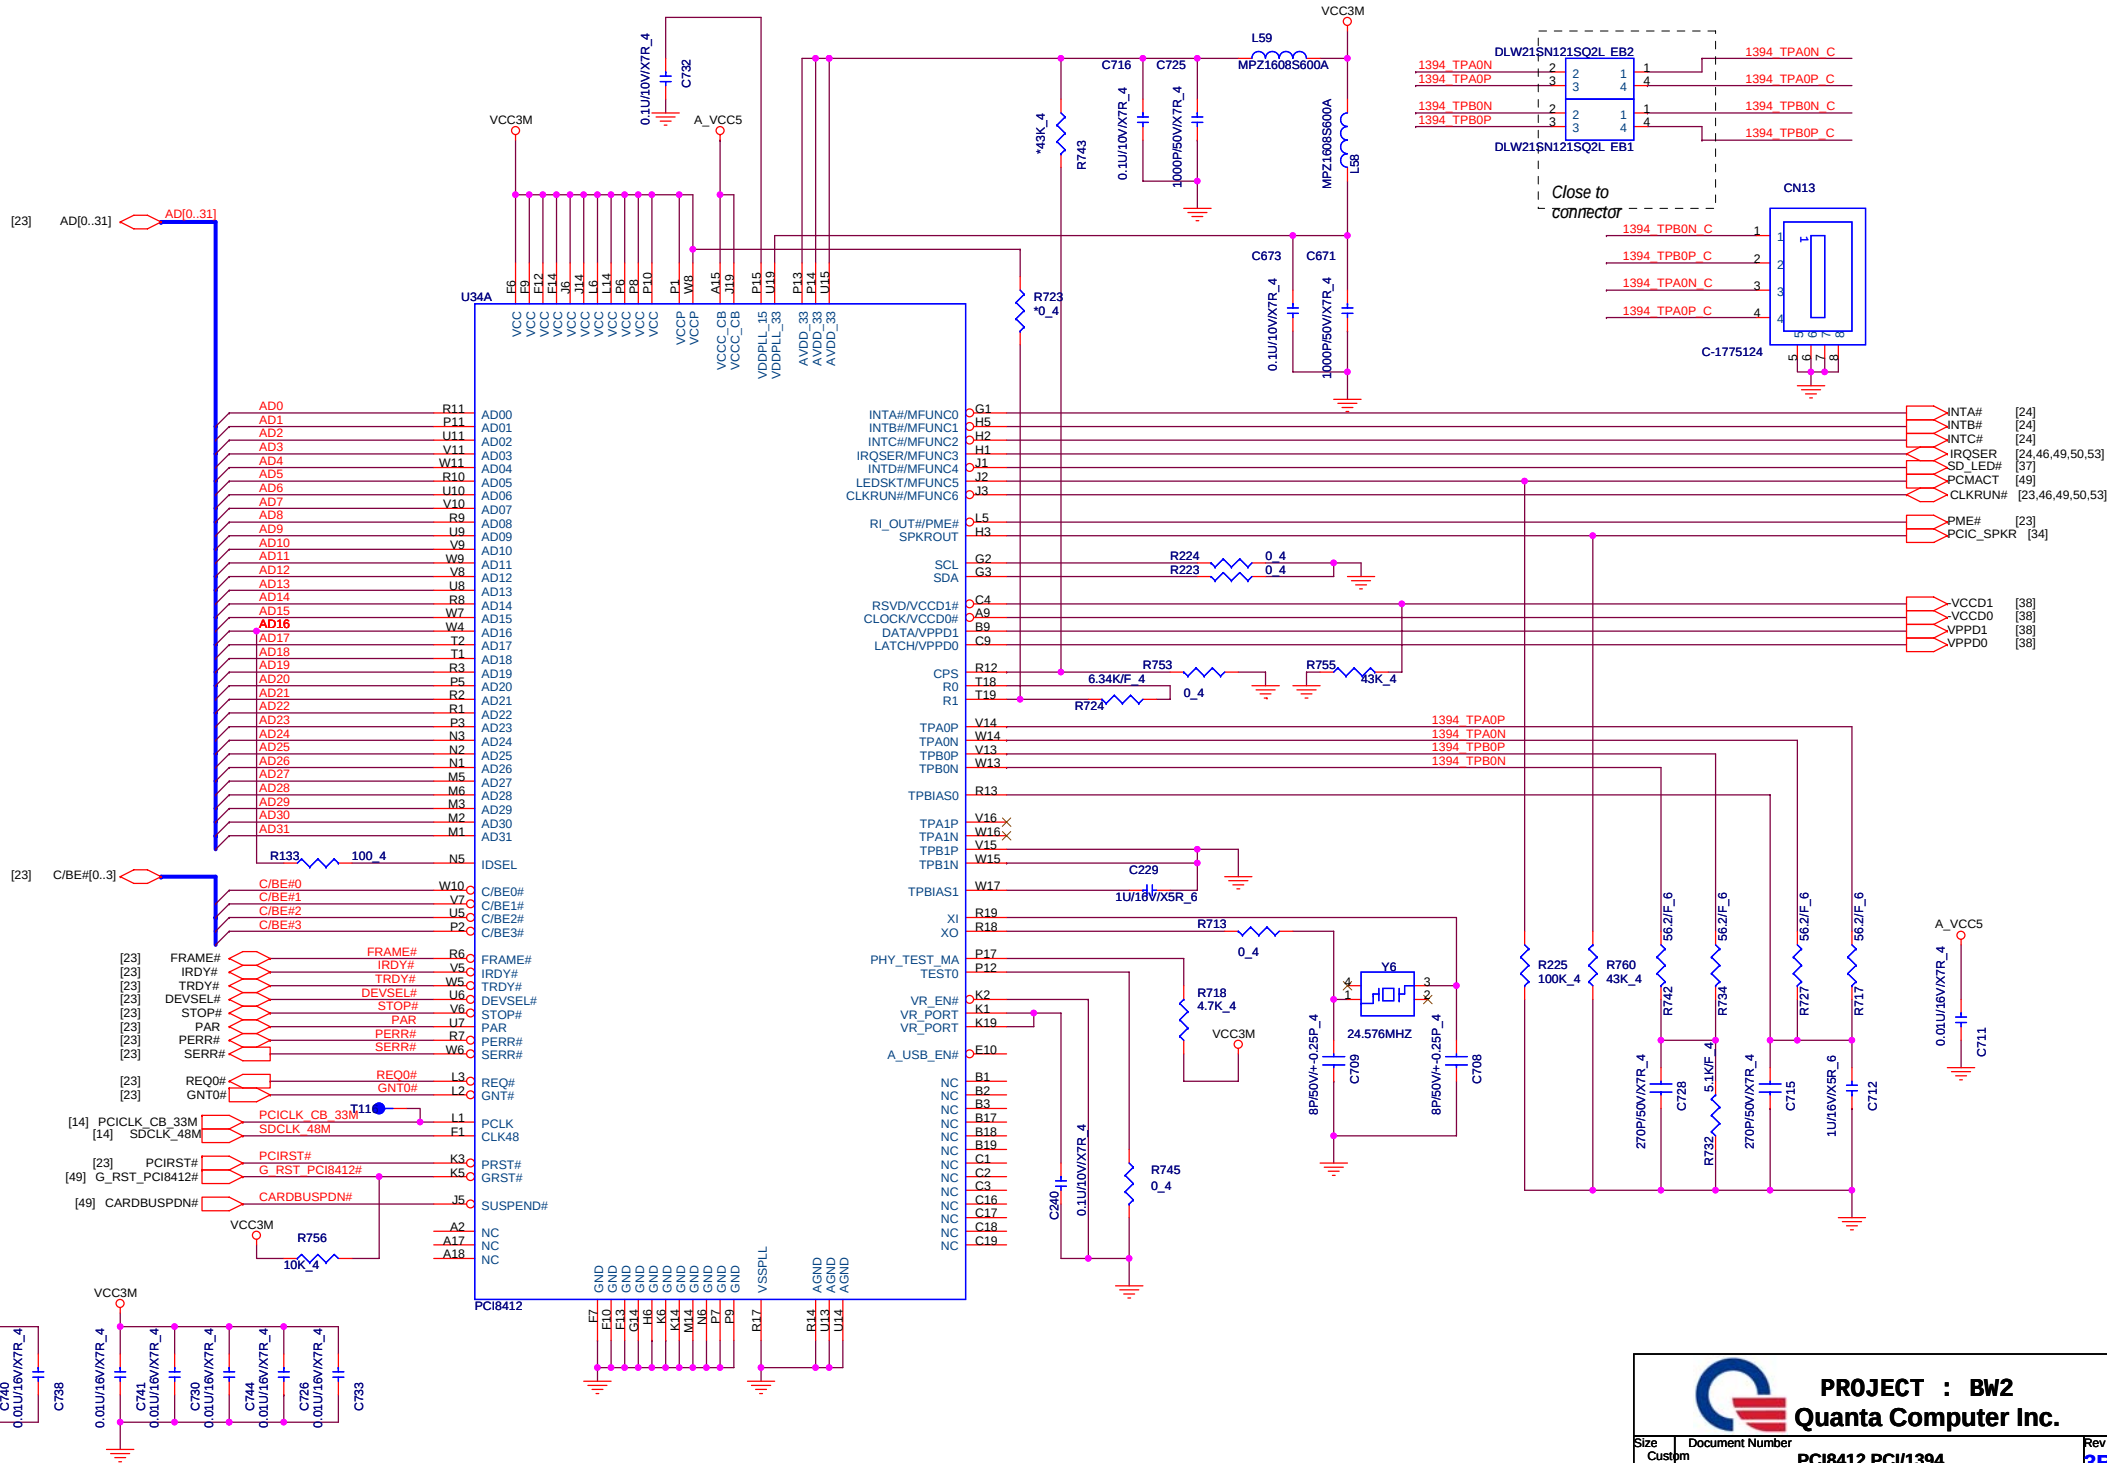




A_A16: CARDBUS CLK 33MHZ
A_IORD#, A_IOWR#: USB2.0

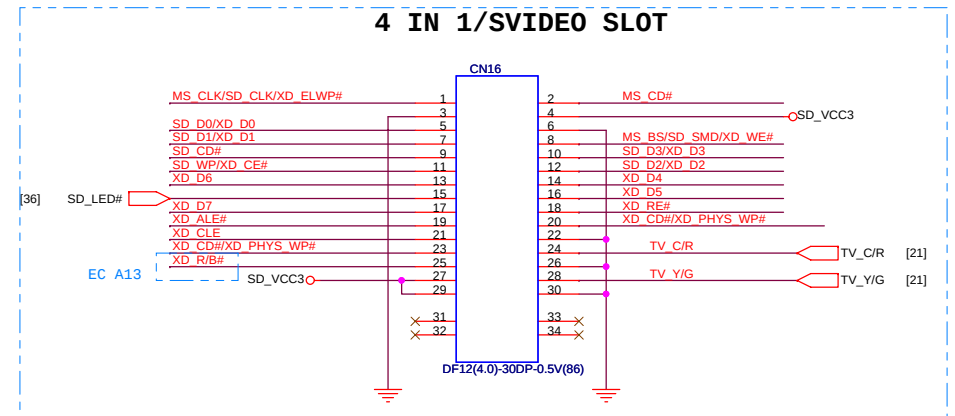

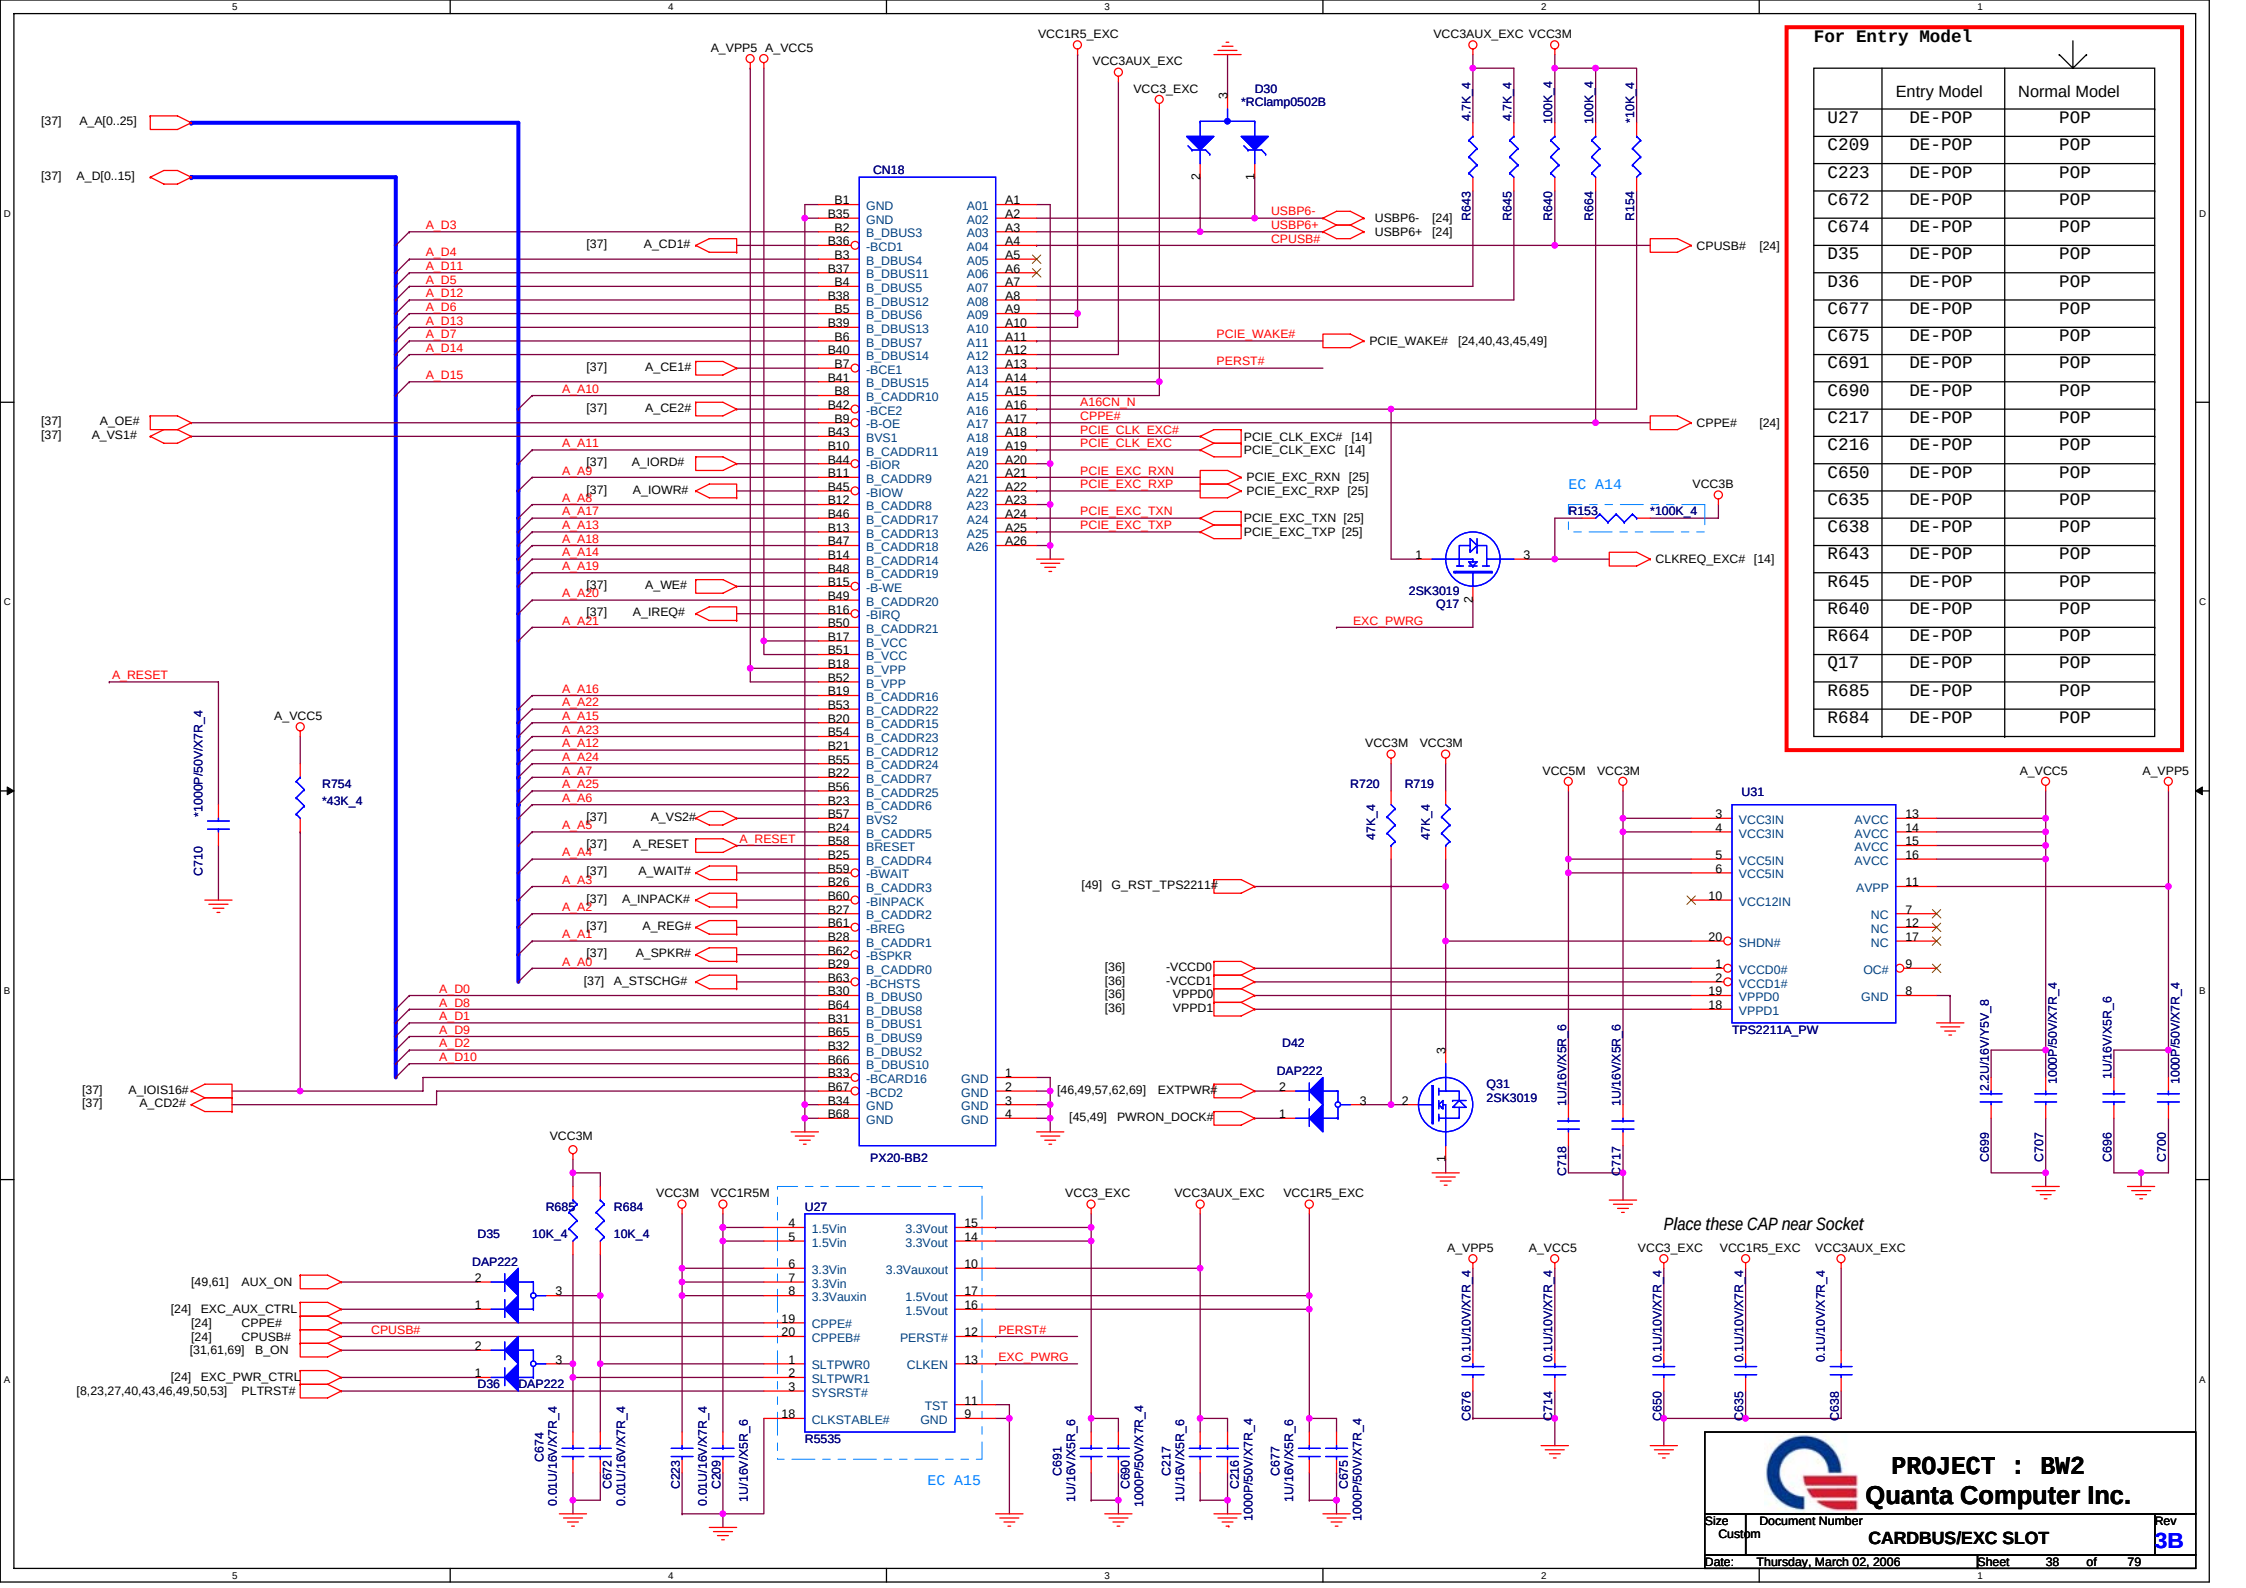


For Entry Model


	Entry Model	Normal Model
U27	DE - POP	P0P
C209	DE - POP	P0P
C223	DE - POP	P0P
C672	DE - POP	P0P
C674	DE - POP	P0P
D35	DE - POP	P0P
D36	DE - POP	P0P
C677	DE - POP	P0P
C675	DE - POP	P0P
C691	DE - POP	P0P
C690	DE - POP	P0P
C217	DE - POP	P0P
C216	DE - POP	P0P
C650	DE - POP	P0P
C635	DE - POP	P0P
C638	DE - POP	P0P
R643	DE - POP	P0P
R645	DE - POP	P0P
R640	DE - POP	P0P
R664	DE - POP	P0P
Q17	DE - POP	P0P
R685	DE - POP	P0P
R684	DE - POP	P0P

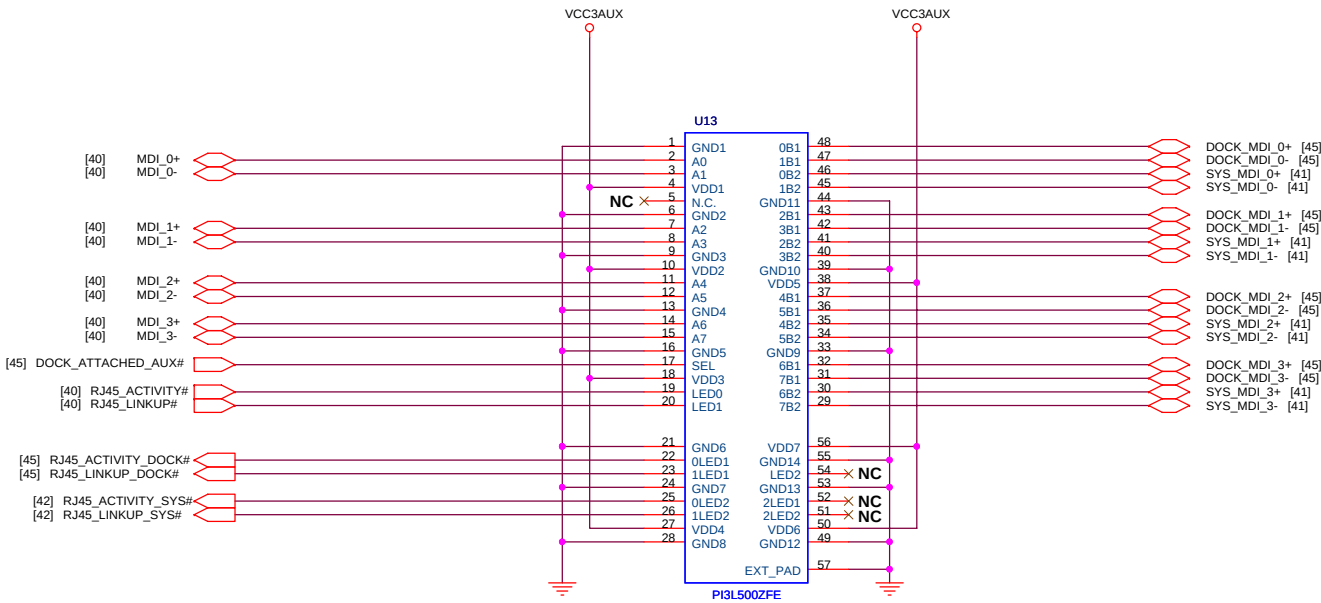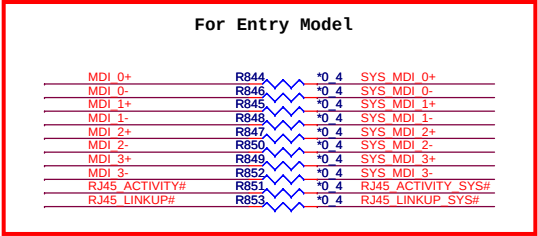


For Entry Model

	Entry Model	Normal Model
U13	DE - POP	POP
C147	DE - POP	POP
C122	DE - POP	POP
C517	DE - POP	POP
C134	DE - POP	POP
C140	DE - POP	POP
C135	DE - POP	POP
C464	DE - POP	POP
R844	POP	DE - POP
R846	POP	DE - POP
R845	POP	DE - POP
R848	POP	DE - POP
R847	POP	DE - POP
R850	POP	DE - POP
R849	POP	DE - POP
R852	POP	DE - POP
R851	POP	DE - POP
R853	POP	DE - POP

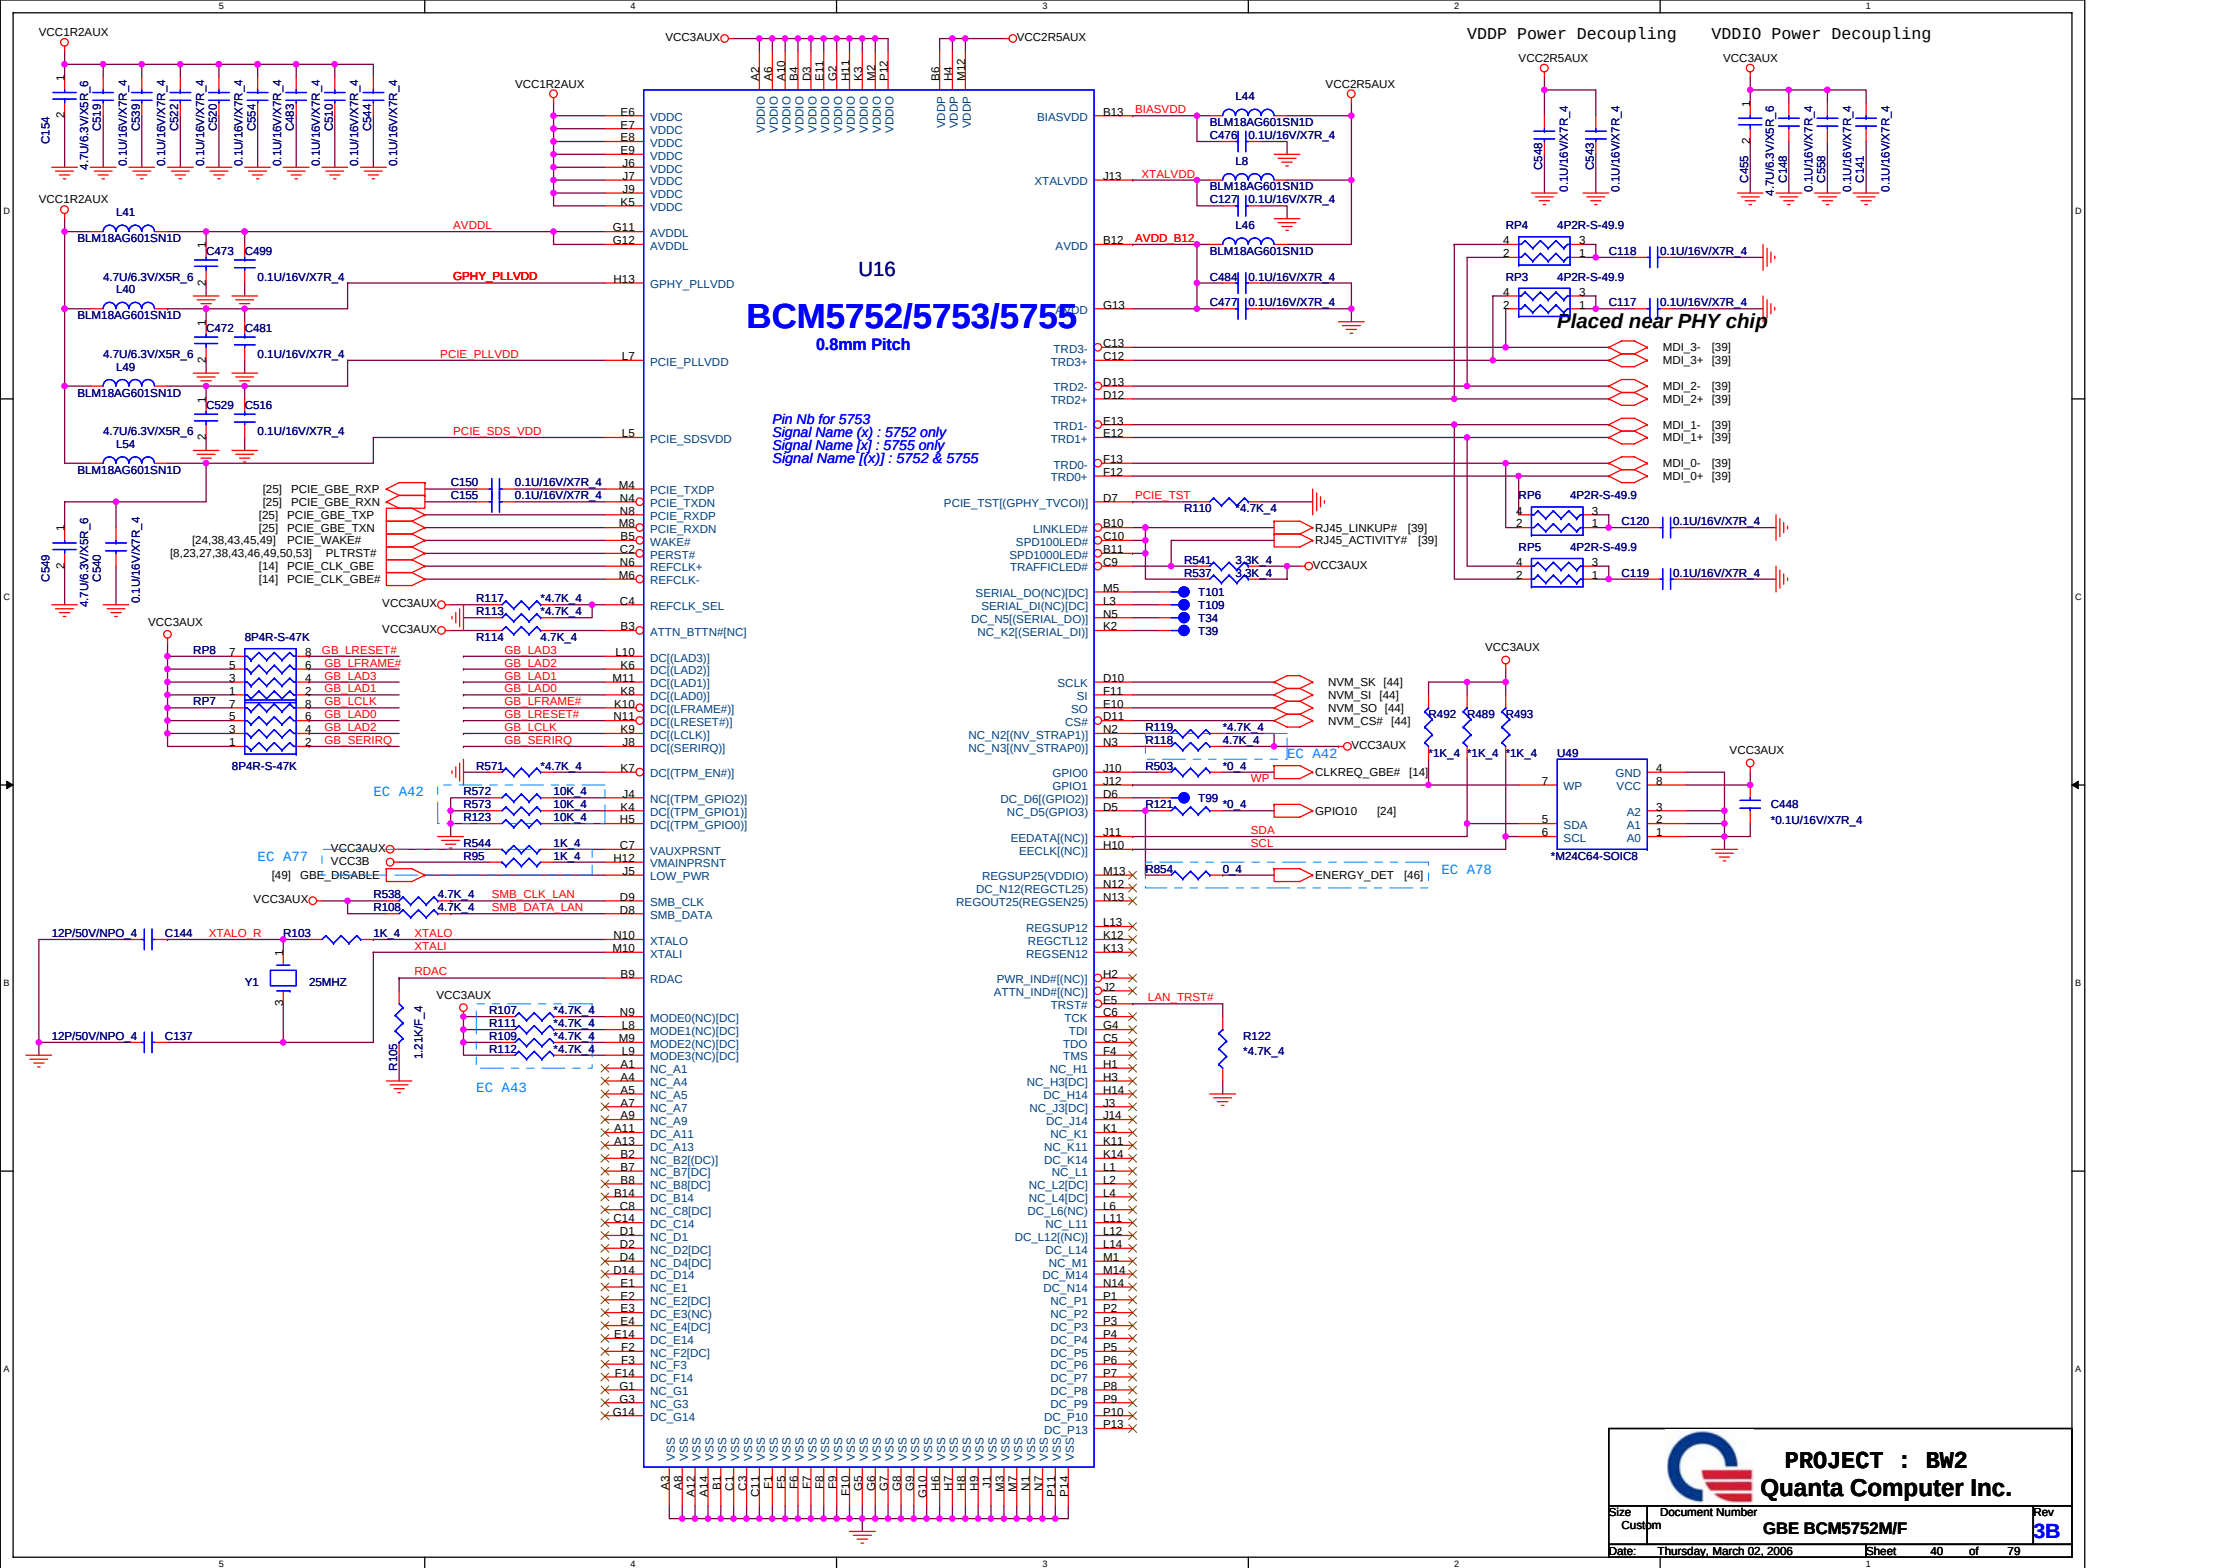

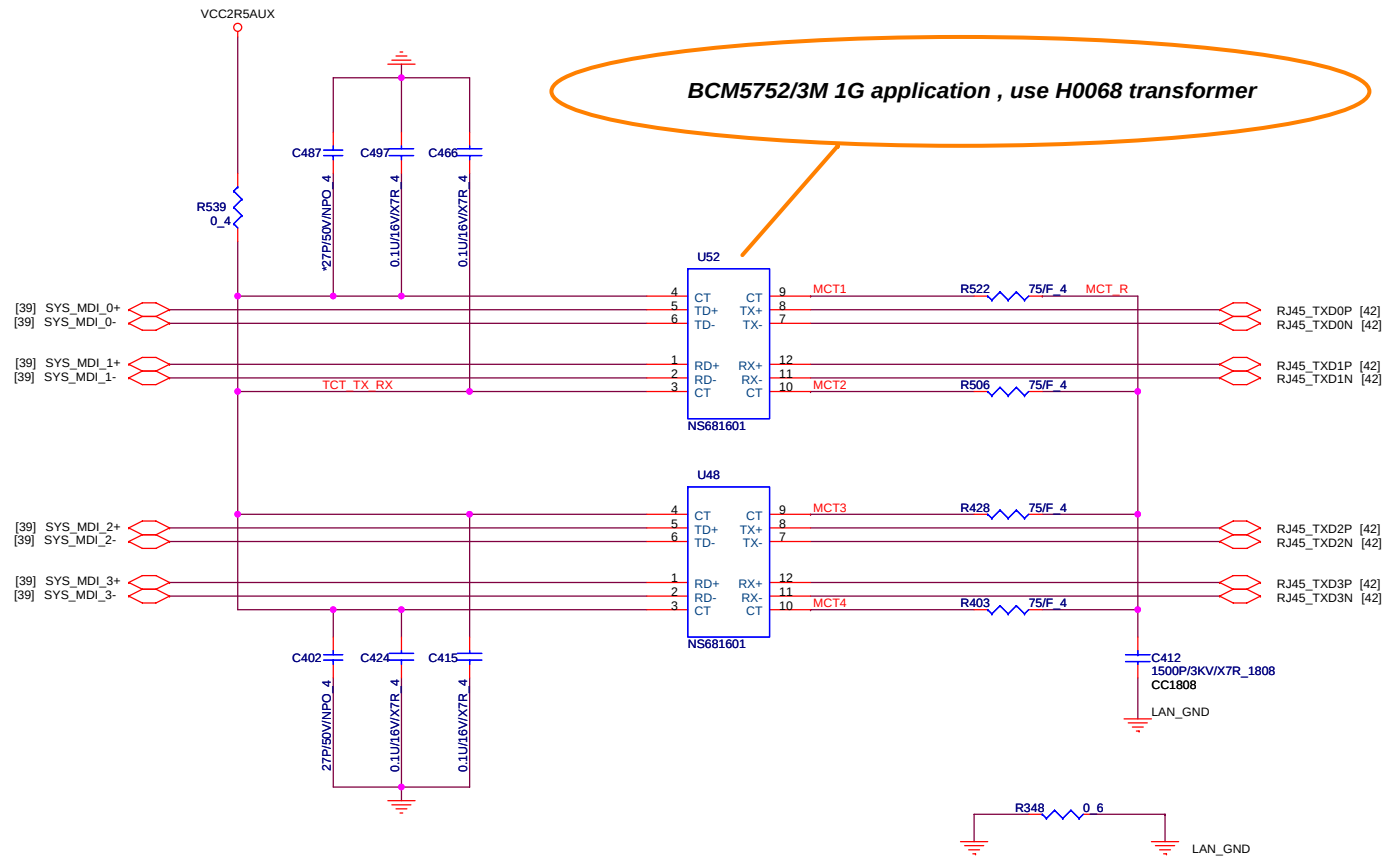

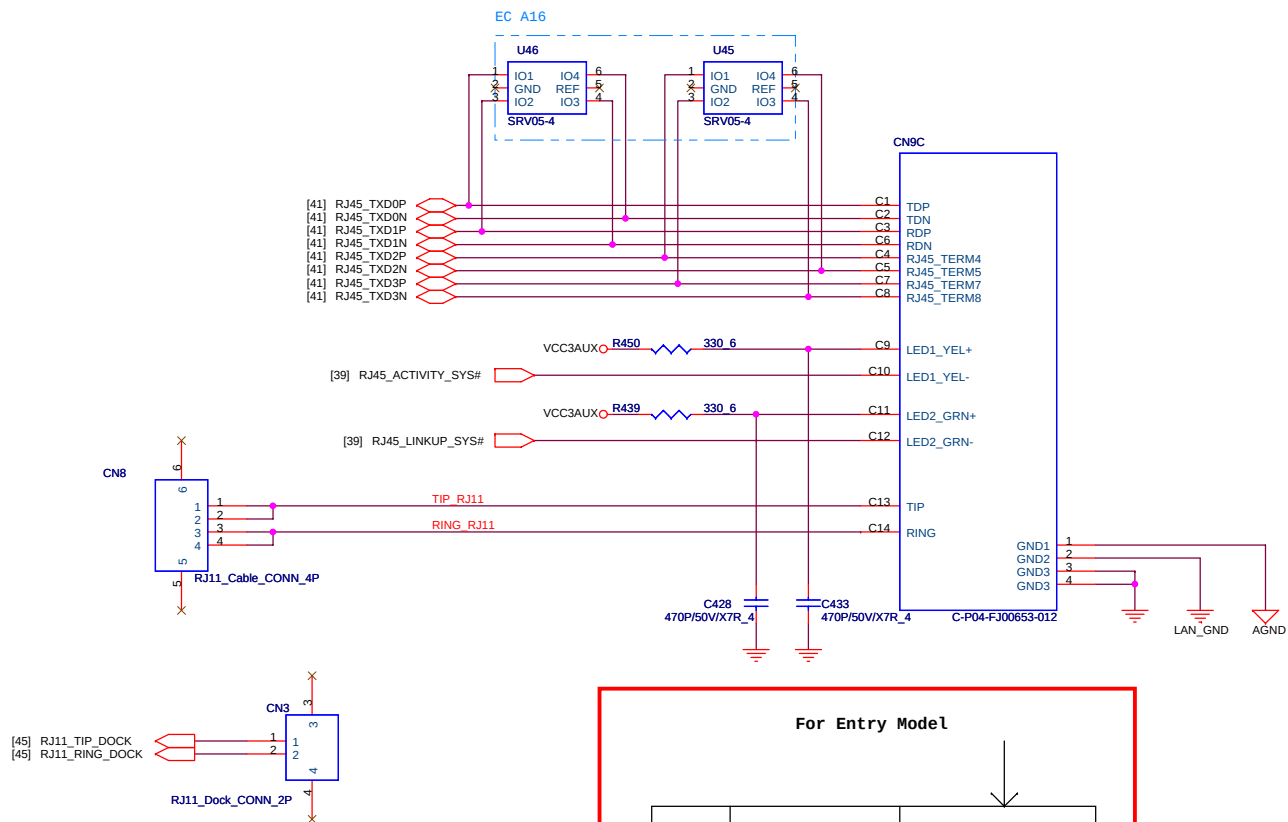


Close to Dock

For Entry Model

	Entry Model	Normal Model
CN3	DE-POP	POP

MINI PCIE CONN-1 FOR WWAN


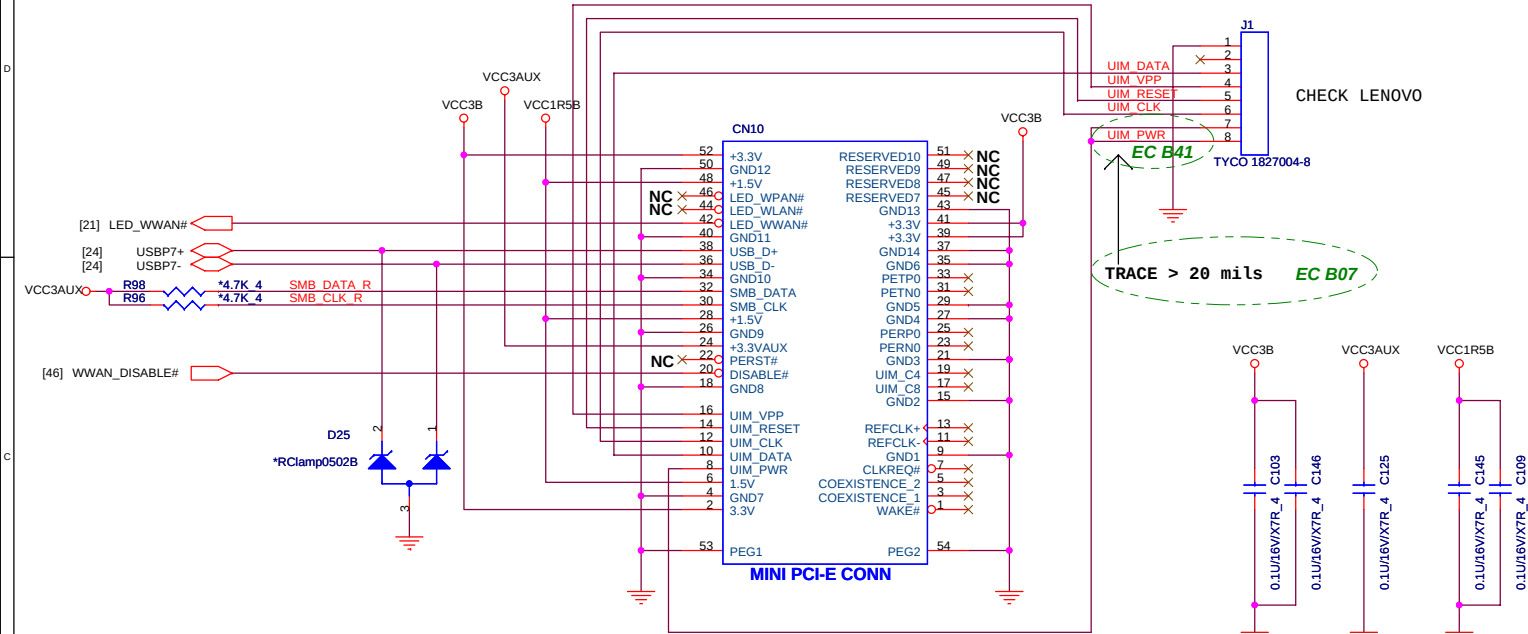


EC A32

For Entry Model

	Entry Model	Normal Model
J1	DE - POP	POP
CN10	DE - POP	POP
C103	DE - POP	POP
C146	DE - POP	POP
C125	DE - POP	POP
C145	DE - POP	POP
C109	DE - POP	POP


MINI PCIE CONN-2 FOR WLAN

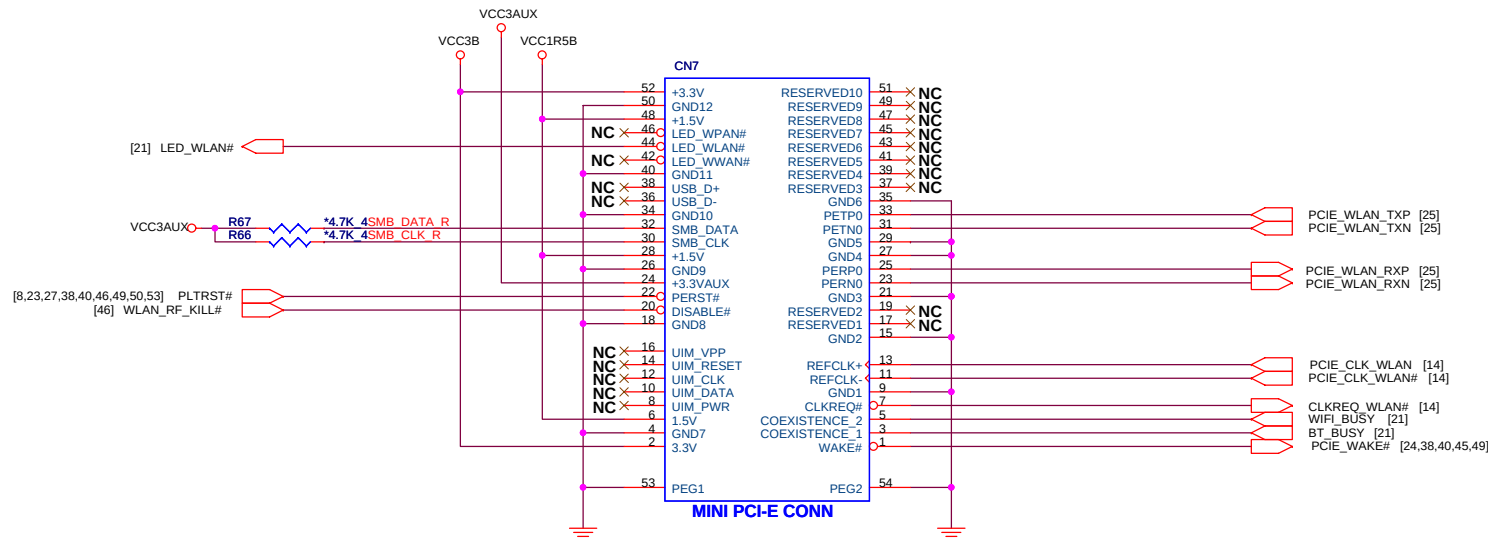

PROJECT : BW2
Quanta Computer Inc.

PLACE LESS THAN 2 INCH FROM THE ICH IF
USING SHARED ARCHITECTURE.



8Mbit (1M Byte), SPI



Macronix MX25L1605A

EC A89

U9 S0IC16 and U10 S0IC8
co-layout

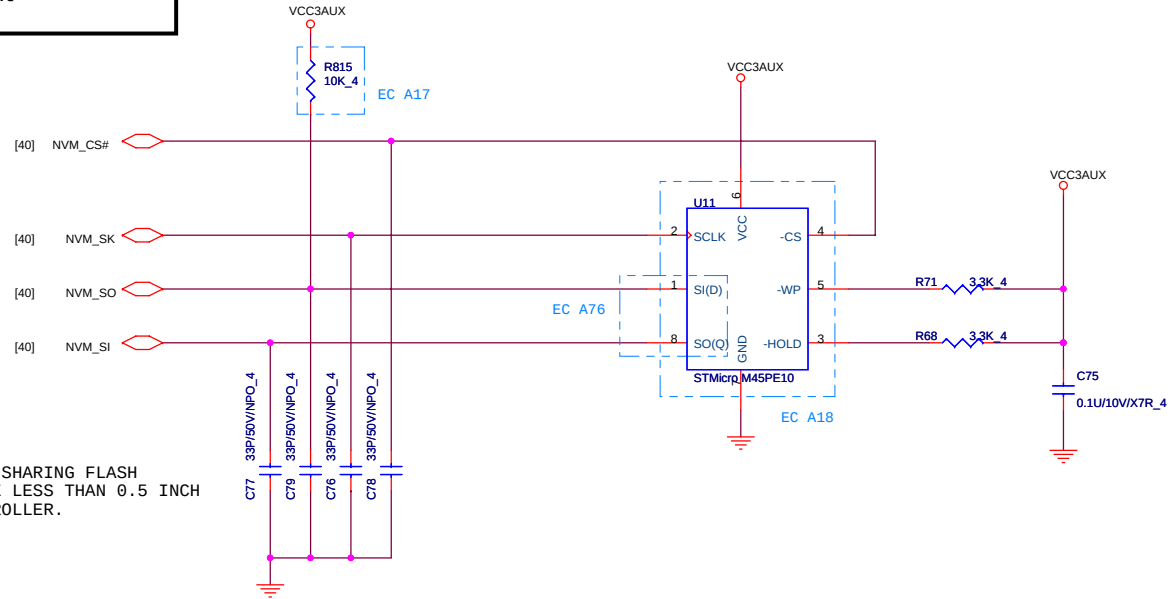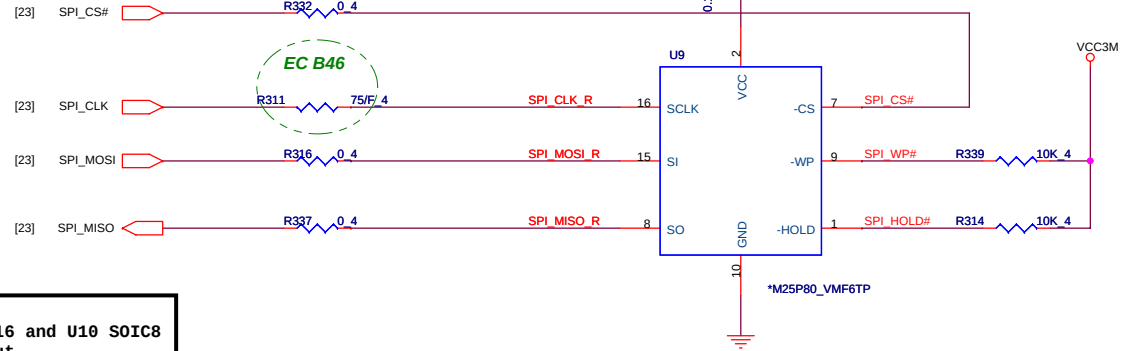



INSTALL ONLY WHEN SHARING FLASH
WITH THE ICH. PLACE LESS THAN 0.5 INCH
FROM THE LAN CONTROLLER.








PROJECT : BW2
Quanta Computer Inc.

For Entry Model	
Entry Model	Normal Model
ALL DE-POP	ALL POP (EXCEPT R28,R29,R30,R31,R32,C756,C757,C758,C759)

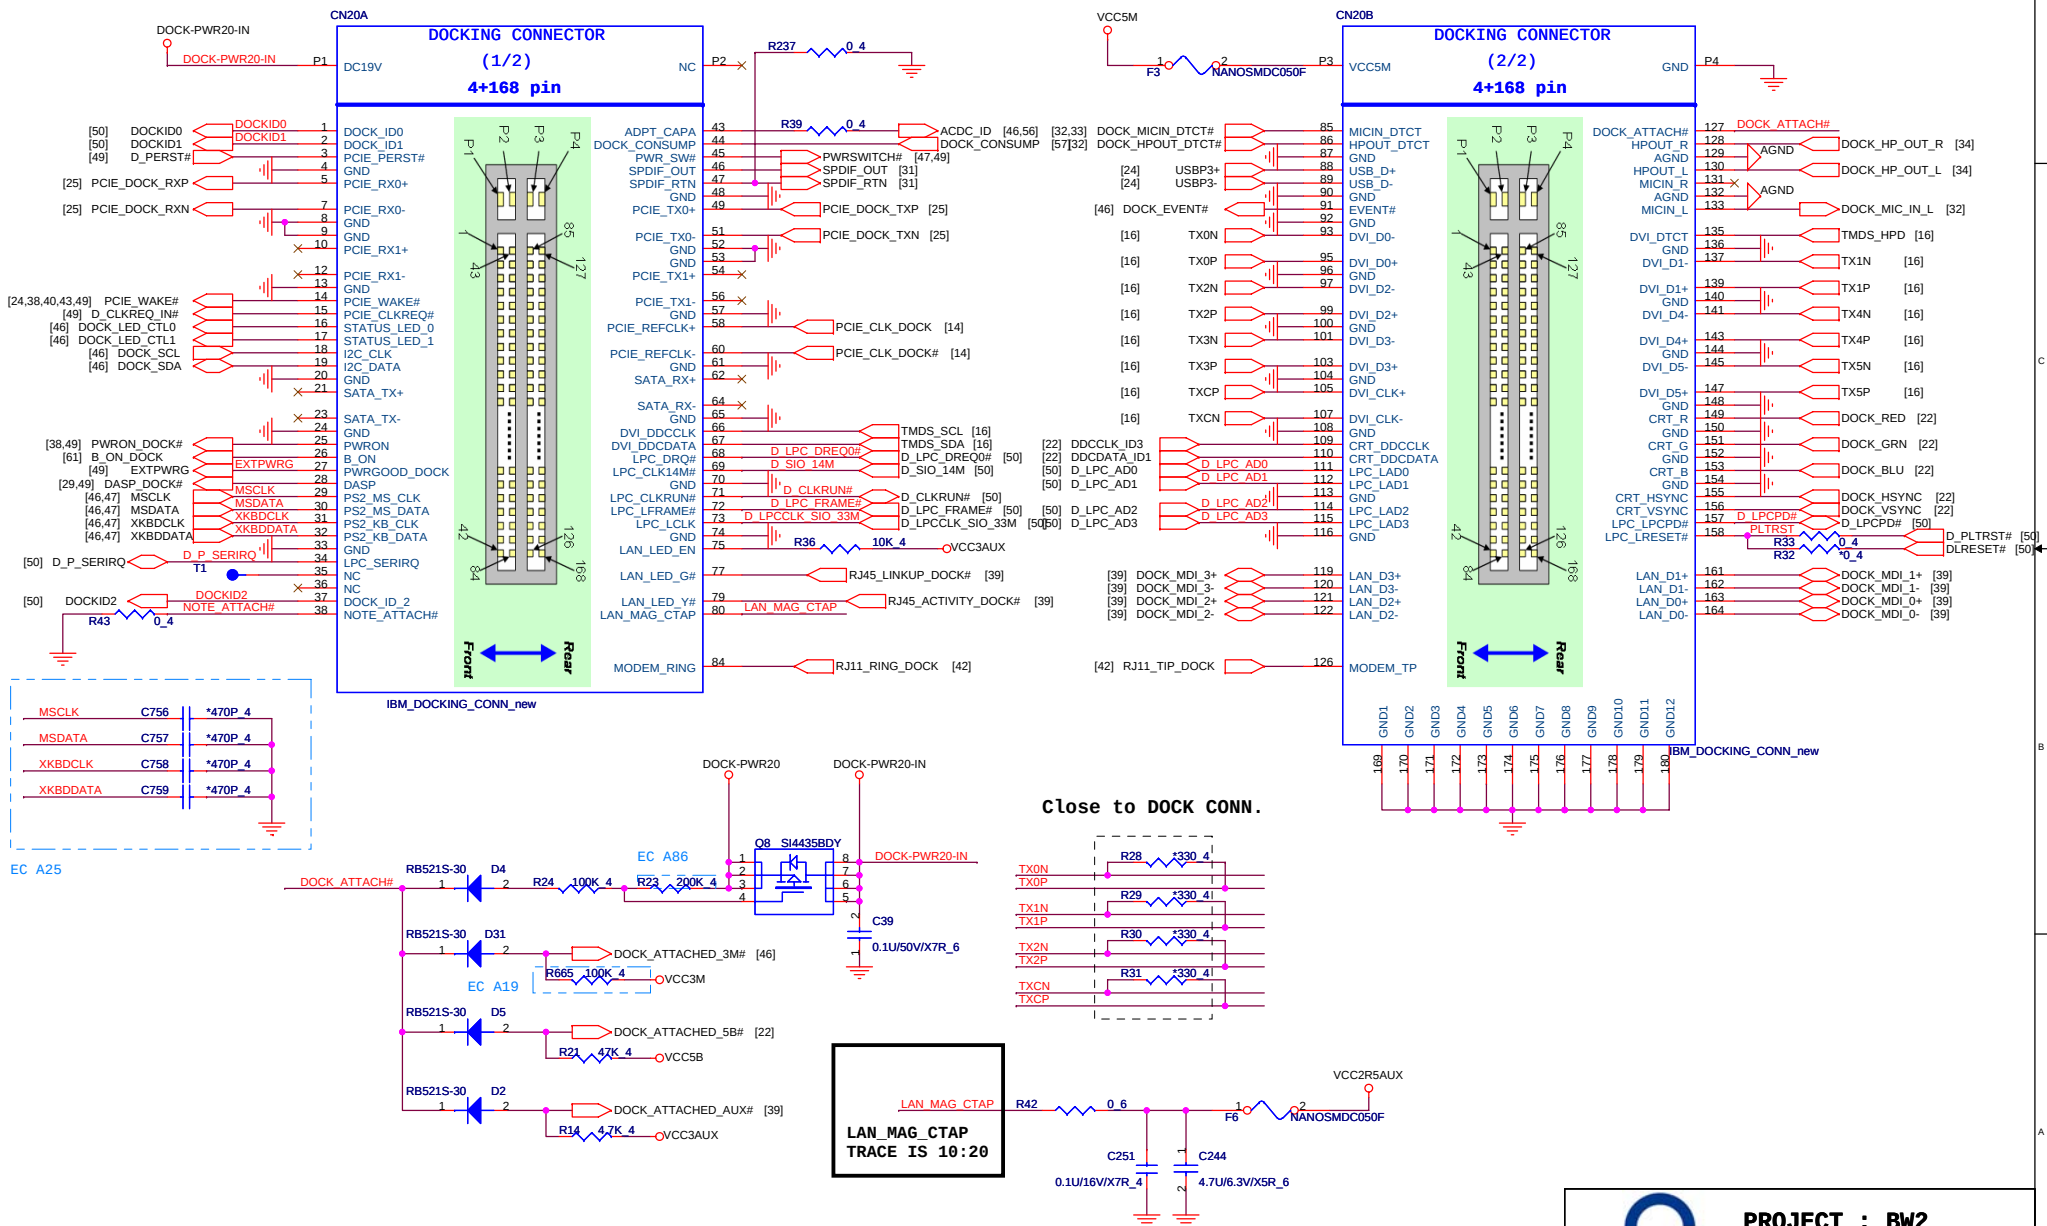




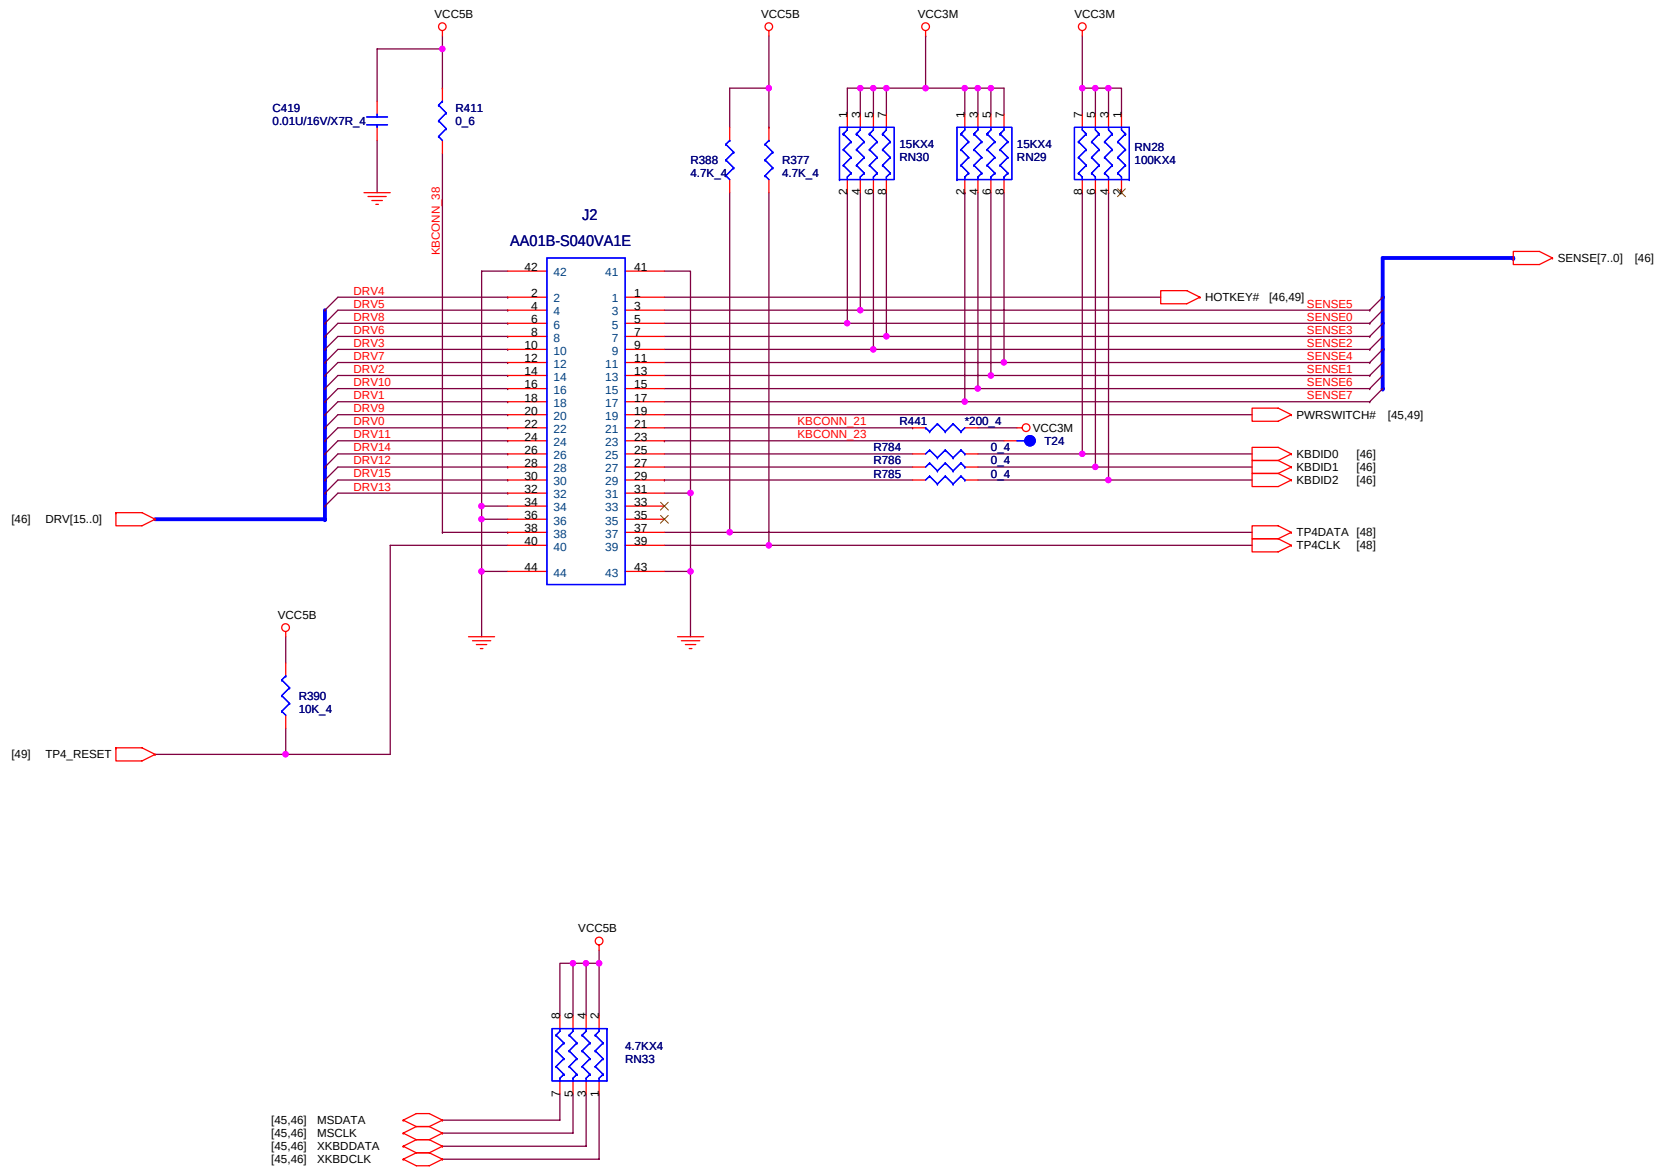


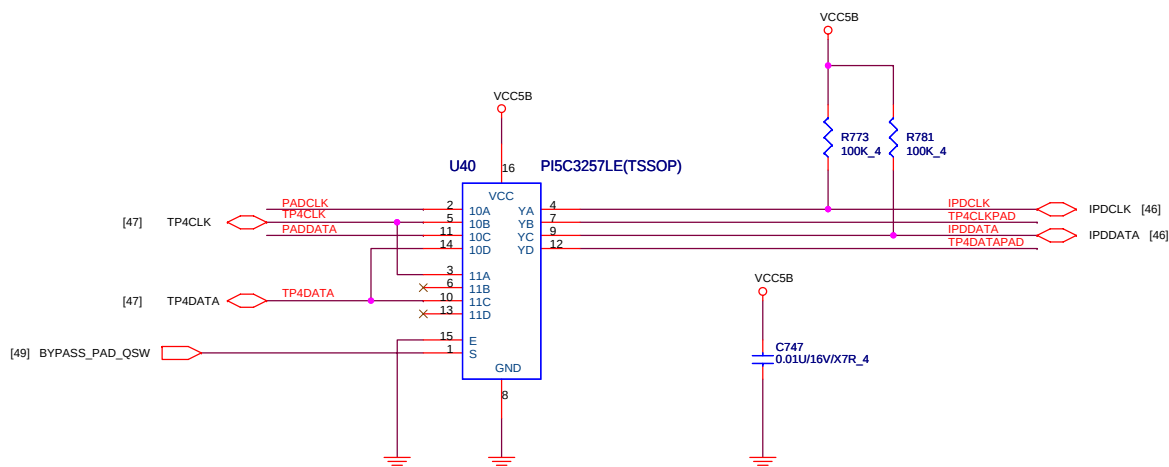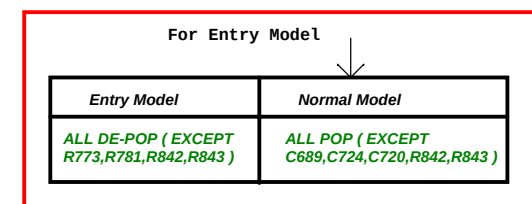
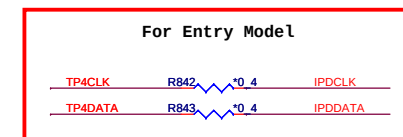
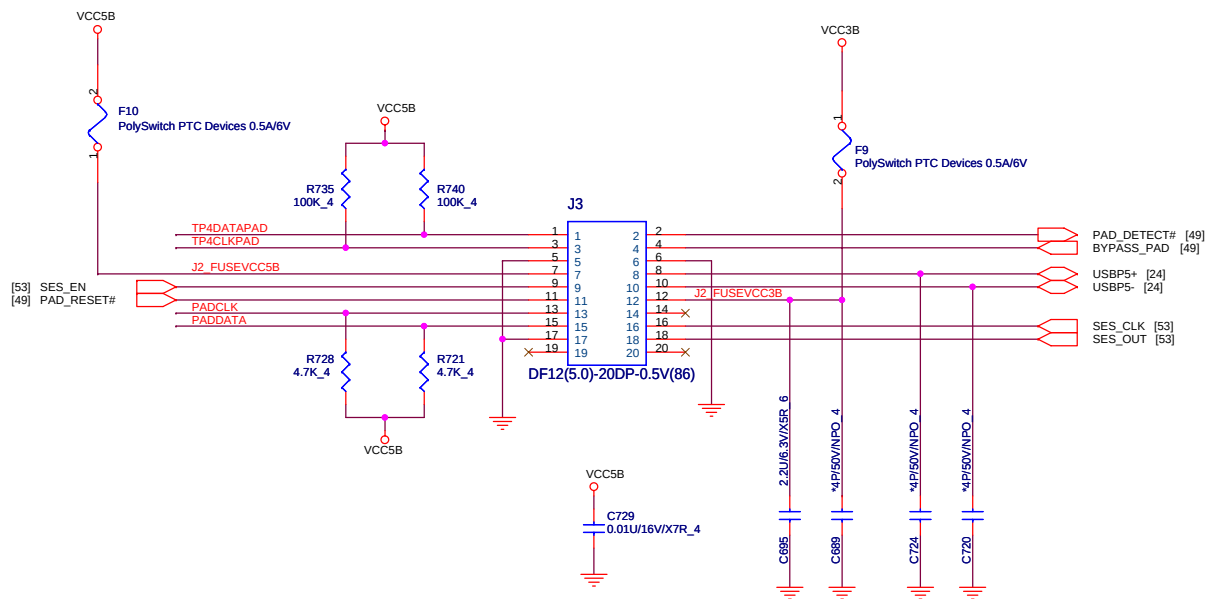



S	YA	YB	YC	YD	FUNCTION
L	10A	10B	10C	10D	S=0
H	11A	11B	11C	11D	S=1

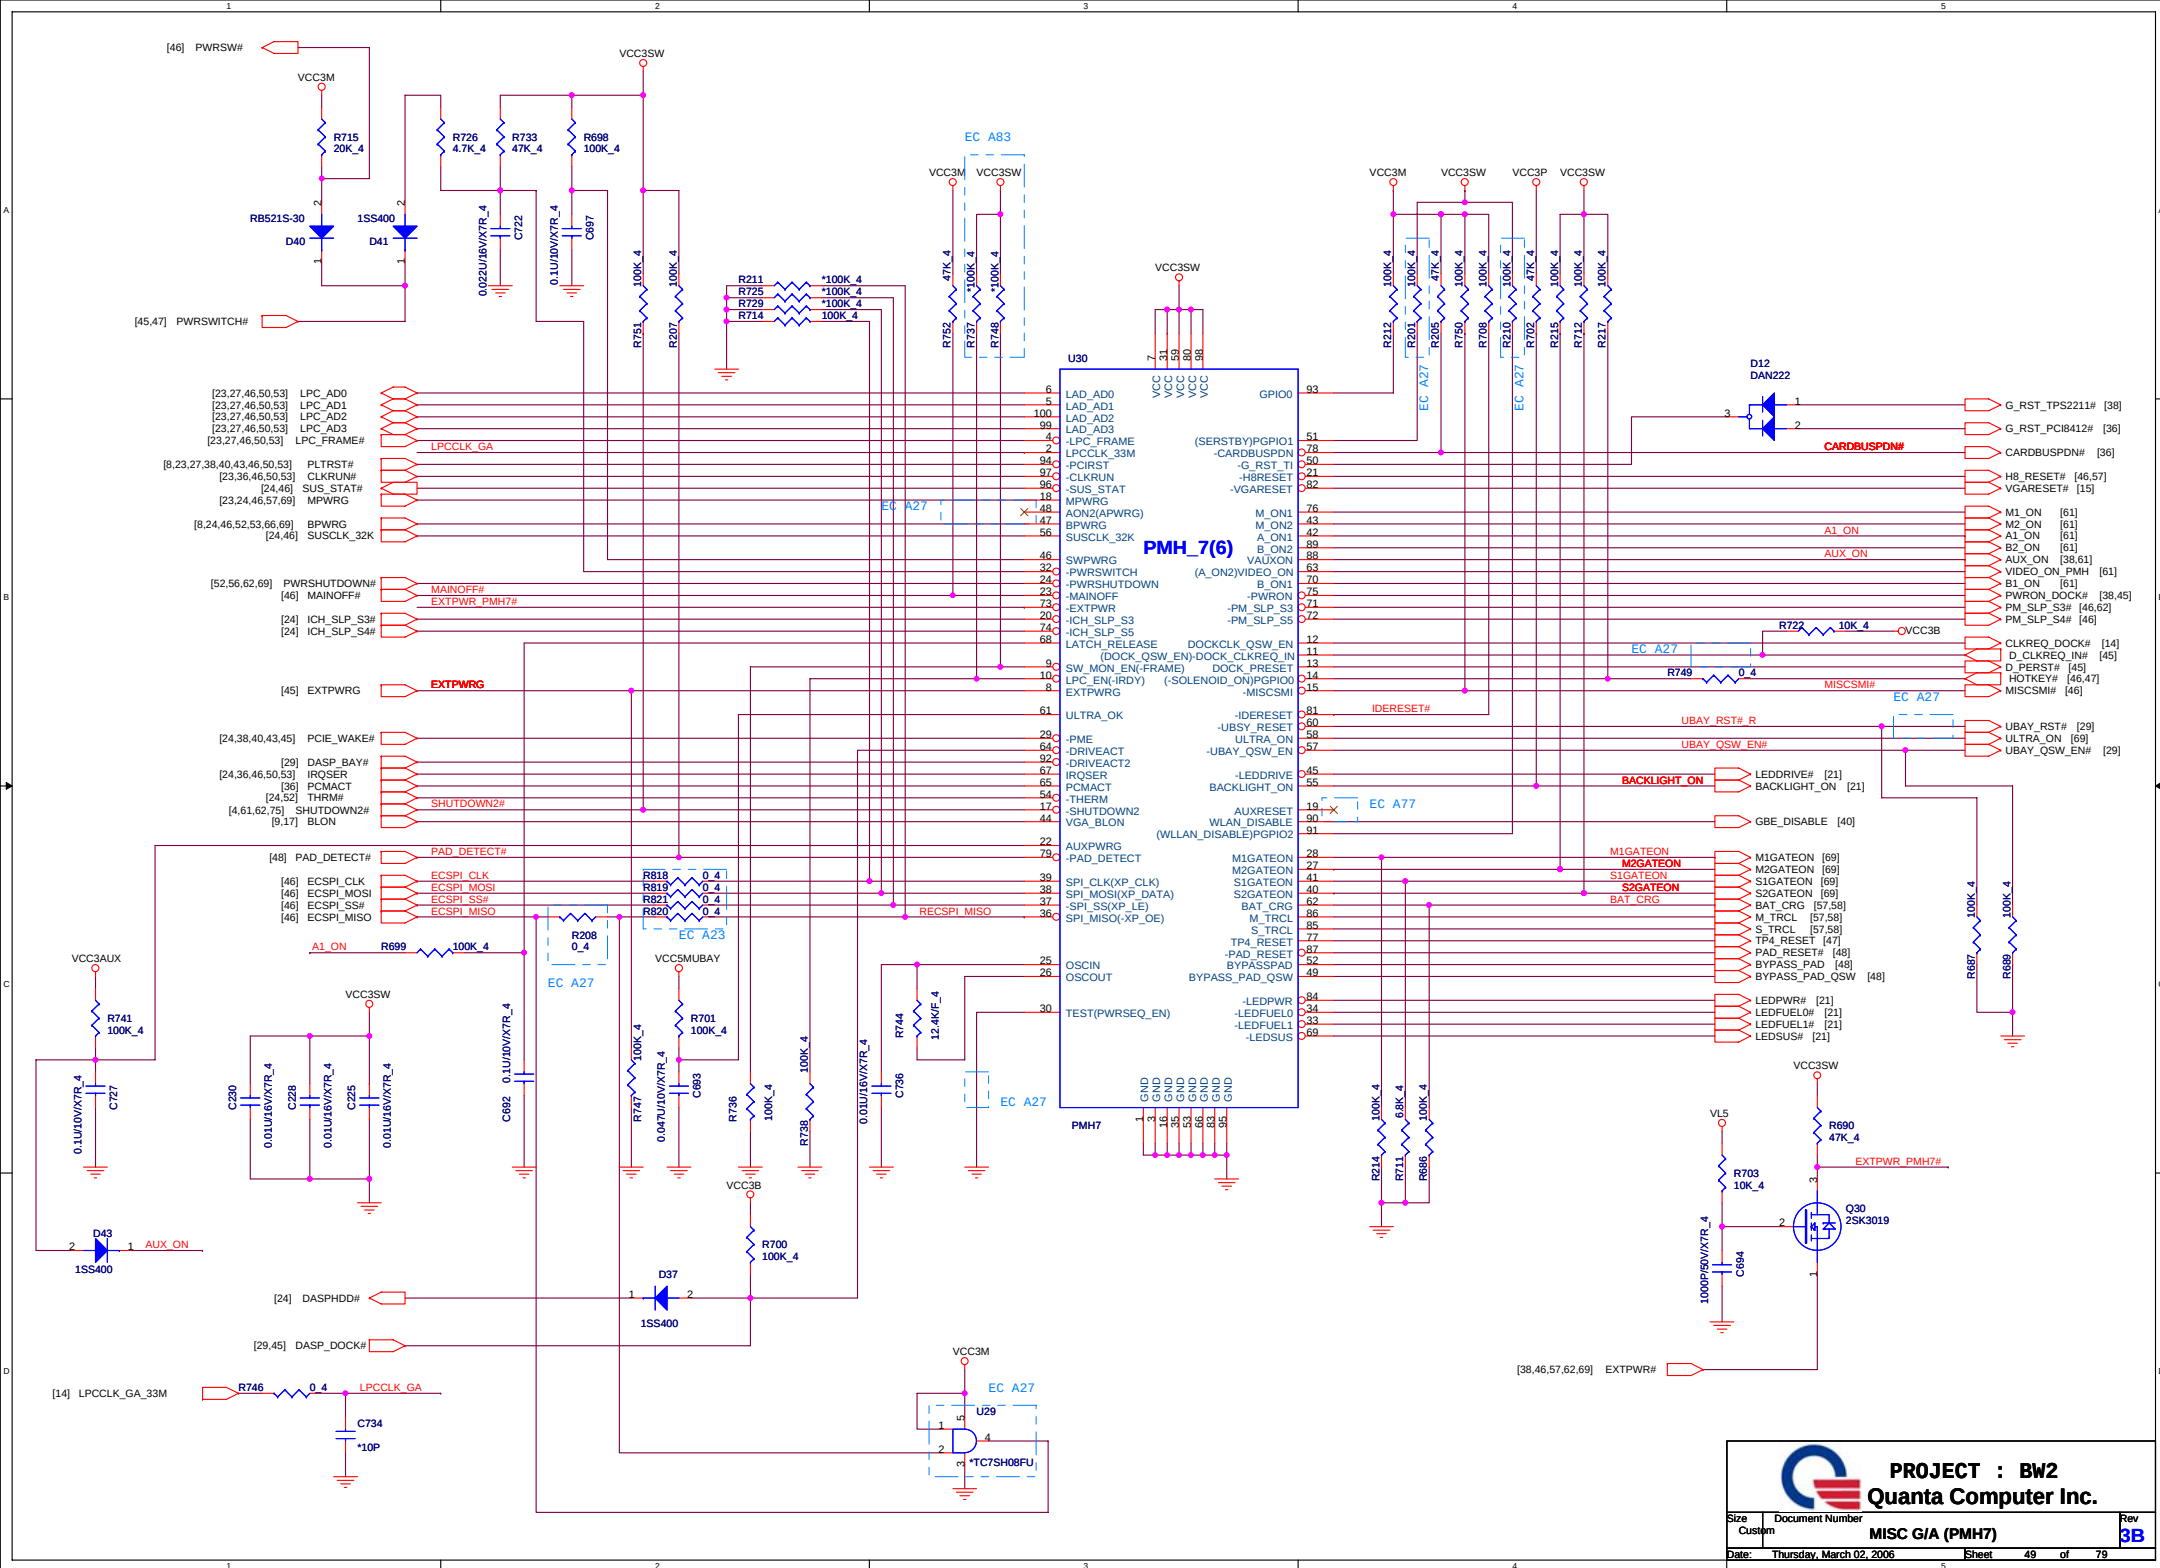

For Entry Model	
Entry Model	Normal Model
ALL DE-POP	ALL POP(EXCEPT R231)

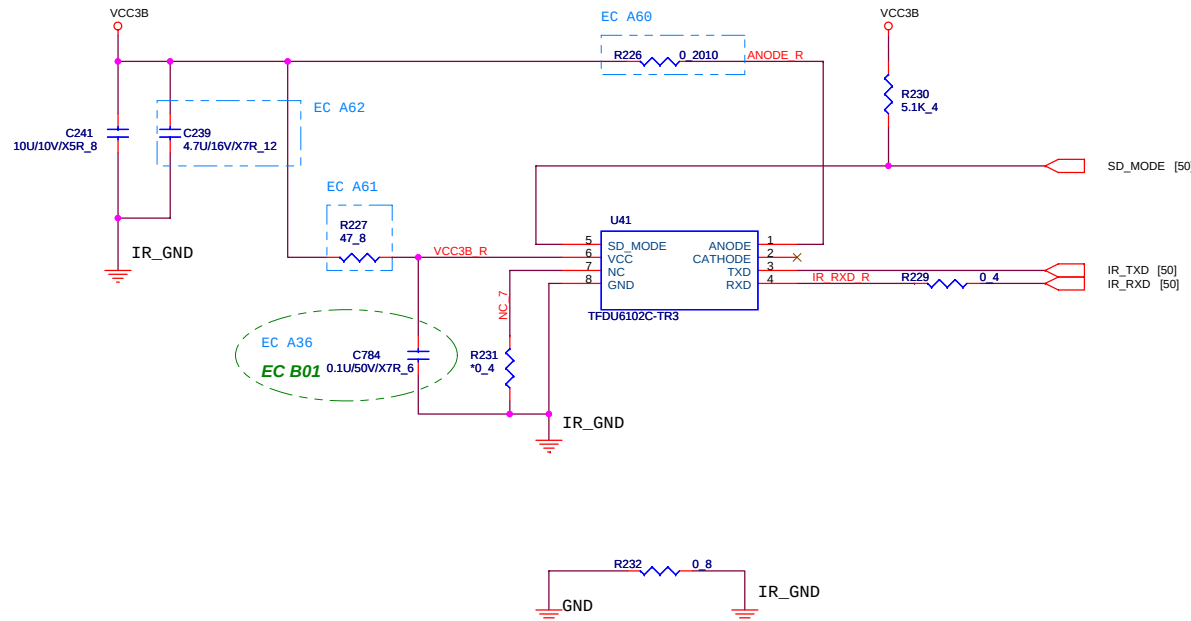

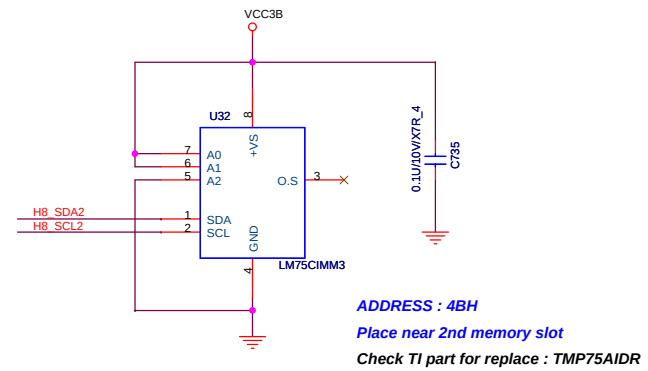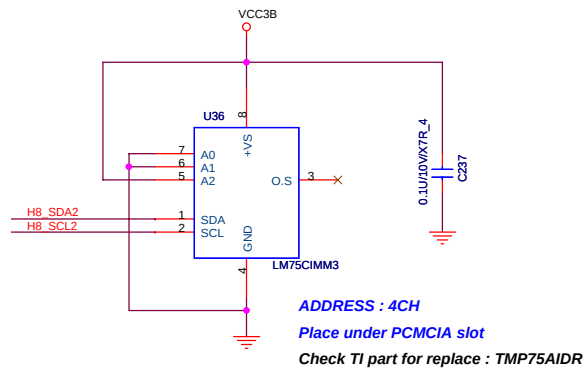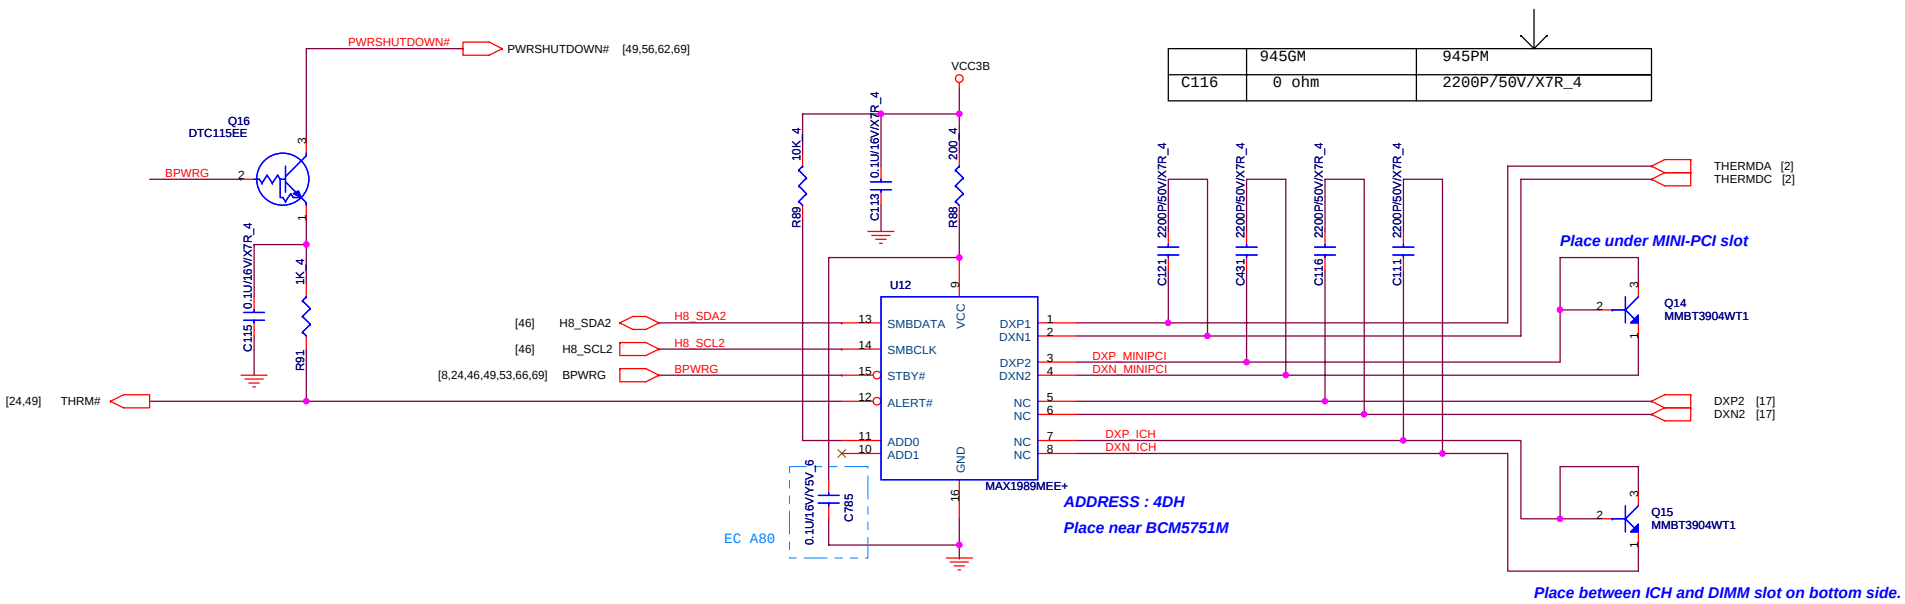


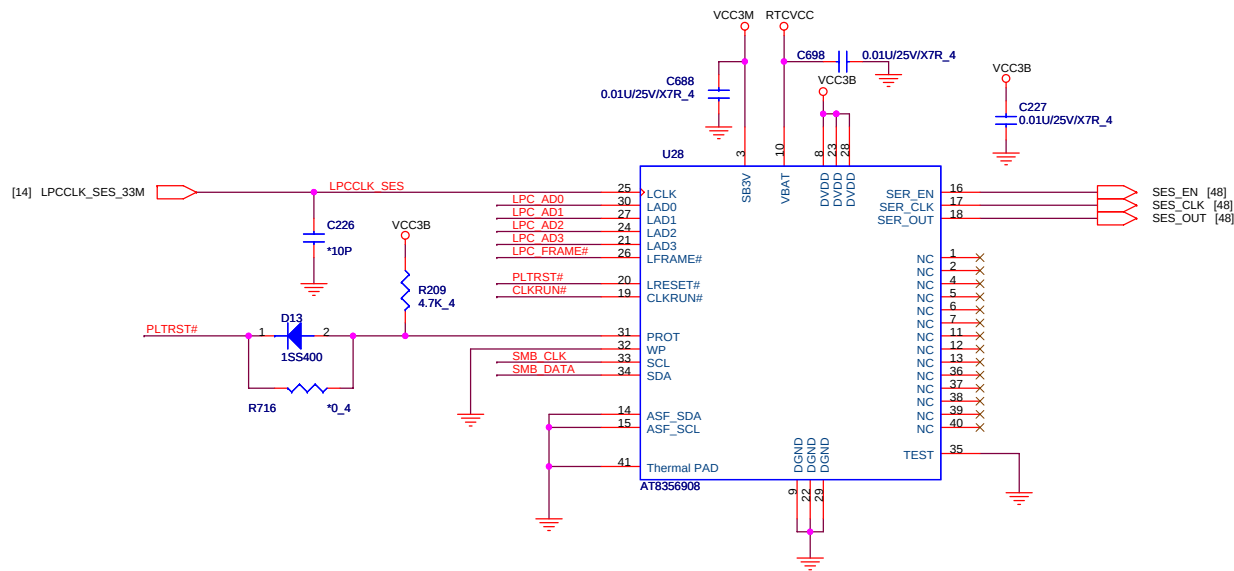

For Entry Model



↓



	Entry Model	Normal Model
U33	DE-POP	POP
C233	DE-POP	POP
C232	DE-POP	POP
C234	DE-POP	POP
R731	DE-POP	POP
R160	POP	DE-POP
R152	DE-POP	POP

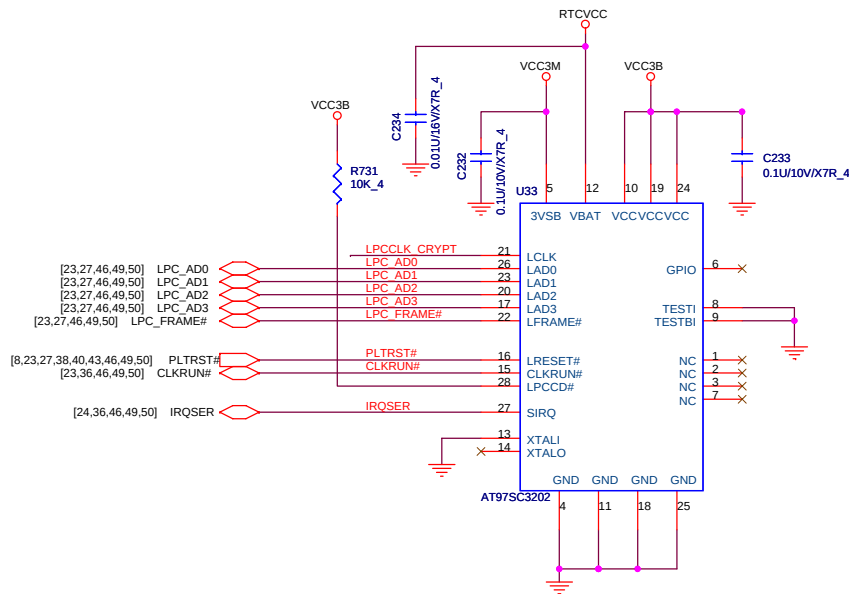



TCPA TABLE


	YES	NO
U33	ASM	NO_ASM
C233	ASM	NO_ASM
C232	ASM	NO_ASM
C234	ASM	NO_ASM
R731	ASM	NO_ASM

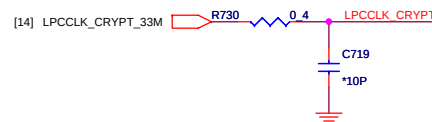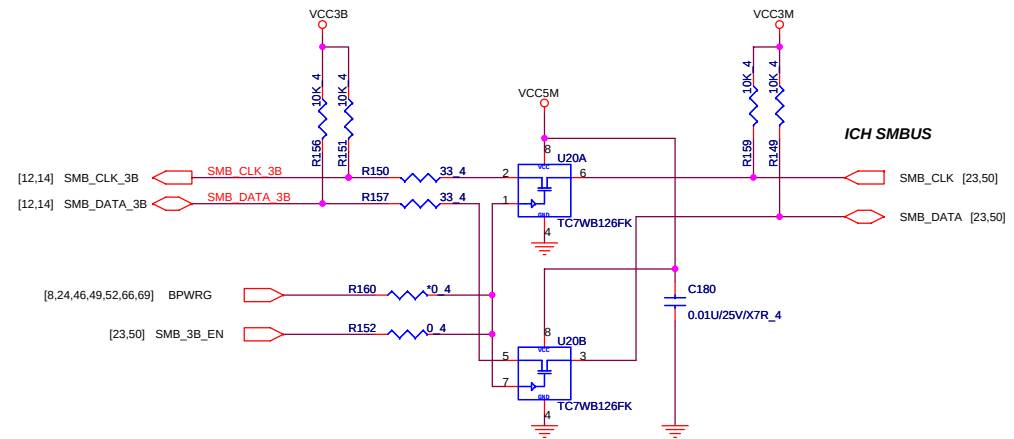

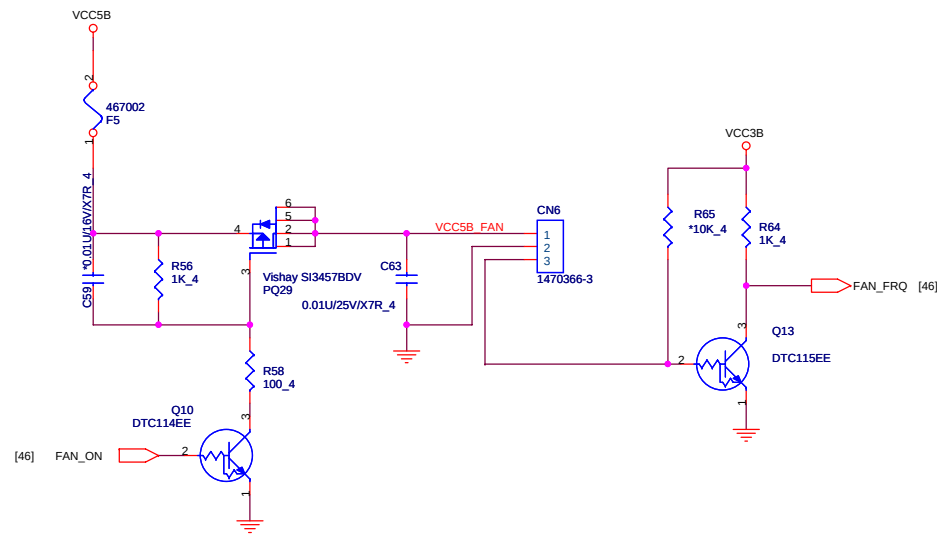

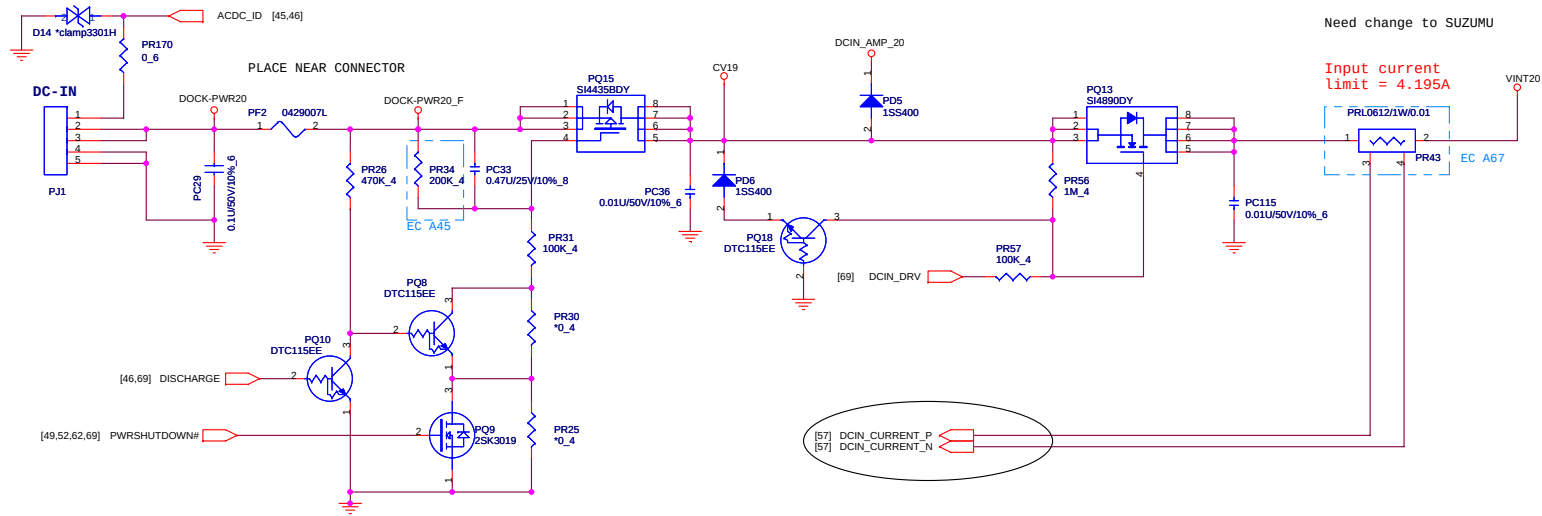


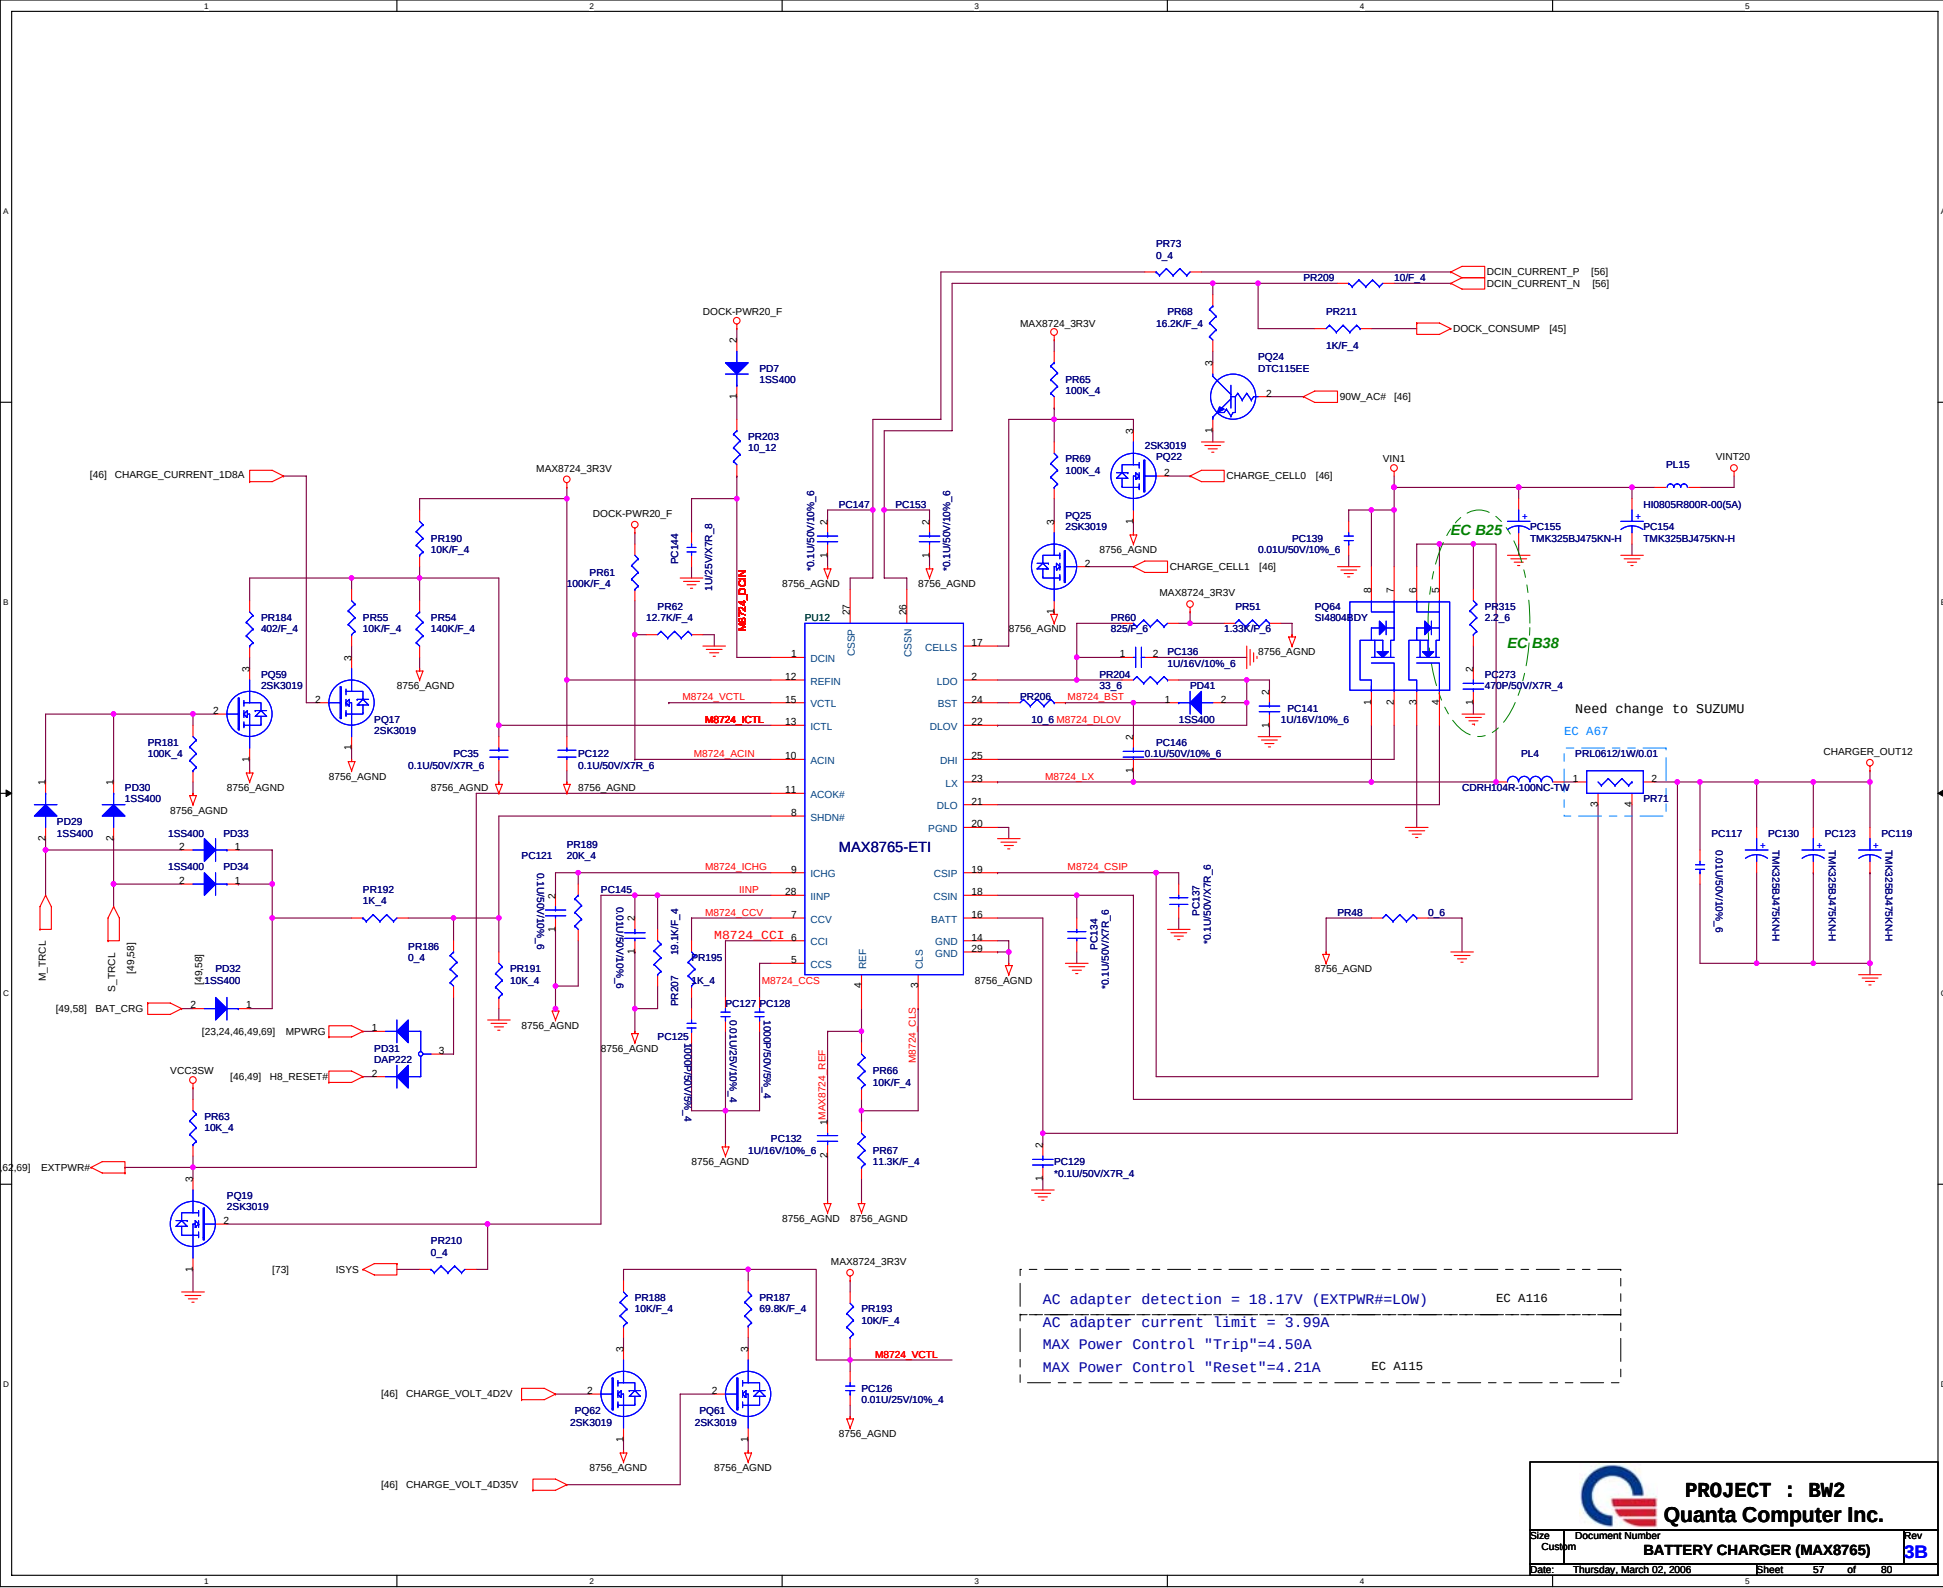

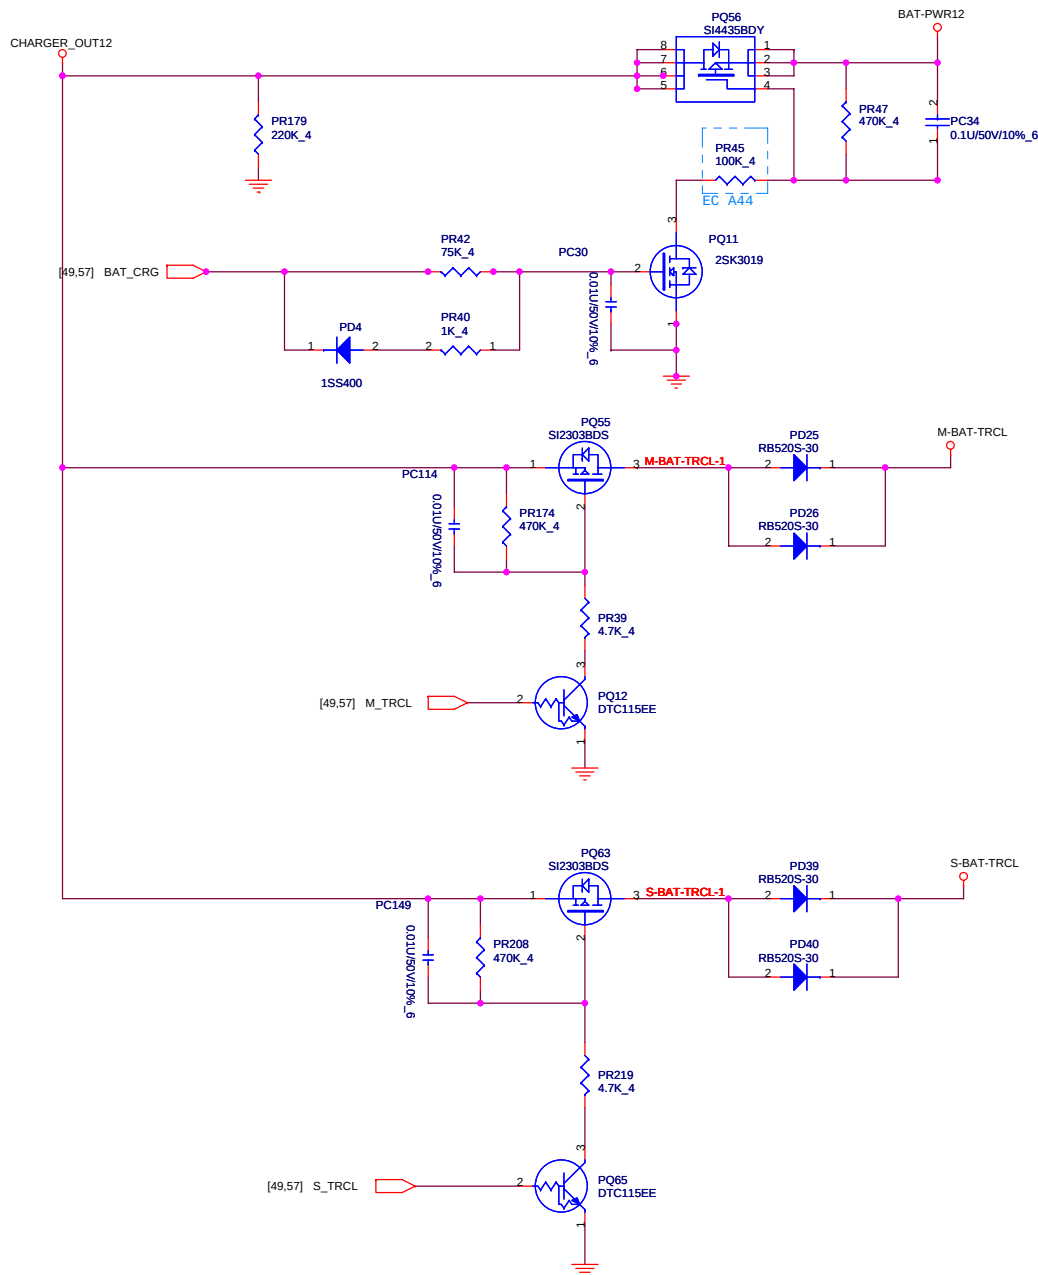

For Entry Model



	Entry Model	Normal Model
PQ63	DE-POP	POP
PQ65	DE-POP	POP
PD39	DE-POP	POP
PD40	DE-POP	POP
PR208	DE-POP	POP
PR219	DE-POP	POP
PC149	DE-POP	POP

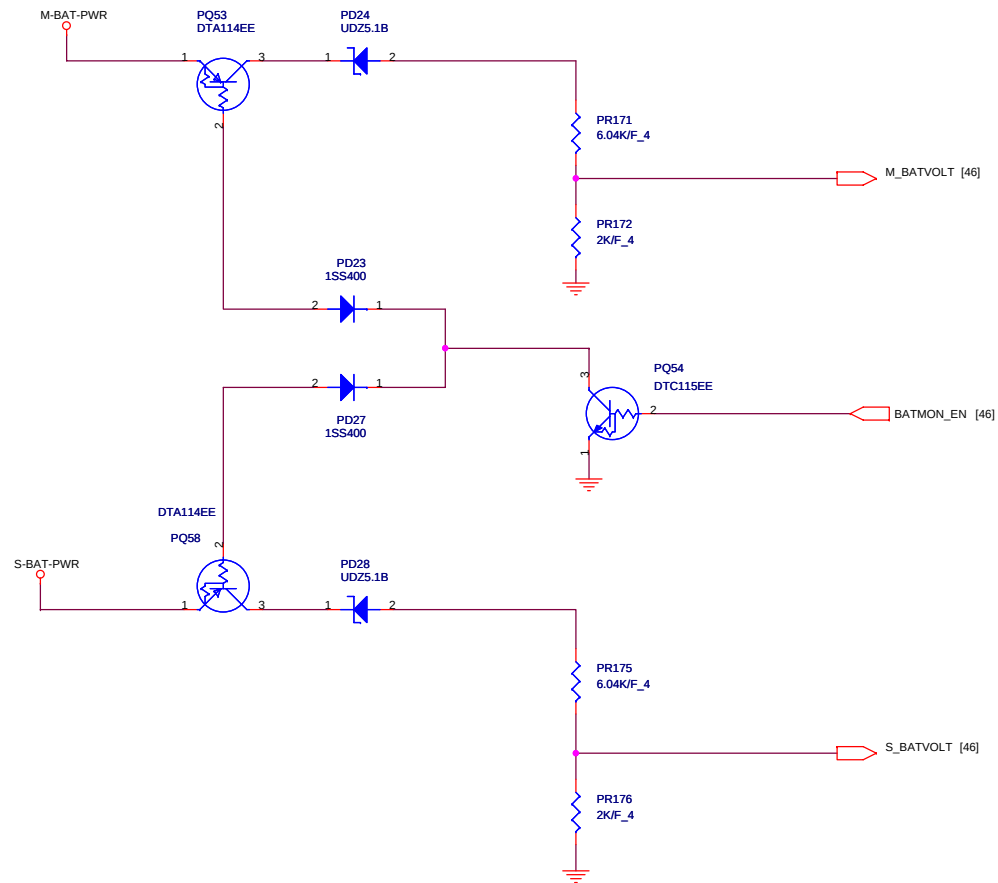



For Entry Model


	Entry Model	Normal Model
PQ58	DE-POP	POP
PD27	DE-POP	POP
PD28	DE-POP	POP
PR175	DE-POP	POP
PR176	POP	POP

EC A87

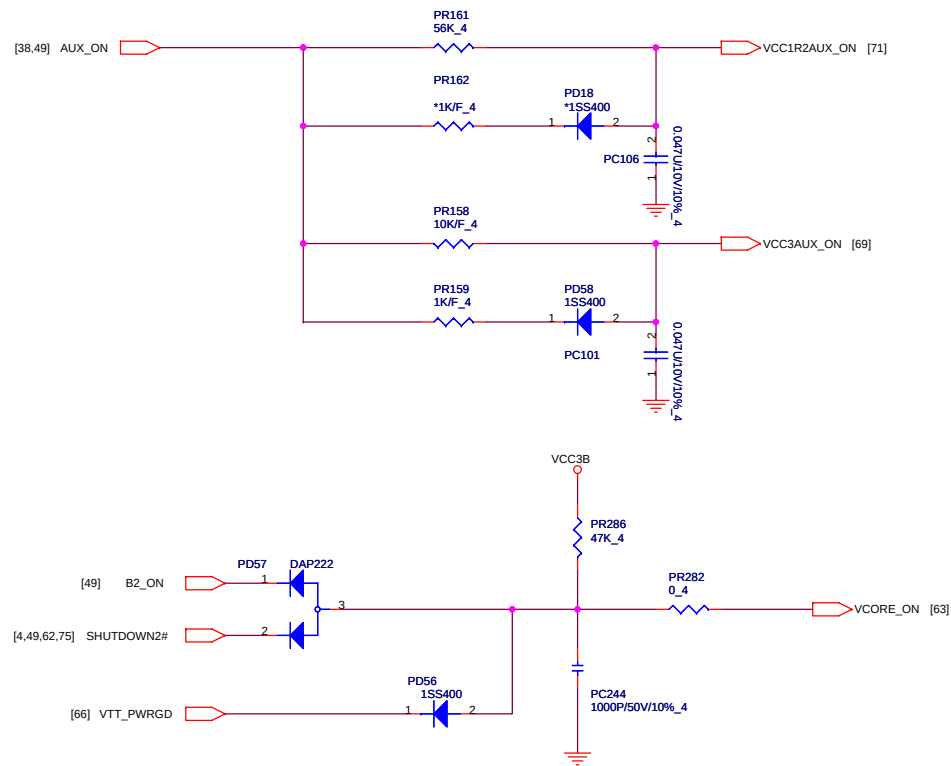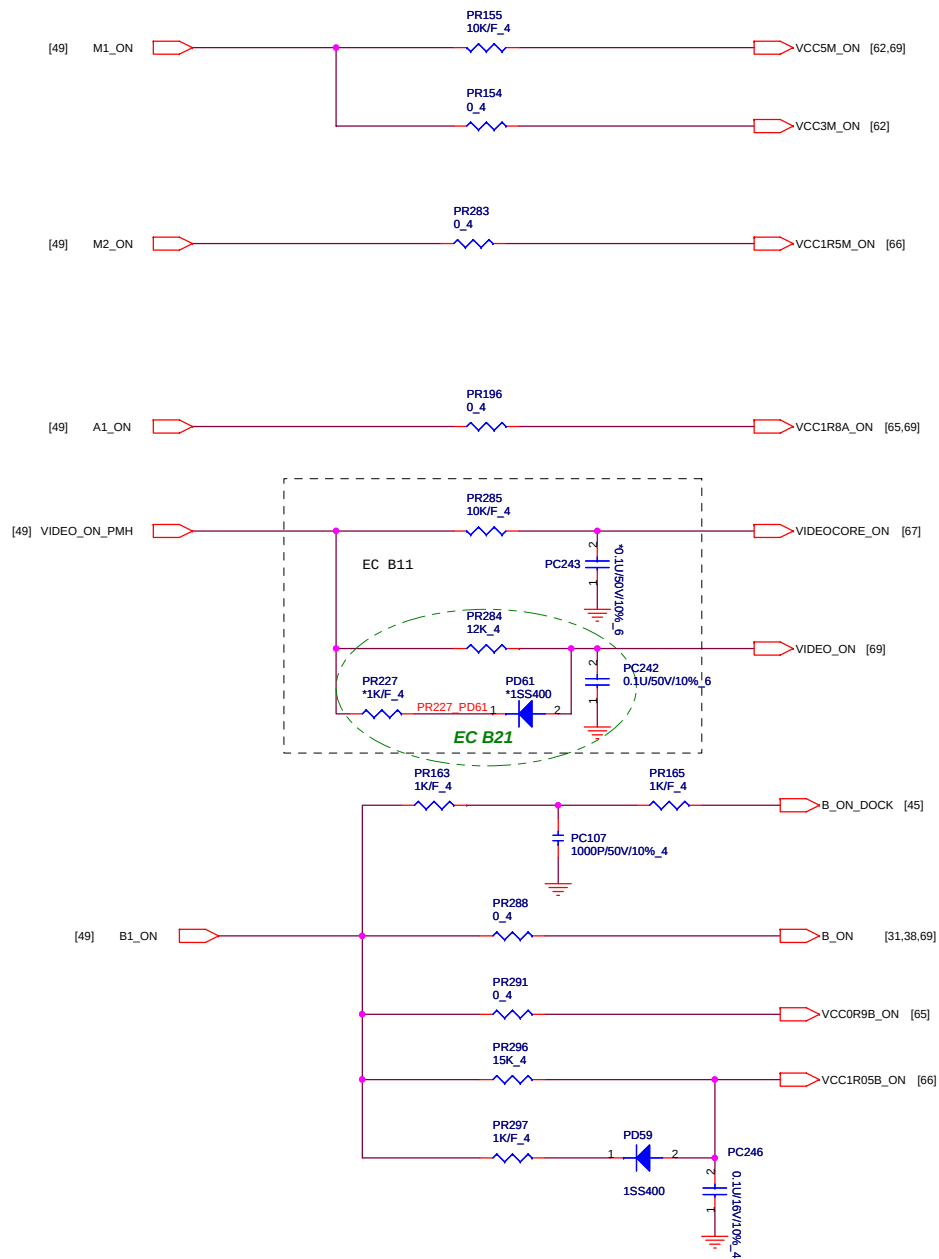



	945GM	945PM
PR285	DE-POP	POP
PC243	DE-POP	DE-POP
PR284	DE-POP	POP
PR227	DE-POP	DE-POP
PD61	DE-POP	DE-POP
PC242	DE-POP	POP
PR166	DE-POP	POP
PD19	DE-POP	POP
PR167	DE-POP	POP
PC109	DE-POP	POP

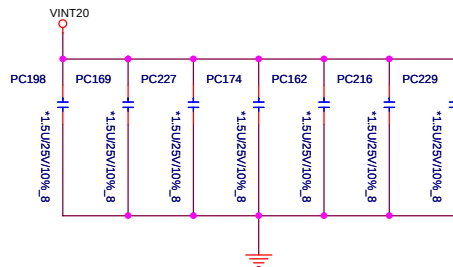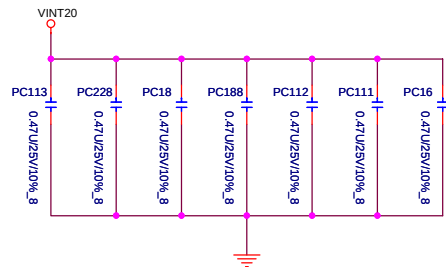

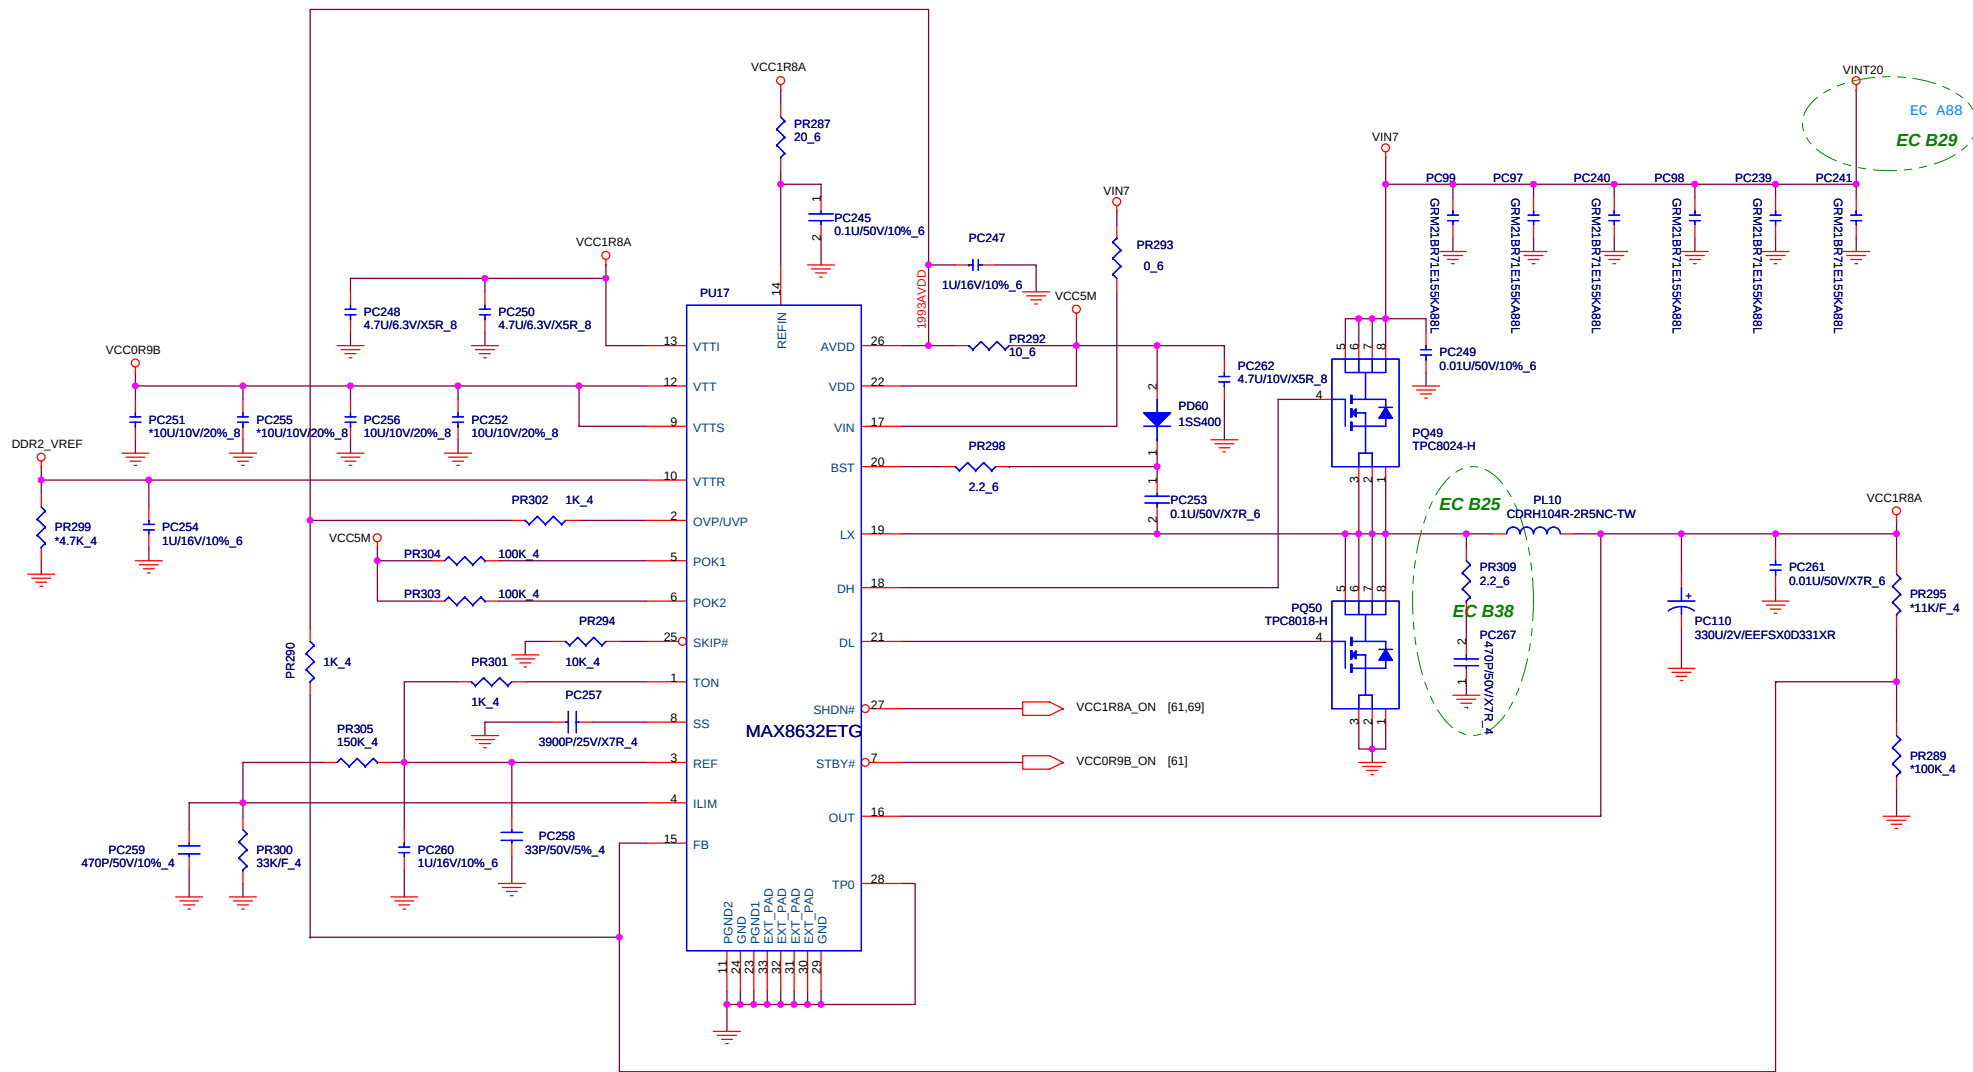

PROJECT : BW2
Quanta Computer Inc.

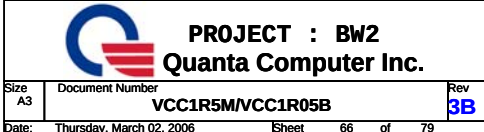

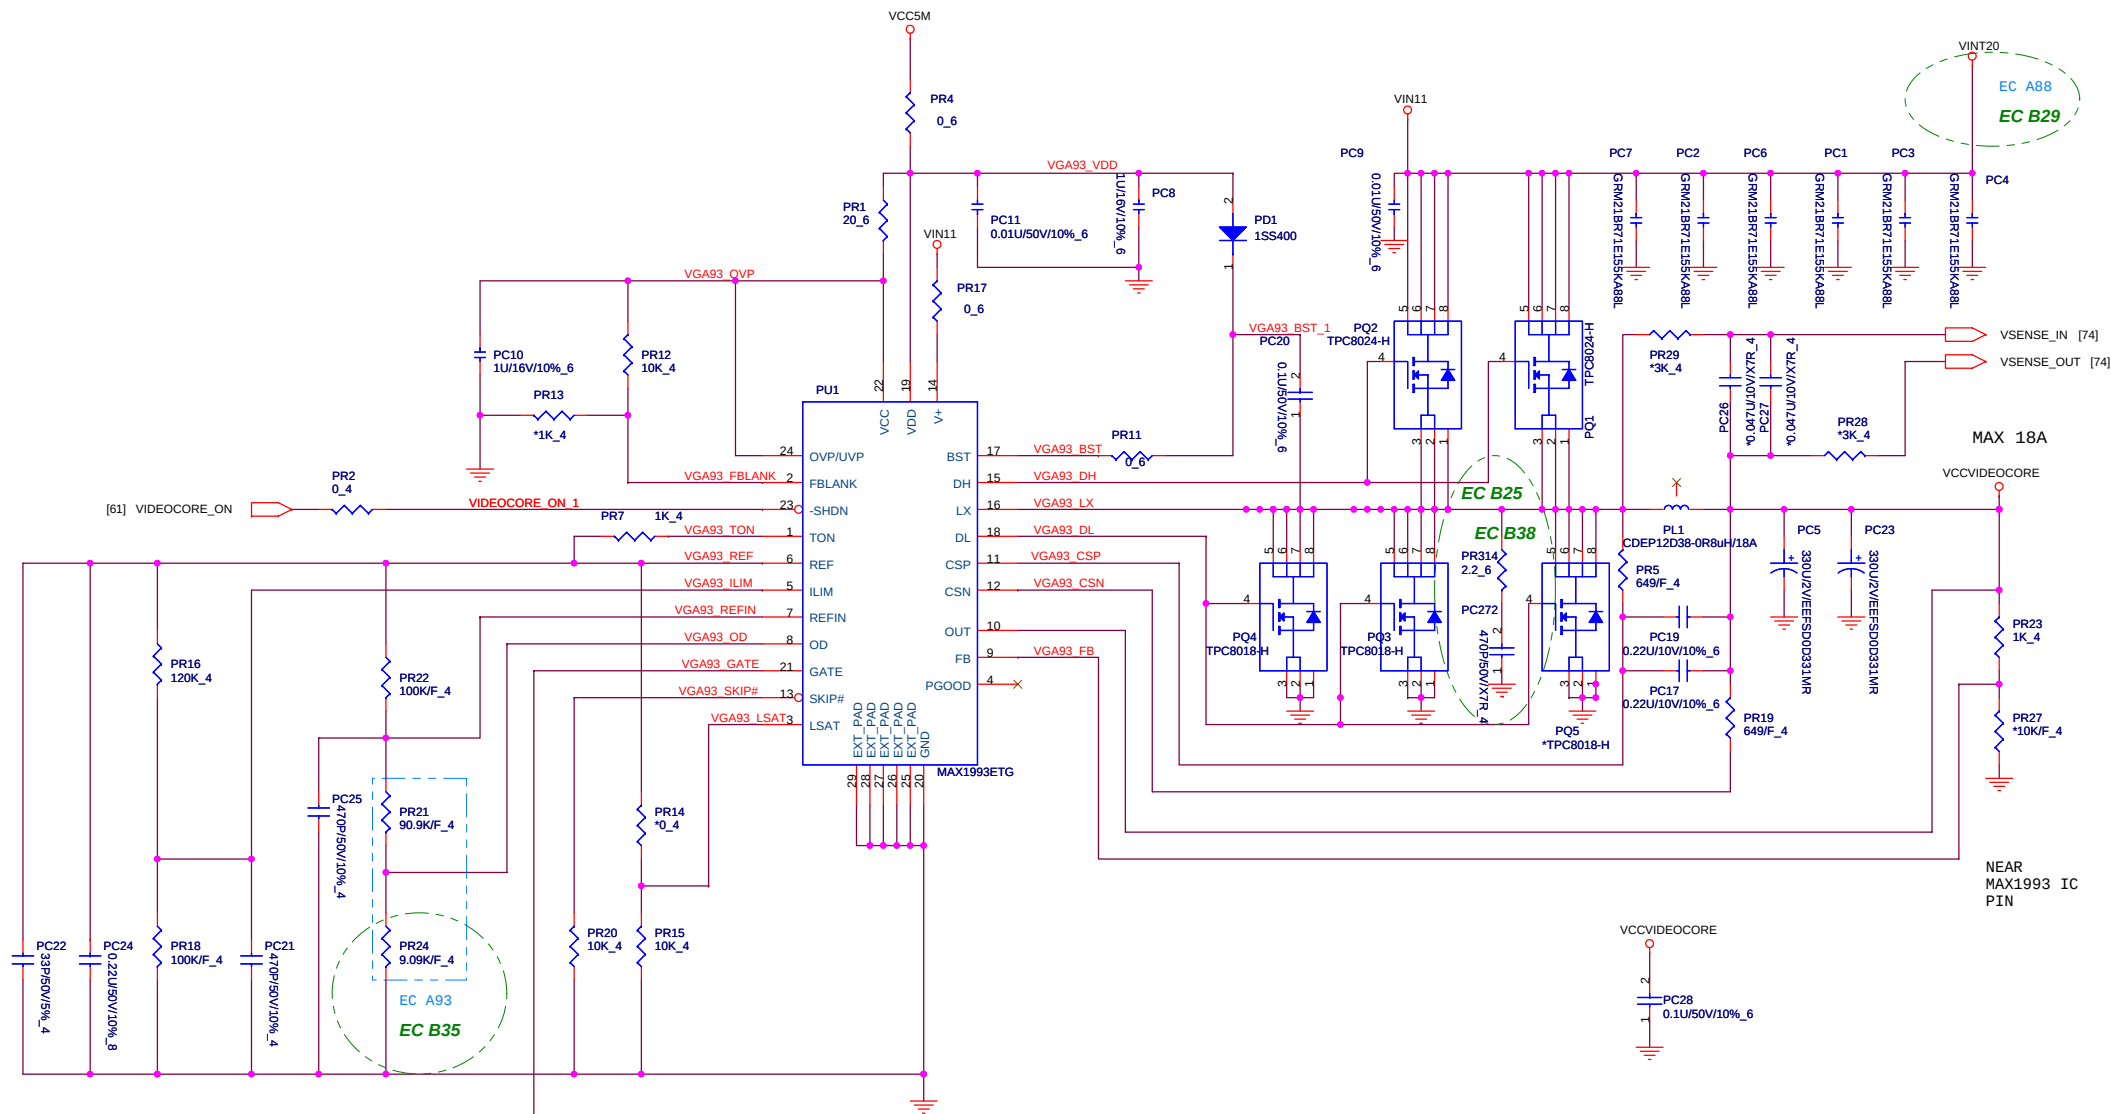


EC A93





	M52	M54	M56
PR22	100K/F	100K/F	100K/F
PR21	90.9K/F	90.9K/F	90.9K/F
PR24	9.09K/F	9.09K/F	20.5K/F

EC B35



PROJECT : BW2
Quanta Computer Inc.

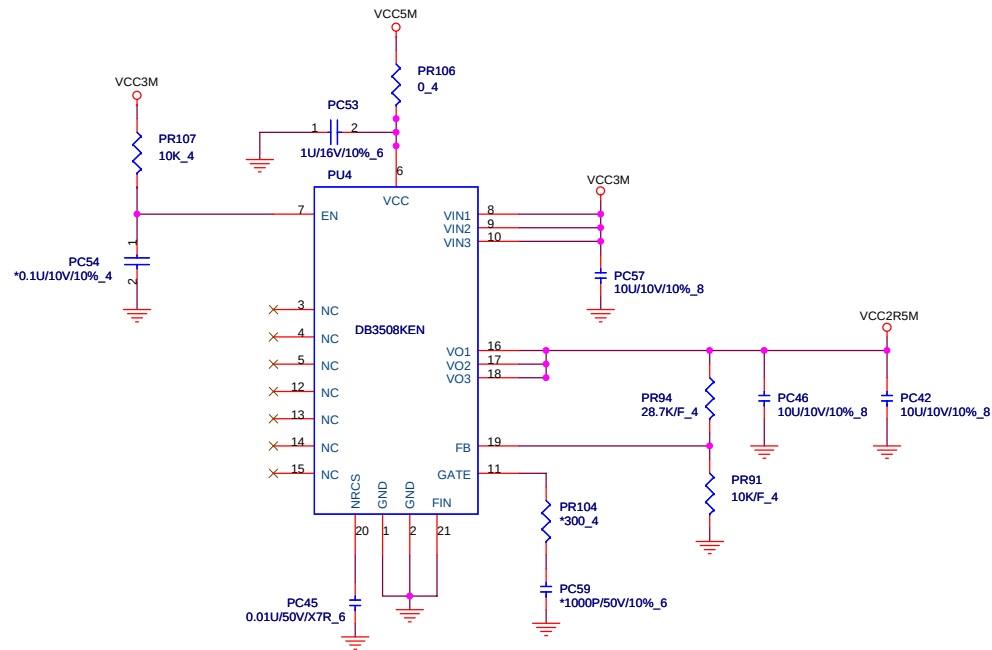

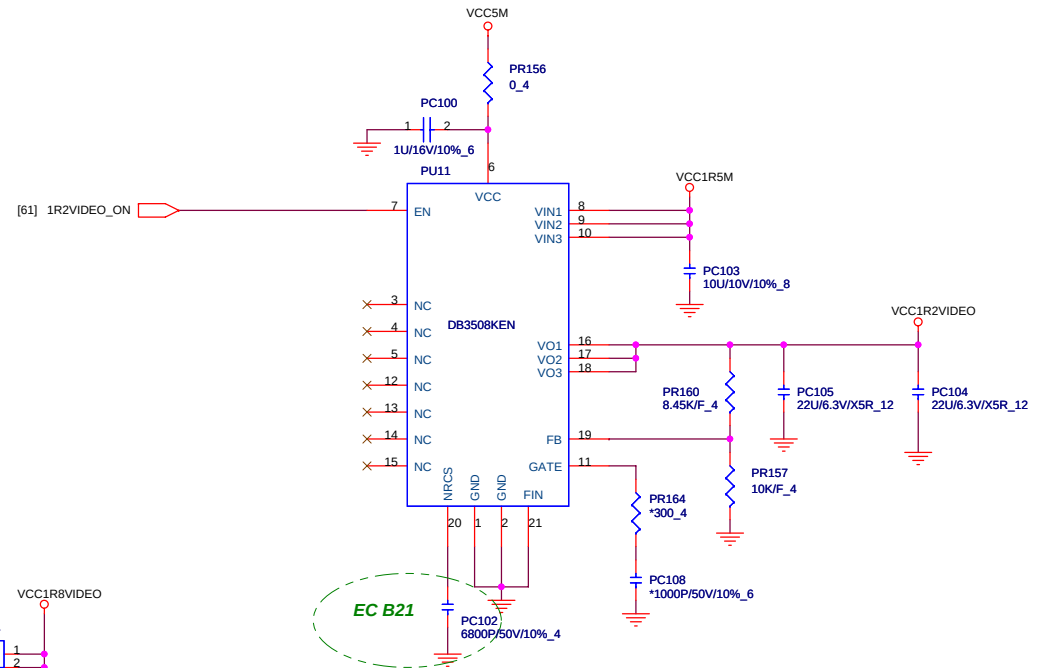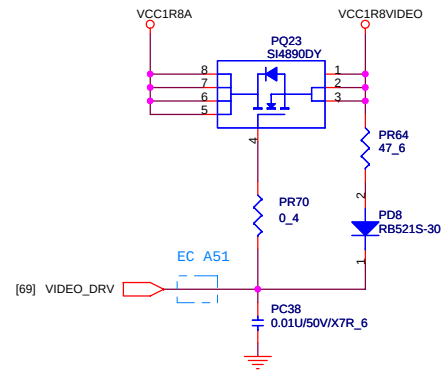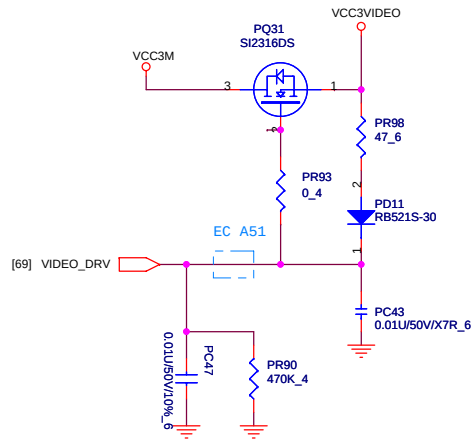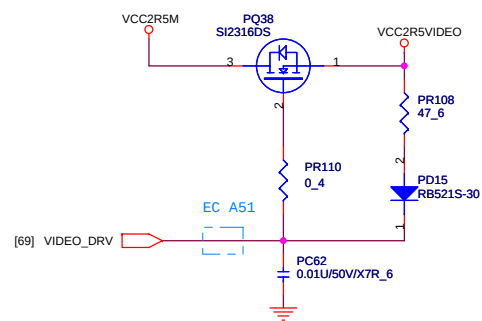




For Entry Model


945GM/Entry Model	945PM/XM
ALL DE-POP	ALL POP (Except PR164,PC108)




PROJECT : BW2
Quanta Computer Inc.

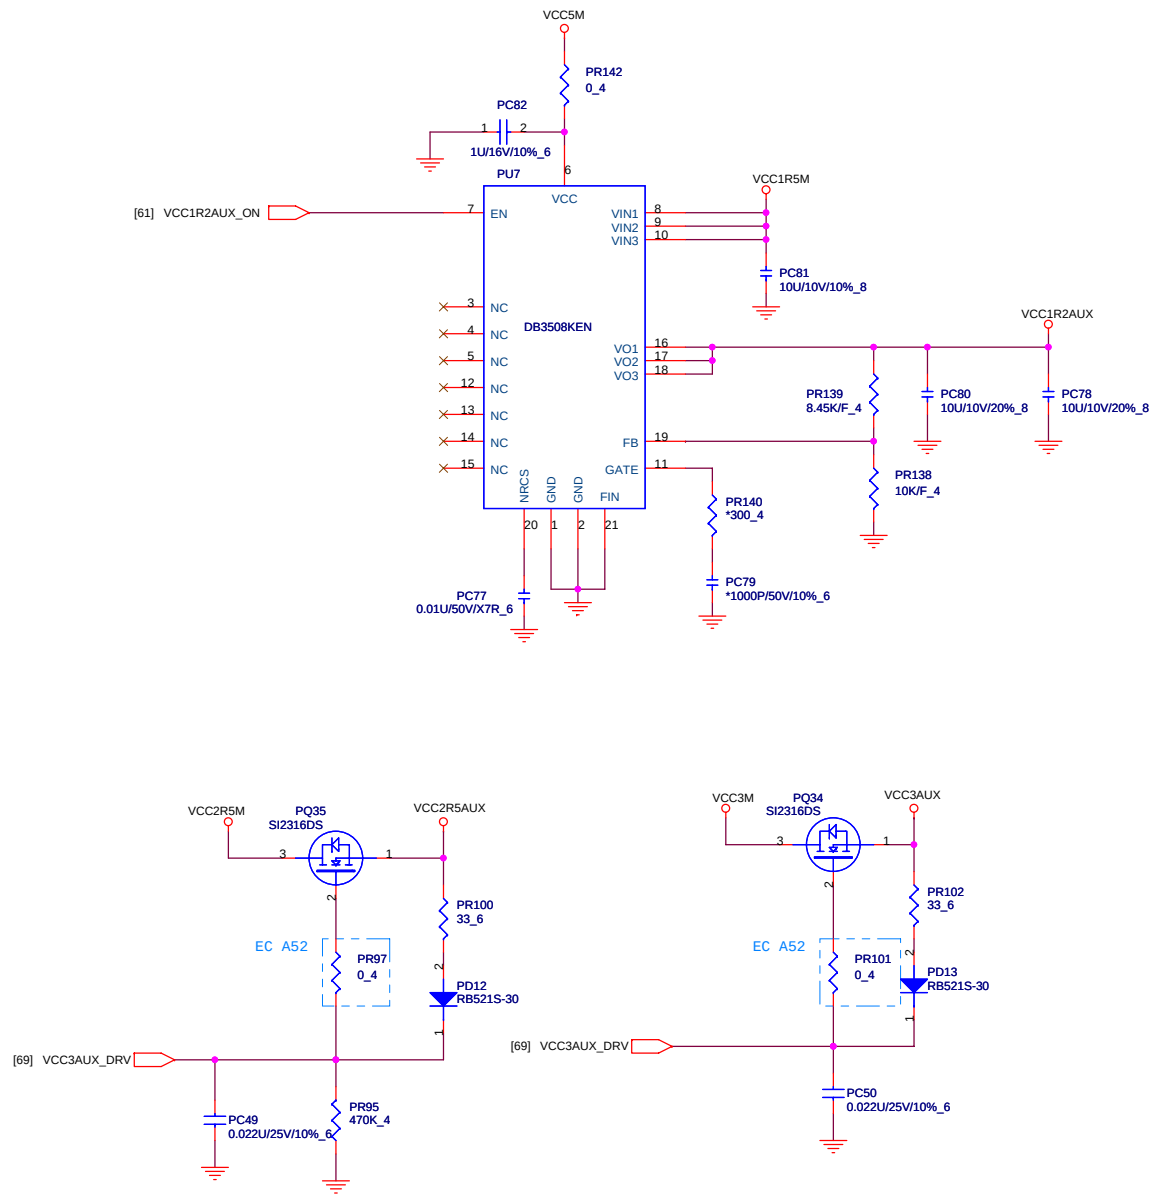


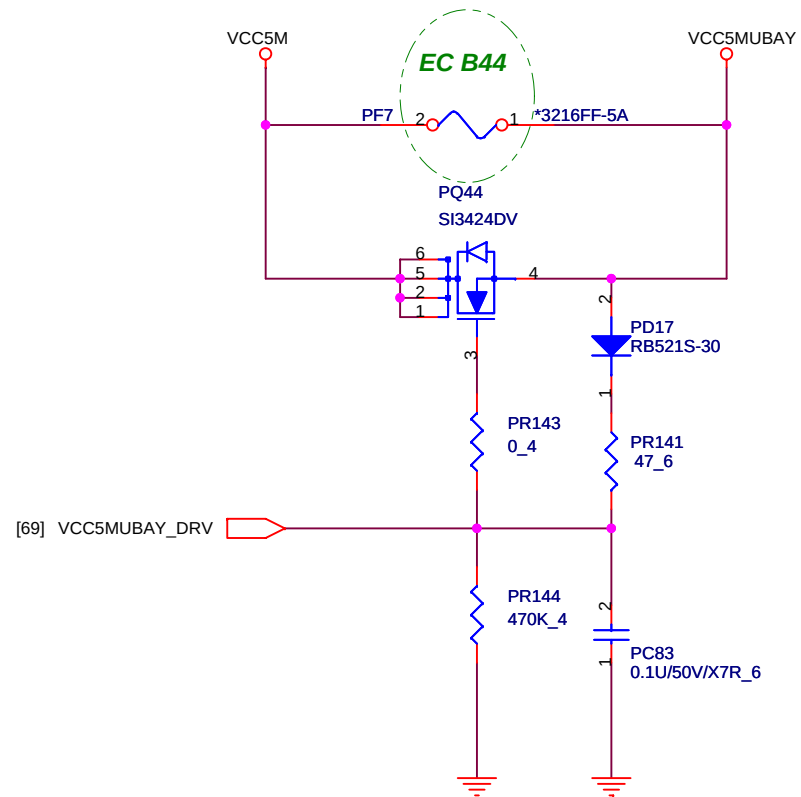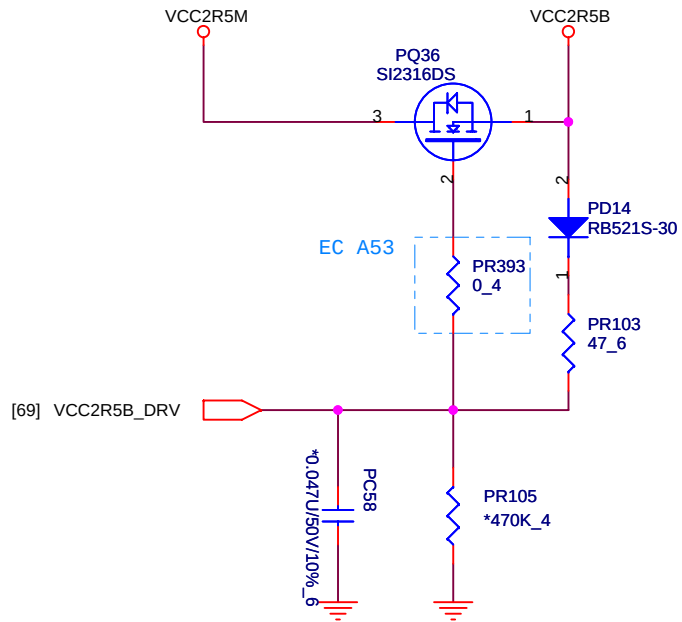

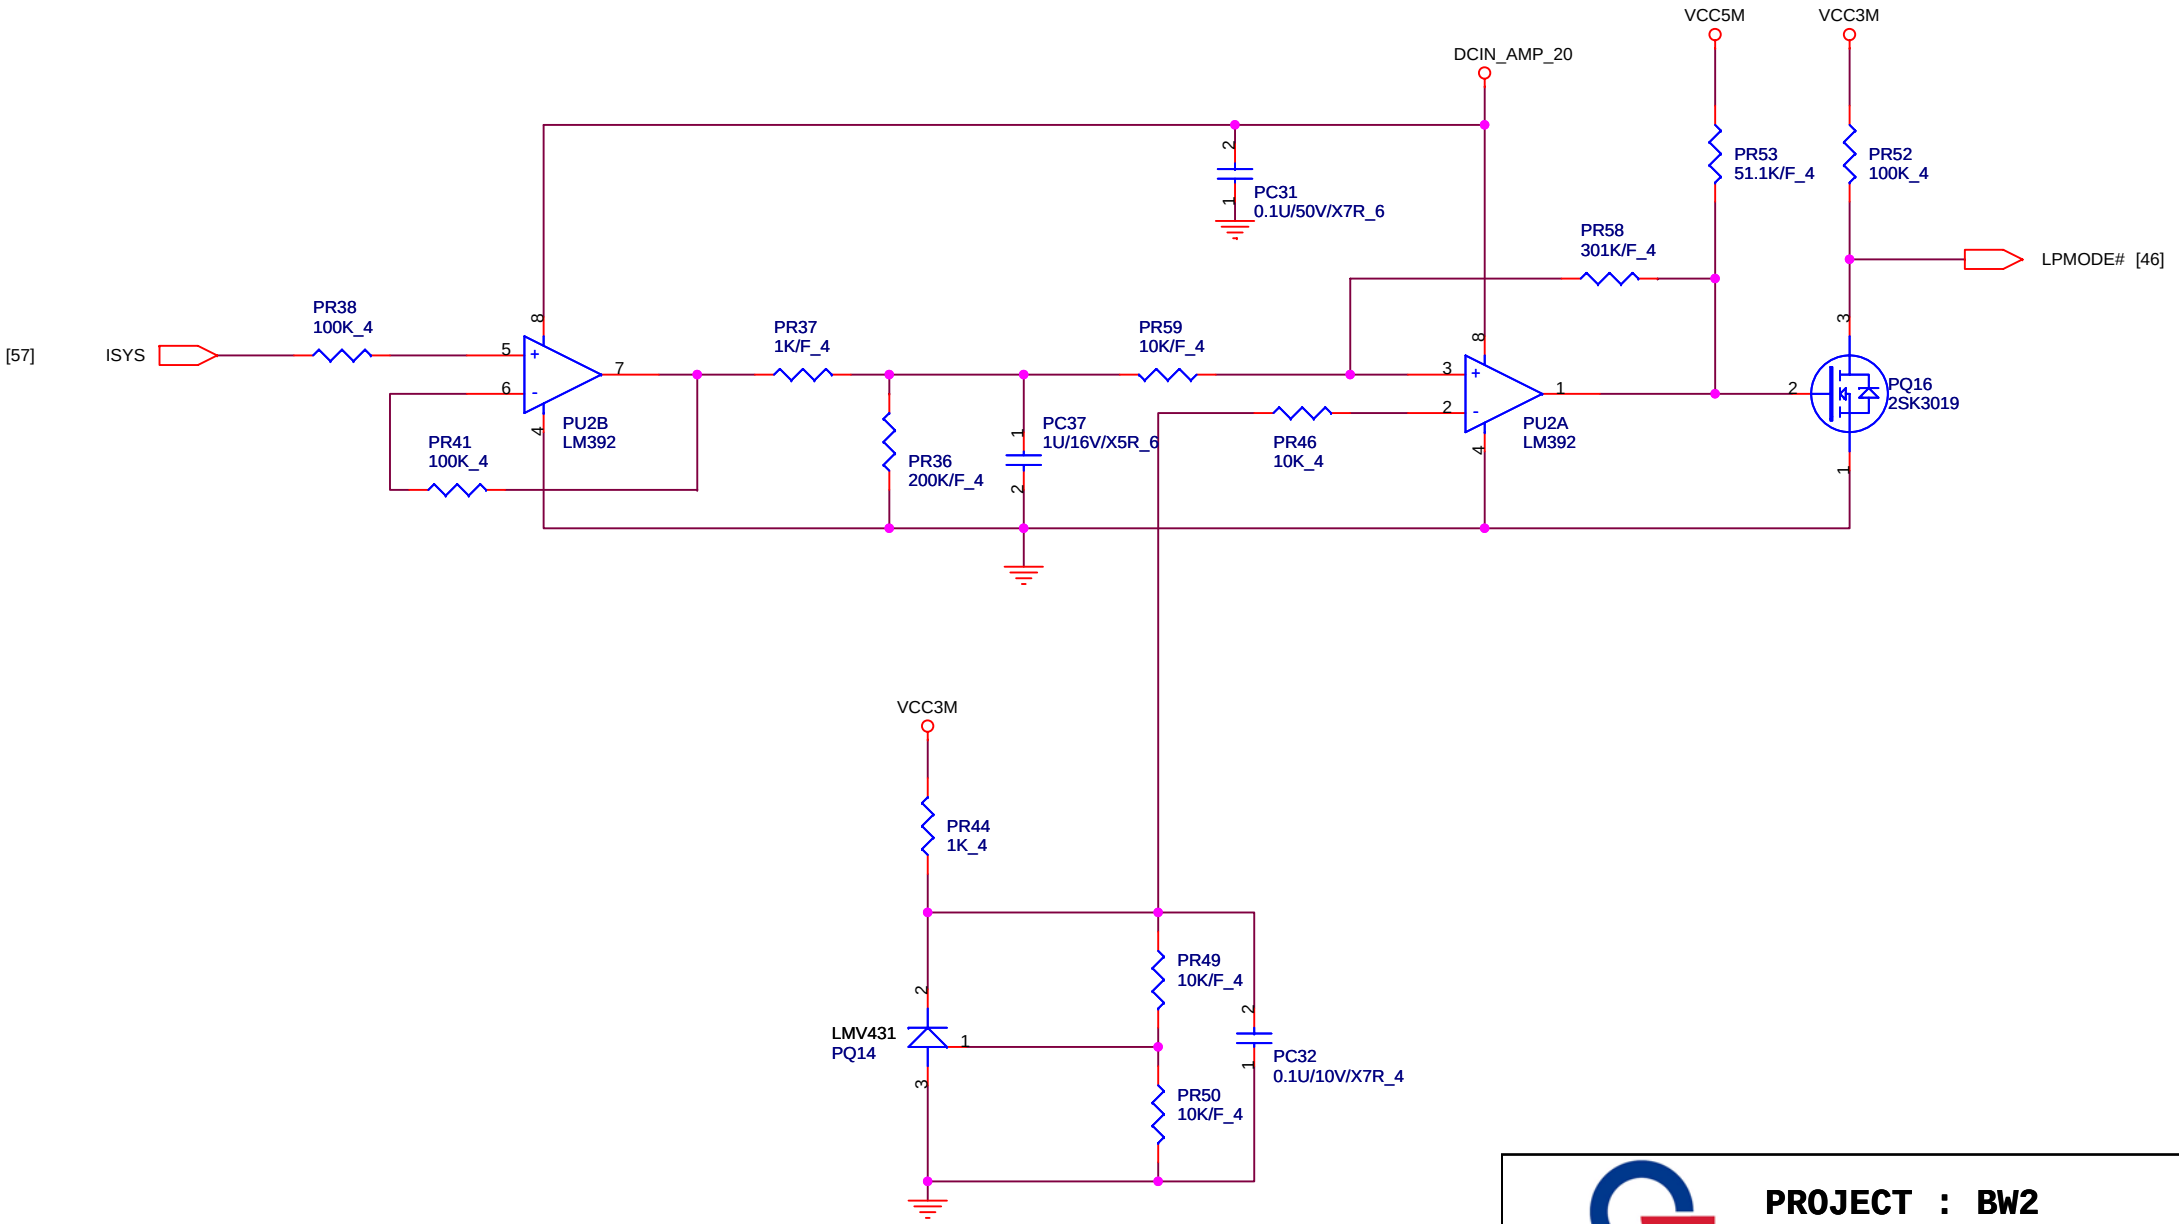


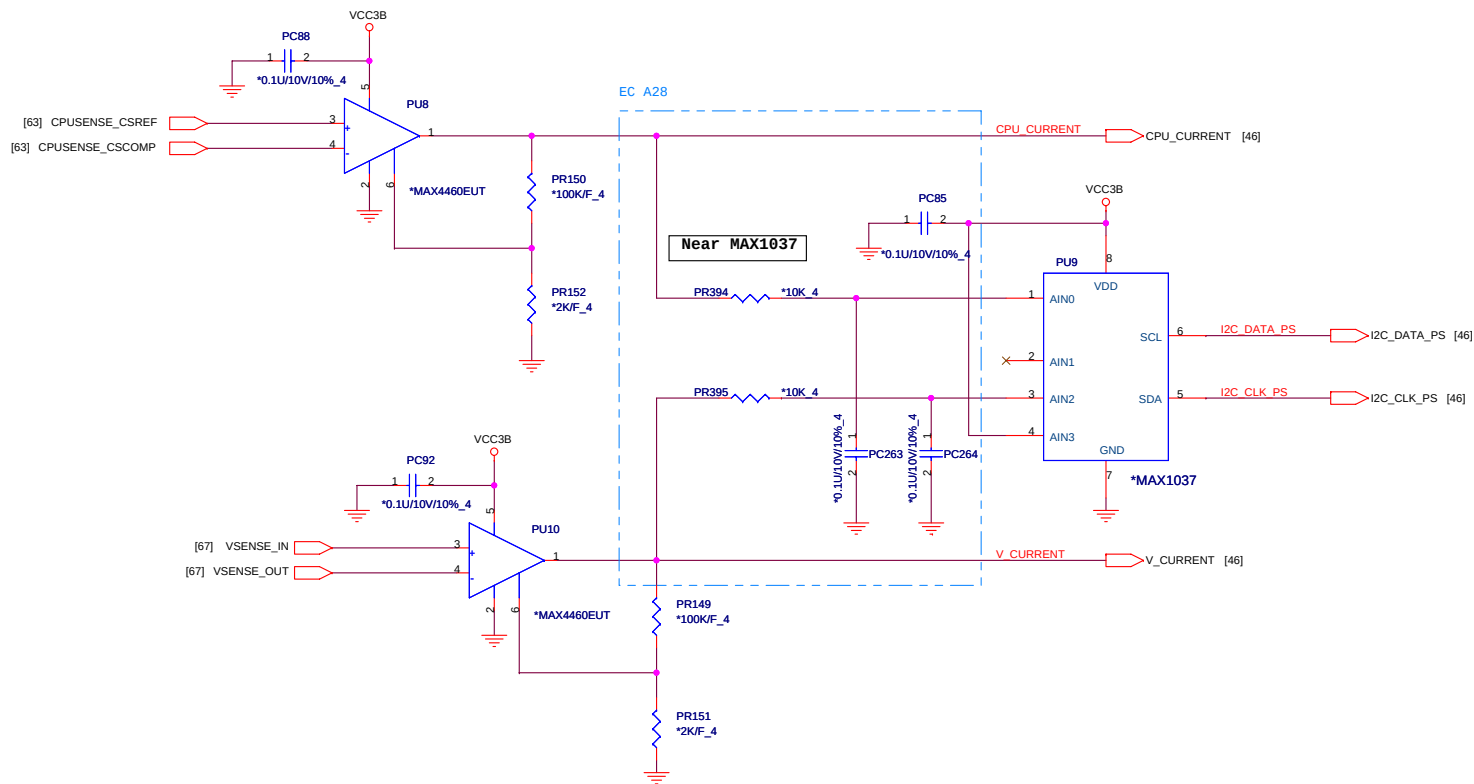


EMI SPRINGS

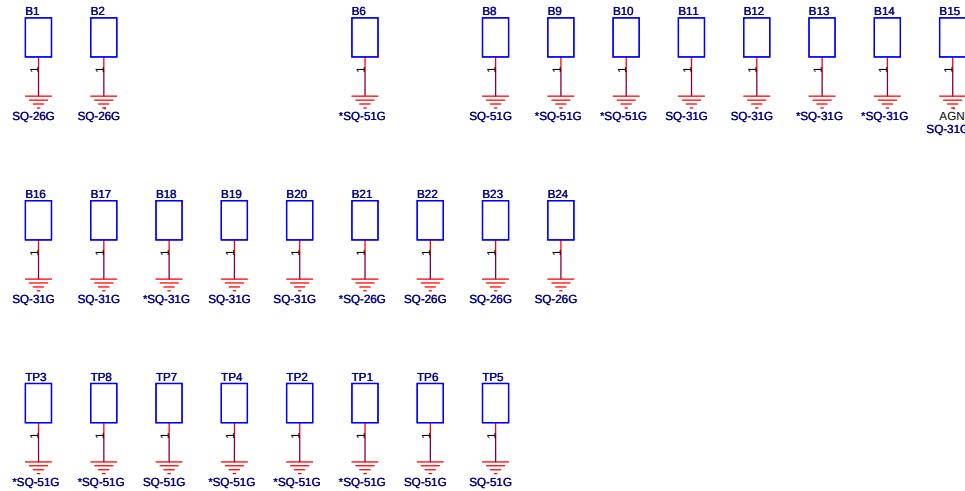


MDC SCREW HOLE




LCD SCREW HOLE




M/B SCREW HOLE

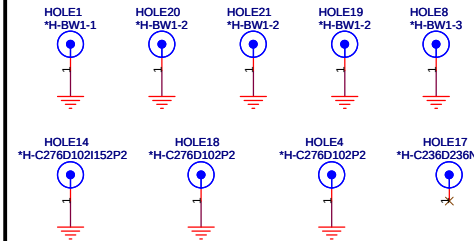


MINI PCI-E LATCH SCREW HOLE (WLAN)




MINI PCI-E LATCH SCREW HOLE (WWAN)




USB HUB SUB CARD SCREW HOLE



CPU SCREW HOLE



TEST PAD

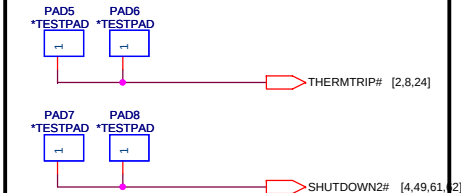

Revision History

Revision	Date	Phase	Change List	Release Schematic Date	Release Gerber File Date
1A	07/08 2005	DV	Initial release		
2A	08/31 2005	SIV	See page 77 Record A-1 (EC A00 - EC A50) See page 78 Record A-2 (EC A51 - EC A92)		
3A	11/22 2005	SIT	See page 79 Record B-1 (EC B01 - EC B44)	2005/12/15	2005/12/15
3B	02/14 2006	SVT	See page 80 Record C-1 (EC C01 - EC C12)	2006/02/17	2006/02/23

Schematic Value Explanation Description :

RESISTOR

Value	F	4	6	8	12	1210	*	Description
*1K/F_4	1%	0402 (1005)					NOASM	1K ohm 1% SMD 0402 package and NOASM
1K_6	5%		0603 (1608)				ASM	1K ohm 5% SMD 0603 package and ASM
1K_8	5%			0805 (2125)			ASM	1K ohm 5% SMD 0805 package and ASM
1K_12	5%				1206 (3216)		ASM	1K ohm 5% SMD 1206 package and ASM
1K_1210	5%					1210 (3225)	ASM	1K ohm 5% SMD 1210 package and ASM

CAPACITOR

Value	Voltage	Material	6				*	Description
*0.1U/10V/X5R_4	10V	X5R	0402 (1005)				NOASM	0.1UF 10V X5R SMD 0402 package NOASM
1U/25V/X7R_6	25V	X7R	0603 (1608)				ASM	0.1UF 25V X7R SMD 0603 package ASM

EC #/Page/Description/Part Affected/CMVC #

EC A00/08/R420 2.2K ohm change to NO_ASM for Calistoga CFG11 from SIV-Lenovo-006.

EC A01/10/Add R805, R806, R807 for 945GM by VCC1R5B, VCC2R5B and 0 ohm change to ASM.

EC A02/21/R5 0 ohm change to ASM for pull-down by Ground.

EC A03/22/D7, D8, D9 ,D18 DA204U change to ASM for CRT ESD .

EC A04/24/RN23, RN24, RN25, RN22 100Kx4 change to ASM for pull-up by VCC5MUBAY.

EC A05/24/R386, R385, R405, R382 from 10K ohm change to 100K ohm for PLANARID0-3.

EC A06/24/R386 100K ohm change to ASM and R387 10K ohm change to NO_ASM for Planar ID change from SIV-Lenovo-001.

EC A07/30/Correct R10 footprint from RC0402 to RC0603.

~~EC A08/32/Add R814 for pull-up by MICVCC and 100K ohm change to ASM.~~~~EC A09/32/Correct U54 footprint from SOT23-5-2_8-95 to SC70-2_1-65-5P.~~

EC A10/32/R556 from 39.2K/F ohm change to 5.1K/F ohm for Q23 Pin3.

EC A11/33/Correct U22, U25 footprint from SOT23-5-2_8-95 to SC70-2_1-65-5P.

EC A12/37/C723, C231 from 270pF change to 220pF for U34 Net A_CD1#, A_CD2#.

EC A13/37/Add Net XD_R/B# for CN16 Pin25 between PCI8412(U34) and 4 IN 1/SVIDEO SLOT(CN16).

EC A14/38/R153 100K ohm change to NO_ASM for pull-up by VCC3B.

EC A15/38/Correct U27 footprint from TSSOP20-6_4-65-21P to SSOP20-6_4-65 for CardBus power switch.

EC A16/42/U45, U46 SRV05-4 change to ASM for LAN ESD.

EC A17/44/Add R815 for pull-up by VCC3AUX and 10K ohm change to ASM.

EC A18/44/Correct U11 M45PE10 Pin definition for LAN BCM5752M/F EEPROM(U11).

EC A19/45/R665 from 47K ohm change to 100K ohm for pull-up by VCC3M.

EC A20/46/R707 from 10K ohm change to 100K ohm for pull-up by VCC3M.

EC A21/14/R501 475/F ohm change to ASM for CLKGen parts and R501 0 ohm change to ASM for CLKGen low-power parts from SIV-Lenovo-002.

EC A22/08,12/Add Net MEM_TS# for thermal sensor signals between Calistoga(U15) and DIMMs(CN15 & CN17) from SIV-Lenovo-003.

EC A23/49/Add R818, R819, R821, R820 and 0 ohm change to ASM for dumper resistors between H8(U26) and PMH-7(U30) from SIV-Lenovo-004.

EC A24/17/R349, R352 10K ohm change to NO_ASM for M52/M54/M56-CSP SS parameter change from SIV-Lenovo-005.

EC A25/45,46/Add C756, C757, C758, C759, C760, C763, C761, C762 and 470pF change to ASM for MW-1 ESD EC(470pF) feed back from SIV-Lenovo-007.

EC A26/17,19,20/Idle power reduction for M56 from SIV-Lenovo-008.

EC A27/49,69/PMH-7 cost reduction from SIV-Lenovo-009.

EC A28/46,74/Power monitor from SIV-Lenovo-010.

EC A29/30/Correct U1, U2 footprint from MSOP8-4_9-65 to MSOP8-4_9-65-9P from SIV-Lenovo-011.

EC A30/25,26/Delete R481, R482, R545, R546, R476, R490 and 0 ohm change to NO_ASM for removing 0 ohm jumper from SIV-Lenovo-012.

EC A31/46/R675, R697 change to ASM and R677, D32, R704, D39, D38 change to NO_ASM for disable H8(U26) debug I/F from SIV-Lenovo-013.

EC A32/43/J1, CN10 change to NO_ASM for Non-WWAN model from SIV-Lenovo-014.

~~EC A33/67/PR21 from 100K/F ohm change to 82.5K/F ohm and PR24 from 49.9K/F ohm change to 17.8K/F ohm for M52 from SIV-Lenovo-017.~~~~EC A34/67/PR21 from 100K/F ohm change to 82.5K/F ohm and PR24 from 49.9K/F ohm change to 40.2K/F ohm for M54/M56 from SIV-Lenovo-018.~~

EC A35/46,55/G-sensor parts change and single source from SIV-Lenovo-020.

EC A36/51/Add C784 and 1uF change to ASM for IR capacitor from SIV-Lenovo-022.

EC A37/63/Add PR386, PR385, PR388, PR389, PR387, PR390, PR391 and 0 ohm change to ASM for Thermal measurement to adjust VID.

EC A38/37/Swap CN16 Net for 3 IN 1/SVIDEO SLOT co-layout with 4 IN 1/SVIDEO SLOT.

EC A39/14/R381 10K ohm change to NO_ASM for pull-up by VCC3B and R401 1K ohm change to ASM for pull-down by Ground.

EC A40/16/R333, R330, R334 75/F ohm change to ASM for pull-down by Ground and fix impedance match with CRT terminal.

EC A41/21/Delete J4 and Swap Net INTMICL_T, INTMICR_T for improving LCD FPC layout.

EC A42/40/R572, R573, R123 10K ohm change to ASM for pull-down by Ground and R118 4.7K ohm change to ASM for pull-up by VCC3AUX from Broadcom suggestion for BCM5752.

EC A43/40/R107, R111, R109, R112 4.7K ohm change to NO_ASM for pull-up by VCC3AUX from Broadcom suggestion for BCM5752 and BCM5753.

EC A44/58/PR45 from 10K ohm change to 100K ohm from SIV-Lenovo-023.

EC A45/56/PR34 from 220K ohm change to 200K ohm from SIV-Lenovo-024.

EC A46/59/PR280 from 100K ohm change to 4.7K ohm from SIV-Lenovo-025.

EC A47/63/PR129 from 133K ohm change to 215K/F ohm from SIV-Lenovo-026.

EC A48/66/PQ67 TPC8018-H change to NO_ASM for Internal VGA from SIV-Lenovo-027.

EC A49/69/Add PR392 for PQ68 Pin4 and 0 ohm change to ASM from SIV-Lenovo-028.

EC A50/69/Delete PR244 for PU13 Pin31 and 0 ohm change to NO_ASM from SIV-Lenovo-028.

		PROJECT : BW2	
		Quanta Computer Inc.	
Size Custom	Document Number	EC RECORD A-1	
Date:	Thursday, March 02, 2006	Sheet	77 of 79
		Rev	3B

EC #/Page/Description/Part Affected/CMVC #

EC A51/70/Delete PR384, PR88, PR72 and 0 ohm change to NO_ASM from SIV-Lenovo-028.
EC A52/71/Correct PR97, PR101 footprint from RC0603 to RC0402 and 0 ohm change to ASM from SIV-Lenovo-028.
EC A53/72/Add PR393 for PQ36 Pin2 and 0 ohm change to ASM from SIV-Lenovo-028.
EC A54/02/C81 100pF change to ASM from SIV-Lenovo-016.
EC A55/23/R520 10K ohm change to NO_ASM from SIV-Lenovo-030.
EC A56/27/R630, R631, R632, R633, R634, C224, C202, C006, U23 change to NO_ASM from SIV-Lenovo-030.
EC A57/44/U9 from ATMEL26DF161 change to Macronix MX25L1605A from SIV-Lenovo-030.
EC A58/46/R710 10K ohm change to NO_ASM for disable H8 debug interface from SIV-Lenovo-031.
EC A59/17/R286 10K ohm change to ASM for ATI M52/M54/M56 from SIV-Lenovo-032.
EC A60/51/Correct R226 footprint from RC1210 to RC2010 and R226 from 2.2 ohm change to 0 ohm from SIV-Lenovo-033.
EC A61/51/Correct R227 footprint from RC1206 to RC0805 and R227 from 0 ohm change to 47 ohm from SIV-Lenovo-033.
EC A62/51/Correct C239 footprint from CC0402 to CC1206 and C239 from 0.1uF change to 4.7uF from SIV-Lenovo-033.
EC A63/66/PR241 from 11.5K/F ohm change to 12.4K/F ohm and PR242 from 10K/F ohm change to 10.5K/F ohm from SIV-Lenovo-034.
EC A64/16/R318 75/F ohm change to ASM and R321, R315 150/F ohm change to ASM for TV function.
EC A65/18/Modify VCC1R8_2R5VIDEO_PLL LDO circuit for ATI M52/M54/M56.
EC A66/62/Modify VDD15 circuit for fix voltage drop.
EC A67/56,57,62/Correct PR43, PR71, PR268, PR145 footprint from RC3720-4P to CC0612-4P.
EC A68/63/Correct PD48, PD36 footprint from SC79 to DSM.
EC A69/62/PQ47, PQ46 from FDS6680A change to TPC8024-H.
EC A70/62/PQ48, PQ45 from SI4892DY change to TPC8018-H.
EC A71/62/PR258, PR262 from 1 ohm change to 4.7 ohm.
EC A72/63/PR248, PR249 from 143K/F ohm change to 154K/F ohm.
EC A73/66/PR225 from 48.7K/F ohm change to 140K/F ohm.
EC A74/66/PR235 from 69.8K/F ohm change to 127K/F ohm.
EC A75/24/R128 100K ohm for pull-up by VCC3M change to pull-up by VCC3AUX from SIV-Lenovo-035.
EC A76/44/Swap library pin name for U11 Pin1 and Pin8 from SIV-Lenovo-037.
EC A77/40,49/Delete Net LAN_POWER_GOOD between BCM5752(U16) and PMH_7(U30), R95 pull-up to VCC3B from SIV-Lenovo-038.
EC A78/40,46/Add R854 and 0 ohm change to ASM, Add Net ENERGY_DET between BCM5752(U16) and H8(U26) from SIV-Lenovo-038.
EC A79/46/R683 100K ohm for pull-up by VCC3M change to pull-up by VCC3AUX from SIV-Lenovo-038.
EC A80/52/Add C785 and 0.1uF change to ASM from SIV-Lenovo-039.
EC A81/31,32,33/Modify stereo Mic. circuit from SIV-Lenovo-040.
EC A82/24/Delete D27 RB521S-30 from SIV-Lenovo-041.
EC A83/49/R737, R748 100K ohm for pull-up by VCC3M change to pull-up by VCC3SW from SIV-Lenovo-042.
EC A84/75/Correct HOLE6, HOLE7 footprint from H-C276D102P2 to H-C236D134I174P2.
EC A85/21/Add F11 and Fuse change to ASM.
EC A86/45/R23 from 470K ohm change to 200K ohm from SIV-Lenovo-043.
EC A87/60/PR176 2K/F ohm change to ASM for Entry Model from SIV-Lenovo-044.
EC A88/65,66,67/PL2, PL16, PL17, PL18 from Bead change to 0 ohm.
EC A89/44/U10 from ST M25P80 change to Mocronix MX25L1605A.
EC A90/09/R465 from 100K ohm NO_ASM change to 10K ohm NO_ASM.
~~EC A91/67/PR21 from 82.5K/F ohm change to 100K/F ohm, PR24 from 17.8K/F ohm change to 0 ohm for M52 and from 40.2K/F ohm change to 22.1K/F ohm for M54/M56.~~
EC A92/62/PR265 from 36.5K/F ohm change to 43K/F ohm.
EC A93/67/PR21 from 100K/F ohm change to 90.9K/F ohm for M52/M54/M56, PR24 from 0 ohm change to 9.09K/F ohm for M52 and from 22.1K/F ohm change to 31.6K/F ohm for M54/M56.

- EC B01/51/ Change C784 from 1U/10V/X5R_6 to 0.1U/10V/X5R_6. (SIT-LENOVO-001)
- EC B02/23/ Change R602 to ASM and R603 to NO ASM. (SIT-LENOVO-002)
- EC B03/16/17/19/ Change SPWG_EDID_CLK/DATA path and power reduction for M52/M54/M56. (SIT-LENOVO-003)
- EC B04/46/ Reserve 68pF cap for H8 I2C bus , the reason is reduce noise. (SIT-LENOVO-004)
- EC B05/34/ Change amplifier IC from MAX9750CETI to MAX9750CETI+C2U version. (SIT-LENOVO-005)
- EC B06/24/ Change planar ID to SIT "0010B" and add Entry model ID used on ICH7 GPIO9. (SIT-LENOVO-006)
- EC B07/43/ Change net "UIM_PWR" layout trace width from 5 mils to 20 mils. (SIT-LENOVO-007)
- EC B08/46/ Reserve 220pF cap near H8 , the reason is noise reduce. (SIT-LENOVO-008)
- EC B09/29/ Add 100pF cap on SIORDY signal near ODD connector , the reason is for CPI test (Cellular Phone Immunity). (SIT-LENOVO-010)
- EC B10/30/ Change U1,U2 footprint to add thermal pad. (SIT-LENOVO-011)
- EC B11/63/ Change PC71 from 680pF to 390pF. (SIT-LENOVO-012)
- EC B12/34/ ChangeR674 from 4.7k to 47k. (SIT-LENOVO-013)
- EC B13/18/ Change LDO to MAX8875EUK25-T for ATi M52/M54. (SIT-LENOVO-014)
- EC B14/19/ Change U57 power source from VCC3VVIDEO to VCC3M. (SIT-LENOVO-015)
- EC B15/45/50 Reserve 0ohm resistor on FRAME# on .debug connector for security concern. (SIT-LENOVO-016)
- EC B16/17 Change R289 to ASM. (SIT-LENOVO-019)
- EC B17/17 Add pull-down 10k at "GENERICD" signal. (SIT-LENOVO-020)
- EC B18/33 Change U59 to MAX4695ETC+ Pb free part. (SIT-LENOVO-021)
- EC B19/18 Correction U43 RoHS part number. (SIT-LENOVO-022)
- EC B20/62 Change PR268,PR145 value from "RL3720WT-R015-GN" to "PRL1632_R015_F. (SIT-LENOVO-023)
- EC B21/61/70 Change PR284 to 12k , PC242 to ASM 0.1uF/10% , Add NOASM 1k ohm , Add NOASM 1SS400 , PC102 to 6800pF. (SIT-LENOVO-027)
- EC B22/19 Correct back bias power circuit. (SIT-LENOVO-028)
- EC B23/21 Modify LCD connector pin assign for USB HUB use.
- EC B24/50 Reserve 0 ohm resistor for SMBUS CLK/DATA and swap USB HUB signals.
- EC B25/57/62/63/65/66/67/ Add Snubber circuit for all Switching DC/DC converters (Add NOASM 2.2ohm,1/10W,1608size and NOASM 470pF,10%,50V,1005size).
- EC B26/23/24/50/ Add GPIO control for no Super I/O in W2 entry model. (SIT-LENOVO-030)
- EC B27/32/33/ Audio noise reduction. (SIT-LENOVO-031)
- EC B28/14/ Swap PCI clock for PMH7/SIO , the reason is for rising / falling time fail issue.
- EC B29/65,66,67/ Delete PL18,PL16,PL17,PL2 bead.
- EC B30/31/32 Modify audio jack sense circuit.
- EC B31/22 Modify CRT circuit for Entry/Intel/ATi model. (SIT-LENOVO-033)
- EC B32/21 Add ESD cap for stereo Mic signals. (SIT-LENOVO-037)
- EC B33/17 Add crystal oscilator circuit. (SIT-LENOVO-036)
- EC B34/50 Add FUSE for USB hub sub card. (SIT-LENOVO-035)
- EC B35/67 Change VCCVIDEOCORE voltage. (SIT-LENOVO-034)
- EC B36/31 Change R546 from 20k to 4.12k 1%. (SIT-LENOVO-039)
- EC B37/34 Change C212,C221 from 4.7UF/10V/Y5V to 2.2UF/10V/X5R , the reason is can reduce the delay time between MUTE# assertion and VOL settings in resuming from the suspend. (SIT-LENOVO-039)
- EC B38/57/62/63/65/66/67/ ASM R,C Snubber circuit for all Switching DC/DC converters.
- EC B39/17/ Correct ATi crystal vendor part number. (SIT-LENOVO-041)
- EC B40/17/ Change C347,C350 from 22pF to 2pF.
- EC B41/43/ Add one power pin for UIM_PWR net of connector.
- EC B42/10/ Add one cap 10/10V/X7R for VCCA_TVBG "H20" pin , the reason is while output to TV have ripple screen for Intel model.
- EC B43/33/ Change C185,C634 to ASM.
- EC B44/72/ Reserve fuse (3216FF-5A) between VCC5M and VCC5MUBAY power line.
- EC B45/37/ Change R216 from 75 ohm to 33 ohm for TI recommand.
- EC B46/44/ Change R311 from 0 ohm to 75 ohm for signal quality.

BW2 SIT planar board ICT coverage 95.56%

- EC C01/24/ Change M/B planar ID from SIT to SVT. (SVT-LENOVO-001)
- EC C02/29/ Reserve 0 ohm resistor for entry model use.
- EC C03/33/ Change R189 to NOASM, the reason is for MIC noise.
- ~~EC C04/72/ Change ODD power source from VCC5M to VCC5B for entry model use.~~
- EC C05/46 Change Wireless Global switch to DIP type. (SIV-LENOVO-021)
- EC C06/37 Add 100k pull-up to VCC3M on SD_PWR0 (TPS2041B pin#4). (SVT-LENOVO-002)
- EC C07/69 Change Tsurumai-2 P/N from 77P2225 -> 41A124. (SVT-LENOVO-006)
- EC C08/66 Connect BPWRG signal to PGOOD2 pin of MAX1540 thru 0ohm , the reason is for CMOS corruption. (SVT-LENOVO-007)
- EC C09/69 Change PR233, PR237 to 470 ohm. (SVT-LENOVO-008)
- EC C10/08 Change R448 to NOASM (SVT-LENOVO-010)
- EC C11/19 Modify ATi configuration table , R545 is NOASM even though in case of M56 configuration. (SVT-LENOVO-011)
- EC C12/62,66 Connect MAX1977_PWRGD to MAX1540 , the reason is minus voltage issue. (SVT-LENOVO-012)
- EC C13/14 Drop Cypress clock generator sourcing , the reason is SATA signal spec off. (SVT-LENOVO-018)
- EC C14/29 NOASM 100pF at SIORDY signal , the reason is Signal quality spec off. (SVT-LENOVO-019)
- EC C15/24 Change W2 SVT Planar ID to 0100b as same as M2 (skip 0011b) (SVT-LENOVO-020)
- EC C16/33 Update pre-amp resistor value , the reason is for stereo MIC noise issue.

BW2 SVT planar board ICT coverage 91.7 %