




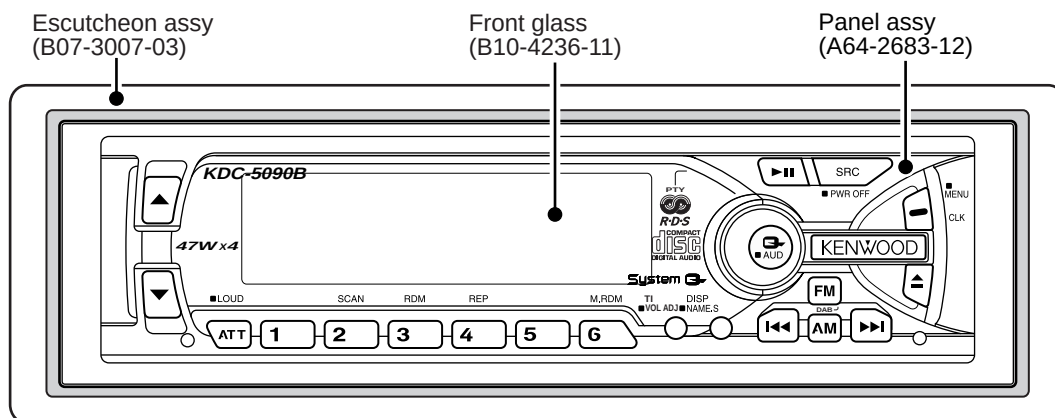

Plastic cabinet assy
(A02-1497-13)




Lever
(D10-4562-04)x2
(D10-4621-04)x2 : KDC-5090B




Screw set
(N99-1704-05)




Mounting hardware assy
(J21-9641-13)



DC cord
(E30-4944-05): KDC-5090BY
(E30-4958-05): KDC-5090B



Antenna adaptor
(T90-0523/0534-05)




The MECHANISM OPERATION DESCRIPTION is the same as model KDC-S3007 and KDC-5050RG.
Please refer to the service manual for model KDC-S3007(B51-7029-00) or KDC-5050RG(B51-7099-00).

KDC-5090B/BY

CONTENTS

BLOCK DIAGRAM	3
COMPONENT DESCRIPTION	4
MICROCOMPUTER'S TERMINAL DESCRIPTION	6
TEST MODE	8
ATTENTION	10
PC BOARD	11
CD PLAYER UNIT (X32-5010-00)	11
ELECTRIC UNIT (X25-87X2-7X)	13
SWITCH UNIT (X13-99XX-X4)	14
SCHEMATIC DIAGRAM	17
ELECTRIC UNIT (X25-87X2-7X)	17
SWITCH UNIT (X13-99XX-X4)	21
CD PLAYER UNIT (X32-5010-00)	23
EXPLODED VIEW	25
PARTS LIST	27
SPECIFICATIONS	BACK COVER

BLOCK DIAGRAM



KDC-5090B/BY

COMPONENT DESCRIPTION

● SWITCH UNIT (X13-99XX-X4)

Ref. No.	Component Name	Application / Function	Operation / Condition / Compatibility
IC1	LC75808W	LCD driver with the key matrix	
IC2	RS-171	Remote sensor IC	
Q1	DTA114EUA or KRA302	Key-permission SW	For the key scanning start
Q3	2SD2114K	Red LED SW	When a base goes Hi, RED LEDs are turned on.
Q4	2SD2114K	Green LED SW	When a base goes Hi, GREEN LEDs are turned on.
Q5	2SC2412K or 2SD601A	VLCD AVR	
Q6	DTA114EUA or KRA302	REMO SW	While a base goes Lo, PAN 5V is supplied to the Remote sensor IC.
Q7	DTC143ZK	Dimmer SW	Usually Q7's base goes Hi. When DIMMER mode is selected, pulse wave shape is applied to Q7's base.

● ELECTRIC UNIT (X25-87X2-7X)

Ref. No.	Component Name	Application / Function	Operation / Condition / Compatibility
IC1	UPD703033GC117 or UPD703033GC145	System MI-COM.	
IC2	TDA7407D	E.VOL & N.C.MPX IC	
IC3	HD74HC02FP or TC74HC02AF	Mute logic	2-input NOR x 4
IC4	TA8263BH	Power AMP. IC	
IC7	TDA7479D	RDS decoder	
IC8	S-80837ANNP	Reset IC	When BU 5V voltage is less than 3.7V, IC outputs Lo.
Q1	DTC143TUA or KRC410	Pre mute (Front L)	When Q1's base goes Hi, Pre-output is muted.
Q2	DTC143TUA or KRC410	Pre mute (Front R)	When Q2's base goes Hi, Pre-output is muted.
Q5	DTC143TUA or KRC410	Pre mute (Rear L)	When Q5's base goes Hi, Pre-output is muted.
Q6	DTC143TUA or KRC410	Pre mute (Rear R)	When Q6's base goes Hi, Pre-output is muted.
Q7	DTA124EUA or KRA303	Mute driver	When BU detection SW or System RESET or MI-COM.'s Pre-mute is working, a base goes Lo, and Q7 is turned on.
Q11	2SC4081 or 2SD1819A	BU 5V AVR	While BACKUP is applied, AVR outputs +5V.
Q12	2SB1548(P)		Q11 and Q12 are inverted Darlington connection.
Q13	2SA1576A or 2SB1218A	SW 5V	While a base goes Lo, SW 5V is supplied to the microprocessor peripheral circuits.
Q14	2SC4081 or 2SD1819A	A8V AVR	When Q14's base goes Hi, A8V AVR outputs 8V.
Q15	2SB1548(P)		
Q16	DTC124EUA or UN5212	SW14V SW	A8V AVR and SERVO +B AVR ON/OFF control
Q17	DTA124EUA or KRA303		While Q16's base goes Hi, Q17 is turned on, A8V AVR and SERVO +B AVR are working.
Q18	2SD2375	SERVO +B AVR	When Q18's base goes Hi, SERVO +B AVR outputs 8V.
Q19	DTC124EUA or UN5212	ILL +B SW	ILL +B AVR ON/OFF control
Q20	DTA124EUA or KRA303		While Q19's base goes Hi, Q20 is turned on, and ILL +B AVR is working.

COMPONENT DESCRIPTION

Ref. No.	Component Name	Application / Function	Operation / Condition / Compatibility
Q21	2SB1184	ILL +B AVR	While Q22's base goes Hi, AVR outputs +10.5V.
Q22	2SC4081 or 2SD1819A		Works during POWER ON mode with a panel attached to the set.
Q26	DTC144EUA or UN5213	Small lamp detection SW	When vehicle small lamps turn on, Q26 is turned on .
Q27	DTC114YUA or UN5214	P-CON SW	When Q27's base goes Hi, Q32 is turned on .
Q32	2SB1277(Q,R)		Works during POWER ON mode.
Q29	DTA124EUA or KRA303	P-CON. protection inhibit SW	Prevents Q30 tuning ON during start-up after power ON.
Q30	2SA1576A or 2SB1218A	P-CON. protection SW	Protect Q32 by turning ON when P-CON output is grounded.
Q33	2SC4081 or 2SD1819A	BU detection SW	While BACKUP is applied, a base goes Hi, and Q33 is turned on. When momentary power down has detected, a base goes Lo, and Q33 is turned off.
Q34	2SC4081 or 2SD1819A	ACC detection SW	While ACC is applied, a base goes Hi, and Q34 is turned on.
Q42	DTC124EUA or UN5212	E. VOL mute SW	When BU detection SW or MI-COM.'s mute is working, a base goes Hi, and Q42 is turned on.
Q43	2SC4081 or 2SD1819A	Noise buffer	
Q45	DTC124EUA or UN5212	FM +B SW	When Q45's base goes Hi, Q47 is turned on.
Q47	2SB1277(Q,R)		Works during FM reception mode.
Q46	DTC124EUA or UN5212	AM +B SW	When Q46's base goes Hi, Q48 is turned on.
Q48	2SB1277(Q,R)		Works during AM reception mode.
Q51	DTC144EUA or UN5213	IFC buffer	Waveform shaping
Q52	2SC4081 or 2SD1819A	Composite signal output buffer	
Q55	2SA1576A or 2SB1218A	PAN 5V SW	While a panel is attached to the set, Q56's base goes Hi, and Q55 is turned on.
Q56	DTC124EUA or UN5212		

● CD PLAYER UNIT (X32-5010-00)

Ref. No.	Component Name	Application / Function	Operation / Condition / Compatibility
IC1	AN22000AA	RF amplifier	Generation of RF signal based on the signals from the APC circuit and pickup, and generation of servo error (focusing error and tracking error) signals. Detection of dropout, anti-shock, track crossing and off-track conditions, Gain control function building in.
IC2	MN662774KG1	CD signal processor built-in MI-COM.	
IC4	BA5917AFP	4CH BTL driver	Focusing coil, tracking coil, spindle motor and sled motor driver
IC6	NJM4565MD	OP Amp.	Low pass filter
Q1	MCH6101	APC	LD power control
Q2	DTC124EUA	P ON SW	When CD source is selected, Q2's base goes Hi, Q3 and Q4 are turned on.
Q3	DTA143XUA	A.8V SW	A8V ON/OFF control. When a base goes Lo, Q3 is turned on.
Q4	2SA1362 (Y)	D.5V SW	D5V ON/OFF control. When a base goes Lo, Q4 is turned on.
Q5	DTC124EUA	MOTOR SW	When CD loading or eject operation is activating, Q5's base goes Hi, Q4 is turned on.

KDC-5090B/BY

MICROCOMPUTER'S TERMINAL DESCRIPTION

IC1 (ELECTRIC UNIT : X25-87X2-7X)

Pin No.	Pin Name	I/O	Description	Processing Operation
1	AM+B	O	AM+B control	Hi : During AM reception
2	FM+B	O	FM+B control	Hi : During FM reception, Hi : Last FM mode (only RDS model)
3	$\overline{\text{AFS}}$	O	Noise detection time constant switching terminal	Hi : During FM reception, Lo : During FM seek or AF search
4	PLL-DATA	I/O	Data input/output with F/E	
5	PLL-CLK	I/O	Clock input/output with F/E	
6	EVDD	-	Positive power supply connection terminal	Connected to BU 5V lines.
7	EVSS	-	Ground connection terminal	Connected to GND lines.
8	NC	O		Not used (N.C.)
9	BEEP	O	BEEP sound output	
10	REMO	I	Data input from the remote control light sensor	
11	$\overline{\text{CH-REQH}}$	O	Request output to changers	Lo : Request
12	CH-RST	O	Reset output to changers	 : Reset
13	$\overline{\text{IC2-SDA}}$	I/O	Data line with IC2, IC5 and CD MECHA. MI-COM.	
14	$\overline{\text{IC2-CLK}}$	I/O	Clock line with IC2, IC5 and CD MECHA. MI-COM.	
15	CH-MUTE	I	Mute request from changers	Hi : Mute request
16	CH-CON	O	Changer control	Hi : Operation mode, Lo : Standby mode
17	DIMMER-CON	O	Dimmer control output	Pulse wave shape : DIMMER mode, Hi : POWER ON
18	TEST	-	Test terminal	Not used (Connected to GND lines)
19	$\overline{\text{P-MUTE}}$	O	Power IC mute control output	Lo : Mute (POWER OFF, TEL MUTE)
20	P-STBY	O	Power IC standby control output	Hi : POWER ON mode except panel detached or panel mask position
21	MUTE	O	IC2 mute control output	Hi : Mute on
22	NC	O		Not used (N.C.)
23	PRE-MUTE	O	Pre-outputs mute control output	Lo : Mute
24	$\overline{\text{ACC-DET}}$	I	ACC detection input	Hi : ACC OFF, Lo : ACC ON
25	$\overline{\text{DIMMER}}$	I	Small lights detection input	Lo : During vehicle small lamps turn on.
26	SW5V	O	SW 5V control output	Lo : POWER ON mode or during CD loading/eject action.
27	$\overline{\text{EXT-AMP-CON}}$	O	External amp. control output	Bass boost OFF__Hi : 160msec, Lo : 40msec Bass boost LOW__Hi : 130msec, Lo : 70msec Bass boost HI__Hi : 100msec, Lo : 100msec
28	P-CON	O	Power control output	Hi : POWER ON mode except ALL OFF mode.
29	ANT-CON	O	Antenna control output	Hi : During FM/AM reception or TI reception.
30	P-ON	O	SW 14V control output	Hi : POWER ON mode or during CD loading/eject action
31	$\overline{\text{RESET}}$	I	Reset input terminal	Lo : System reset
32	XT1	I	Sub clock resonator connection terminal	Clock count during POWER OFF mode
33	XT2	-	Sub clock resonator connection terminal	
34	REGC	-	C terminal	
35	X2	-	Main clock resonator connection terminal	Oscillation stop : POWER OFF mode or momentary power down detected
36	X1	I	Main clock resonator connection terminal	
37	VSS	-	Ground connection terminal	Connected to GND lines.
38	VDD	-	Positive power supply connection terminal	Connected to BU 5V lines.
39	CLKOUT	O	Internal system clock output	Not used (N.C.)
40,41	NC	O		Not used (N.C.)
42~45	TYPE0-TYPE3	I	Destination type input terminal 0~3	
46	IC2TYPE0	I	IC2 setting terminal	Lo : Initial value
47	IC2TYPE1	I	IC2 setting terminal	Lo : Initial value

MICROCOMPUTER'S TERMINAL DESCRIPTION

Pin No.	Pin Name	I/O	Description	Processing Operation
48~51	NC	O		Not used (N.C.)
52	ILL-ON	O	Illumination AVR on/off control output	Hi : POWER ON mode except panel detached or panel mask position
53	$\overline{\text{M-MUTE L}}$	I	Mute request (Lch) from CD MECHA. MI-COM.	Lo : Mute request
54	$\overline{\text{M-MUTE R}}$	I	Mute request (Rch) from CD MECHA. MI-COM.	Lo : Mute request
55	BVDD	-	Positive power supply connection terminal	Connected to BU 5V lines.
56	BVSS	-	Ground connection terminal	Connected to GND lines.
57	$\overline{\text{M-RST}}$	O	Reset output to CD MECHA. MI-COM.	Lo : Reset
58	$\overline{\text{M-STOP}}$	O	Stop request to CD MECHA. MI-COM.	Lo: Stop mode, Hi : Operation mode
59	NC	O		Not used (N.C.)
60	LO/EJ	I/O	CD MECHA. loading/Eject switching output	Lo : Loading, Hi : Eject, Hi-Z : Stop or Break
61	MOSW	O	CD mechanism loading motor control output	Hi : CD loading/eject action or Break, Lo : other
62	NC	O		Not used (N.C.)
63	CD-SW3	I	Down & limit switch detection input	Hi : Chucking, Lo : Pickup most inner position
64	NC	O		Not used (N.C.)
65	L-CE	I/O	CE output to LCD driver	
66~69	NC	O		Not used (N.C.)
70	AVCONT	O	A/D converter reference voltage control output	Hi : Active, Connected to AVREF terminal.
71	AVDD	-	A/D converter positive power supply connection terminal	Connected to BU 5V lines.
72	AVSS	-	A/D, D/A converter ground connection terminal	Connected to GND lines.
73	AVREF	I	A/D converter reference voltage input terminal	
74	PHONE	I	PHONE detection input	1V or less : TEL MUTE, 2.5V or greater : NAVI MUTE
75,76	NC (GND)	I		Not used (pull down to GND lines)
77	SRT-SW2	I	SRT position detection input	Panel : (SW1, SW2) = (Hi, Hi) , Slide : (SW1, SW2) = (Hi, Lo) Mask : (SW1, SW2) = (Lo, Lo)
78	SRT-SW1	I	SRT position detection input	
79	NOISE	I	FM noise detection input	
80	S-METER	I	S-meter input from F/E	
81	R-DATA	I	Data input from the RDS decoder IC	Except RDS model : Not used (pull down to GND lines)
82	R-QUAL	I	Quality input from the RDS decoder IC	Except RDS model : Not used (pull down to GND lines)
83	IFC-OUT	I	F/E IFC OUT input terminal	Hi : Station detected, Lo : Not detected
84,85	NC (GND)	I		Not used (pull down to GND lines)
86	NC	O		Not used (N.C.)
87	R-CLK	I	Clock input from the RDS decoder IC	Except RDS model : Not used (pull down to GND lines)
88	$\overline{\text{CH-REQC}}$	I	Request input from changers	Lo : Request
89	KEY-REQ	I	Communication request input form LCD driver IC	
90	CD-SW1	I	Loading detection	Lo : CD chucking.
91	CD-SW2	I	12cm disc detection terminal	When 12cm disc was detected, the input becomes Lo temporarily.
92	NC	O		Not used (N.C.)
93	$\overline{\text{BU-DET}}$	I	Momentary power down detection input	Hi : When momentary power down detected or BU OFF, Lo : BU ON
94	CH-DATAC	I	Data input from changers	
95	CH-DATAH	O	Data output to changers	
96	CH-CLK	I/O	Clock input/output with changers	
97	L-DATAL	I	Data input from the LCD driver IC	
98	L-DATAS	I/O	Data output to the LCD driver IC	
99	L-CLK	I/O	Clock output to the LCD driver IC /Panel detaching detection input (LCD Driver)	Lo : Panel attached
100	PAN5V	O	Panel 5V control	Hi : Panel attached, Lo : Panel detached

TEST MODE

1. How to enter the test mode

While holding the FM and Preset 6 keys, reset the unit.

2. How to exit from the test mode

While holding the Preset 6 key, reset the unit.

(Note) The test mode cannot be terminated by ACC OFF, power OFF or momentary power down.

3. Initial status in the test mode

- Sources : ALL OFF
- Display : All segments are lit.
- Volume : -10dB (displayed as "30")
- Loudness : OFF
- CRSC : OFF regardless of the presence of switching function.
- SYSTEM Q : Flat

4. Special display in Tuner mode

When any of the following messages is displayed in Tuner mode, the F/E may be abnormal.

- "TNE2P NG" : The EEPROM is set to the default (unstable values) because the F/E was shipped without passing through the adjustment process, etc.
- "TNCON NG" : Communication with the F/E is not possible.

5. Forced switching of K3I

Each press of the Preset 6 key in Tuner mode should switch K3I from AUTO → Forced Wide → Forced Middle → Forced Narrow → AUTO.

The initial status is AUTO and the display shows these modes as follows.

- AUTO : FMA
- Forced Wide : FMW
- Forced Middle : FMM
- Forced Narrow : FMN

6. Test mode specifications of the CD receiver

- Forced ejection is inhibited in the reset start operation.
When the unit is reset while a CD is loaded in it, the CD is not recognized by resetting.

- Each press of the Track Up key jumps to the following track numbers:

No. 9 → No. 15 → No. 10 → No. 11 → No. 12 → No. 13 → No. 14 → No. 9 (The cycle restarts from here.)

- Each press of the Track Down key jumps to the previous track number to the track being played.

7. Audio-related specifications

- A short press of the Q key initiates the audio adjustment mode.
- Pressing the * key on the remote initiates the audio adjustment mode.
- Continuous holding of a remote control key is inhibited.
- Bass, Middle and Treble are adjusted in 3 steps of Min / Center / Max with the Track Up/Down keys.
- Balance is adjusted in 3 steps of Left Max / Center / Right Max with the Track Up/Down keys.
- Fader is adjusted in 3 steps of Rear Max / Center / Front Max with the Track Up/Down keys.
- HPF is adjusted in 2 steps of Through/220Hz with the Track Up/Down keys.
- LPF is adjusted in 2 steps of Through/120Hz with the Track Up/Down keys.
- Bass f, Bass Q, Bass EXT, Middle f, Middle Q and Treble f are not dealt with by the audio adjustment.

8. Menu-related specifications

- A short press of the CLK key initiates the Menu mode.
- Pressing the DNPP/SBF key on the remote initiates the Menu mode.
- Continuous holding of a remote control key is inhibited.
- Contrast is adjusted in 3 steps of 0/5/10 and the default is 5.

9. Backup current measurement

When the unit is reset while ACC is OFF (i.e. by turning Backup ON), the MUTE terminal goes OFF in 2 seconds in place of 15 second. (The panel and CD mechanism are not activated at this time.)

TEST MODE

10. Special display when the display is all on

Pressing the Preset keys while the power is ALL OFF displays the following information.

[PRESET 1]	Version display (8 digits, Month/Day/Hour/Minute) (Display) SYS xxxxxxxx System microcomputer
[PRESET 3]	Short press : View power ON time. (The All OFF period is not counted.) Long press/hold : Clear power ON time. (Display) PonTim xxxxx Max. 65535 (hours)
[PRESET 4]	Short press : Display CD operation time. Long press/hold : Clear CD operation time (Display) CDTime xxxxx (CD/R) Max. 65535 (hours)
[PRESET 5]	Short press : Display CD ejection count. Long press/hold : Clear CD ejection count. (Display) EjeTim xxxxx Max. 65535 (times)
[PRESET 6]	Short press : Display Panel open/close count. Long press/hold : Clear Panel open/close count. (Display) PnCnt xxxxx Max. 655350 (times)

11. Other specifications

- Messages such as "CODE OFF" are not displayed when power is turned ON.
- Pressing the TI (AUTO) key during changer operation turns 2zone ON. 2zone can be turned OFF by pressing the TI (AUTO) key again. The P/S dot lights while 2zone is ON.
- Pressing and holding the CLK key for a second in the ALL OFF status the Mask Key (security) write mode.

• Security-related information

1. Forced Power ON mode (All models)

Even when the security (Mask key) is approved, resetting the unit while holding the ATT and Preset 4 keys makes it possible to turn the power ON for 30 minutes.
After 30 minutes have elapsed, it is not possible to return to the previous condition unless the unit is reset again.

2. Method of registration of the security code after EEPROM (Tuner Unit Ass'y) replacement (Code security model)

- 1) Enter the test mode. (See 1. How to enter the test mode)
 - 2) Press the CLK key to enter the security registration mode.
 - 3) Enter the code using the Preset 1/2/3/4 keys.
Example : To enter "3510"
 - Press the Preset 1 key 4 times.
 - Press the Preset 2 key 6 times.
 - Press the Preset 3 key twice.
 - Press the Preset 4 key once.
 - 4) Hold down the DISP key for at least 3 seconds and the message, "RE-ENTER" appears, so once again enter the code according to Step 3) above.
 - 5) Press and hold the DISP key for 3 seconds until "APPROVED" is displayed.
 - 6) Exit from the test mode. (See 2. How to exit from the test mode)
- (Note) All Clear is not applicable to the security code of this model.

3. Method of writing the Mask key while the EEPROM is in the initial status

- 1) Enter the test mode. (See 1. How to enter the test mode)
- 2) Press the CLK key to enter the Mask key registration mode. "TRANSMIT1" should be displayed now. The display at this time should show "< >" in place of "[]".
- 3) Point the Mask key remote toward the light sensor, and press and hold its key for more than 0.5 second.
- 4) When "TRANSMIT2" is displayed, press and hold the key on the Mask key remote for more than 0.5 second again. The first and second counter codes are not compared at this time.
- 5) When "APPROVED" is displayed, the write operation is complete. Now the demonstration mode is initiated and the test mode is terminated.

(Note) In the same way as previous models, if 30 minutes have elapsed with no code written, an error occurs and the power is turned OFF.

TEST MODE / ATTENTION

4. Method of initializing the Mask key (How to reset the unit from the Mask key approved condition to the factory condition)

- 1) Enter the test mode. (See 1. How to enter the test mode)
- 2) "TRANSMIT1" is displayed and the Mask key entry request mode is initiated. The display at this time should show " ** " in place of " [] ".
- 3) Press and hold the key on the Master key remote for more than 3 seconds.
- 4) When "TRANSMIT2" is displayed, press and hold the key on the Master key remote for more than 3 seconds again.
- 5) When "APPROVED" is displayed, the Mask key is cleared, the demonstration mode is initiated, the test mode is terminated and the unit returns to the factory condition.

5. Method of clearing all Mask key-related data

- 1) Enter the test mode. (See 1. How to enter the test mode)
- 2) Press the CLK key to enter the Mask key registration mode. "TRANSMIT1" should be displayed now.
- 3) Point the Master key remote toward the light sensor, and press and hold its key for more than 3 seconds (until the level display shows the full condition).
- 4) When "TRANSMIT2" is displayed, press and hold the key on the Mask key remote for more than 3 seconds again. If "TRANSMIT1" is displayed in place of "TRANSMIT2", restart the procedure from step 3).
- 5) When "APPROVED" is displayed, all security data is cleared and the unit returns to the condition before Mask key writing with the EEPROM in the initial status.


ATTENTION

Assembly of FPC (Flexible PC board) onto Roller ass'y


Turn Roller ass'y by 2 times.

Hook the end of Roller ass'y to the tongue.

Insert the FPC into the slit of Roller ass'y then release the end of Roller ass'y and the tongue.

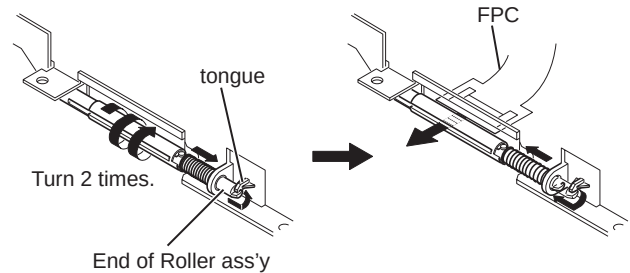


PC BOARD (COMPONENT SIDE VIEW)

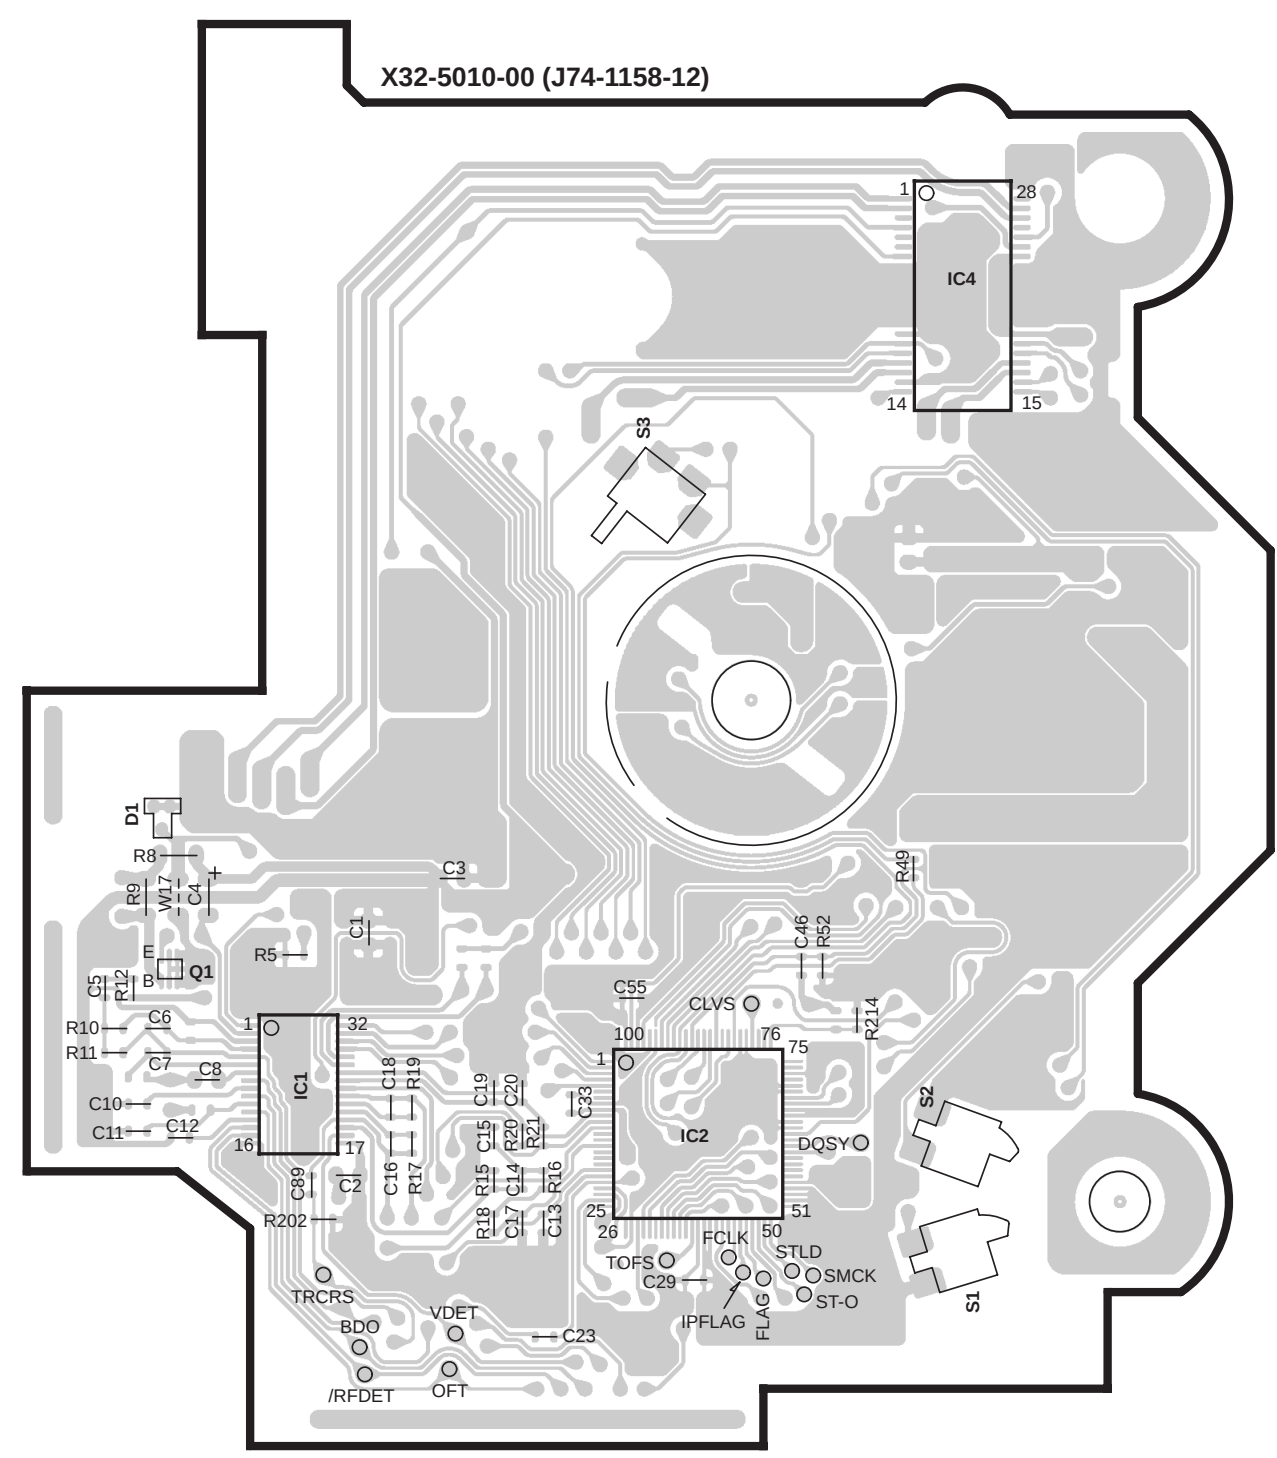

X32-5010-00		
IC	Q	Address
1		5B
2		5C
4		2D
1		4A



Refer to the schematic diagram for the values of resistors and capacitors.

(FOIL SIDE VIEW)

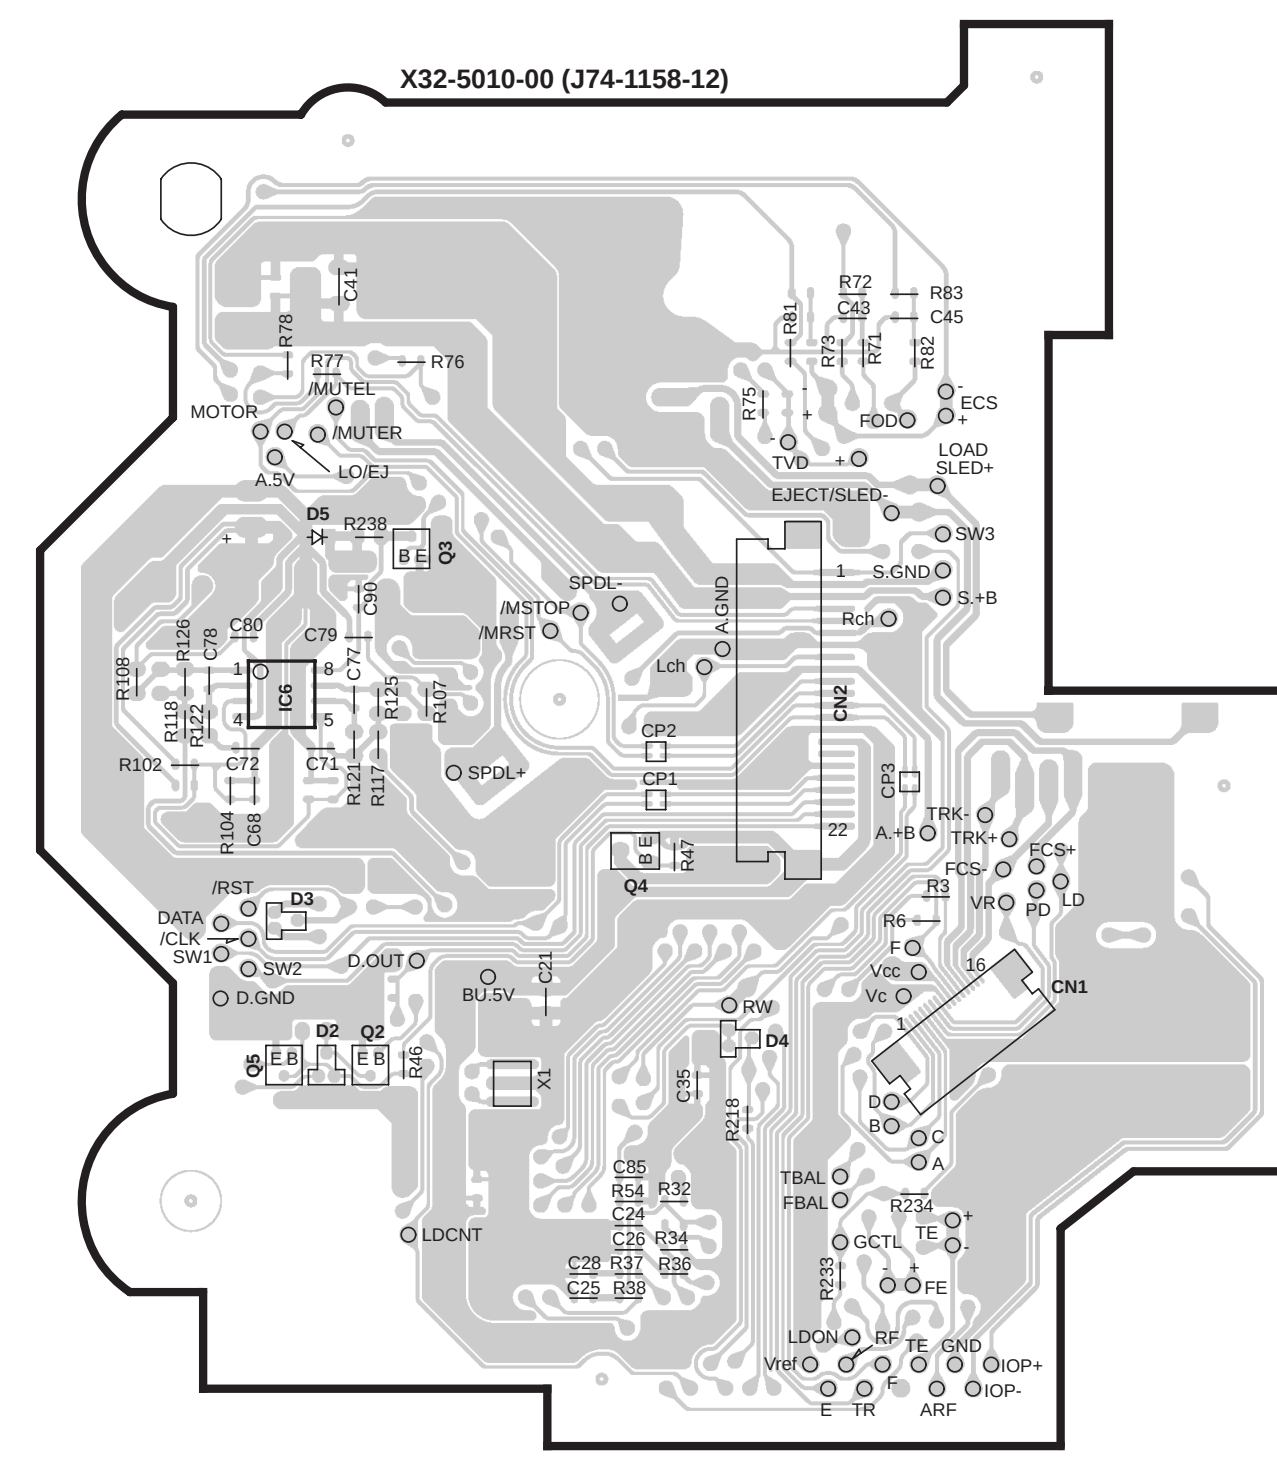

X32-5010-00		
IC	Q	Address
6		3G
2		5G
3		3G
4		4H
5		5G

X13-9960-14 (J74-1184-22)
X13-9992-74 (J74-1184-22)

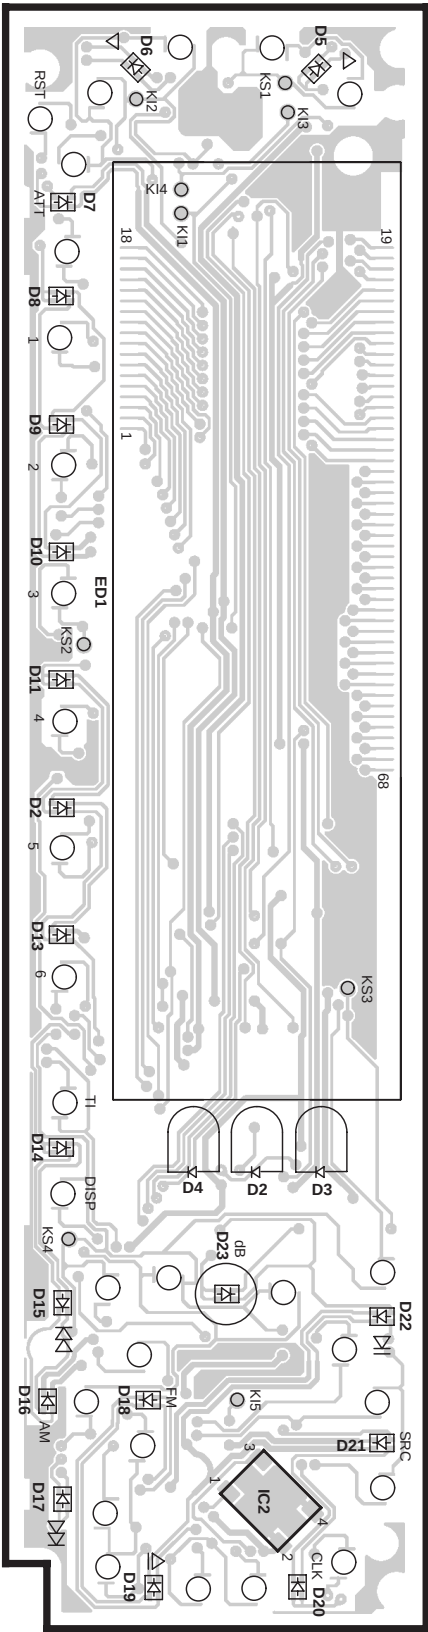


Refer to the schematic diagram for the values of resistors and capacitors.

PC BOARD (FOIL SIDE VIEW)

X13-9960-14 (J74-1184-22)
X13-9992-74 (J74-1184-22)

X13-99XX-X4


IC	Q	Address
1		3V
1		2V
3		5V
4		5V
5		4V
6		5V
7		5V

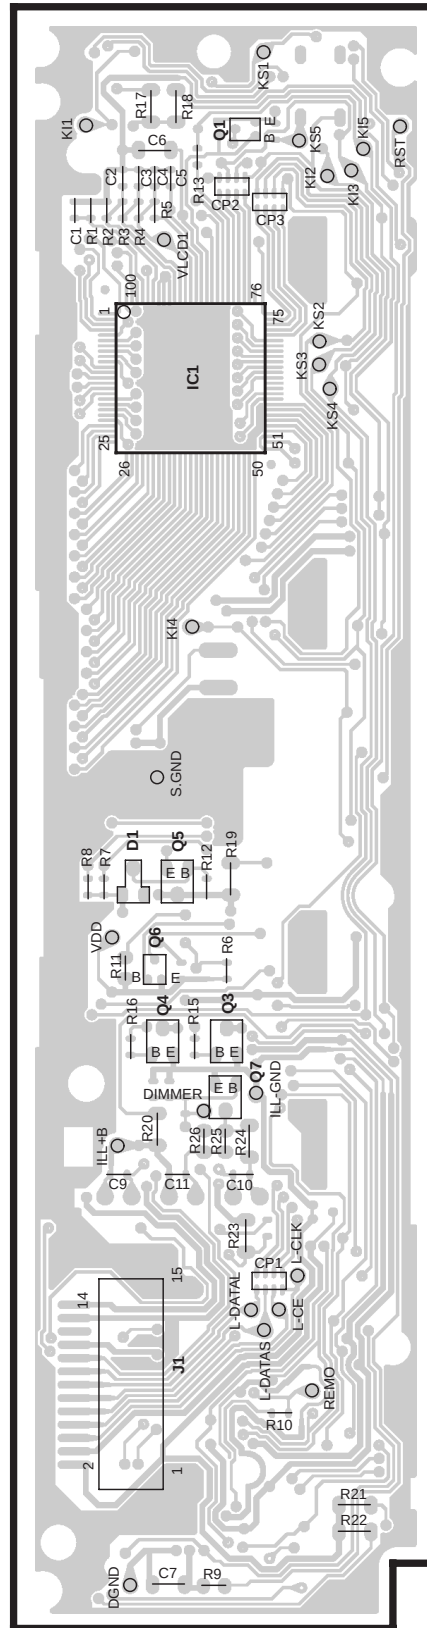


X25-87X2-7X

IC	Q	Address
13		5AC
14		3AD
16		3AC
20		5AC
21		5AD
22		5AD
27		4AB
29		4AB
30		4AB
33		4AB
34		4AA
42		4Z
43		4Y
52		4Y



X25-8772-72 (J74-1144-12)
X25-8782-71 (J74-1219-12)

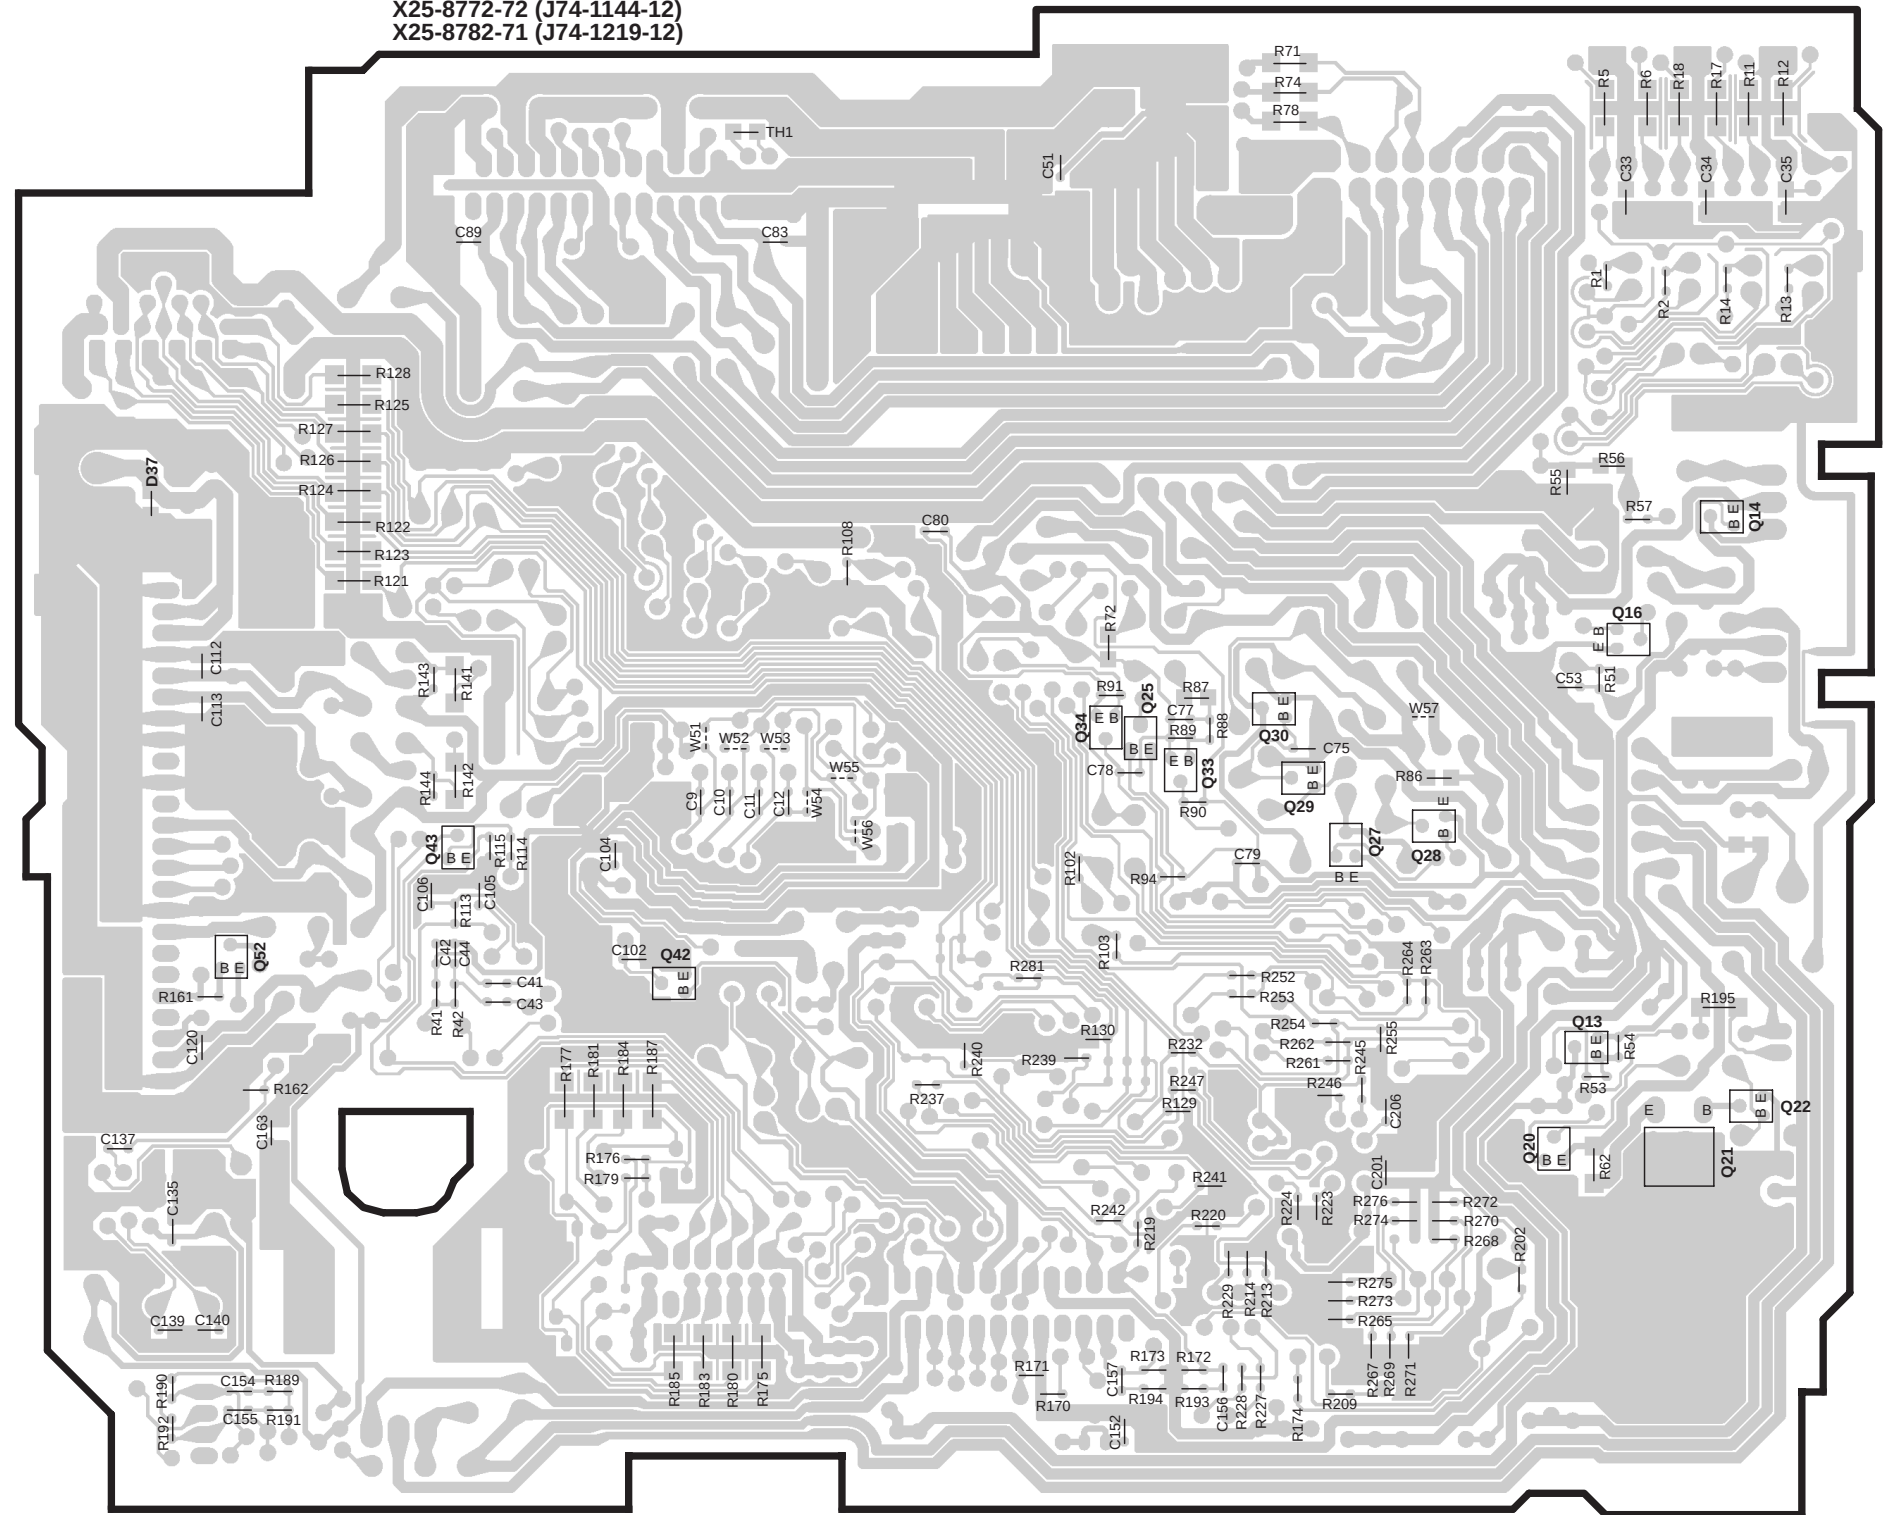

Refer to the schematic diagram for the values of resistors and capacitors.

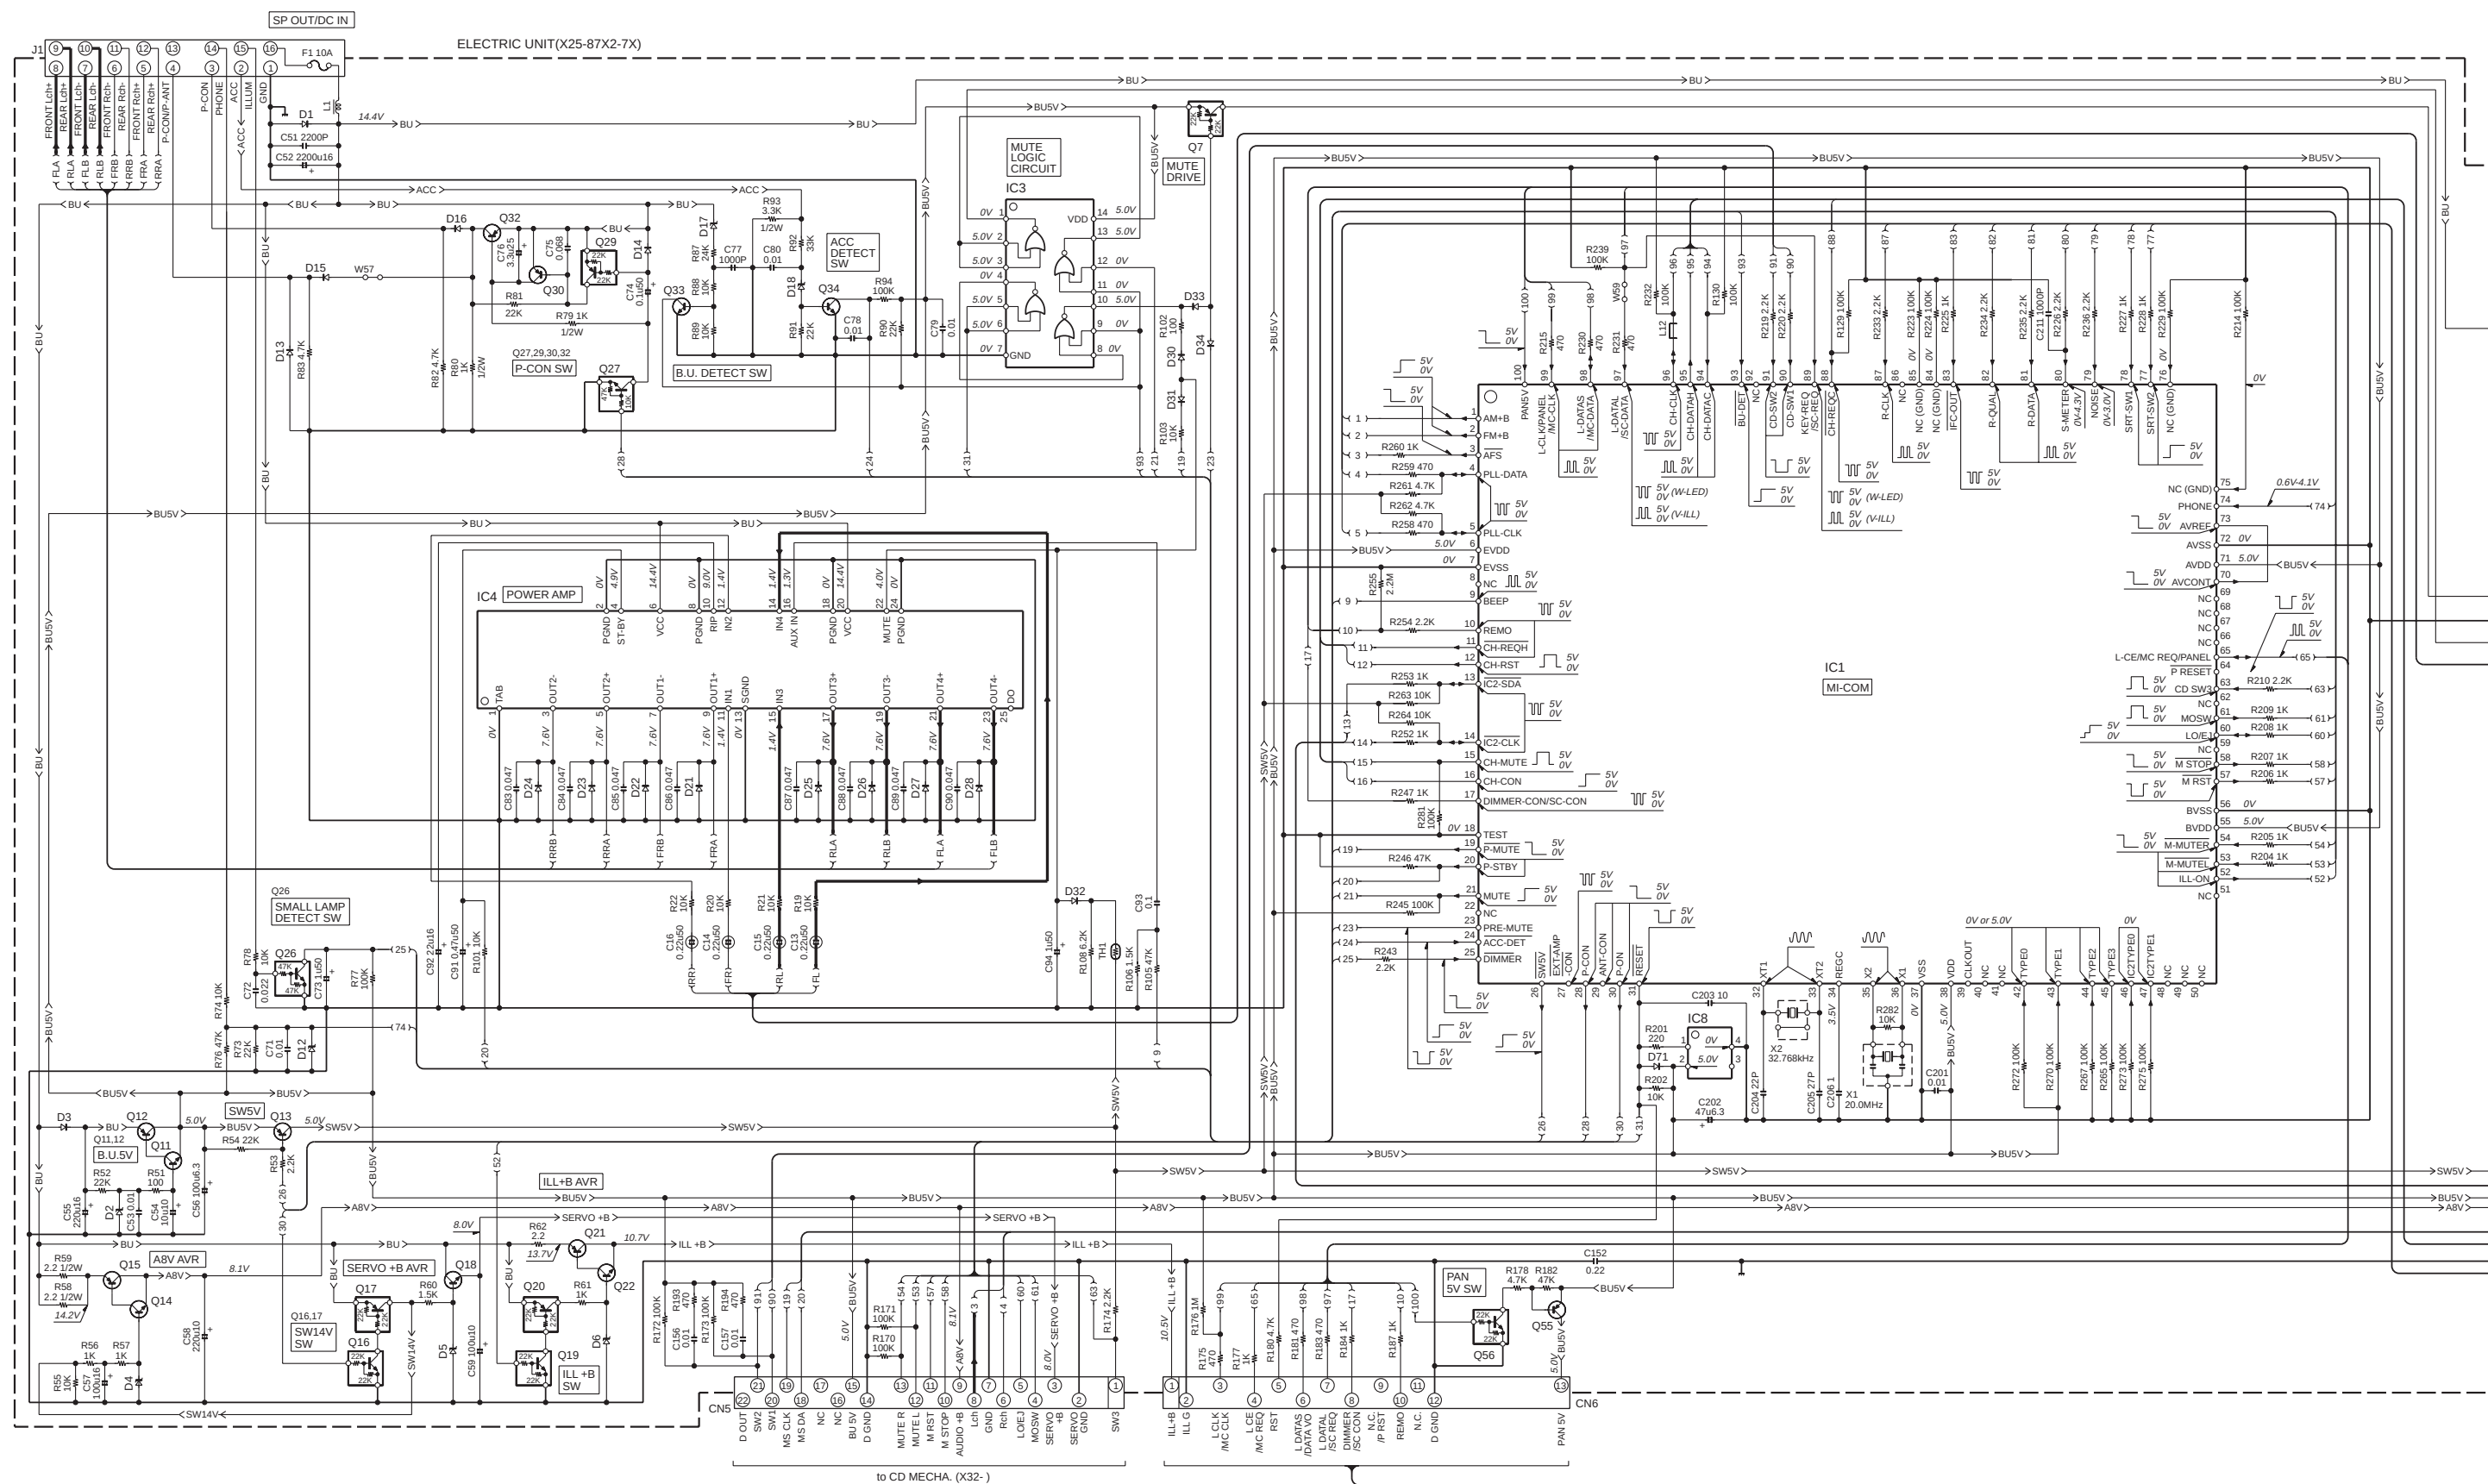

to CD MECHA. (X32-)

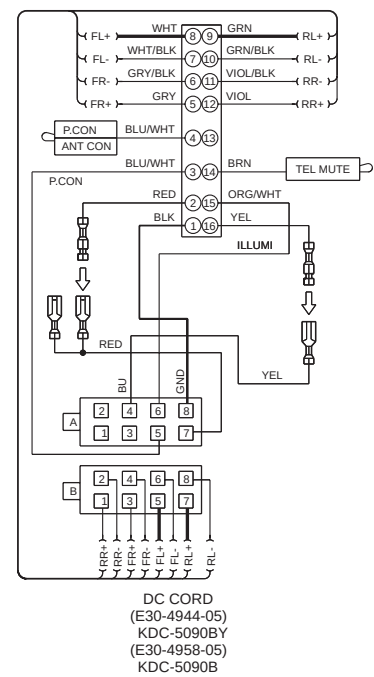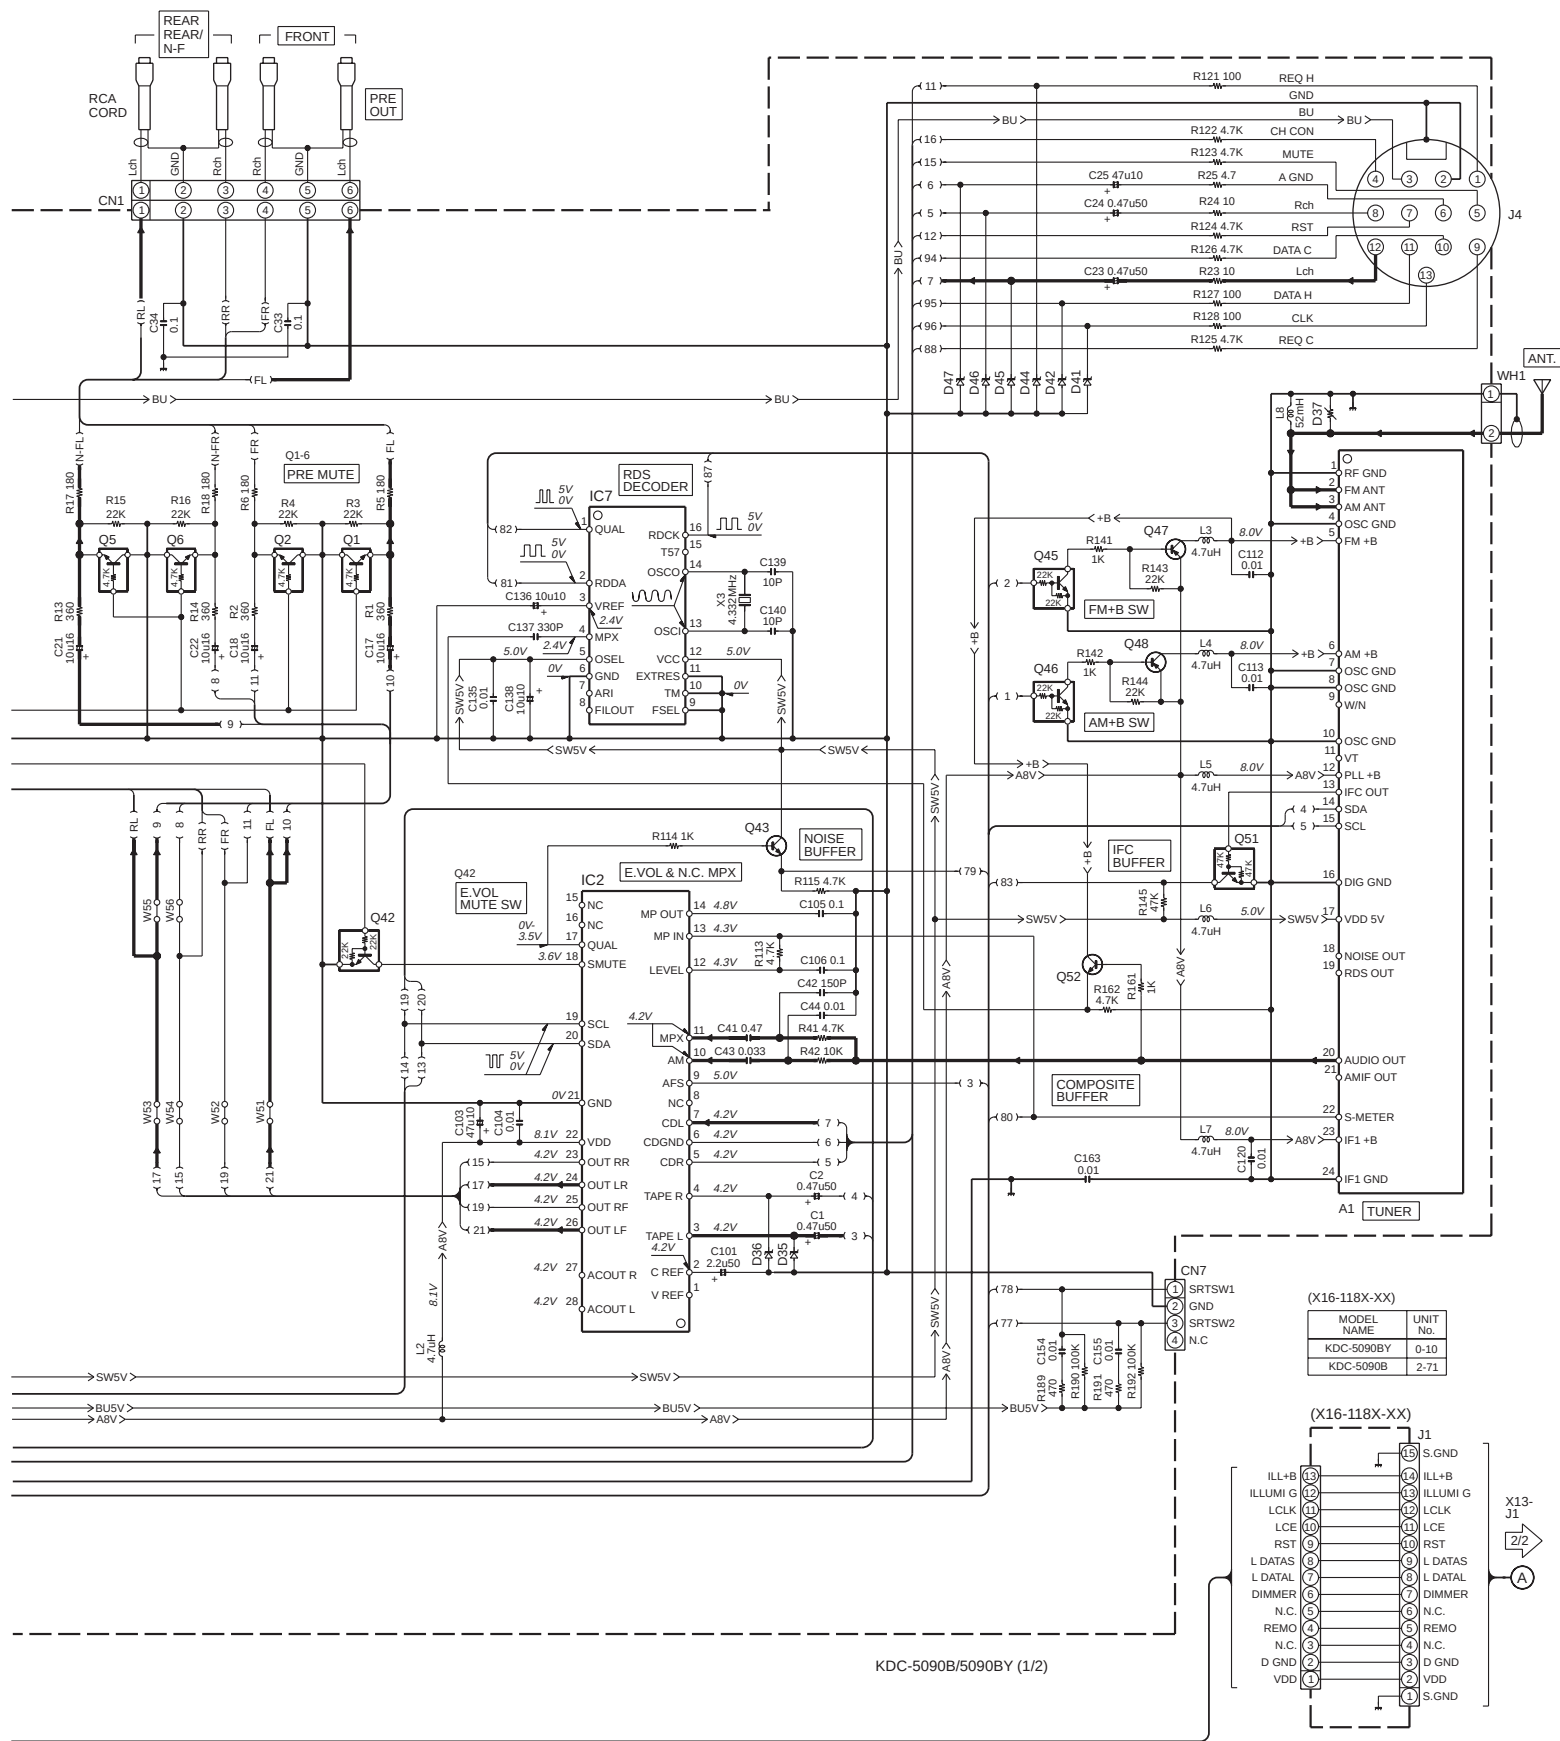

- IC1 : UPDA7030337GC117
IC2 : TDA7407D
IC3 : HD74HC02FP or TC74HC02AF
IC4 : TA8263BH
IC7 : TDA7479D
IC8 : S-80837ANNP
Q1,2,5,6 : DTC143TUA or KRC4110
Q7,17,20,29 : DTA124EUA or KRA303
Q11,14,22,33,34,43,52 : 2SC4081 or 2SD1819A
Q12,15 : 2SB1548(P)
Q13,30,55 : 2SA1576A or 2SB1218A
Q16,19,42,45,46,56 : DTC124EUA or UN5212
Q18 : 2SD2375
Q21 : 2SB1184
Q26,51 : DTC144EUA or UN5213
Q27 : DTC114YUA or UN5214
Q32,47,48 : 2SB1277(Q,R)
D1 : RM102LF
D2 : MA4056(N)-M
D3 : 1GWJ43
D4 : MA4091(N)-L
D5 : MA4082(N)-L or HZS9A2L
D6 : MA4110-L or HZS11B2
D12 : MA4047-M or HZS5B1
D13,15,16,21-28 : AM012 or DSM1SD2 or ERA15-02
D14,30-34,71 : 1SS133
D17,18,35,36,45-47 : MA4068(N)-M
D37 : IM5A-6081
D41,42,44 : MA4062-L or HZS9C1

— SIGNAL LINE
— GND LINE
— +B LINE

DTC114YUA
DTC143TUA
DTC143ZK
UN5213
UN5214
2SA1362
2SA1576A
2SB1218A
2SC2412K
2SD1819A
2SD2114K

2SC4081

UN5212

DTA114EUA
DTA124EUA
DTC124EUA
DTC144EUA

TC74HC02AF

NJM4565MD


TDA7479D

DAN202U


DA204U

CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).
⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.
• DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

SWITCH UNIT(X13-996X-XX)

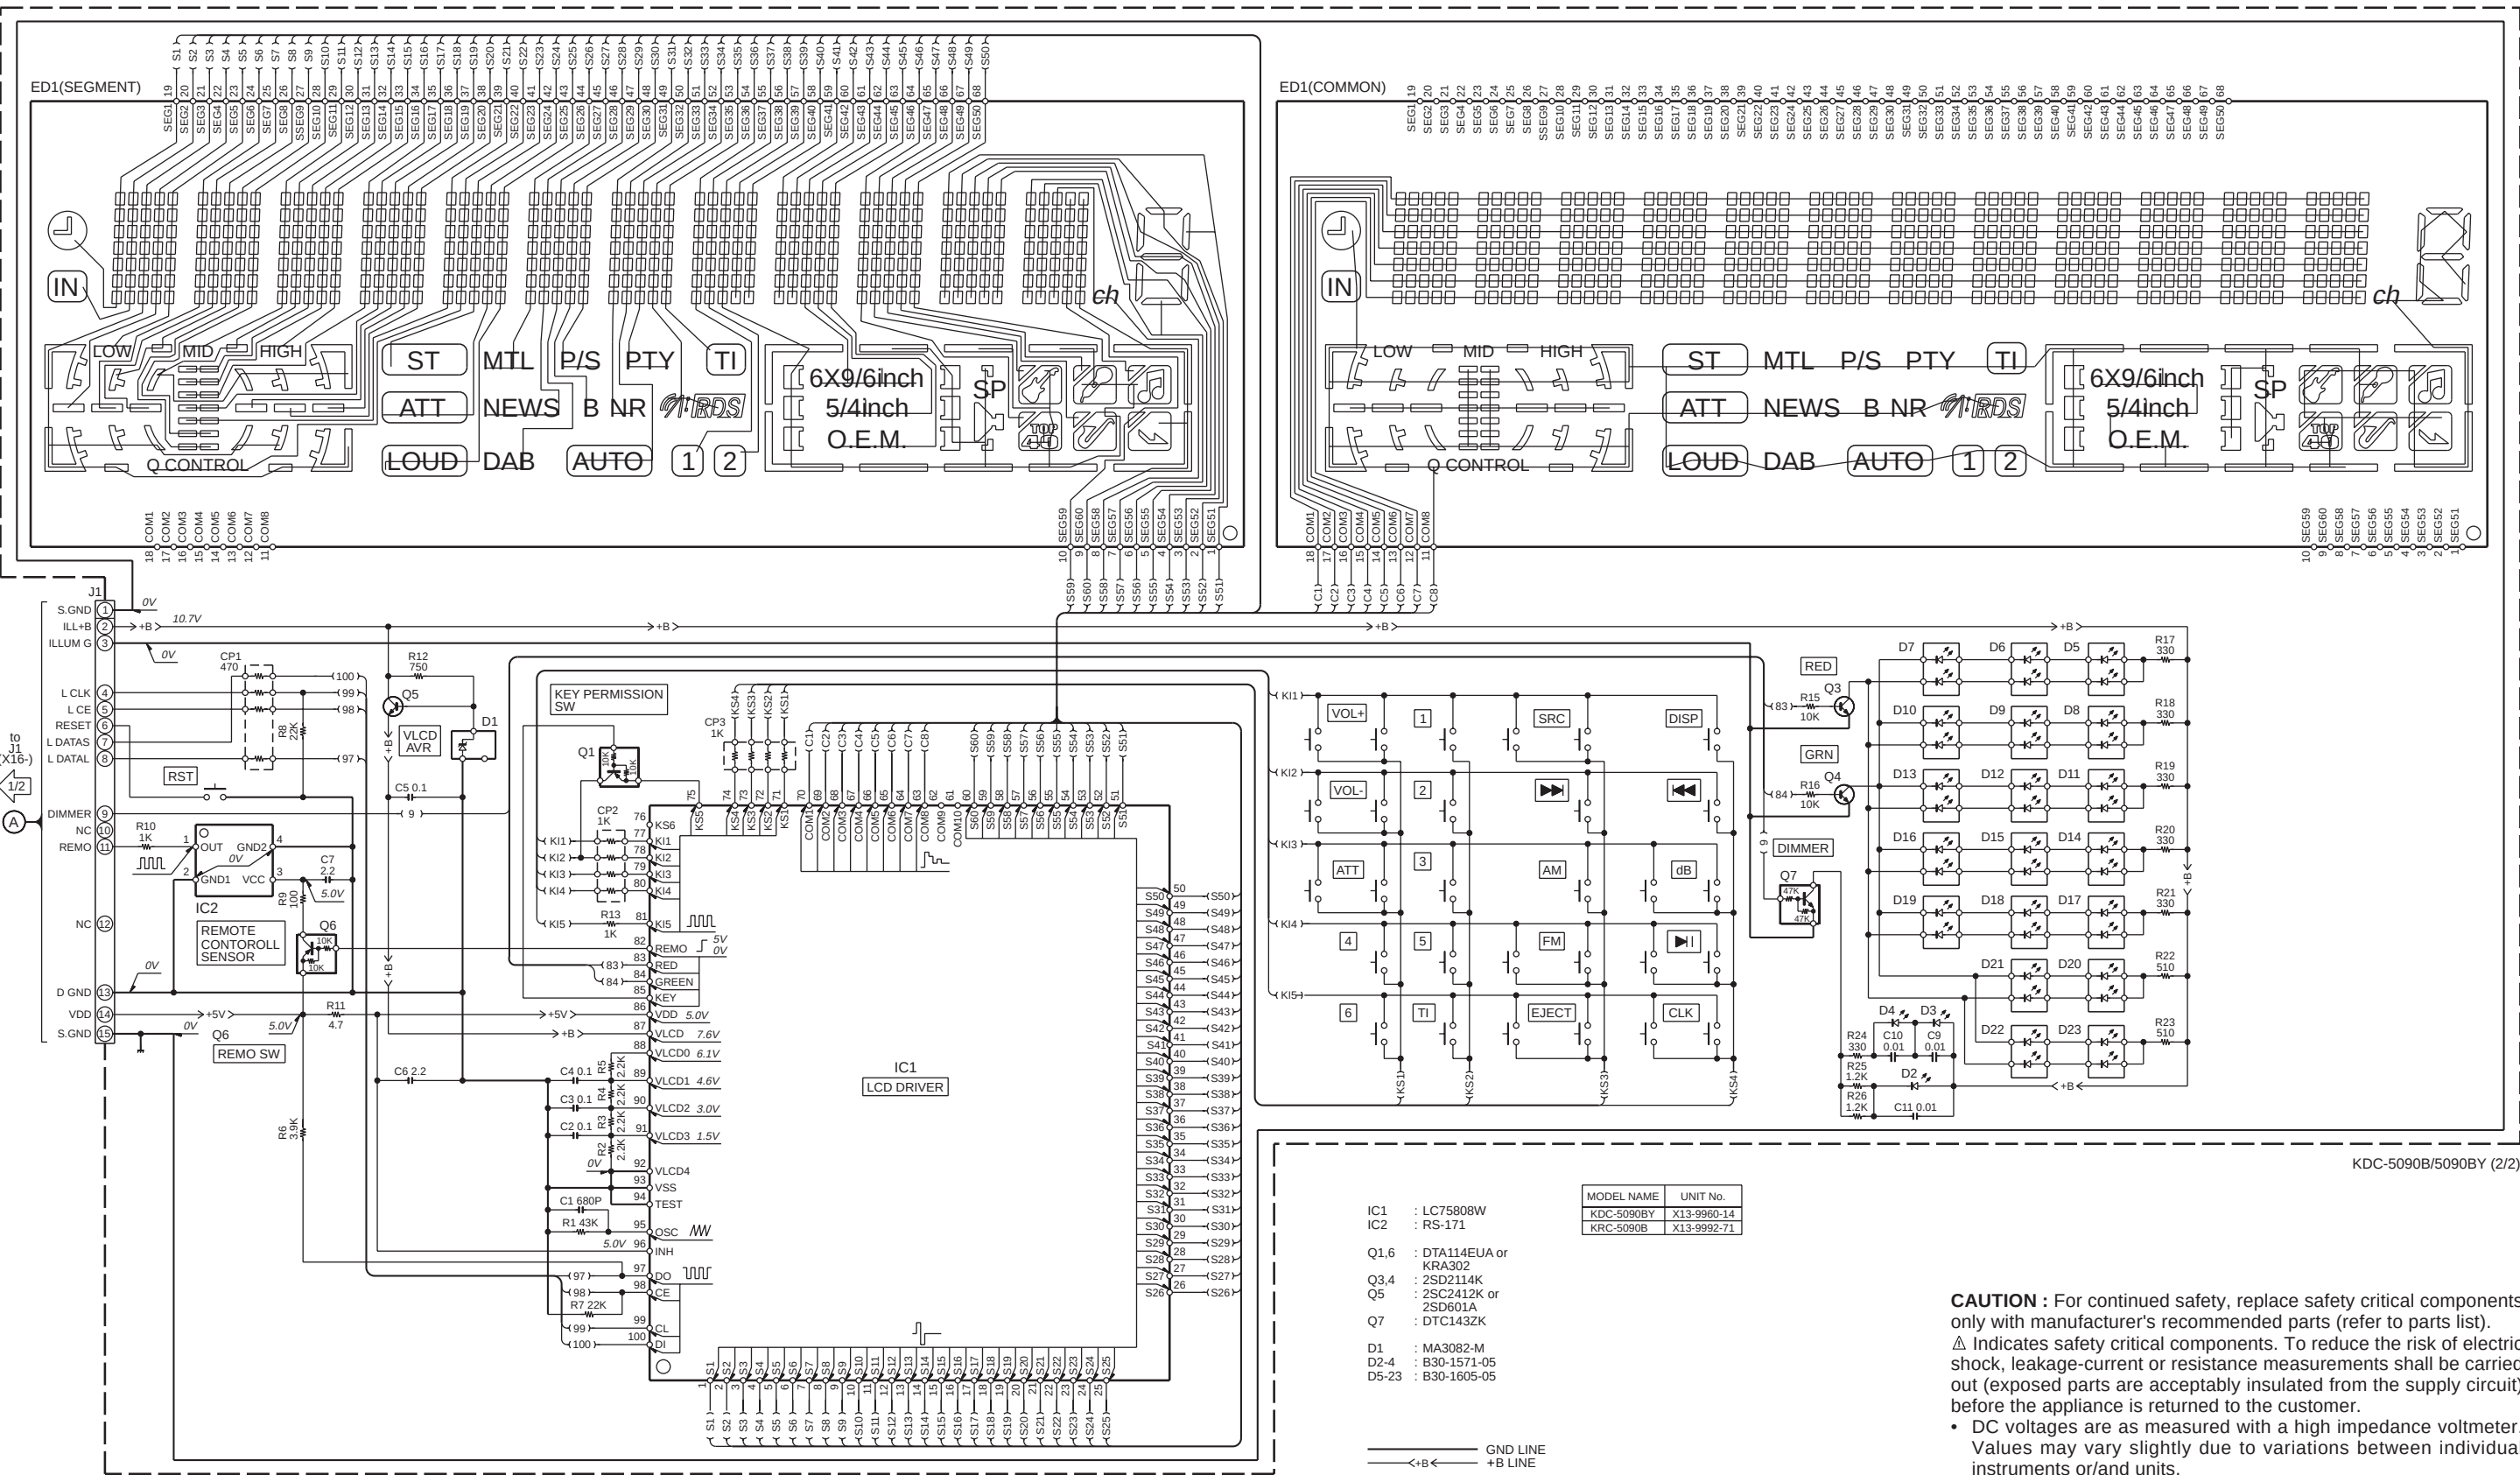


(X32-5010-00)

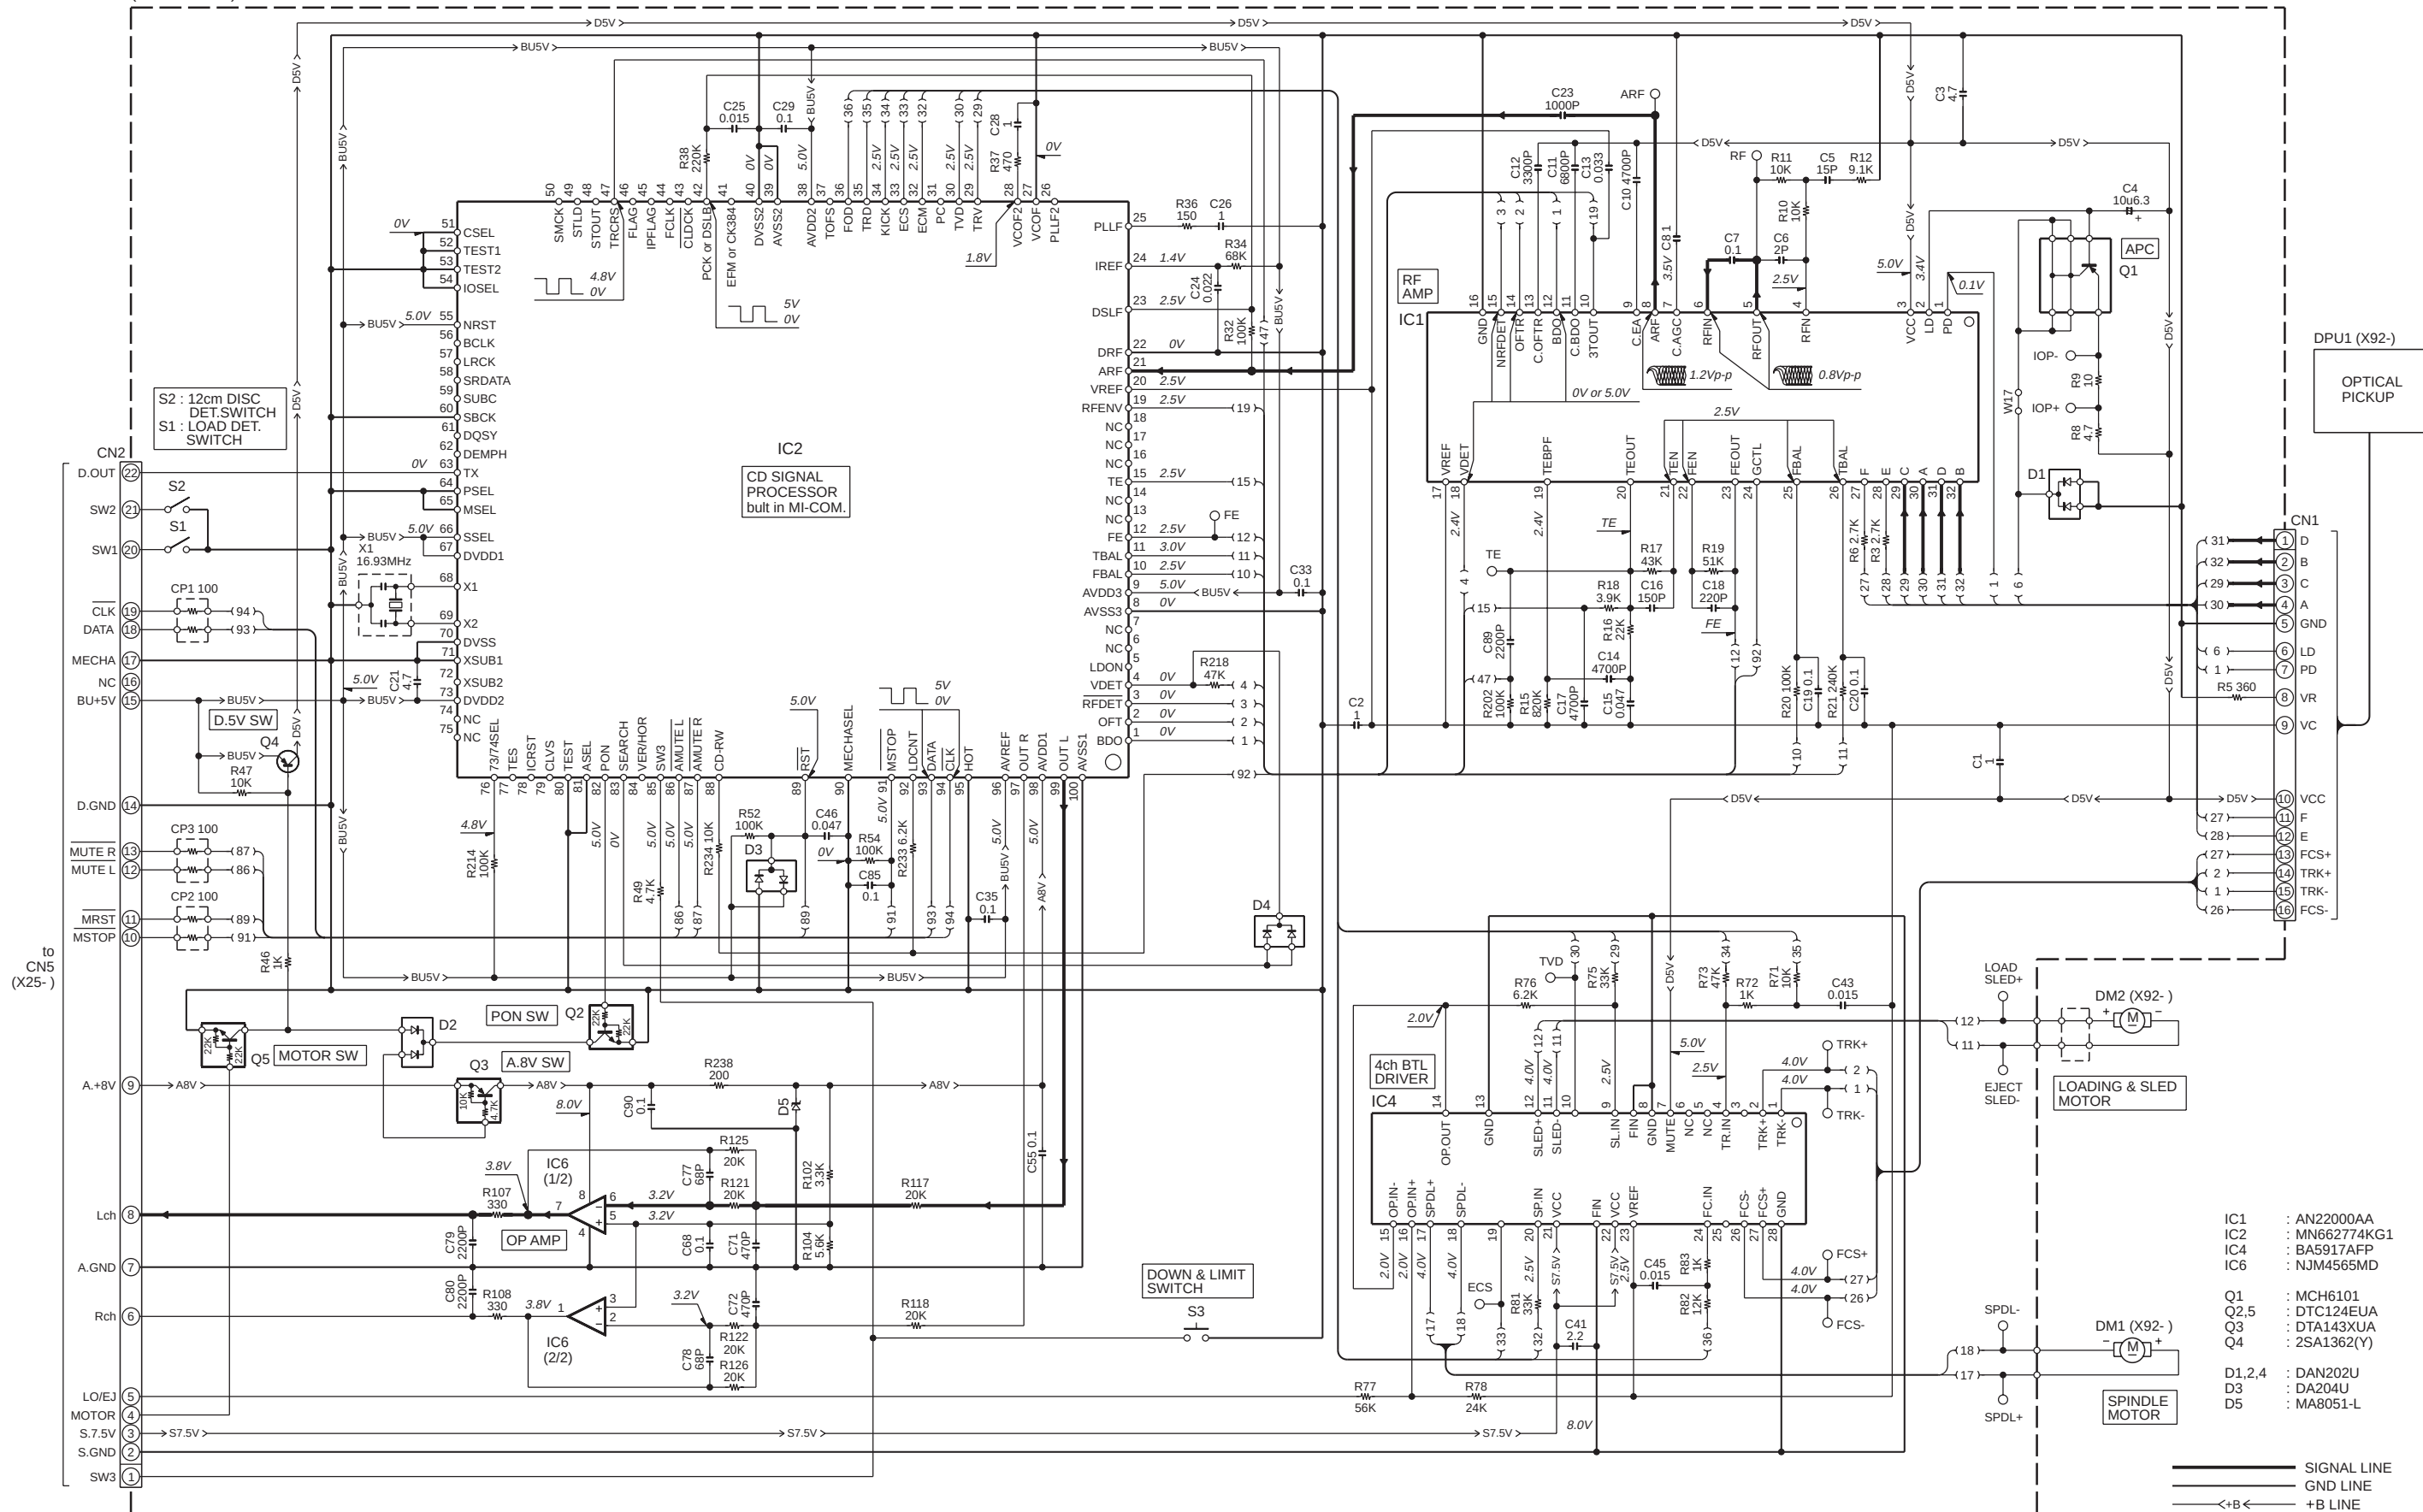


CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).
 ⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.
 • DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

KDC-5090B/BY
KENWOOD

EXPLODED VIEW (MECHANISM)

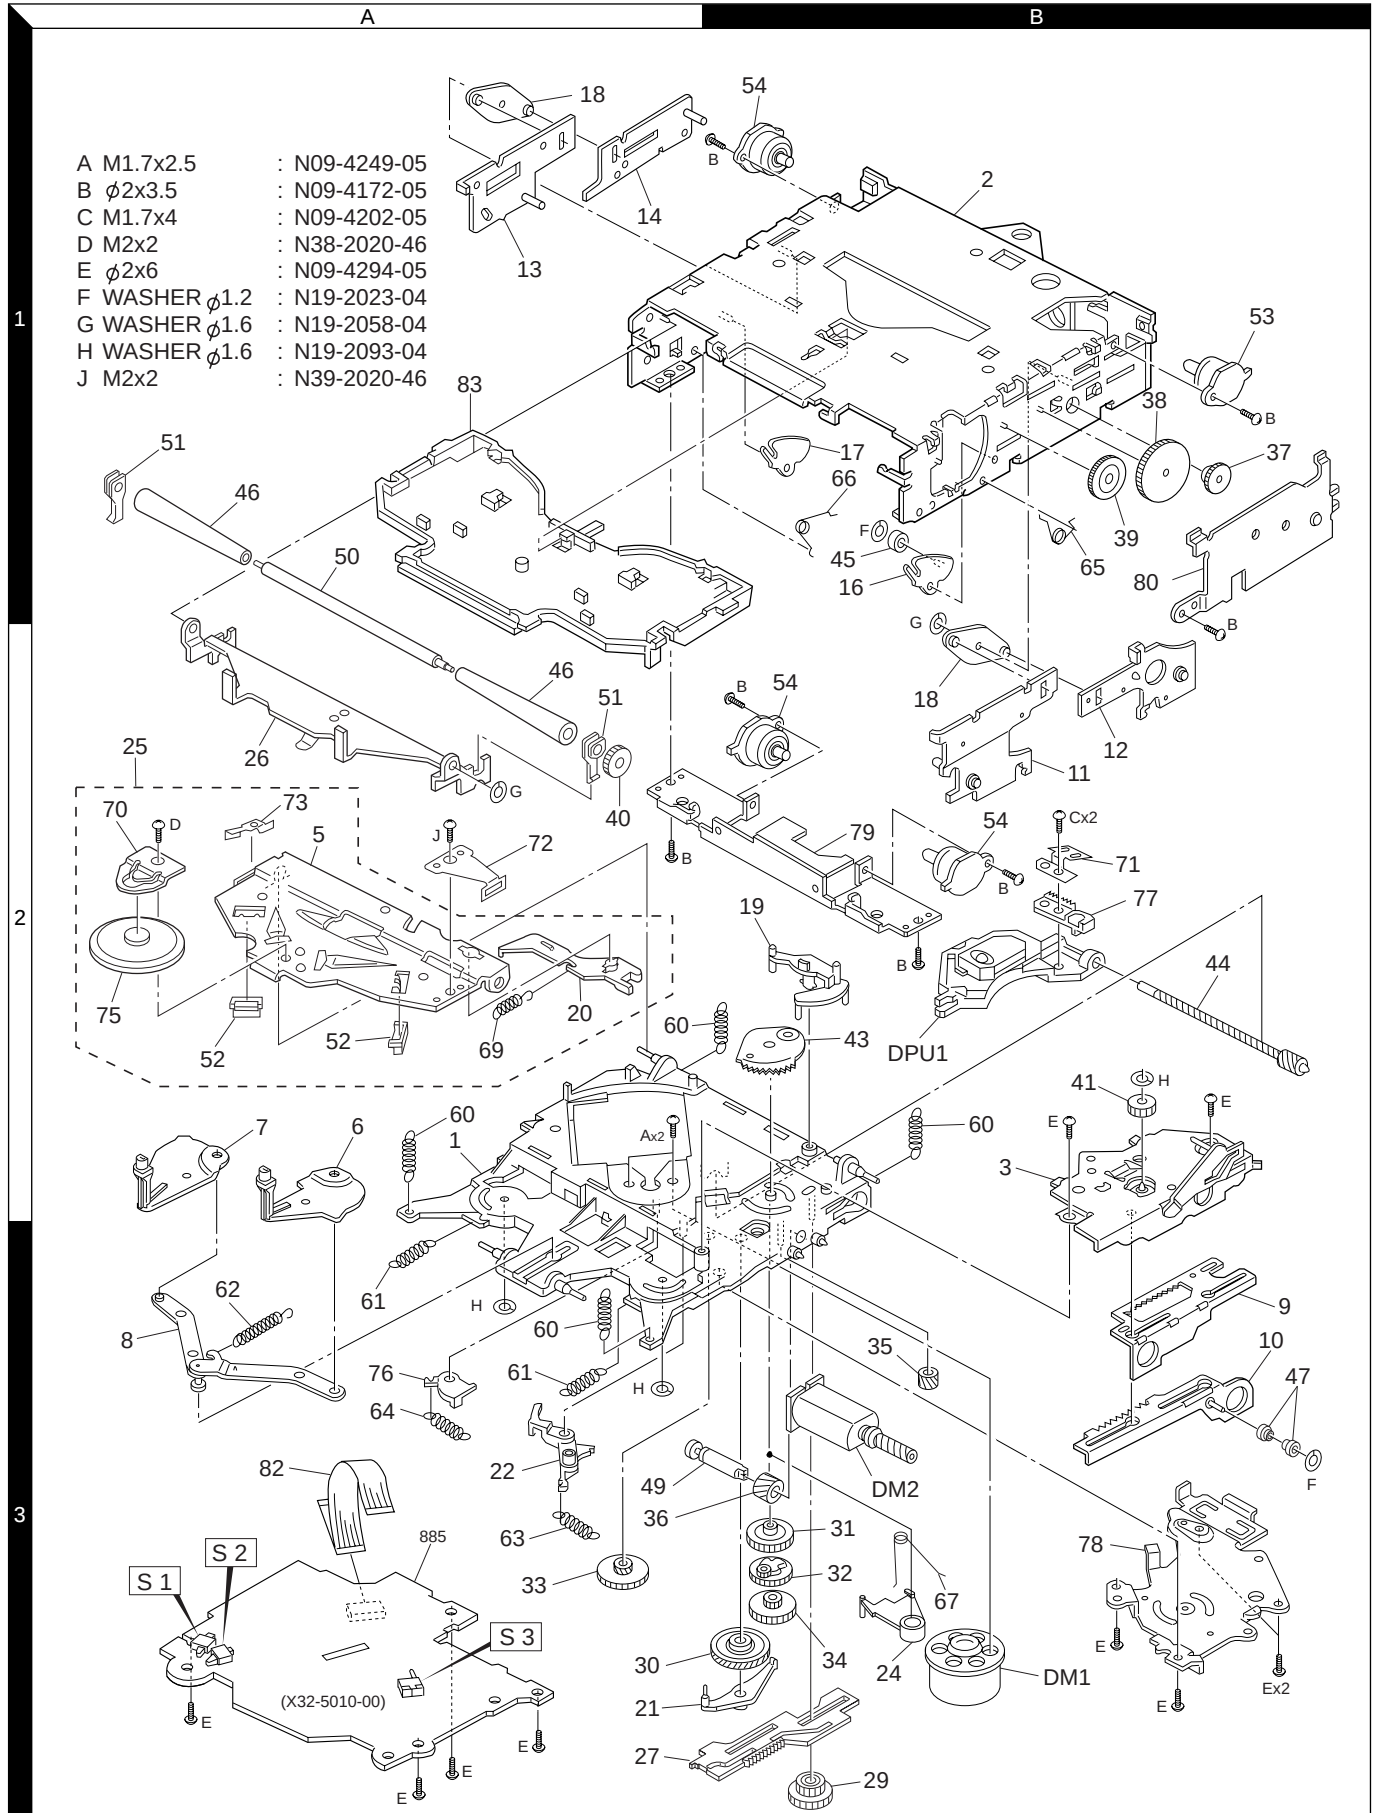

EXPLODED VIE (UNIT)

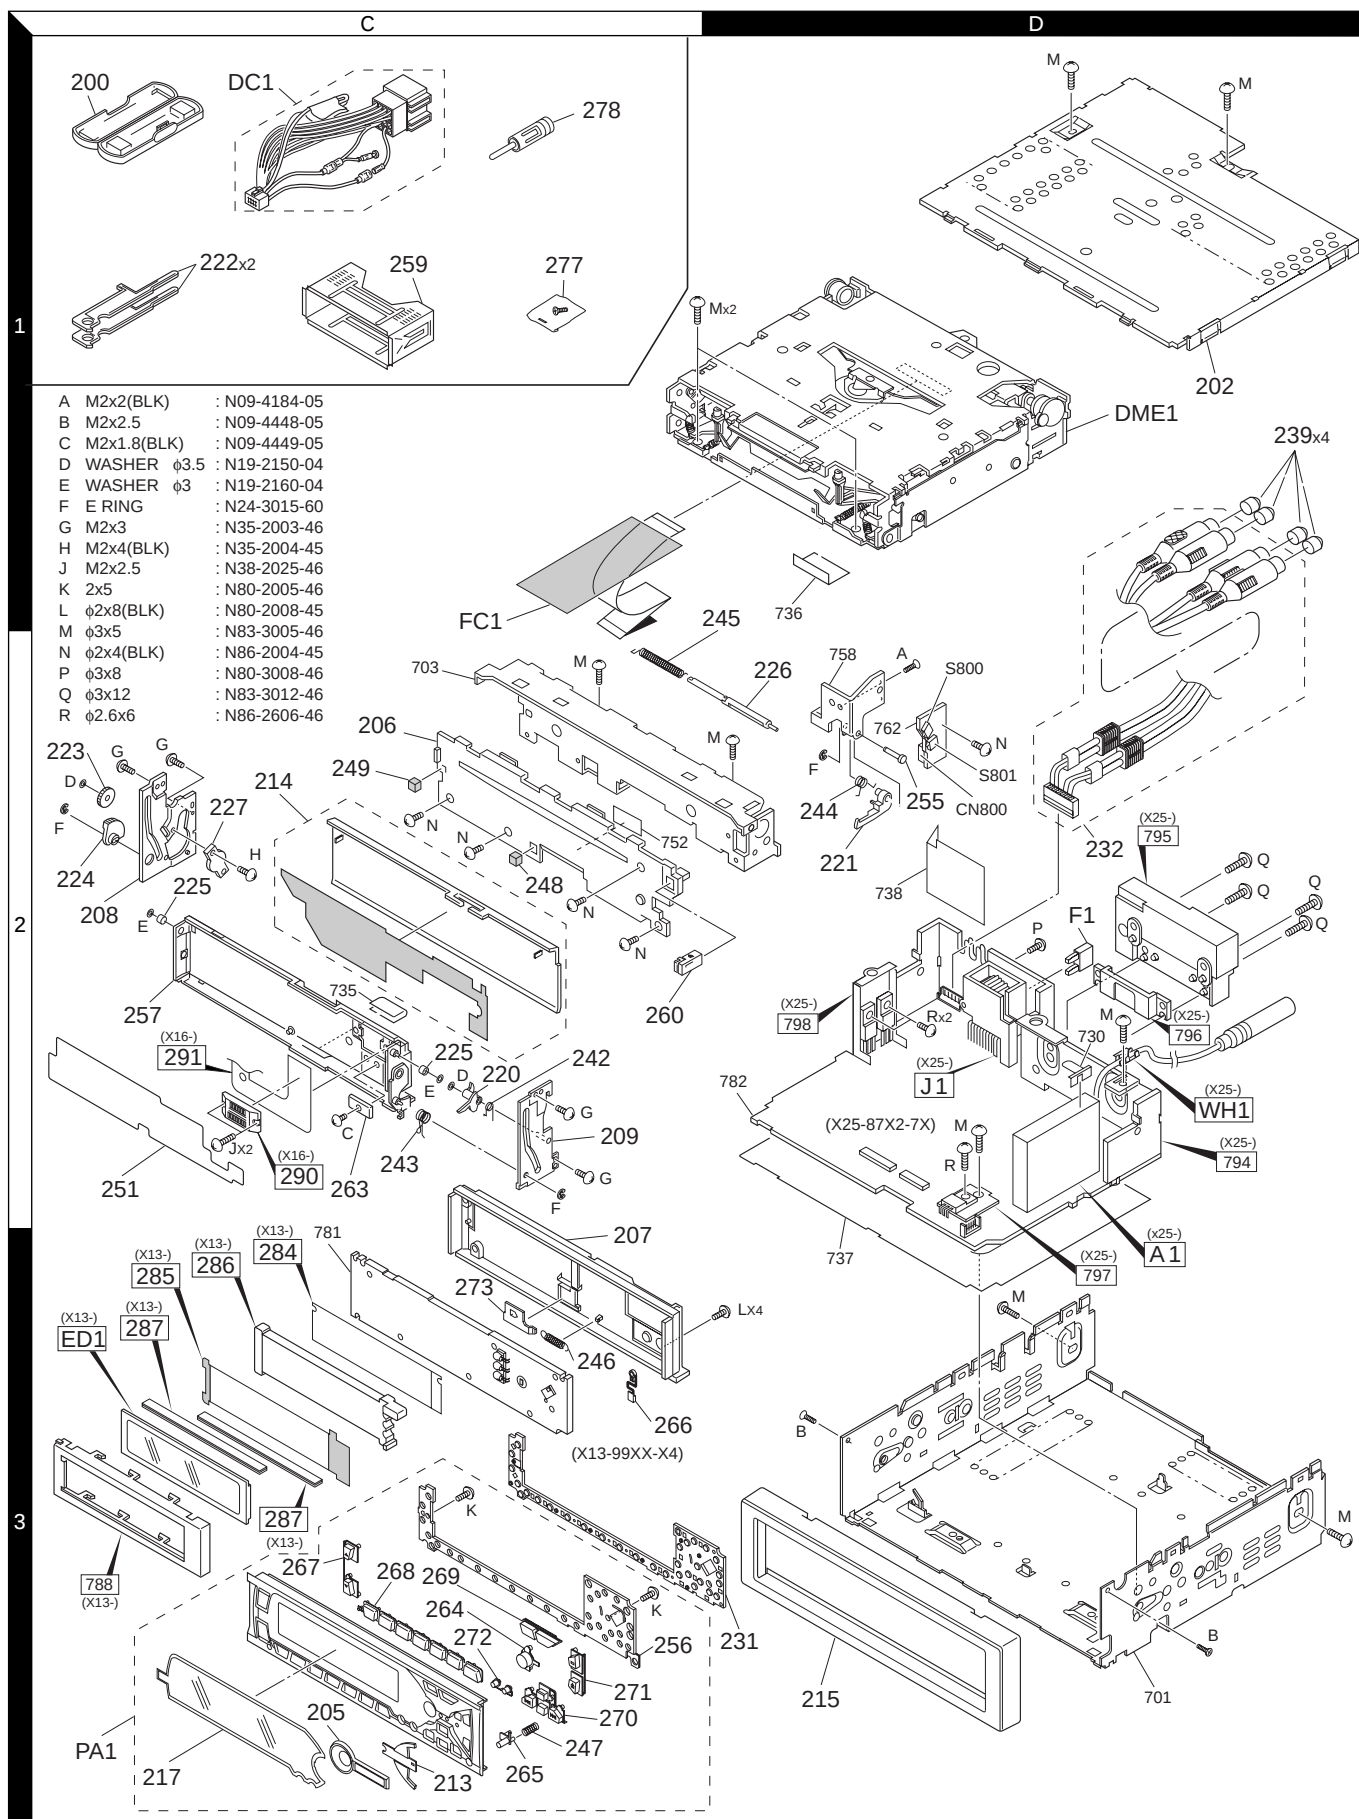

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KDC-5090B/BY					
200	1C		A02-1497-13	PLASTIC CABINET ASSY	
202	1D		A52-0779-02	TOP PLATE	
205	3C		A21-4073-03	DRESSING PANEL	
206	2C		A22-2853-23	SUB PANEL ASSY	
207	3C		A46-1692-01	REAR COVER	
208	2C		A50-1019-04	SIDE PLATE ASSY (L)	
209	2C		A50-1022-04	SIDE PLATE ASSY (R)	
PA1	3C	*	A64-2683-12	PANEL ASSY	
213	3C		B03-3071-03	DRESSING PLATE	
214	2C		B03-3075-22	DRESSING PLATE (BLK)	
215	3D		B07-3007-03	ESCUTCHEON ASSY (BLK)	
217	3C	*	B10-4236-11	FRONT GLASS	
-			B46-0100-50	WARRANTY CARD	E
-			B46-0632-04	ID CARD	
-			B58-1380-04	CAUTION CARD	
-		*	B64-1867-30	INST. MANUAL (ENG,RUS,POL)	E1
-		*	B64-1868-30	INST. MANUAL (CZE,HUN,CRO)	E1
-		*	B64-1869-30	INST. MANUAL (SWE,FIN)	E1
-		*	B64-1873-30	INST. MANUAL (ENGLISH)	E
-		*	B64-1874-30	INST. MANUAL (FRE,GER,DUT)	E
-		*	B64-1875-30	INST. MANUAL (ITA,SPA,POR)	E
220	2C		D10-4557-04	LEVER (SRT POSITION SW)	
221	2D		D10-4558-04	ARM (RELEASE)	
222	1C		D10-4562-04	LEVER	
222	1C		D10-4621-04	LEVER	E
223	2C		D13-2117-04	GEAR (IDOL)	
224	2C		D13-2118-04	GEAR (ARM)	
225	2C		D14-0751-04	ROLLER (PANEL)	
226	2D		D14-0752-03	ROLLER (FPC)	
227	2C		D39-0244-05	DAMPER	
231	3D		E29-1824-02	CONDUCTIVE RUBBER (KEY)	
232	2D		E30-4935-05	CORD WITH PINPLUG	E1
232	2D	*	E30-4979-05	CORD WITH PINPLUG	E
CN800	2D		E41-0070-05	SOCKET FOR PIN ASSY (4P)	
△ DC1	1C		E30-4944-05	DC CORD	E1
△ DC1	1C		E30-4958-05	DC CORD	E
FC1	1C		E39-0375-05	FLAT CABLE (22P)	
239	1D		F29-0049-05	INSULATING COVER	
△ F1	2D		F52-0006-05	FUSE(MINI BLADE TYPE) (10A)	
△ F1	2D		F52-0011-05	FUSE(MINI BLADE TYPE) (10A)	E1
242	2C		G01-3057-04	TORSION COIL SPRING (SW LEVER)	
243	2C		G01-3058-04	TORSION COIL SPRING (MAIN)	
244	2D		G01-3059-04	TORSION COIL SPRING (RELEASE)	
245	1D	*	G01-3060-14	TORSION COIL SPRING (FPC ROLL)	
246	3C		G01-3069-04	EXTENSION SPRING (LOCK)	
247	3C		G01-3070-04	COMPRESSION SPRING (RELEASE)	
248	2C		G11-1919-04	CUSHION (SUB PANEL MIDDLE)	
249	2C		G11-1920-24	CUSHION (SUB PANEL LEFT)	
251	2C		G16-1178-04	SHEET (CAUTION)	
-			H10-4762-12	POLYSTYRENE FOAMED FIXTURE	E
-			H10-4763-12	POLYSTYRENE FOAMED FIXTURE	E1

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
-			H25-0329-04	PROTECTION BAG (280X450X0.03)	E1
-			H25-0337-04	PROTECTION BAG (180X300X0.03)	
-			H25-1108-04	PROTECTION BAG (100X300X0.03)	
-			H25-1111-04	PROTECTION BAG (280X450X0.03)	E
-		*	H54-2375-03	ITEM CARTON CASE	E
-		*	H54-2376-03	ITEM CARTON CASE	E1
255	2D		J12-1156-04	PIN (RELEASE)	
256	3C		J19-5036-02	HOLDER	
257	2C		J21-9613-12	MOUNTING HARDWARE ASSY	
259	1C		J21-9641-13	MOUNTING HARDWARE ASSY	
260	2C		J52-0604-05	PUSH LATCH	
263	2C		J90-0999-04	GUIDE	
264	3C		K24-3647-04	KNOB (DB)	
265	3C		K24-3648-04	KNOB (RELEASE)	
266	3C		K24-3658-04	KNOB (RELEASE2)	
267	3C		K25-1222-03	KNOB (VOL)	
268	3C		K25-1223-03	KNOB (PRESET)	
269	3C		K25-1224-03	KNOB (SRC)	
270	3C		K25-1225-03	KNOB (FM,AM)	
271	3C		K25-1226-03	KNOB (EJECT)	
272	3C		K25-1227-03	KNOB (DISP)	
273	3C		K29-7017-03	KNOB (LOCK)	
277	1C		N99-1704-05	SCREW SET	
A	2D		N09-4184-05	MACHINE SCREW (N2X2 BLK)	
B	3D		N09-4448-05	MACHINE SCREW	
C	2C		N09-4449-05	MACHINE SCREW	
D	2C		N19-2150-04	FLAT WASHER (1.6X3.5X0.25)	
E	2C		N19-2160-04	FLAT WASHER (1.2X3.0X0.25)	
F	2C		N24-3015-60	E TYPE RETAINING RING	
G	2C		N35-2003-46	BINDING HEAD MACHINE SCREW	
H	2C		N35-2004-45	BINDING HEAD MACHINE SCREW	
J	2C		N38-2025-46	PAN HEAD MACHIN SCREW	
K	3C		N80-2005-46	PAN HEAD TAPTITE SCREW	
L	3D		N80-2008-45	PAN HEAD TAPTITE SCREW	
M	1D		N83-3005-46	PAN HEAD TAPTITE SCREW	
N	2C		N86-2004-45	BINDING HEAD TAPTITE SCREW	
S800,801	2D		S68-0830-05	PUSH SWITCH	
278	1C		T90-0523-05	ANTENNA ADAPTOR	
278	1C		T90-0534-05	ANTENNA ADAPTOR	
DME1	1D		X92-4130-00	MECHANISM ASSY (DXM-1062)	
SWITCH UNIT (X13-99XX-X4)					
284	3C	*	B11-1381-04	REFLECTION SHEET	
285	3C		B11-1324-04	OPTICAL DIFFUSER	
286	3C		B19-2062-03	LIGHTING BOARD	
D2-4			B30-1571-05	LED (WHITE)	
D5-23			B30-1605-05	LED (2COLOR PG/RED)	
ED1	3C	*	B38-1095-05	LIQUID CRYSTAL	
C1			CC73GCH1H681J	CHIP C 680PF J	
C2-5			CK73GB1C104K	CHIP C 0.10UF K	
C2-5			CK73GB1H104K	CHIP C 0.10UF K	
C6,7			CK73EB1C225K	CHIP C 2.2UF K	

E : KDC-5090B E1 : KDC-5090BY

△ Indicates safety critical components.

PARTS LIST

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C9-11			CK73GB1H103K	CHIP C 0.010UF K	
287 J1	3C		E29-1596-04 E59-0835-05	CONDUCTIVE RUBBER RECTANGULAR PLUG (15P)	
CP1 CP2,3 R1 R2-5 R6			R90-1016-05 R90-0724-05 RK73GB2A433J RK73GB2A222J RK73GB2A392J	MULTI-COMP 470 X4 MULTI-COMP 1K X4 CHIP R 43K J 1/10W CHIP R 2.2K J 1/10W CHIP R 3.9K J 1/10W	
R7,8 R9 R10 R11 R12			RK73GB2A223J RK73FB2B101J RK73GB2A102J RK73FB2B4R7J RK73GB2A751J	CHIP R 22K J 1/10W CHIP R 100 J 1/8W CHIP R 1.0K J 1/10W CHIP R 4.7 J 1/8W CHIP R 750 J 1/10W	
R13 R15,16 R17-21 R22,23 R24		*	RK73GB2A102J RK73GB2A103J RK73EB2E331J RK73EB2E511J RK73EB2E331J	CHIP R 1.0K J 1/10W CHIP R 10K J 1/10W CHIP R 330 J 1/4W CHIP R 510 J 1/4W CHIP R 330 J 1/4W	
R25,26		*	RK73FB2B122J	CHIP R 1.2K J 1/8W	
D1 IC1 IC2 Q1 Q1			MA3082-M LC75808W RS-171 DTA114EUA KRA302	ZENER DIODE MOS-IC ANALOGUE IC DIGITAL TRANSISTOR DIGITAL TRANSISTOR	E1
Q3,4 Q5 Q5 Q6 Q6			2SD2114K 2SC2412K 2SD601A DTA114EUA KRA302	TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	E1 E1
Q7			DTC143ZK	DIGITAL TRANSISTOR	E1
SUB-CIRCUIT UNIT (X16-118X-XX)					
290	2C		E58-0903-05	RECTANGULAR PLUG (15P)	
291	2C	*	J84-0121-12	FLEXIBLE PRINTED WIRING BOARD	
ELECTRIC UNIT (X25-87X2-7X)					
C1,2 C13-16 C17,18 C21,22 C23,24			C90-2606-05 C90-5296-05 C90-2597-05 C90-2597-05 C90-2606-05	ELECTRO 0.47UF 50WV NP-ELECT 0.22UF 50WV ELECTRO 10UF 16WV ELECTRO 10UF 16WV ELECTRO 0.47UF 50WV	
C25 C33,34 C41 C42 C43			CE04CW1A470M CK73FB1E104K CK73GB1A474K CC73GCH1H151J CK73GB1E333K	ELECTRO 47UF 10WV CHIP C 0.10UF K CHIP C 0.47UF K CHIP C 150PF J CHIP C 0.033UF K	
C43 C44 C51 C52 C53			CK73GB1H333K CK73GB1H103K CK73GB1H222K C90-5235-05 CK73GB1H103K	CHIP C 0.033UF K CHIP C 0.010UF K CHIP C 2200PF K ELECTRO 2200UF 16WV CHIP C 0.010UF K	
C54 C55			C90-2594-05 C90-2866-05	ELECTRO 10UF 10WV ELECTRO 220UF 16WV	

SWITCH UNIT (X13-99XX-X4)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C56 C57 C58 C59 C71			CE04CW0J101M CE04CW1C101M CE04CW1A221M CE04CW1A101M CK73GB1H103K	ELECTRO 100UF 6.3WV ELECTRO 100UF 16WV ELECTRO 220UF 10WV ELECTRO 100UF 10WV CHIP C 0.010UF K	
C72 C72 C73 C74 C75			CK73GB1E223K CK73GB1H223K C90-2608-05 C90-2602-05 CK73GB1C683K	CHIP C 0.022UF K CHIP C 0.022UF K ELECTRO 1.0UF 50WV ELECTRO 0.10UF 50WV CHIP C 0.068UF K	
C75 C76 C77 C78-80 C83-90			CK73GB1H683K C90-2598-05 CK73GB1H102K CK73GB1H103K CK73GB1E473K	CHIP C 0.068UF K ELECTRO 3.3UF 25WV CHIP C 1000PF K CHIP C 0.010UF K CHIP C 0.047UF K	
C83-90 C91 C92 C93 C93			CK73GB1H473K C90-2606-05 CE04CW1C220M CK73GB1C104K CK73GB1H104K	CHIP C 0.047UF K ELECTRO 0.47UF 50WV ELECTRO 22UF 16WV CHIP C 0.10UF K CHIP C 0.10UF K	
C94 C101 C103 C104 C105,106			C90-2608-05 C90-2610-05 CE04CW1A470M CK73GB1H103K CK73GB1C104K	ELECTRO 1.0UF 50WV ELECTRO 2.2UF 50WV ELECTRO 47UF 10WV CHIP C 0.010UF K CHIP C 0.10UF K	
C105,106 C112,113 C120 C135 C136			CK73GB1H104K CK73GB1H103K CK73GB1H103K CK73GB1H103K C90-2594-05	CHIP C 0.10UF K CHIP C 0.010UF K CHIP C 0.010UF K CHIP C 0.010UF K ELECTRO 10UF 10WV	
C137 C138 C139,140 C152 C154-157			CC73GCH1H331J C90-2594-05 CC73GCH1H100D CK73GB1A224K CK73GB1H103K	CHIP C 330PF J ELECTRO 10UF 10WV CHIP C 10PF D CHIP C 0.22UF K CHIP C 0.010UF K	
C163 C201 C202 C203 C204			CK73GB1H103K CK73GB1H103K CE04CW0J470M CK73EB0J106K CC73GCH1H220J	CHIP C 0.010UF K CHIP C 0.010UF K ELECTRO 47UF 6.3WV CHIP C 10UF K CHIP C 22PF J	
C205 C206 C211			CC73GCH1H270J CK73GB0J105K CK73GB1H102K	CHIP C 27PF J CHIP C 1.0UF K CHIP C 1000PF K	
CN1 CN5 CN6 CN7 J1		2D	E40-3241-05 E40-9550-05 E40-9557-05 E40-5448-05 E58-0863-15	PIN ASSY (6P) FLAT CABLE CONNECTOR (22P) FLAT CABLE CONNECTOR (13P) PIN ASSY (4P) RECTANGULAR RECEPTACLE (16P)	
J4 WH1 WH1		2D 2D	E56-0834-05 E30-4804-05 E30-4932-05	CYLINDRICAL RECEPTACLE (13P) CORD WITH PLUG CORD WITH PLUG	E1
L1 L2-7 L8			L33-1170-05 L40-4795-91 L33-1123-05	CHOKE COIL ASSY SMALL FIXED INDUCTOR (4.7UH,J) LINE FILTER COIL (52mH)	

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-87X2-7X)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
L12			L92-0075-05	CHIP FERRITE	
X1			L78-0821-05	RESONATOR (20MHz)	
X2			L77-2738-05	CRYSTAL RESONATOR (32.768kHz)	
X3			L77-2002-05	CRYSTAL RESONATOR (4.332MHz)	
M	2D		N83-3005-46	PAN HEAD TAPTITE SCREW	
P	2D		N80-3008-46	PAN HEAD TAPTITE SCREW	
Q	2D		N83-3012-46	PAN HEAD TAPTITE SCREW	
R	2D		N86-2606-46	BINDING HEAD TAPTITE SCREW	
R1,2			RK73GB1J361J	CHIP R 360 J 1/16W	
R3,4			RK73GB1J223J	CHIP R 22K J 1/16W	
R5,6			RK73EB2B181J	CHIP R 180 J 1/8W	
R13,14			RK73GB1J361J	CHIP R 360 J 1/16W	
R15,16			RK73GB1J223J	CHIP R 22K J 1/16W	
R17,18			RK73EB2B181J	CHIP R 180 J 1/8W	
R19-22			RK73GB1J103J	CHIP R 10K J 1/16W	
R23,24			RK73EB2B100J	CHIP R 10 J 1/8W	
R25			RK73EB2B4R7J	CHIP R 4.7 J 1/8W	
R41			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R42			RK73GB1J103J	CHIP R 10K J 1/16W	
R51			RK73GB1J101J	CHIP R 100 J 1/16W	
R52			RD14BB2C223J	RD 22K J 1/6W	
R53			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R54			RK73GB1J223J	CHIP R 22K J 1/16W	
R55			RK73FB2A103J	CHIP R 10K J 1/10W	
R56			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R57			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R58,59			RD14DB2H2R2J	SMALL-RD 2.2 J 1/2W	
R60			RD14BB2C152J	RD 1.5K J 1/6W	
R61			RD14BB2C102J	RD 1.0K J 1/6W	
R62			RK73EB2B2R2J	CHIP R 2.2 J 1/8W	
R73			RK73GB1J223J	CHIP R 22K J 1/16W	
R74			RK73EB2B103J	CHIP R 10K J 1/8W	
R76			RK73GB1J473J	CHIP R 47K J 1/16W	
R77			RK73GB1J104J	CHIP R 100K J 1/16W	
R78			RK73EB2B103J	CHIP R 10K J 1/8W	
R79,80			RD14DB2H102J	SMALL-RD 1.0K J 1/2W	
R81			RD14BB2C223J	RD 22K J 1/6W	
R82,83			RD14BB2C472J	RD 4.7K J 1/6W	
R87			RK73FB2A243J	CHIP R 24K J 1/10W	
R88,89			RK73GB1J103J	CHIP R 10K J 1/16W	
R90,91			RK73GB1J223J	CHIP R 22K J 1/16W	
R92			RD14BB2C333J	RD 33K J 1/6W	
R93			RD14DB2H332J	SMALL-RD 3.3K J 1/2W	
R94			RK73GB1J104J	CHIP R 100K J 1/16W	
R101			RK73GB1J103J	CHIP R 10K J 1/16W	
R102			RK73GB1J101J	CHIP R 100 J 1/16W	
R103			RK73GB1J103J	CHIP R 10K J 1/16W	
R105			RK73GB1J473J	CHIP R 47K J 1/16W	
R106			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R108			RK73GB1J622J	CHIP R 6.2K J 1/16W	
R113			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R114			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R115			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R121			RK73EB2B101J	CHIP R 100 J 1/8W	
R122-126			RK73EB2B472J	CHIP R 4.7K J 1/8W	
R127,128			RK73EB2B101J	CHIP R 100 J 1/8W	
R129,130			RK73GB1J104J	CHIP R 100K J 1/16W	
R141,142			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R143,144			RK73GB1J223J	CHIP R 22K J 1/16W	
R145			RK73GB1J473J	CHIP R 47K J 1/16W	
R161			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R162			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R170-173			RK73GB1J104J	CHIP R 100K J 1/16W	
R174			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R175			RK73EB2B471J	CHIP R 470 J 1/8W	
R176			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R177			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R178			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R180			RK73EB2B472J	CHIP R 4.7K J 1/8W	
R181			RK73EB2B471J	CHIP R 470 J 1/8W	
R182			RK73GB1J473J	CHIP R 47K J 1/16W	
R183			RK73EB2B471J	CHIP R 470 J 1/8W	
R184			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R187			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R189			RK73GB1J471J	CHIP R 470 J 1/16W	
R190			RK73GB1J104J	CHIP R 100K J 1/16W	
R191			RK73GB1J471J	CHIP R 470 J 1/16W	
R192			RK73GB1J104J	CHIP R 100K J 1/16W	
R193,194			RK73GB1J471J	CHIP R 470 J 1/16W	
R201			RK73GB1J221J	CHIP R 220 J 1/16W	
R202			RK73GB1J103J	CHIP R 10K J 1/16W	
R204-209			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R210			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R214			RK73GB1J104J	CHIP R 100K J 1/16W	
R215			RK73GB1J471J	CHIP R 470 J 1/16W	
R219,220			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R223,224			RK73GB1J104J	CHIP R 100K J 1/16W	
R225			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R226			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R227,228			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R229			RK73GB1J104J	CHIP R 100K J 1/16W	
R230,231			RK73GB1J471J	CHIP R 470 J 1/16W	
R232			RK73GB1J104J	CHIP R 100K J 1/16W	
R233-236			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R239			RK73GB1J104J	CHIP R 100K J 1/16W	
R243			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R245			RK73GB1J104J	CHIP R 100K J 1/16W	
R246			RK73GB1J473J	CHIP R 47K J 1/16W	
R247			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R252,253			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R254			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R255			RK73GB1J225J	CHIP R 2.2M J 1/16W	
R258,259			RK73GB1J471J	CHIP R 470 J 1/16W	
R260			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R261,262			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R263,264			RK73GB1J103J	CHIP R 10K J 1/16W	
R265			RK73GB1J104J	CHIP R 100K J 1/16W	
R267			RK73GB1J104J	CHIP R 100K J 1/16W	
R270			RK73GB1J104J	CHIP R 100K J 1/16W	

KDC-5090B/BY

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-87X2-7X)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R272,273			RK73GB1J104J	CHIP R 100K J 1/16W	
R275			RK73GB1J104J	CHIP R 100K J 1/16W	
R281			RK73GB1J104J	CHIP R 100K J 1/16W	
R282			RK73GB1J103J	CHIP R 10K J 1/16W	
W51-57			R92-1252-05	CHIP R 0 OHM J 1/16W	
W59			R92-1252-05	CHIP R 0 OHM J 1/16W	
D1			RM10ZLF	DIODE	
D2			MA4056(N)-M	ZENER DIODE	
D3			1GWJ43	DIODE	
D4			MA4091(N)-L	ZENER DIODE	
D5			HZS9A2L	ZENER DIODE	E1
D5			MA4082(N)-L	ZENER DIODE	
D6			HZS11B2	ZENER DIODE	E1
D6			MA4110-L	ZENER DIODE	
D12			HZS5B1	ZENER DIODE	E1
D12			MA4047-M	ZENER DIODE	
D13			AM01Z	DIODE	
D13			DSM1SD2	DIODE	
D13			ERA15-02	DIODE	
D14			1SS133	DIODE	
D15,16			AM01Z	DIODE	
D15,16			DSM1SD2	DIODE	
D15,16			ERA15-02	DIODE	
D17,18			MA4068(N)-M	ZENER DIODE	
D21-28			AM01Z	DIODE	
D21-28			DSM1SD2	DIODE	
D21-28			ERA15-02	DIODE	
D30-34			1SS133	DIODE	
D35,36			MA4068(N)-M	ZENER DIODE	
D37			IMSA-6801	SURGE ABSORBER	
D37			SA-C2012-101TB	SURGE ABSORBER	E
D41,42			HZS6C1	ZENER DIODE	E1
D41,42			MA4062-L	ZENER DIODE	
D44			HZS6C1	ZENER DIODE	E1
D44			MA4062-L	ZENER DIODE	
D45-47			MA4068(N)-M	ZENER DIODE	
D71			1SS133	DIODE	
IC1		*	UPD703033GC117	MI-COM IC	E1
IC1			UPD703033GC145	MI-COM IC	E
IC2			TDA7407D	ANALOGUE IC	
IC3			HD74HC02FP	MOS-IC	
IC3			TC74HC02AF	MOS-IC	E1
IC4			TA8263BH	ANALOGUE IC	
IC7			TDA7479D	ANALOGUE IC	
IC8			S-80837ANNP	MOS-IC	
Q1,2			DTC143TUA	DIGITAL TRANSISTOR	
Q1,2			KRC410	DIGITAL TRANSISTOR	E1
Q5,6			DTC143TUA	DIGITAL TRANSISTOR	
Q5,6			KRC410	DIGITAL TRANSISTOR	E1
Q7			DTA124EUA	DIGITAL TRANSISTOR	
Q7			KRA303	DIGITAL TRANSISTOR	E1
Q11			2SC4081	TRANSISTOR	
Q11			2SD1819A	TRANSISTOR	E1
Q12			2SB1548(P)	TRANSISTOR	
Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Q13			2SA1576A	TRANSISTOR	
Q13			2SB1218A	TRANSISTOR	E1
Q14			2SC4081	TRANSISTOR	
Q14			2SD1819A	TRANSISTOR	E1
Q15			2SB1548(P)	TRANSISTOR	
Q16			DTC124EUA	DIGITAL TRANSISTOR	
Q16			UN5212	DIGITAL TRANSISTOR	E1
Q17			DTA124EUA	DIGITAL TRANSISTOR	
Q17			KRA303	DIGITAL TRANSISTOR	E1
Q18			2SD2375	TRANSISTOR	
Q19			DTC124EUA	DIGITAL TRANSISTOR	
Q19			UN5212	DIGITAL TRANSISTOR	E1
Q20			DTA124EUA	DIGITAL TRANSISTOR	
Q20			KRA303	DIGITAL TRANSISTOR	E1
Q21			2SB1184	TRANSISTOR	
Q22			2SC4081	TRANSISTOR	
Q22			2SD1819A	TRANSISTOR	E1
Q26			DTC144EUA	DIGITAL TRANSISTOR	
Q26			UN5213	DIGITAL TRANSISTOR	E1
Q27			DTC114YUA	DIGITAL TRANSISTOR	
Q27			UN5214	DIGITAL TRANSISTOR	E1
Q29			DTA124EUA	DIGITAL TRANSISTOR	
Q29			KRA303	DIGITAL TRANSISTOR	E1
Q30			2SA1576A	TRANSISTOR	
Q30			2SB1218A	TRANSISTOR	E1
Q32			2SB1277(Q,R)	TRANSISTOR	
Q33,34			2SC4081	TRANSISTOR	
Q33,34			2SD1819A	TRANSISTOR	E1
Q42			DTC124EUA	DIGITAL TRANSISTOR	
Q42			UN5212	DIGITAL TRANSISTOR	E1
Q43			2SC4081	TRANSISTOR	
Q43			2SD1819A	TRANSISTOR	E1
Q45,46			DTC124EUA	DIGITAL TRANSISTOR	
Q45,46			UN5212	DIGITAL TRANSISTOR	E1
Q47,48			2SB1277(Q,R)	TRANSISTOR	
Q51			DTC144EUA	DIGITAL TRANSISTOR	
Q51			UN5213	DIGITAL TRANSISTOR	E1
Q52			2SC4081	TRANSISTOR	
Q52			2SD1819A	TRANSISTOR	E1
Q55			2SA1576A	TRANSISTOR	
Q55			2SB1218A	TRANSISTOR	E1
Q56			DTC124EUA	DIGITAL TRANSISTOR	
Q56			UN5212	DIGITAL TRANSISTOR	E1
TH1			PTH9C42BD471Q	POSITIVE RESISTOR	
A1	3D		X86-3242-70	TUNER UNIT	E1
A1	3D		X86-3342-71	TUNER UNIT	E
CD PLAYER UNIT (X32-5010-00)					
C1,2			CK73FB1C105K	CHIP C 1.0UF K	
C3			CK73FB0J475K	CHIP C 4.7UF K	
C4			C92-0566-05	CHIP-TAN 10UF 6.3WV	
C5			CC73GCH1H150J	CHIP C 15PF J	
C6			CC73GCH1H020C	CHIP C 2.0PF C	
C7			CK73GB1C104K	CHIP C 0.10UF K	
C8			CK73FB1C105K	CHIP C 1.0UF K	

E : KDC-5090B E1 : KDC-5090BY

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

CD PLAYER UNIT (X32-5010-00)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C10			CK73GB1H472K	CHIP C 4700PF K		R36			RK73GB1J151J	CHIP R 150 J 1/16W	
C11			CK73GB1H682K	CHIP C 6800PF K		R37			RK73GB1J471J	CHIP R 470 J 1/16W	
C12			CK73GB1H332K	CHIP C 3300PF K		R38			RK73GB1J224J	CHIP R 220K J 1/16W	
C13			CK73GB1C333K	CHIP C 0.033UF K		R46			RK73GB1J102J	CHIP R 1.0K J 1/16W	
C14			CK73GB1H472K	CHIP C 4700PF K		R47			RK73GB1J103J	CHIP R 10K J 1/16W	
C15			CK73GB1C473K	CHIP C 0.047UF K		R49			RK73GB1J472J	CHIP R 4.7K J 1/16W	
C16			CC73GCH1H151J	CHIP C 150PF J		R52			RK73GB1J104J	CHIP R 100K J 1/16W	
C17			CK73GB1H472K	CHIP C 4700PF K		R54			RK73GB1J104J	CHIP R 100K J 1/16W	
C18			CC73GCH1H221J	CHIP C 220PF J		R71			RK73GB1J103J	CHIP R 10K J 1/16W	
C19,20			CK73GB1C104K	CHIP C 0.10UF K		R72			RK73GB1J102J	CHIP R 1.0K J 1/16W	
C21			CK73FB0J475K	CHIP C 4.7UF K		R73			RK73GB1J473J	CHIP R 47K J 1/16W	
C23			CK73GB1H102K	CHIP C 1000PF K		R75			RK73GB1J333J	CHIP R 33K J 1/16W	
C24			CK73GB1E223K	CHIP C 0.022UF K		R76			RK73GB1J622J	CHIP R 6.2K J 1/16W	
C25			CK73GB1H153K	CHIP C 0.015UF K		R77			RK73GB1J563J	CHIP R 56K J 1/16W	
C26			CK73GB0J105K	CHIP C 1.0UF K		R78			RK73GB1J243J	CHIP R 24K J 1/16W	
C28			CK73GB0J105K	CHIP C 1.0UF K		R81			RK73GB1J333J	CHIP R 33K J 1/16W	
C29			CK73GB1C104K	CHIP C 0.10UF K		R82			RK73GB1J123J	CHIP R 12K J 1/16W	
C33			CK73GB1C104K	CHIP C 0.10UF K		R83			RK73GB1J102J	CHIP R 1.0K J 1/16W	
C35			CK73GB1C104K	CHIP C 0.10UF K		R102			RK73GB1J332J	CHIP R 3.3K J 1/16W	
C41			CK73EB1C225K	CHIP C 2.2UF K		R104			RK73GB1J562J	CHIP R 5.6K J 1/16W	
C43			CK73GB1H153K	CHIP C 0.015UF K		R107,108			RK73FB2A331J	CHIP R 330 J 1/10W	
C45			CK73GB1H153K	CHIP C 0.015UF K		R117,118			RK73FB2A203J	CHIP R 20K J 1/10W	
C46			CK73GB1C473K	CHIP C 0.047UF K		R121,122			RK73FB2A203J	CHIP R 20K J 1/10W	
C55			CK73GB1C104K	CHIP C 0.10UF K		R125,126			RK73FB2A203J	CHIP R 20K J 1/10W	
C68			CK73GB1C104K	CHIP C 0.10UF K		R202			RK73GB1J104J	CHIP R 100K J 1/16W	
C71,72			CK73GB1H471K	CHIP C 470PF K		R214			RK73GB1J104J	CHIP R 100K J 1/16W	
C77,78			CC73GCH1H680J	CHIP C 68PF J		R218			RK73GB1J473J	CHIP R 47K J 1/16W	
C79,80			CK73GB1H222K	CHIP C 2200PF K		R233			RK73GB1J622J	CHIP R 6.2K J 1/16W	
C85			CK73GB1C104K	CHIP C 0.10UF K		R234			RK73GB1J103J	CHIP R 10K J 1/16W	
C89			CK73GB1H222K	CHIP C 2200PF K		R238			RK73FB2A201J	CHIP R 200 J 1/10W	
C90			CK73GB1C104K	CHIP C 0.10UF K		W17			R92-2053-05	CHIP R 0 J 1/8W	
CN1			E40-9536-05	FLAT CABLE CONNECTOR (16P)		S1,2			S68-0838-05	PUSH SWITCH	
CN2			E40-9339-05	FLAT CABLE CONNECTOR (22P)		S3			S68-0859-05	PUSH SWITCH	
CN2			E41-0036-05	FLAT CABLE CONNECTOR (22P)		D1,2			DAN202U	DIODE	
CN2			E41-0129-05	FLAT CABLE CONNECTOR (22P)		D3			DA204U	DIODE	
X1			L78-0572-05	RESONATOR (16.93MHZ)		D4			DAN202U	DIODE	
CP1-3			R90-1019-05	MULTI-COMP 100 X2		D5			MA8051-L	ZENER DIODE	
R3			RK73GB1J272J	CHIP R 2.7K J 1/16W		IC1			AN22000AA	ANALOGUE IC	
R5			RK73GB1J361J	CHIP R 360 J 1/16W		IC2			MN662774KG1	MOS-IC	
R6			RK73GB1J272J	CHIP R 2.7K J 1/16W		IC4			BA5917AFP	ANALOGUE IC	
R8			RK73EB2B4R7J	CHIP R 4.7 J 1/8W		IC6			NJM4565MD	IC (OP AMP X2)	
R9			RK73EB2B100J	CHIP R 10 J 1/8W		Q1			MCH6101	TRANSISTOR	
R10,11			RK73GB1J103J	CHIP R 10K J 1/16W		Q2			DTC124EUA	DIGITAL TRANSISTOR	
R12			RK73GB1J912J	CHIP R 9.1K J 1/16W		Q3			DTA143XUA	DIGITAL TRANSISTOR	
R15			RK73GB1J824J	CHIP R 820K J 1/16W		Q4			2SA1362(Y)	TRANSISTOR	
R16			RK73GB1J223J	CHIP R 22K J 1/16W		Q5			DTC124EUA	DIGITAL TRANSISTOR	
R17			RK73GB1J433J	CHIP R 43K J 1/16W		MECHANISM ASSY (X92-4130-00)					
R18			RK73GB1J392J	CHIP R 3.9K J 1/16W		1	2A		A10-4482-01	CHASSIS	
R19			RK73GB1J513J	CHIP R 51K J 1/16W		2	1B		A10-4225-33	CHASSIS CALKING ASSY	
R20			RK73GB1J104J	CHIP R 100K J 1/16W		3	2B		A11-0915-43	SUB CHASSIS CALKING ASSY	
R21			RK73GB1J244J	CHIP R 240K J 1/16W		5	2A		D10-3082-13	ARM	
R32			RK73GB1J104J	CHIP R 100K J 1/16W		6	2A		D10-4306-14	ARM ASSY	
R34			RK73GB1J683J	CHIP R 68K J 1/16W		7	2A		D10-4305-14	ARM ASSY	

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MECHANISM ASSY (X92-4130-00)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
8	3A		D10-3087-44	ARM ASSY		73	2A		G02-1248-14	FLAT SPRING	
9	3B		D10-3092-03	SLIDER		75	2A		J11-0613-13	CLAMPER	
10	3B		D10-3093-04	SLIDER ASSY		76	3A		J19-4678-13	HOLDER	
11	2B		D10-3095-04	SLIDER ASSY		77	2B	*	J19-4679-34	HOLDER	
12	2B		D10-3096-04	SLIDER ASSY		78	3B		J21-7684-13	MOUNTING HARDWARE	
13	1A		D10-3099-24	SLIDER ASSY		79	2B		J21-7686-13	MOUNTING HARDWARE	
14	1A		D10-3100-04	SLIDER ASSY		80	1B		J21-7690-03	MOUNTING HARDWARE	
16	1B		D10-4004-04	LEVER ASSY		82	3A		J84-0107-05	FLEXIBLE PRINTED WIRING BOARD	
17	1B		D10-4006-04	LEVER		83	1A		J90-0757-22	GUIDE	
18	1A		D10-4007-04	LEVER		A	2A		N09-4249-05	MACHINE SCREW (M1.7X2.5,LOCK)	
19	2B		D10-4008-14	LEVER		B	1B		N09-4172-05	TAPPING SCREW (2X3.5,CTITE)	
20	2A		D10-4009-23	ARM		C	2B		N09-4202-05	STEPPED SCREW	
21	3A		D10-4010-04	LEVER		D	2A		N38-2020-46	PAN HEAD MACHIN SCREW	
22	3A		D10-4307-04	LEVER ASSY		E	3A		N09-4294-05	TAPTITE SCREW (BIND P TAPTIT)	
24	3B		D10-4050-04	ARM		F	3B		N19-2023-04	FLAT WASHER (1.2X3X0.25)	
25	3A		D10-4038-23	ARM ASSY		G	2A		N19-2058-04	FLAT WASHER (1.6X4X0.25 LUMI)	
26	2A		D10-4123-24	LEVER ASSY		H	3A		N19-2093-04	FLAT WASHER (1.6X4.0X0.25)	
27	3A		D13-1442-03	RACK (GEAR)		J	2A		N39-2020-46	PAN HEAD MACHIN SCREW	
29	3B		D13-1231-04	GEAR		DM1	3B		T42-1026-04	DC MOTOR ASSY (SPINDLE)	
30	3A		D13-1240-04	GEAR		DM2	3B		T42-1028-04	DC MOTOR ASSY (LOADING)	
31	3B		D13-1233-04	GEAR		DPU1	2B		T25-0223-05	OPTICAL PICKUP HEAD	
32	3B		D13-1234-14	GEAR ASSY							
33	3A		D13-1441-03	GEAR							
34	3B		D13-1232-04	GEAR							
35	3B		D13-1241-04	GEAR							
36	3A		D13-1242-04	GEAR							
37	1B		D13-1243-04	GEAR							
38	1B		D13-1244-04	GEAR							
39	1B		D13-1245-14	GEAR							
40	2A		D13-1246-04	GEAR							
41	2B		D13-1247-04	GEAR							
43	2B		D13-1249-04	GEAR ASSY							
44	2B		D13-2090-04	GEAR ASSY (LEAD SCREW)							
45	1B		D14-0668-04	ROLLER							
46	2A		D14-0670-04	ROLLER							
47	3B		D14-0674-04	ROLLER							
49	3A		D21-2228-14	SHAFT							
50	1A		D21-2229-04	SHAFT							
51	1A		D23-0925-24	RETAINER							
52	2A		D32-0614-04	STOPPER							
53	1B		D39-0223-05	DAMPER							
54	2B		D39-0224-05	DAMPER							
60	2A		G01-2770-04	EXTENSION SPRING							
61	3A		G01-2771-04	EXTENSION SPRING							
62	3A		G01-2772-24	EXTENSION SPRING							
63	3A		G01-2773-14	EXTENSION SPRING							
64	3A		G01-2774-34	EXTENSION SPRING							
65	1B		G01-2775-04	TORSION COIL SPRING							
66	1B		G01-2776-14	TORSION COIL SPRING							
67	3B		G01-2777-24	TORSION COIL SPRING							
69	2A		G01-2844-04	EXTENSION SPRING							
70	2A		G02-1231-04	FLAT SPRING							
71	2B		G02-1232-24	FLAT SPRING							
72	2A		G02-1241-24	FLAT SPRING							

