

# SHARP SERVICE MANUAL



No. S360921KFD5RU

## COLOUR TELEVISION Chassis No.GA-5

## MODEL 21K-FD5RU

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

### FEATURES

- Multi 21 Systems
- Full Auto Channel Preset and Auto Channel Skip
- 100-CH Program Memory
- CATV (Hyper Band) Ready
- <Used Frequency Synthesizer Tuner>
- Black Stretch Circuit
- On Timer/Sleep Timer/Reminder Timer
- Blue Back Noise Mute
- Front AV IN & Rear AV IN/OUT Terminals
- Aperture Control Circuit
- Auto Fine Tuning
- Colour Comb Filter (PAL & NTSC)
- High Contrast Picture
- Hotel Mode
- English/ Russia
- 2 Languages OSD
- White Temperature Select
- Component In
- Surround Sound Effect (with Bass/Treble/Balance)
- AV Stereo
- Blue Stretch Function
- AV Mode (Dynamic/Standard/Soft)
- Auto Picture Noise Reduction
- Pixel Generator
- Nicam & A2 Stereo decoder
- Tuner Booster
- Multi Language FastText

### CONTENTS

#### CHAPTER 1. SPECIFICATIONS

- [1] SPECIFICATIONS .....1-1

#### CHAPTER 2. IMPORTANT SERVICE NOTES

- [1] IMPORTANT SERVICE NOTES .....2-1

#### CHAPTER 3. ADJUSTMENT PRECAUTIONS

- [1] ADJUSTMENT PRECAUTIONS .....3-1  
[2] ADJUSTMENT .....3-17

#### CHAPTER 4. MEMORY MAP

- [1] MEMORY MAP .....4-1

#### CHAPTER 5. TROUBLE SHOOTING

- [1] TROUBLE SHOOTING .....5-1

#### CHAPTER 6. SOLID STATE DEVICE BASE DIAGRAM

- [1] SOLID STATE DEVICE BASE DIAGRAM .....6-1

#### CHAPTER 7. CHASSIS LAYOUT

- [1] CHASSIS LAYOUT .....7-1

#### CHAPTER 8. BLOCK DIAGRAM

- [1] BLOCK DIAGRAM: MAIN UNIT .....8-1

- [2] BLOCK DIAGRAM: CRT UNIT .....8-3

- [3] BLOCK DIAGRAM: HEADPHONE UNIT .....8-3

- [4] BLOCK DIAGRAM: NICAM UNIT .....8-4

#### CHAPTER 9. DESCRIPTION OF SCHEMATIC DIAGRAM

- [1] DESCRIPTION OF SCHEMATIC DIAGRAM .....9-1

#### CHAPTER 10. WAVEFORM

- [1] WAVEFORMS .....10-1

#### CHAPTER 11. SCHEMATIC DIAGRAM

- [1] SCHEMATIC DIAGRAM: CRT UNIT .....11-1

- [2] SCHEMATIC DIAGRAM: HEADPHONE UNIT .....11-1

- [3] SCHEMATIC DIAGRAM: NICAM UNIT .....11-2

- [4] SCHEMATIC DIAGRAM: MAIN UNIT .....11-3

#### CHAPTER 12. PRINTED WIRING BOARD ASSEMBLIES

- [1] PWB-A: MAIN UNIT .....12-1

- [2] PWB-B: CRT UNIT .....12-5

- [3] PWB-C: HEADPHONE UNIT .....12-5

- [4] PWB-D: NICAM UNIT .....12-6

#### Parts Guide

### WARNING

The chassis in this receiver is partially hot. Use an isolation transformer between the line cord plug and power receptacle, when servicing this chassis. To prevent electric shock, do not remove cover. No user-serviceable parts inside. Refer servicing to qualified service personnel.

CHAPTER 1. SPECIFICATIONS

[1] SPECIFICATIONS

|                                    |                                                                                                           |
|------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Convergence .....                  | Self Convergence System                                                                                   |
| Focus .....                        | UNI-BI Focusing                                                                                           |
| Sweep Deflection .....             | Magnetic                                                                                                  |
| Intermediate Frequencies           |                                                                                                           |
| Picture IF Carrier .....           | 38.9MHz                                                                                                   |
| Sound IF Carrier Frequency         |                                                                                                           |
| 6.5MHz .....                       | 32.4MHz                                                                                                   |
| 6.0MHz .....                       | 32.9MHz                                                                                                   |
| 5.5MHz .....                       | 33.4MHz                                                                                                   |
| 4.5MHz .....                       | 34.4MHz                                                                                                   |
| Colour Sub-Carrier Frequency ..... | 34.47MHz                                                                                                  |
| Power Input .....                  | 220 ~ 240V AC 50 Hz                                                                                       |
| Power Consumption .....            | 115W                                                                                                      |
| Audio Power Output Rating .....    | 7.5W(rms) x 2pcs                                                                                          |
| Speaker                            |                                                                                                           |
| Size .....                         | 12 x 6 cm (2pcs)                                                                                          |
| Voice Coil Impedance .....         | 16 ohms at 400 Hz                                                                                         |
| Aerial Input Impedance             |                                                                                                           |
| VHF/UHF .....                      | 75 ohms Unbalanced                                                                                        |
| Receiving System .....             | PAL I, B/G, D/K SECAM B/G, D/K, K1, NTSC-M                                                                |
| Receiving Channel                  |                                                                                                           |
| VHF-Channels .....                 | E2(48.25MHz) thru E12(224.25MHz)<br>C1(49.75MHz) thru C12(216.25MHz)<br>S1(105.25MHz) thru S41(463.25MHz) |
| UHF-Channels .....                 | E21(471.25MHz) thru E69(855.25MHz)<br>C13(471.25MHz) thru C57(863.25MHz)                                  |
| Dimensions .....                   | Width: 605mm<br>Height: 468mm<br>Depth: 487.5mm<br>Weight(approx): 22.5kg                                 |
| Cabinet material.....              | All Plastics                                                                                              |

Specifications are subject to change without prior notice

## CHAPTER 2. IMPORTANT SERVICE NOTES

### [1] IMPORTANT SERVICE NOTES

Maintenance and repair of this receiver should be done by qualified service personnel only.

#### 1. SERVICE OF HIGH VOLTAGE SYSTEM AND PICTURE TUBE

When servicing the high voltage system, remove static charge from it by connecting a 10K ohm resistor in series with an insulated wire ( such as a test probe ) between picture tube dag and 2nd anode lead. ( AC line cord should be disconnected from AC outlet. )

- 1) Picture tube in this receiver employs integral implosion protection.
- 2) Replace with the same type number of picture tube for continued safety.
- 3) Do not lift picture tube by the neck.
- 4) Handle the picture tube only when wearing shatterproof goggles and after discharging the high voltage completely.

#### 2. X-RAY

This receiver is designed so that any X-Ray radiation is kept to an absolute minimum. Since certain malfunctions or servicing may produce potentially hazardous radiation with prolonged exposure at close range, the following precautions should be observed :

- 1) When repairing the circuit, please make sure do not increase the high voltage of the set to more than 30.0kV ( at beam 0 $\mu$ A ).
- 2) To keep the set in a normal operation, please make sure it's function at 26.2kV $\pm$ 1.0kV ( at beam 1150 $\mu$ A ). The set has been factory - adjusted to the above -mentioned high voltage.

\* If there is a possibility that the high voltage fluctuates as a result of the repairs, never forget to check for such high voltage after the work.

- 3) Do not substitute a picture tube with unauthorized types and/or brands which may cause excessive X-ray radiation.

#### 3. BEFORE RETURNING THE RECEIVER

Before returning the receiver to the user , perform the following safety checks.

- 1) Inspect all lead dress to make certain that leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the receiver.
- 2) Inspect all protective devices such as non-metal control knobs, insulating materials, cabinet backs, adjustment and compartment cover or shields, isolation resistor-capacity networks, mechanical insulators etc.

## CHAPTER 3. ADJUSTMENT PRECAUTIONS

### [1] ADJUSTMENT PRECAUTIONS

This model's setting are adjusted in two different ways: through the I2C bus control and in the conventional analog manner. The adjustments via the I2C bus control include preset-only items and variable data.

CAUTION: MAKE SURE TV SET IN "NORMAL CONDITION" BEFORE SWITCH TO SERVICE MODE FOR ADJUSTMENT.

#### 1. Setting the service mode by the microprocessor.

- 1) Press SERVICE key on the remote controller to set the TV set to SERVICE mode position, and the microprocessor is in input mode. (Adjustment through the I2C bus control).
- 2) Press the MENU key on the remote controller to get ready to select the mode. (Adjustment mode, Setting mode, Check mode and Option mode) one by one.
- 3) Press the CH DOWN / UP key on the remote controller to select the item in Adjustment mode, Setting mode or Option mode.
- 4) Using the VOLUME UP / DOWN key on the remote controller, the data can be modified. Please wait approximately 200 msec for data storage in EEPROM before select to another mode.
- 5) In Check mode the data cannot be changed.
- 6) Press the SERVICE key again, it will switch to the NORMAL mode position, and the microprocessor is out of the SERVICE mode.

#### 2. Factory Presetting.

- 1) Power ON the TV set, press the SERVICE key on the remote controller, then press both the CH UP and VOL UP button on the set simultaneously for 5 secs.  
Initial values are automatically preset, only when a new EEPROM is used.
- 2) The initial data are preset as listed in page 3.7 ~ 3.16.
- 3) Make sure the data need modification or not (Initial data).

Precaution: If haven't done this initialization, it may possibly generate excessive Beam current.

#### 3. For reference please check with memory map RH-IXB584WJXX (See attachment).

## 1. ADJUSTMENT ITEM

\*\*\*Below are the adjustment items that should be done, PLS FOLLOW THE PROCEDURE.

Otherwise some adjustment items will not be accurate.

| NO *** | ADJUSTMENT ITEM             | EFFECTIVE MODEL      | REVISION |
|--------|-----------------------------|----------------------|----------|
| 1      | BUS SET UP                  | ALL MODEL            |          |
| 2      | OPTION SET UP               |                      |          |
| 3      | H-VCO                       |                      |          |
| 4      | VIF-VCO                     |                      |          |
| 5      | S-TRAP fo                   |                      |          |
| 6      | RF-AGC                      |                      |          |
| 7      | PURITY ADJ                  |                      |          |
| 8      | CONVERGENCE ADJ             |                      |          |
| 9      | FOCUS ADJ                   |                      |          |
| 10     | V-SHIFT (50 Hz)             |                      |          |
| 11     | H-SHIFT (50 Hz)             |                      |          |
| 12     | V-SIZE (50 Hz)              |                      |          |
| 13     | SCREEN                      |                      |          |
| 14     | SECAM-OFFSET                |                      |          |
| 15     | SUB-COLOR                   |                      |          |
| 16     | SUB-TINT                    |                      |          |
| 17     | WHITE BALANCE               |                      |          |
| 18     | SUB-BRIGHTNESS              |                      |          |
| 19     | SUB-CONTRAST                |                      |          |
| 20     | SIF VCO ADJ                 | Only for Nicam model |          |
| 21     | BEAM CURRENT CHECK          | ALL MODEL            |          |
| 22     | BEAM PROTECTOR CHECK        |                      |          |
| 23     | HV PROTECTOR CHECK          |                      |          |
| 24     | OTHER PROTECTOR CHECK       |                      |          |
| 25     | AV OUT CHECK                |                      |          |
| 26     | AV IN CHECK                 |                      |          |
| 27     | COMPONENT IN CHECK          |                      |          |
| 28     | CONTRAST CONTROL CHECK      |                      |          |
| 29     | COLOR CONTROL CHECK         |                      |          |
| 30     | BRIGHTNESS CONTROL CHECK    |                      |          |
| 31     | TINT CONTROL CHECK          |                      |          |
| 32     | SHARPNESS CONTROL CHECK     |                      |          |
| 33     | CH DISPLAY COLOR CHECK      |                      |          |
| 34     | NORMAL DISPLAY CHECK        |                      |          |
| 35     | WHITE TEMP CONTROL CHECK    |                      |          |
| 36     | COLOR SYSTEM CHECK          |                      |          |
| 37     | SURROUND CHECK              |                      |          |
| 38     | TREBLE CHECK                |                      |          |
| 39     | BASS CHECK                  |                      |          |
| 40     | BALANCE CHECK               |                      |          |
| 41     | SOUND SYSTEM CHECK          |                      |          |
| 42     | NOISE MUTE CHECK            |                      |          |
| 43     | OSD LANGUAGE QUANTITY CHECK |                      |          |
| 44     | HEAD PHONE CHECK            |                      |          |
| 45     | SHOCK TEST CHECK            |                      |          |

## 2. USER DATA IN SERVICE MODE

- 1). While SERVICE mode ON, EEPROM DATA will switch to the service data. Also, once SERVICE mode OFF, EEPROM will switch back to previous USER DATA.
- 2). In the service mode, the user data establish as below.

|            | USER DATA |    |
|------------|-----------|----|
| CONTRAST   | MAX       | 60 |
| COLOUR     | CENT      | 0  |
| BRIGHTNESS | CENT      | 0  |
| TINT       | CENT      | 0  |
| SHARPNESS  | CENT      | 0  |
| WHITE TEMP | STANDARD  |    |
| S-VOLUME   | MIN       |    |
| SURROUND   | OFF       |    |
| TREBLE     | CENT      | 0  |
| BASS       | CENT      | 0  |
| BALANCE    | CENT      | 0  |
| BLUE BACK  | OFF       |    |
| C SYSTEM   | AUTO      |    |
| S SYSTEM   | *1        |    |

\*1: For each CH, data is same as before switch to Service mode.

The flow of Mode list as following,

\* Direct Key-in Mode for Service Items in Service Mode

| RC CODE (HEX) | R/C KEY NAME    | SERVICE-ITEM                         |
|---------------|-----------------|--------------------------------------|
| 01            | POS 1           | R-C UP (IN SERVICE MODE V00)         |
| 02            | POS 2           | G-C UP (IN SERVICE MODE V00)         |
| 03            | POS 3           | B-C UP (IN SERVICE MODE V00)         |
| 04            | POS 4           | R-C DOWN (IN SERVICE MODE V00)       |
| 05            | POS 5           | G-C DOWN (IN SERVICE MODE V00)       |
| 06            | POS 6           | B-C DOWN (IN SERVICE MODE V00)       |
| 07            | POS 7           | R-D UP (IN SERVICE MODE V00)         |
| 08            | POS 8           | B-D UP (IN SERVICE MODE V00)         |
| 0A            | POS 0           | B-D DOWN (IN SERVICE MODE V00)       |
| 09            | FLASHBACK       | R-D DOWN (IN SERVICE MODE V00)       |
| 27            | FLASHBACK       | Y-MUTE (BESIDES OF SERVICE MODE V00) |
| AE            | WHITE TEMP UP   | RF-AGC (V01)                         |
| AF            | WHITE TEMP DOWN | VIF-VC0 (V02)                        |
| 43            | TUNE DOWN       | H-VCO (V03)                          |
| B1            | SHARPNESS DOWN  | SUB-CON (V04)                        |
| 6B            | BALANCE LEFT    | SUB-COL (V05)                        |
| B0            | SHARPNESS UP    | SUB-BRIGHT (V06)                     |
| 6C            | BALANCE RIGHT   | SUB-TINT (V07)                       |
| 62            | TREBLE UP       | SUB-SHP (V08)                        |
| 63            | TREBLE DOWN     | SUB-COL-YUV (V09)                    |
| 64            | BASS UP         | SUB-TINT-YUV (V10)                   |
| 24            | COLOUR UP       | V-SIZE (V11), V-SIZE60 (V17)         |
| 2A            | BRIGHTNESS DOWN | V-SHIFT (V12), V-SHIFT60 (V18)       |
| 2E            | TINT DOWN       | H-SHIFT (V13), H-SHIFT60 (V19)       |
| 66            | SURROUND UP     | SCM-BR (V14)                         |
| 67            | SURROUND DOWN   | SCM-BB (V15)                         |
| 23            | CONTRAST DOWN   | SUB-VOL (V16)                        |
| 32            | PICTURE         | S-TRAP-BG (V20)                      |
| 33            | HOLD            | S-TRAP-I (V21)                       |
| 34            | TEXT            | S-TRAP-DK (V22)                      |
| 35            | CANCEL          | S-TRAP-M (V23)                       |
| 37            | SIZE            | S-TRAP-574 (V24)                     |
| 01            | POS 1           | R-C UP YUV (IN SERVICE MODE V25)     |
| 02            | POS 2           | G-C UP YUV (IN SERVICE MODE V25)     |
| 03            | POS 3           | B-C UP YUV (IN SERVICE MODE V25)     |
| 04            | POS 4           | R-C DOWN YUV (IN SERVICE MODE V25)   |
| 05            | POS 5           | G-C DOWN YUV (IN SERVICE MODE V25)   |
| 06            | POS 6           | B-C DOWN YUV (IN SERVICE MODE V25)   |

| RC CODE (HEX) | R/C KEY NAME | SERVICE-ITEM                                        |
|---------------|--------------|-----------------------------------------------------|
| 07            | POS 7        | R-D UP YUV (IN SERVICE MODE V25)                    |
| 08            | POS 8        | B-D UP YUV (IN SERVICE MODE V25)                    |
| 0A            | POS 0        | B-D DOWN YUV (IN SERVICE MODE V25)                  |
| 09            | FLASHBACK    | R-D DOWN YUV (IN SERVICE MODE V25)                  |
| 83            |              | AUTO ADJ FOR V01, V02, V03, V20, V21, V22, V23, V24 |
| 53            |              | T-SET                                               |
| 81            |              | SERVICE MODE                                        |

1.) Please set the MCL according to the specific models.

MCL1 : 21K-FD5RU

MCL2 :

MCL3 :

MCL4 :

2.) After set the MCL, please set the INITIAL SETTING for each models.

INITIAL 1 : For China ( All Channel Sound System are set to D/K )

INITIAL 2 : For Hong Kong ( All Channel Sound System are set to I )

INITIAL 3 : For Singapore, Africa and Australia ( All Channel Sound System are set to B/G )

INITIAL 4 : For Middle-East ( All Channel Sound System are set to B/G )

INITIAL 5: For Russia (All Channel Sound System are set to D/K)

| MCL1 (HEX AE) |          |           | MCL2 (HEX 95) |          |           | MCL3 (HEX 55) |          |           | MCL4 (HEX D5) |          |           |
|---------------|----------|-----------|---------------|----------|-----------|---------------|----------|-----------|---------------|----------|-----------|
| CH-No         | Fv (MHz) | Sound Sys | CH-No         | Fv (MHz) | Sound Sys | CH-No         | Fv (MHz) | Sound Sys | CH-No         | Fv (MHz) | Sound Sys |
| 0             |          |           | 0             | 590.25   | B/G       | 0             |          |           | 0             |          |           |
| 1             | 48.25    | B/G       | 1             | 46.25    | B/G       | 1             | 48.25    | B/G       | 1             | 55.25    | B/G       |
| 2             | 62.25    | B/G       | 2             | 64.25    | B/G       | 2             | 59.25    | D/K       | 2             | 175.25   | B/G       |
| 3             | 77.25    | D/K       | 3             | 86.25    | B/G       | 3             | 65.75    | D/K       | 3             | 189.25   | B/G       |
| 4             | 175.25   | B/G       | 4             | 95.25    | B/G       | 4             | 77.25    | D/K       | 4             | 203.25   | B/G       |
| 5             | 182.25   | B/G       | 5             | 138.25   | B/G       | 5             | 85.25    | D/K       | 5             | 217.25   | B/G       |
| 6             | 183.25   | D/K       | 6             | 175.25   | B/G       | 6             | 93.25    | D/K       | 6             | 535.25   | B/G       |
| 7             | 191.25   | D/K       | 7             | 182.25   | B/G       | 7             | 175.25   | B/G       | 7             |          |           |
| 8             | 196.25   | B/G       | 8             | 189.25   | B/G       | 8             | 184.25   | D/K       | 8             |          |           |
| 9             | 199.25   | M         | 9             | 196.25   | B/G       | 9             | 199.25   | D/K       | 9             |          |           |
| 10            | 210.25   | B/G       | 10            | 209.25   | B/G       | 10            | 210.25   | B/G       | 10            |          |           |
| 11            | 224.25   | B/G       | 11            | 216.25   | B/G       | 11            | 224.25   | B/G       | 11            | 48.25    | B/G       |
| 12            | 471.25   | B/G       | 12            |          |           | 12            | 487.25   | I         | 12            | 62.25    | B/G       |
| 13            | 487.25   | I         | 13            |          |           | 13            | 503.25   | I         | 13            | 196.25   | B/G       |
| 14            | 503.25   | B/G       | 14            |          |           | 14            | 575.25   | B/G       | 14            | 210.25   | B/G       |
| 15            | 575.25   | B/G       | 15            |          |           | 15            | 639.25   | D/K       | 15            | 224.25   | B/G       |
| 16            | 583.25   | B/G       | 16            |          |           | 16            | 767.25   | D/K       | 16            | 471.25   | B/G       |
| 17            | 599.25   | B/G       | 17            |          |           | 17            | 831.25   | D/K       | 17            | 855.25   | B/G       |
| 18            | 621.25   | M         | 18            |          |           | 18            | 855.25   | I         | 18            |          |           |
| 19            | 639.25   | D/K       | 19            |          |           | 19            | 97.25    | M         | 19            |          |           |
| 20            | 703.25   | B/G       | 20            |          |           | 20            | 183.25   | M         | 20            |          |           |
| 21            | 735.25   | I         | 21            |          |           | 21            | 193.25   | M         | 21            | 223.95   | B/G       |
| 22            | 767.25   | B/G       | 22            |          |           | 22            | 211.25   | M         | 22            | 224.55   | B/G       |
| 23            | 815.25   | B/G       | 23            |          |           | 23            | 217.25   | M         | 23            | 223.85   | B/G       |
| 24            | 855.25   | I         | 24            |          |           | 24            | 477.25   | M         | 24            | 224.65   | B/G       |
| 25            | 855.25   | B/G       | 25            |          |           | 25            | 693.25   | M         | 25            | 223.75   | B/G       |
| 26            | 55.25    | M         | 26            |          |           | 26            | 62.25    | B/G       | 26            | 224.75   | B/G       |
| 27            | 83.25    | M         | 27            |          |           | 27            | 503.25   | B/G       | 27            |          |           |
| 28            | 183.25   | M         | 28            | 527.25   | B/G       | 28            | 527.25   | B/G       | 28            |          |           |
| 29            | 193.25   | M         | 29            |          |           | 29            | 599.25   | B/G       | 29            |          |           |
| 30            | 217.25   | M         | 30            |          |           | 30            | 621.25   | M         | 30            |          |           |
| 31            | 471.25   | M         | 31            |          |           | 31            | 815.25   | B/G       | 31            | 91.25    | M         |
| 32            | 477.25   | M         | 32            |          |           | 32            | 112.25   | B/G       | 32            | 103.25   | M         |
| 33            | 693.25   | M         | 33            |          |           | 33            | 168.25   | B/G       | 33            | 171.25   | M         |
| 34            | 885.25   | M         | 34            |          |           | 34            | 91.25    | M         | 34            | 183.25   | M         |
| 35            | 112.25   | B/G       | 35            |          |           | 35            | 294.25   | B/G       | 35            | 193.25   | M         |
| 36            | 168.25   | B/G       | 36            |          |           | 36            | 463.25   | B/G       | 36            | 205.25   | M         |
| 37            |          |           | 37            | 590.25   | B/G       | 37            | 174.95   | B/G       | 37            | 217.25   | M         |
| 38            | 294.25   | B/G       | 38            |          |           | 38            | 174.55   | B/G       | 38            | 621.25   | M         |
| 39            | 463.25   | B/G       | 39            |          |           | 39            |          |           | 39            |          |           |
| 40            |          |           | 40            |          |           | 40            |          |           | 40            |          |           |

| MCL1 (HEX AE) |          |           | MCL2 (HEX 95) |          |           | MCL3 (HEX 55) |          |           | MCL4 (HEX D5) |          |           |
|---------------|----------|-----------|---------------|----------|-----------|---------------|----------|-----------|---------------|----------|-----------|
| CH-No         | Fv (MHz) | Sound Sys | CH-No         | Fv (MHz) | Sound Sys | CH-No         | Fv (MHz) | Sound Sys | CH-No         | Fv (MHz) | Sound Sys |
| 41            | 647.25   | B/G       | 41            | 48.25    | B/G       | 41            |          |           | 41            |          |           |
| 42            | 663.25   | B/G       | 42            | 62.25    | B/G       | 42            |          |           | 42            |          |           |
| 43            | 679.25   | B/G       | 43            | 77.25    | D/K       | 43            |          |           | 43            |          |           |
| 44            | 174.95   | B/G       | 44            | 175.25   | B/G       | 44            |          |           | 44            |          |           |
| 45            | 175.55   | B/G       | 45            | 183.25   | D/K       | 45            |          |           | 45            |          |           |
| 46            |          |           | 46            | 191.25   | D/K       | 46            |          |           | 46            |          |           |
| 47            |          |           | 47            | 210.25   | B/G       | 47            |          |           | 47            |          |           |
| 48            |          |           | 48            | 224.25   | B/G       | 48            |          |           | 48            |          |           |
| 49            |          |           | 49            | 487.25   | I         | 49            |          |           | 49            |          |           |
| 50            |          |           | 50            | 503.25   | B/G       | 50            |          |           | 50            |          |           |
| 51            |          |           | 51            | 575.25   | B/G       | 51            |          |           | 51            |          |           |
| 52            |          |           | 52            | 599.25   | B/G       | 52            |          |           | 52            |          |           |
| 53            |          |           | 53            | 621.25   | M         | 53            |          |           | 53            |          |           |
| 54            |          |           | 54            | 639.25   | D/K       | 54            |          |           | 54            |          |           |
| 55            |          |           | 55            | 735.25   | I         | 55            |          |           | 55            |          |           |
| 56            |          |           | 56            | 767.25   | B/G       | 56            |          |           | 56            |          |           |
| 57            |          |           | 57            | 815.25   | B/G       | 57            |          |           | 57            |          |           |
| 58            |          |           | 58            | 855.25   | I         | 58            |          |           | 58            |          |           |
| 59            |          |           | 59            | 91.25    | M         | 59            |          |           | 59            |          |           |
| 60            |          |           | 60            | 183.25   | M         | 60            |          |           | 60            |          |           |
| 61            |          |           | 61            | 193.25   | M         | 61            |          |           | 61            |          |           |
| 62            |          |           | 62            | 217.25   | M         | 62            |          |           | 62            |          |           |
| 63            |          |           | 63            | 471.25   | M         | 63            |          |           | 63            |          |           |
| 64            |          |           | 64            | 693.25   | M         | 64            |          |           | 64            |          |           |
| 65            |          |           | 65            | 112.25   | B/G       | 65            |          |           | 65            |          |           |
| 66            |          |           | 66            | 168.25   | B/G       | 66            |          |           | 66            |          |           |
| 67            |          |           | 67            | 294.25   | B/G       | 67            |          |           | 67            |          |           |
| 68            |          |           | 68            | 463.25   | B/G       | 68            |          |           | 68            |          |           |
| 69            |          |           | 69            | 174.25   | B/G       | 69            |          |           | 69            |          |           |
| 70            |          |           | 70            | 175.25   | B/G       | 70            |          |           | 70            |          |           |

### 3. SHIPPING SETTING & CHECKING

(1) The following default data has been factory-set for the E2PROM follow by INITIAL DATA selected.

| ITEMS                | DATA SETTING  |
|----------------------|---------------|
| LAST POWER           | ON            |
| LAST TV/AV MODE      | TV MODE       |
| LAST POSITION        | CH 1          |
| FLASHBACK CHANNEL    | CH 1          |
| 1/2 DIGIT ENTRY      | 2 DIGIT ENTRY |
| VOLUME               | 0 (Min)       |
| BLUE BACK            | OFF           |
| OFF TIMER            | --:--         |
| ON TIMER             | --:--         |
| ON TIMER POSITION    | --            |
| ON TIMER VOLUME      | --            |
| REMINDER             | --:--         |
| AFT                  | ALL CH ON     |
| COLOR SYSTEM         | ALL CH AUTO   |
| SKIP                 | ALL CH OFF    |
| NICAM ON/OFF         | ALL CH ON     |
| NICAM STEREO MODE    | ALL CH STEREO |
| NICAM BILINGUAL MODE | ALL CH MAIN   |
| NICAM MONO MODE      | ALL CH MONO   |
| A2 ON/OFF            | ALL CH ON     |
| A2 STEREO MODE       | ALL CH STEREO |
| A2 BILINGUAL MODE    | ALL CH MAIN   |
| CONTRAST             | 60            |
| COLOR                | 0             |
| BRIGHTNESS           | 0             |
| TINT                 | 0             |
| SHARPNESS            | 0             |
| WHITE TEMP           | 0             |
| SURROUND             | OFF           |
| TREBLE               | 0             |
| BASS                 | 0             |
| BALANCE              | 0 (CENTER)    |

| INITIAL    | LANGUAGE | SOUND SYSTEM |
|------------|----------|--------------|
| 1 (HEX 14) | CHINESE  | D/K          |
| 2 (HEX 15) | CHINESE  | I            |
| 3 (HEX 17) | ENGLISH  | B/G          |
| 4 (HEX 97) | ARABIC   | B/G          |
| 5 (HEX 57) | RUSSIAN  | D/K          |
| 6 (HEX D7) | MALAY    | B/G          |
| 7 (HEX 37) | FRENCH   | D/K          |

FACTORY SETTING BY MODEL  
(Reference: Geomagnetism Adjustment)

| MODEL     | MAGNETIC FIELD(V, H) nT |       | BACKGROUND | LANG.   | S-SYS | LANG QTY |
|-----------|-------------------------|-------|------------|---------|-------|----------|
| CHINA     | 30000                   | 20000 | 12300K     | CHINESE | D/K   | 5        |
| HONG KONG | 20000                   | 40000 | 12300K     | CHINESE | I     | 5        |
| SINGAPORE | -10000                  | 40000 | 12300K     | ENGLISH | B/G   | 5        |
| AFRICA    | -10000                  | 40000 | 12300K     | ENGLISH | B/G   | 5        |
| MID-EAST  | 30000                   | 20000 | 18000K     | ARABIC  | B/G   | 6        |
| RUSSIA    | 45000                   | 20000 | 7500K      | RUSSIAN | D/K   | 2        |
| AUSTRALIA | -50000                  | 20000 | 12300K     | ENGLISH | B/G   | 5        |

\*NOTE FOR OSD TYPE:

2: ENGLISH/RUSSIA

5: ENGLISH/CHINESE/FRENCH/ARABIC/MALAY

6: ENGLISH/CHINESE/FRENCH/ARABIC/MALAY/RUSSIAN

\*\*AFTER INITIALIZED THE EEPROM (REFER TO FACTORY PRESETTING), READ DATA FROM EEPROM ADDRESS 00H ~ 03H, AND COMPARE TO THE LIST BELOW, IF DIFFERENT, INITIALIZE THE EEPROM.

|         |      |         |      |
|---------|------|---------|------|
| ADDRESS | DATA | ADDRESS | DATA |
| 00H:    | 7BH  | 02H:    | 78H  |
| 01H:    | 75H  | 03H:    | 74H  |

\*\*\* There are five stages of service mode data. First stage data from V00~V31 (Adjustment Mode).

To go into second stage of service mode data, press MENU key. Second stage data from F01~F298 (Setting Mode).

To go into third stage of service mode data, press MENU key. Third stage data is Pixel mode setting.

To go into fourth stage of service mode data, press MENU key. Fourth stage data is Check Mode.

To go into fifth stage of service mode data, press MENU key. Fifth stage data from O01~O29 (Option Mode).

| ADJUSTMENT MODE (FIRST STAGE) |     |               |              |              |                                                             |
|-------------------------------|-----|---------------|--------------|--------------|-------------------------------------------------------------|
| EEPROM ITEMS                  | OSD | DATA LENGTH   | INITIAL DATA | FIX/ADJ/AUTO | REMARK                                                      |
| R-DRIVE                       | V00 | 0...127       | 31           | FIX          | PLS REFER TO<br>ADJ ITEM FOR<br>SCREEN AND<br>WHITE BALANCE |
| B-DRIVE                       | V00 | 0...127       | 31           | FIX          |                                                             |
| R-CUT                         | V00 | 0...511       | 95           | FIX          |                                                             |
| G-CUT                         | V00 | 0...511       | 95           | FIX          |                                                             |
| B-CUT                         | V00 | 0...511       | 95           | FIX          |                                                             |
| RF-AGC                        | V01 | 0...127       | 50           | ADJ          |                                                             |
| VIF-VCO                       | V02 | 0...127       | 63           | ADJ          |                                                             |
| H-VCO                         | V03 | 0...15        | 7            | ADJ          |                                                             |
| SUB-CONTRAST                  | V04 | 0...127       | 65           | ADJ          |                                                             |
| SUB-COLOR                     | V05 | 0...127       | 63           | ADJ          |                                                             |
| SUB-BRIGHT                    | V06 | 0...255       | 75           | ADJ          |                                                             |
| SUB-TINT                      | V07 | 0...127       | 63           | ADJ          |                                                             |
| SUB-SHARPNESS                 | V08 | 0...63        | 44           | FIX          |                                                             |
| SUB-COLOR -YUV                | V09 | 0...127       | 55           | *FIX         | BUS SET UP                                                  |
| SUB-TINT-YUV                  | V10 | 0...127       | 63           | *FIX         | BUS SET UP                                                  |
| V-SIZE 50 Hz                  | V11 | 0...63        | 38           | ADJ          |                                                             |
| V-SHIFT 50 Hz                 | V12 | 0...15        | 7            | ADJ          |                                                             |
| H-SHIFT 50 Hz                 | V13 | 0...127       | 63           | ADJ          |                                                             |
| SECAM-BR                      | V14 | 0...255       | 127          | ADJ          |                                                             |
| SECAM-BB                      | V15 | 0...255       | 127          | ADJ          |                                                             |
| SUB-VOL                       | V16 | 0...60        | 60           | FIX          |                                                             |
| V-SIZE 60 Hz                  | V17 | -31...0...+31 | + 3          | FIX          | IF NECESSARY, ADJ                                           |
| V-SHIFT 60 Hz                 | V18 | -7...0...+7   | - 3          | FIX          | IF NECESSARY, ADJ                                           |
| H-SHIFT 60 Hz                 | V19 | -15...0...+15 | - 4          | *FIX         | BUS SET UP                                                  |
| S-TRAP (BG)                   | V20 | 0...31        | 15           | ADJ          |                                                             |
| S-TRAP (I)                    | V21 | 0...31        | 15           | ADJ          |                                                             |
| S-TRAP (DK)                   | V22 | 0...31        | 15           | ADJ          |                                                             |
| S-TRAP (M)                    | V23 | 0...31        | 15           | ADJ          |                                                             |
| S-TRAP (5.74)                 | V24 | 0...31        | 15           | ADJ          |                                                             |
| CUTOFF/BKGD YUV               | V25 |               |              | FIX          |                                                             |
| R-DRI YUV                     | V25 | 0...127       | 31           | FIX          |                                                             |
| B-DRI YUV                     | V25 | 0...127       | 31           | FIX          |                                                             |
| R-CUT YUV                     | V25 | 0...511       | 95           | FIX          |                                                             |
| G-CUT YUV                     | V25 | 0...511       | 95           | FIX          |                                                             |
| B-CUT YUV                     | V25 | 0...511       | 95           | FIX          |                                                             |
| SUB-CON YUV                   | V26 | 0...127       | 65           | FIX          |                                                             |
| SUB-BRGHT YUV                 | V27 | 0...255       | 75           | FIX          |                                                             |
| VS-CORRECT                    | V28 | 0...63        | 31           | FIX          |                                                             |
| VC-CORRECT OFFSET             | V29 | -13...+13     | + 2          | FIX          |                                                             |
| V LINEARITY                   | V30 | 0...63        | 31           | *FIX         | BUS SET UP                                                  |
| V LINEARITY OFFSET            | V31 | -13...+13     | + 2          | FIX          |                                                             |

| SETTING MODE (SECOND STAGE) |                           |     |         |                 |              |              |            |
|-----------------------------|---------------------------|-----|---------|-----------------|--------------|--------------|------------|
| EEPROM ITEMS                | FUNCTION                  | OSD | IC      | DATA LENGTH     | INITIAL DATA | FIX/ADJ/AUTO | REMARK     |
| SIF-PAL                     |                           | F01 | iDREAMA | 0/1             | 0            | FIX          |            |
| SBPF WIDE                   |                           | F02 | iDREAMA | 0..3            | 0            | FIX          |            |
| STRAP OFF                   |                           | F03 | iDREAMA | 0/1             | 0            | FIX          |            |
| OM-DET                      |                           | F04 | iDREAMA | 0/1             | 0            | FIX          |            |
| SIF M GAIN                  |                           | F05 | iDREAMA | 0/1             | 0            | FIX          |            |
| TV Audio ATT [S-OUT-LVL]    |                           | F06 | iDREAMA | 0..127          | 95           | FIX          |            |
| VIF-G                       |                           | F07 | iDREAMA | 0..7            | 4            | FIX          |            |
| AMF ON                      |                           | F08 | iDREAMA | 0/1             | 0            | FIX          |            |
| AMF VTH                     |                           | F09 | iDREAMA | 0/1             | 0            | FIX          |            |
| 2DYCS BPF                   |                           | F10 | iDREAMA | 0..3            | 0            | FIX          |            |
| YDL                         | Y SIGNAL DELAY            | F11 | iDREAMA | 0..15           | 7            | FIX          |            |
| YDL-P                       | Y SIGNAL DELAY PAL        | F12 | iDREAMA | 0..15           | 3            | FIX          |            |
| YDL-S                       | Y SIGNAL DELAY SECAM      | F13 | iDREAMA | 0..15           | 7            | FIX          |            |
| YDL-N4                      | Y SIGNAL DELAY N443       | F14 | iDREAMA | 0..15           | 6            | FIX          |            |
| YDL-N3                      | Y SIGNAL DELAY N358       | F15 | iDREAMA | 0..15           | 4            | *FIX         | BUS SET UP |
| YDL-AV                      | Y SIGNAL DELAY AV         | F16 | iDREAMA | 0..15           | 7            | FIX          |            |
| YDL-AV-P                    | Y SIGNAL DELAY PAL (AV)   | F17 | iDREAMA | 0..15           | 3            | FIX          |            |
| YDL-AV-S                    | Y SIGNAL DELAY SECAM (AV) | F18 | iDREAMA | 0..15           | 5            | FIX          |            |
| YDL-AV-N4                   | Y SIGNAL DELAY N443 (AV)  | F19 | iDREAMA | 0..15           | 5            | FIX          |            |
| YDL-AV-N3                   | Y SIGNAL DELAY N358 (AV)  | F20 | iDREAMA | 0..15           | 5            | *FIX         | BUS SET UP |
| YDL-YUV                     | Y SIGNAL DELAY YUV        | F21 | iDREAMA | 0..15           | 7            | FIX          |            |
| AP FREQ                     |                           | F22 | iDREAMA | 0..3            | 0            | FIX          |            |
| CORH LH                     |                           | F23 | iDREAMA | 0..15           | 8            | FIX          |            |
| SHP OV-P                    |                           | F24 | iDREAMA | -31..0..+31     | 0            | FIX          |            |
| SHP OV-S                    |                           | F25 | iDREAMA | -31..0..+31     | -5           | FIX          |            |
| SHP OV-N4                   |                           | F26 | iDREAMA | -31..0..+31     | 0            | FIX          |            |
| SHP OV-N3                   |                           | F27 | iDREAMA | -31..0..+31     | 0            | FIX          |            |
| SHP OV-AV                   |                           | F28 | iDREAMA | -31..0..+31     | +5           | FIX          |            |
| SHP OV-YUV                  |                           | F29 | iDREAMA | -31..0..+31     | +5           | FIX          |            |
| SHP PRE-P                   |                           | F30 | iDREAMA | -31..0..+31     | -10          | FIX          |            |
| SHP PRE-S                   |                           | F31 | iDREAMA | -31..0..+31     | -15          | FIX          |            |
| SHP PRE-N4                  |                           | F32 | iDREAMA | -31..0..+31     | -10          | FIX          |            |
| SHP PRE-N3                  |                           | F33 | iDREAMA | -31..0..+31     | -10          | FIX          |            |
| SHP PRE-AV                  |                           | F34 | iDREAMA | -31..0..+31     | +5           | FIX          |            |
| SHP PRE-YUV                 |                           | F35 | iDREAMA | -31..0..+31     | -5           | FIX          |            |
| SHP ANT-ONII OFFSET         |                           | F36 | iDREAMA | -31..0..+31     | 0            | *FIX         | BUS SET UP |
| BS SW [BS]                  |                           | F37 | iDREAMA | 0/1             | 1            | FIX          |            |
| BS ST PNT                   |                           | F38 | iDREAMA | 0..3            | 3            | FIX          |            |
| BS D                        |                           | F39 | iDREAMA | 0..7            | 0            | FIX          |            |
| BS ATK T                    |                           | F40 | iDREAMA | 0..15           | 7            | FIX          |            |
| BS RCV T                    |                           | F41 | iDREAMA | 0..15           | 7            | FIX          |            |
| ACC AMP ON                  |                           | F42 | iDREAMA | 0/1             | 0            | FIX          |            |
| Take-Off-TV                 |                           | F43 | iDREAMA | 0 (BPF)/ 1(TOF) | 1            | FIX          |            |
| Take-Off-AV                 |                           | F44 | iDREAMA | 0 (BPF)/ 1(TOF) | 0            | FIX          |            |
| Take-Off-YUV                |                           | F45 | iDREAMA | 0 (BPF)/ 1(TOF) | 0            | FIX          |            |
| BGP SEL                     |                           | F46 | iDREAMA | 0/1             | 0            | FIX          |            |
| P/N BGP SHIFT               |                           | F47 | iDREAMA | 0..3            | 0            | FIX          |            |
| SCM BGP SHIFT               |                           | F48 | iDREAMA | 0..3            | 0            | *FIX         | BUS SET UP |
| BGP WIDTH                   |                           | F49 | iDREAMA | 0..31           | 22           | FIX          |            |
| BGP FRT POS                 |                           | F50 | iDREAMA | 0..31           | 14           | FIX          |            |
| AUTO-SCM-KIL-TV             |                           | F51 | iDREAMA | 0..3            | 1            | FIX          |            |
| AUTO-SCM-KIL-AV-YUV         |                           | F52 | iDREAMA | 0..3            | 1            | FIX          |            |
| Forced-SCM-KIL-TV           |                           | F53 | iDREAMA | 0..3            | 2            | FIX          |            |
| Forced-SCM-KIL-AV-YUV       |                           | F54 | iDREAMA | 0..3            | 2            | FIX          |            |
| SCM FO COL                  |                           | F55 | iDREAMA | 0/1             | 0            | FIX          |            |
| PAL ID                      |                           | F56 | iDREAMA | 0..127          | 15           | FIX          |            |
| NTSC ID                     |                           | F57 | iDREAMA | 0..127          | 15           | *FIX         | BUS SET UP |

| SETTING MODE (SECOND STAGE)                                |          |      |         |                      |              |              |            |
|------------------------------------------------------------|----------|------|---------|----------------------|--------------|--------------|------------|
| EEPROM ITEMS                                               | FUNCTION | OSD  | IC      | DATA LENGTH          | INITIAL DATA | FIX/ADJ/AUTO | REMARK     |
| ID ATK TIME                                                |          | F58  | iDREAMA | 0..3                 | 0            | FIX          |            |
| ID RCV TIME                                                |          | F59  | iDREAMA | 0..3                 | 3            | FIX          |            |
| KILLER LEVEL                                               |          | F60  | iDREAMA | 0..127               | 28           | *FIX         | BUS SET UP |
| KILLER ATK TIME                                            |          | F61  | iDREAMA | 0..3                 | 2            | *FIX         | BUS SET UP |
| KILLER RCV TIME                                            |          | F62  | iDREAMA | 0..3                 | 1            | FIX          |            |
| 443 50 NT                                                  |          | F63  | iDREAMA | 0/1                  | 0            | FIX          |            |
| COL-AV                                                     |          | F64  | iDREAMA | -31..0..+31          | +20          | *FIX         | BUS SET UP |
| COL-P                                                      |          | F65  | iDREAMA | -31..0..+31          | 0            | FIX          |            |
| COL-S                                                      |          | F66  | iDREAMA | -31..0..+31          | -25          | FIX          |            |
| COL-N4                                                     |          | F67  | iDREAMA | -31..0..+31          | -7           | *FIX         | BUS SET UP |
| COL-N3                                                     |          | F68  | iDREAMA | -31..0..+31          | -7           | *FIX         | BUS SET UP |
| COL-ADJ                                                    |          | F69  | iDREAMA | -31..0..+31          | +15          | FIX          |            |
| TINT-AV                                                    |          | F70  | iDREAMA | -63..0..+63          | 0            | *FIX         | BUS SET UP |
| TINT-ADJ                                                   |          | F71  | iDREAMA | -63..0..+63          | +12          | *FIX         | BUS SET UP |
| TINT-YUV-ADJ                                               |          | F72  | iDREAMA | -63..0..+63          | 0            | FIX          |            |
| CTI                                                        |          | F73  | iDREAMA | 0/1                  | 1            | FIX          |            |
| R-Y PHASE OFFSET                                           |          | F74  | iDREAMA | 0..63                | 21           | *FIX         | BUS SET UP |
| U OFFSET<br>[Black <FmSdata>[amp ]<br>White signal or YUV] |          | F75  | iDREAMA | 0..255               | 127          | FIX          |            |
| V OFFSET<br>[Black <FmSdata>[amp ]<br>White signal or YUV] |          | F76  | iDREAMA | 0..255               | 127          | FIX          |            |
| G-DRI                                                      |          | F77  | iDREAMA | 0..127               | 31           | *FIX         | BUS SET UP |
| G-Y GAIN                                                   |          | F78  | iDREAMA | 0..3                 | 3            | *FIX         | BUS SET UP |
| GAMMA                                                      |          | F79  | iDREAMA | 0..3                 | 2            | *FIX         | BUS SET UP |
| BLUE ST                                                    |          | F80  | iDREAMA | 0..3                 | 1            | FIX          |            |
| OSD BRT LIMIT                                              |          | F81  | iDREAMA | 0..3                 | 0            | FIX          |            |
| OSD CONT LIMIT                                             |          | F82  | iDREAMA | 0..3                 | 2            | FIX          |            |
| ABL TH                                                     |          | F83  | iDREAMA | 0..7                 | 0            | FIX          |            |
| ABL GAIN                                                   |          | F84  | iDREAMA | 0..7                 | 0            | FIX          |            |
| DC TRAN SEL                                                |          | F85  | iDREAMA | 0/1                  | 0            | FIX          |            |
| DC TRAN GAIN                                               |          | F86  | iDREAMA | 0..15                | 0            | FIX          |            |
| DC TRAN TH                                                 |          | F87  | iDREAMA | 0..127               | 0            | FIX          |            |
| AUTO SLICE LVL-TV                                          |          | F88  | iDREAMA | 0..15                | 3            | FIX          |            |
| AUTO SLICE LVL-AV                                          |          | F89  | iDREAMA | 0..15                | 3            | FIX          |            |
| AUTO SLICE LVL-YUV                                         |          | F90  | iDREAMA | 0..15                | 3            | FIX          |            |
| AS GAIN-TV                                                 |          | F91  | iDREAMA | 0..3                 | 0            | FIX          |            |
| AS GAIN-AV                                                 |          | F92  | iDREAMA | 0..3                 | 0            | FIX          |            |
| AS GAIN-YUV                                                |          | F93  | iDREAMA | 0..3                 | 0            | FIX          |            |
| V SYNC DET-TV                                              |          | F94  | iDREAMA | 0..7                 | 0            | *FIX         | BUS SET UP |
| V SYNC DET-AV                                              |          | F95  | iDREAMA | 0..7                 | 0            | FIX          |            |
| V SYNC DET-YUV                                             |          | F96  | iDREAMA | 0..7                 | 0            | FIX          |            |
| S DET ON-TV                                                |          | F97  | iDREAMA | 0/1                  | 1            | FIX          |            |
| S DET ON-AV                                                |          | F98  | iDREAMA | 0/1                  | 1            | FIX          |            |
| S DET ON-YUV                                               |          | F99  | iDREAMA | 0/1                  | 1            | FIX          |            |
| V STD DET-TV                                               |          | F100 | iDREAMA | 0/1                  | 0            | FIX          |            |
| V STD DET-AV                                               |          | F101 | iDREAMA | 0/1                  | 0            | FIX          |            |
| V STD DET-YUV                                              |          | F102 | iDREAMA | 0/1                  | 0            | FIX          |            |
| C SYNC LPF                                                 |          | F103 | iDREAMA | 0..3                 | 0            | FIX          |            |
| V SYNC LPF1                                                |          | F104 | iDREAMA | 0..3                 | 0            | FIX          |            |
| V SYNC LPF2                                                |          | F105 | iDREAMA | 0..3                 | 3            | FIX          |            |
| AFC1 GAIN-TV                                               |          | F106 | iDREAMA | 0..7                 | 4            | *FIX         | BUS SET UP |
| AFC1 GAIN-AV                                               |          | F107 | iDREAMA | 0..7                 | 4            | FIX          |            |
| AFC1 GAIN-YUV                                              |          | F108 | iDREAMA | 0..7                 | 4            | FIX          |            |
| AFC2 GAIN UP-TV                                            |          | F109 | iDREAMA | 0..3                 | 0            | FIX          |            |
| AFC2 GAIN UP-AV                                            |          | F110 | iDREAMA | 0..3                 | 0            | FIX          |            |
| AFC2 GAIN UP-YUV                                           |          | F111 | iDREAMA | 0..3                 | 0            | FIX          |            |
| V PULLIN WIDE                                              |          | F112 | iDREAMA | 0/1                  | 0            | FIX          |            |
| H PULLIN UP                                                |          | F113 | iDREAMA | 0/1                  | 0            | FIX          |            |
| DBL COIN                                                   |          | F114 | iDREAMA | 0/1                  | 0            | FIX          |            |
| V-FREE(NO SYNC)                                            |          | F115 | iDREAMA | 1 (off)/ 1(free-run) | 1            | FIX          |            |
| V-FREE2(H-FREE)                                            |          | F116 | iDREAMA | 1 (off)/ 1(free-run) | 1            | FIX          |            |

| SETTING MODE (SECOND STAGE) |                                                |      |         |                                                                               |              |              |            |
|-----------------------------|------------------------------------------------|------|---------|-------------------------------------------------------------------------------|--------------|--------------|------------|
| EEPROM ITEMS                | FUNCTION                                       | OSD  | IC      | DATA LENGTH                                                                   | INITIAL DATA | FIX/ADJ/AUTO | REMARK     |
| RDRV-R                      |                                                | F117 | iDREAMA | -63..0..+63                                                                   | +8           | *FIX         | BUS SET UP |
| BDRV-R                      |                                                | F118 | iDREAMA | -63..0..+63                                                                   | -10          | *FIX         | BUS SET UP |
| RDRV-B                      |                                                | F119 | iDREAMA | -63..0..+63                                                                   | -3           | *FIX         | BUS SET UP |
| BDRV-B                      |                                                | F120 | iDREAMA | -63..0..+63                                                                   | +13          | *FIX         | BUS SET UP |
| R-DRI YUV OFFSET            |                                                | F121 | iDREAMA | -63..0..+63                                                                   | 0            | FIX          |            |
| VRAMP LPF ADJ               |                                                | F122 | iDREAMA | 0..7                                                                          | 0            | FIX          |            |
| B-DRI YUV OFFSET            |                                                | F123 | iDREAMA | -63..0..+63                                                                   | 0            | FIX          |            |
| R-CUT YUV OFFSET            |                                                | F124 | iDREAMA | -63..0..+63                                                                   | 0            | FIX          |            |
| G-CUT YUV OFFSET            |                                                | F125 | iDREAMA | -63..0..+63                                                                   | + 17         | *FIX         | BUS SET UP |
| B-CUT YUV OFFSET            |                                                | F126 | iDREAMA | -63..0..+63                                                                   | + 5          | *FIX         | BUS SET UP |
| CON YUV OFFSET              |                                                | F127 | iDREAMA | -63..0..+63                                                                   | + 1          | FIX          |            |
| BRT YUV OFFSET              |                                                | F128 | iDREAMA | -63..0..+63                                                                   | - 5          | FIX          |            |
| Contrast OFFSET             |                                                | F129 | iDREAMA | -63..0..+63                                                                   | 0            | FIX          |            |
| Bright OFFSET               |                                                | F130 | iDREAMA | -63..0..+63                                                                   | 0            | *FIX         | BUS SET UP |
| AV2 Brightness OFFSET       |                                                | F131 | iDREAMA | -15..0..+15                                                                   | 0            | FIX          |            |
| V-Demute-Delay              |                                                | F132 | iDREAMA | 0..255                                                                        | 0            | FIX          |            |
| S-Demute-Delay              |                                                | F133 | iDREAMA | 0..255                                                                        | 0            | FIX          |            |
| Pow-Storage                 |                                                | F134 | iDREAMA | 0 (disable)/<br>1(enable)                                                     | 1            | FIX          |            |
| OSD-POS                     |                                                | F135 | iDREAMA | 00127                                                                         | 0            | FIX          |            |
| CP                          |                                                | F136 | iDREAMA | 0/1                                                                           | 1            | FIX          |            |
| SMALL-SURR                  |                                                | F137 | iDREAMA | 0/1                                                                           | 0            | FIX          |            |
| SUB-BASS                    | SUB BASS CONTROL                               | F138 | iDREAMA | 0(0dB), 1(-1dB),<br>2(-2dB), 3(-3dB),<br>4(0dB), 5(+1dB),<br>6(+2dB), 7(+3dB) | 6            | *FIX         | BUS SET UP |
| SUB-TREB                    | SUB TREBLE CONTROL                             | F139 | iDREAMA | 0(0dB), 1(-1dB),<br>2(-2dB), 3(-3dB),<br>4(0dB), 5(+1dB),<br>6(+2dB), 7(+3dB) | 3            | *FIX         | BUS SET UP |
| AGC-ADJ                     | AGC LEVEL ADJUST                               | F140 | iDREAMA | 0(AGC Off),<br>1(300mVrms),<br>2(400mVrms),<br>3(500Vrms),<br>4(600mVrms)     | 3            | *FIX         | BUS SET UP |
| AGC-Sw-Off                  | NICAM AGC SWITCH<br>OFF                        | F141 | iDREAMA | 0(Disable, fix gain),<br>1(Enable AGC)                                        | 1            | FIX          |            |
| AGC-Gain-Adjust             |                                                | F142 | iDREAMA | 0...31                                                                        | 16           | FIX          |            |
| FM-Level-Adjust             |                                                | F143 | iDREAMA | -15..0..+15 (please<br>refer to Appendix A)                                   | 0            | FIX          |            |
| IGR-Level-Adjust            |                                                | F144 | iDREAMA | -15..0..+15 (please<br>refer to Appendix A)                                   | +1           | FIX          |            |
| NICAM-BG-Level-Adjust       |                                                | F145 | iDREAMA | -15..0..+15 (please<br>refer to Appendix A)                                   | -2           | FIX          |            |
| NICAM-I-Level-Adjust        |                                                | F146 | iDREAMA | -15..0..+15 (please<br>refer to Appendix A)                                   | +3           | FIX          |            |
| NICAM-DK-Level-Adjust       |                                                | F147 | iDREAMA | -15..0..+15 (please<br>refer to Appendix A)                                   | -1           | FIX          |            |
| NICAM-Lower-Error-Limit     |                                                | F148 | iDREAMA | 0..55                                                                         | 35           | FIX          |            |
| NICAM-Upper-Error-Limit     |                                                | F149 | iDREAMA | 0..255                                                                        | 70           | FIX          |            |
| IGR-Gain-Adjust             |                                                | F150 | iDREAMA | -6..0..+7 (please<br>refer to Appendix B)                                     | 0            | FIX          |            |
| A2-ID-Response              |                                                | F151 | iDREAMA | 0 (normal)/ 1(fast)                                                           | 1            | FIX          |            |
| FM-ID-Speed                 |                                                | F152 | iDREAMA | 0..3                                                                          | 1            | FIX          |            |
| NICAM-Auto-Mute             |                                                | F153 | iDREAMA | 0/1                                                                           | 0            | FIX          |            |
| MER                         | S-BOOSTER FREQ.<br>CHARACTERISTIC CON-<br>TROL | F154 | iDREAMA | 0..255                                                                        | 70           | FIX          |            |
| MEL1                        | S-BOOSTER LEVEL1                               | F155 | iDREAMA | 0..255                                                                        | 150          | FIX          |            |
| MEL2                        | S-BOOSTER LEVEL2                               | F156 | iDREAMA | 0..255                                                                        | 156          | FIX          |            |
| MEL3                        | S-BOOSTER LEVEL3                               | F157 | iDREAMA | 0..255                                                                        | 163          | FIX          |            |
| MEL4                        | S-BOOSTER LEVEL4                               | F158 | iDREAMA | 0..255                                                                        | 165          | FIX          |            |
| MEL5                        | S-BOOSTER LEVEL5                               | F159 | iDREAMA | 0..255                                                                        | 170          | FIX          |            |
| MEL6                        | S-BOOSTER LEVEL6                               | F160 | iDREAMA | 0..255                                                                        | 180          | FIX          |            |

| SETTING MODE (SECOND STAGE) |                                               |      |         |             |              |              |            |
|-----------------------------|-----------------------------------------------|------|---------|-------------|--------------|--------------|------------|
| EEPROM ITEMS                | FUNCTION                                      | OSD  | IC      | DATA LENGTH | INITIAL DATA | FIX/ADJ/AUTO | REMARK     |
| S-St-Point                  | S-BOOSTER START POINT                         | F161 | iDREAMA | 0..60       | 21           | FIX          |            |
| S-Sp-Point                  | S-BOOSTER STOP POINT                          | F162 | iDREAMA | 0..60       | 60           | FIX          |            |
| S-Step                      | S-BOOSTER STEP                                | F163 | iDREAMA | 0..60       | 7            | FIX          |            |
| S-B-BASS                    | S-BOOSTER BASS LIMITER (WHEN S-BOOSTER ON)    | F164 | iDREAMA | -30..0..+30 | +15          | FIX          |            |
| S-B-TREB                    | S-BOOSTER TREBLE LIMITER (WHEN S-BOOSTER ON)  | F165 | iDREAMA | -30..0..+30 | +15          | FIX          |            |
| S-BASS                      | S-BOOSTER BASS LIMITER (WHEN S-BOOSTER OFF)   | F166 | iDREAMA | -30..0..+30 | +30          | FIX          |            |
| S-TREB                      | S-BOOSTER TREBLE LIMITER (WHEN S-BOOSTER OFF) | F167 | iDREAMA | -30..0..+30 | +30          | FIX          |            |
| COREL YNR1                  |                                               | F168 | iDREAMA | 0..15       | 5            | *FIX         | BUS SET UP |
| COREL YNR2                  |                                               | F169 | iDREAMA | 0..15       | 12           | FIX          |            |
| COREL YNR3                  |                                               | F170 | iDREAMA | 0..15       | 15           | FIX          |            |
| H COEF1 TV                  |                                               | F171 | iDREAMA | 0..7        | 3            | FIX          |            |
| H COEF2 TV                  |                                               | F172 | iDREAMA | 0..7        | 2            | FIX          |            |
| H COEF3 TV                  |                                               | F173 | iDREAMA | 0..7        | 1            | FIX          |            |
| SF COEF1 TV                 |                                               | F174 | iDREAMA | 0..7        | 6            | *FIX         | BUS SET UP |
| SF COEF2 TV                 |                                               | F175 | iDREAMA | 0..7        | 4            | *FIX         | BUS SET UP |
| SF COEF3 TV                 |                                               | F176 | iDREAMA | 0..7        | 3            | *FIX         | BUS SET UP |
| SG COEF1 TV                 |                                               | F177 | iDREAMA | 0..7        | 1            | FIX          |            |
| SG COEF2 TV                 |                                               | F178 | iDREAMA | 0..7        | 3            | FIX          |            |
| SG COEF3 TV                 |                                               | F179 | iDREAMA | 0..7        | 4            | FIX          |            |
| VC COEF1 TV                 |                                               | F180 | iDREAMA | 0..7        | 2            | *FIX         | BUS SET UP |
| VC COEF2 TV                 |                                               | F181 | iDREAMA | 0..7        | 2            | *FIX         | BUS SET UP |
| VC COEF3 TV                 |                                               | F182 | iDREAMA | 0..7        | 2            | *FIX         | BUS SET UP |
| VD COEF1 TV                 |                                               | F183 | iDREAMA | 0..7        | 5            | *FIX         | BUS SET UP |
| VD COEF2 TV                 |                                               | F184 | iDREAMA | 0..7        | 5            | *FIX         | BUS SET UP |
| VD COEF3 TV                 |                                               | F185 | iDREAMA | 0..7        | 5            | *FIX         | BUS SET UP |
| H COEF1 AV                  |                                               | F186 | iDREAMA | 0..7        | 6            | FIX          |            |
| H COEF2 AV                  |                                               | F187 | iDREAMA | 0..7        | 4            | FIX          |            |
| H COEF3 AV                  |                                               | F188 | iDREAMA | 0..7        | 2            | FIX          |            |
| SF COEF1 AV                 |                                               | F189 | iDREAMA | 0..7        | 6            | FIX          |            |
| SF COEF2 AV                 |                                               | F190 | iDREAMA | 0..7        | 4            | FIX          |            |
| SF COEF3 AV                 |                                               | F191 | iDREAMA | 0..7        | 3            | FIX          |            |
| SG COEF1 AV                 |                                               | F192 | iDREAMA | 0..7        | 1            | FIX          |            |
| SG COEF2 AV                 |                                               | F193 | iDREAMA | 0..7        | 3            | FIX          |            |
| SG COEF3 AV                 |                                               | F194 | iDREAMA | 0..7        | 4            | FIX          |            |
| VC COEF1 AV                 |                                               | F195 | iDREAMA | 0..7        | 3            | FIX          |            |
| VC COEF2 AV                 |                                               | F196 | iDREAMA | 0..7        | 3            | FIX          |            |
| VC COEF3 AV                 |                                               | F197 | iDREAMA | 0..7        | 3            | FIX          |            |
| VD COEF1 AV                 |                                               | F198 | iDREAMA | 0..7        | 4            | FIX          |            |
| VD COEF2 AV                 |                                               | F199 | iDREAMA | 0..7        | 4            | FIX          |            |
| VD COEF3 AV                 |                                               | F200 | iDREAMA | 0..7        | 4            | FIX          |            |
| H COEF1 YUV                 |                                               | F201 | iDREAMA | 0..7        | 6            | FIX          |            |
| H COEF2 YUV                 |                                               | F202 | iDREAMA | 0..7        | 4            | FIX          |            |
| H COEF3 YUV                 |                                               | F203 | iDREAMA | 0..7        | 2            | FIX          |            |
| SF COEF1 YUV                |                                               | F204 | iDREAMA | 0..7        | 6            | *FIX         | BUS SET UP |
| SF COEF2 YUV                |                                               | F205 | iDREAMA | 0..7        | 4            | *FIX         | BUS SET UP |
| SF COEF3 YUV                |                                               | F206 | iDREAMA | 0..7        | 3            | *FIX         | BUS SET UP |
| SG COEF1 YUV                |                                               | F207 | iDREAMA | 0..7        | 1            | FIX          |            |
| SG COEF2 YUV                |                                               | F208 | iDREAMA | 0..7        | 3            | FIX          |            |
| SG COEF3 YUV                |                                               | F209 | iDREAMA | 0..7        | 4            | FIX          |            |
| VC COEF1 YUV                |                                               | F210 | iDREAMA | 0..7        | 3            | *FIX         | BUS SET UP |
| VC COEF2 YUV                |                                               | F211 | iDREAMA | 0..7        | 4            | *FIX         | BUS SET UP |
| VC COEF3 YUV                |                                               | F212 | iDREAMA | 0..7        | 3            | *FIX         | BUS SET UP |
| VD COEF1 YUV                |                                               | F213 | iDREAMA | 0..7        | 4            | FIX          |            |

| SETTING MODE (SECOND STAGE) |          |      |         |                              |              |              |            |
|-----------------------------|----------|------|---------|------------------------------|--------------|--------------|------------|
| EEPROM ITEMS                | FUNCTION | OSD  | IC      | DATA LENGTH                  | INITIAL DATA | FIX/ADJ/AUTO | REMARK     |
| VD COEF2 YUV                |          | F214 | iDREAMA | 0..7                         | 3            | *FIX         | BUS SET UP |
| VD COEF3 YUV                |          | F215 | iDREAMA | 0..7                         | 4            | FIX          |            |
| NOISE BPF SEL               |          | F216 | iDREAMA | 0..3                         | 1            | FIX          |            |
| NOISE DET SENSE             |          | F217 | iDREAMA | 0..3                         | 0            | FIX          |            |
| NOISE DET LINE              |          | F218 | iDREAMA | 0..3                         | 0            | FIX          |            |
| SIG BPF SEL                 |          | F219 | iDREAMA | 0..3                         | 0            | FIX          |            |
| SIG DET SENSE               |          | F220 | iDREAMA | 0..3                         | 0            | FIX          |            |
| CONT SOFT                   |          | F221 | iDREAMA | 0..60                        | 30           | *FIX         | BUS SET UP |
| CONT STD                    |          | F222 | iDREAMA | 0..60                        | 50           | FIX          |            |
| CONT DYM                    |          | F223 | iDREAMA | 0..60                        | 60           | FIX          |            |
| BRIGHT SOFT                 |          | F224 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| BRIGHT STD                  |          | F225 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| BRIGHT DYM                  |          | F226 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| COL SOFT                    |          | F227 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| COL STD                     |          | F228 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| COL DYM                     |          | F229 | iDREAMA | -30..0..+30                  | +10          | *FIX         | BUS SET UP |
| SHARP SOFT                  |          | F230 | iDREAMA | -30..0..+30                  | -10          | FIX          |            |
| SHARP STD                   |          | F231 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| SHARP DYM                   |          | F232 | iDREAMA | -30..0..+30                  | +5           | FIX          |            |
| SURR SOFT                   |          | F233 | iDREAMA | 0(OFF) / 1(ONI)<br>/ 2(ONII) | 0            | FIX          |            |
| SURR STD                    |          | F234 | iDREAMA | 0(OFF) / 1(ONI)<br>/ 2(ONII) | 0            | FIX          |            |
| SURR DYM                    |          | F235 | iDREAMA | 0(OFF) / 1(ONI)<br>/ 2(ONII) | 0            | FIX          |            |
| TREBLE SOFT                 |          | F236 | iDREAMA | -30..0..+30                  | -10          | FIX          |            |
| TREBLE STD                  |          | F237 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| TREBLE DYM                  |          | F238 | iDREAMA | -30..0..+30                  | +5           | FIX          |            |
| BASS SOFT                   |          | F239 | iDREAMA | -30..0..+30                  | -5           | FIX          |            |
| BASS STD                    |          | F240 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| BASS DYM                    |          | F241 | iDREAMA | -30..0..+30                  | +10          | *FIX         | BUS SET UP |
| S-BOOST SOFT                |          | F242 | iDREAMA | 0(OFF) / 1(ON)               | 0            | FIX          |            |
| S-BOOST STD                 |          | F243 | iDREAMA | 0(OFF) / 1(ON)               | 1            | FIX          |            |
| S-BOOST DYM                 |          | F244 | iDREAMA | 0(OFF) / 1(ON)               | 1            | FIX          |            |
| AC-Fail-WO-Bright           |          | F245 | iDREAMA | 0..255                       | 255          | FIX          |            |
| WO-Bright-after-WO-TIME     |          | F246 | iDREAMA | 0..255                       | 255          | FIX          |            |
| WO-Contrast-after-WO-TIME   |          | F247 | iDREAMA | 0..127                       | 127          | FIX          |            |
| WO-Bright-before-WO-TIME    |          | F248 | iDREAMA | 0..255                       | 255          | FIX          |            |
| WO-Contrast-before-WO-TIME  |          | F249 | iDREAMA | 0..127                       | 127          | FIX          |            |
| WO-TIME                     |          | F250 | iDREAMA | 0..31                        | 0            | FIX          |            |
| BASS OFFSET                 |          | F251 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| TREBLE OFFSET               |          | F252 | iDREAMA | -30..0..+30                  | 0            | FIX          |            |
| PM500                       |          | F253 | iDREAMA | 0 (250) / 1 (500)            | 0            | FIX          |            |
| OSDCLK_NCEN                 |          | F254 | iDREAMA | 0 (OFF) / 1 (ON)             | 0            | FIX          |            |
| PXG_HDDL                    |          | F255 | iDREAMA | 0..15                        | 0            | *FIX         | BUS SET UP |
| FPB_FIX                     |          | F256 | iDREAMA | 0 (OFF) / 1 (ON)             | 0            | FIX          |            |
| FH_JUDGE                    |          | F257 | iDREAMA | 0..3                         | 0            | FIX          |            |
| RC_DLY_SEL                  |          | F258 | iDREAMA | 0..3                         | 0            | FIX          |            |
| RC_RESET_SEL                |          | F259 | iDREAMA | 0..3                         | 0            | FIX          |            |
| RC_REST0                    |          | F260 | iDREAMA | 0/1                          | 0            | FIX          |            |
| LBVLATCH                    |          | F261 | iDREAMA | 0/1                          | 1            | FIX          |            |
| S BPF WIDE (574 MHZ)        |          | F262 | iDREAMA | 0..3                         | 0            | FIX          |            |
| U OFFSET-PAL                |          | F263 | iDREAMA | 0..255                       | 127          | *FIX         | BUS SET UP |
| V OFFSET-PAL                |          | F264 | iDREAMA | 0..255                       | 127          | *FIX         | BUS SET UP |
| U OFFSET-N358               |          | F265 | iDREAMA | 0..255                       | 127          | *FIX         | BUS SET UP |
| V OFFSET-N358               |          | F266 | iDREAMA | 0..255                       | 127          | *FIX         | BUS SET UP |
| U OFFSET-N443               |          | F267 | iDREAMA | 0..255                       | 127          | *FIX         | BUS SET UP |
| V OFFSET-N443               |          | F268 | iDREAMA | 0..255                       | 127          | FIX          |            |
| U OFFSET-SECAM              |          | F269 | iDREAMA | 0..255                       | 127          | *FIX         | BUS SET UP |
| V OFFSET-SECAM              |          | F270 | iDREAMA | 0..255                       | 127          | *FIX         | BUS SET UP |
| YCDTVTH                     |          | F271 | iDREAMA | 0/1                          | 1            | FIX          |            |
| AS SPEED UP                 |          | F272 | iDREAMA | 0/1                          | 1            | FIX          |            |
| SECAM FSC FREE              |          | F273 | iDREAMA | 0/1                          | 1            | FIX          |            |

| SETTING MODE (SECOND STAGE)                                                   |          |      |         |             |              |              |            |
|-------------------------------------------------------------------------------|----------|------|---------|-------------|--------------|--------------|------------|
| EEPROM ITEMS                                                                  | FUNCTION | OSD  | IC      | DATA LENGTH | INITIAL DATA | FIX/ADJ/AUTO | REMARK     |
| AFC1 GAIN-NOSYNC                                                              |          | F274 | iDREAMA | 00..07      | 0            | FIX          |            |
| RF-AGC WAIT TIME                                                              |          | F275 | iDREAMA | 00..127     | 0            | FIX          |            |
| PAL/SECAM TINT                                                                |          | F276 | iDREAMA | 00..127     | 63           | *FIX         | BUS SET UP |
| TELETEXT LEVEL                                                                |          | F277 | iDREAMA | 0..255      | 8            | *FIX         | BUS SET UP |
| CLK LINE AUTO ADJ                                                             |          | F278 | iDREAMA | 0..255      | 1            | FIX          |            |
| CLK LINE KILLER LEVEL                                                         |          | F279 | iDREAMA | 0..255      | 0            | FIX          |            |
| CSYNC SLICE LEVEL                                                             |          | F280 | iDREAMA | 0..255      | 112          | FIX          |            |
| AFC COMPRESSION LIMIT                                                         |          | F281 | iDREAMA | 0..255      | 19           | FIX          |            |
| F SPECIAL ADJ                                                                 |          | F282 | iDREAMA | 0..255      | 164          | FIX          |            |
| AD OFFSET (EPG)                                                               |          | F283 | iDREAMA | 0..255      | 212          | FIX          |            |
| AD GAIN (EPG)                                                                 |          | F284 | iDREAMA | 0..255      | 193          | FIX          |            |
| CLK GATE, LOW POWER RESET, CLK LINE LIMIT, VPS COMPARE MASK, WSS COMPARE MASK |          | F285 | iDREAMA | 0..127      | 59           | FIX          |            |
| REG. SETTING VALUE                                                            |          | F286 | iDREAMA | 0..255      | 132          | FIX          |            |
| REG. SETTING VALUE                                                            |          | F287 | iDREAMA | 0..255      | 132          | FIX          |            |
| FRAMING GATE START POS                                                        |          | F288 | iDREAMA | 0..255      | 116          | FIX          |            |
| FRAMING GATE END POS                                                          |          | F289 | iDREAMA | 0..255      | 170          | FIX          |            |
| CLK GATE START POS                                                            |          | F290 | iDREAMA | 0..255      | 108          | FIX          |            |
| CLK GATE END POS                                                              |          | F291 | iDREAMA | 0..255      | 128          | FIX          |            |
| AD OFFSET (TELETEXT)                                                          |          | F292 | iDREAMA | 0..255      | 207          | FIX          |            |
| AD GAIN (TELETEXT)                                                            |          | F293 | iDREAMA | 0..255      | 140          | FIX          |            |
| CCD (N) DATA REG. 1                                                           |          | F294 | iDREAMA | 0..255      | 148          | FIX          |            |
| VPS DATA REG. 1                                                               |          | F295 | iDREAMA | 0..255      | 3            | FIX          |            |
| OSD_HS                                                                        |          | F296 | iDREAMA | 0..1        | 0            | *FIX         | BUS SET UP |
| TEXT_MD                                                                       |          | F297 | iDREAMA | 0..1        | 0            | FIX          |            |
| V-BLK TOP SHIFT                                                               |          | F298 | iDREAMA | 0..15       | 3            | FIX          |            |

| OPTION MODE (FIFTH STAGE)                                                                   |     |             |              |               |  |
|---------------------------------------------------------------------------------------------|-----|-------------|--------------|---------------|--|
| EEPROM ITEMS                                                                                | OSD | DATA LENGTH | INITIAL DATA | REMARK        |  |
| HTL                                                                                         | O01 | 0/1         | 0            | OPTION SET UP |  |
| HTL-POS                                                                                     | O02 | 0...99,--   | --           | OPTION SET UP |  |
| HTL-VOL                                                                                     | O03 | 0...60,--   | --           | OPTION SET UP |  |
| SECAM                                                                                       | O04 | 0/1         | 1            | OPTION SET UP |  |
| N443(RF)                                                                                    | O05 | 0/1         | 1            | OPTION SET UP |  |
| N358(RF)                                                                                    | O06 | 0/1         | 1            | OPTION SET UP |  |
| Force-Col                                                                                   | O07 | 0/1         | 0            | OPTION SET UP |  |
| S-SYS                                                                                       | O08 | 1...15      | 15           | OPTION SET UP |  |
| AV                                                                                          | O09 | 0/1         | 1            | OPTION SET UP |  |
| AV2                                                                                         | O10 | 0/1         | 1            | OPTION SET UP |  |
| YUV                                                                                         | O11 | 0/1         | 1            | OPTION SET UP |  |
| S-CTRL                                                                                      | O12 | 0/1         | 1            | OPTION SET UP |  |
| NICAM                                                                                       | O13 | 0/1         | 0            | OPTION SET UP |  |
| A2                                                                                          | O14 | 0/1         | 0            | OPTION SET UP |  |
| TEXT                                                                                        | O15 | 0/1         | 0            | OPTION SET UP |  |
| BIL                                                                                         | O16 | 0/1         | 0            | OPTION SET UP |  |
| LANG                                                                                        | O17 | 1...65      | 63           | OPTION SET UP |  |
| SERCH-SP                                                                                    | O18 | 1...5       | 3            | OPTION SET UP |  |
| LED-CONT                                                                                    | O19 | 0/1         | 0            | OPTION SET UP |  |
| S-BOOSTER                                                                                   | O20 | 0/1         | 0            | OPTION SET UP |  |
| SHARP-LOGO                                                                                  | O21 | 0/1         | 0            | OPTION SET UP |  |
| YUV BKGD ADJ                                                                                | O22 | 0/1         | 0            | OPTION SET UP |  |
| WHITE BACK                                                                                  | O23 | 0/1         | 0            | OPTION SET UP |  |
|  BOOSTER | O24 | 0/1         | 1            | OPTION SET UP |  |
| MESSAGE                                                                                     | O25 | 0/1         | 0            | OPTION SET UP |  |
| LNA TUNER                                                                                   | O26 | 0...2       | 0            | OPTION SET UP |  |
| GAME                                                                                        | O27 | 0/1         | 0            | OPTION SET UP |  |
| CHILD LOCK                                                                                  | O28 | 0/1         | 1            | OPTION SET UP |  |
| Idreama IC                                                                                  | O29 | 0/1         | 0            | OPTION SET UP |  |

|                                             |     |        |    |               |
|---------------------------------------------|-----|--------|----|---------------|
|                                             |     |        |    |               |
| Setting below only applicable to Thai Model |     |        |    |               |
| LANG                                        | O17 | 1...65 | 65 | OPTION SET UP |

Remark for O08 (S-SYS)

When O08=1 (B/G only), SOUND item in CH-SETTING OSD MENU will not be appeared, and there is no showing of sound system B/G in AUTO PRESET and MANUAL PRESET OSD Menu

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>*** HOTEL MODE</p> <p>OPERATION OF HOTEL MODE:</p> <p>WHEN CHANGE SERVICE DATA O01 TO 1, HOTEL MODE IS ON</p> <p>WHEN HOTEL MODE IS ON,</p> <ol style="list-style-type: none"> <li>1. Max volume data is determined by option setting HTL-VOL (O03)</li> <li>2. Channel position after POWER ON is determined by option setting HOTEL-POS (O02) (if option setting HOTEL-POS is not set, processing is according to last position data).</li> <li>3. User data updates of EEPROM regarding the video and audio control is not allowed.</li> <li>4. Preset mode is disable.</li> <li>5. CH SETTING menu is not available.</li> </ol> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


## Pixel Generator (PXG-2)

### PXG-2 DEMO MODE


#### Concept

- ★ SHARP 21K-FD series TV that adopt high features is a step up model that first implement Pixel Generator (PXG-2) technology. SHARP has made a step ahead by producing high resolution picture in 21K-FD series and this make 21K-FD series model stands out among SHARP and other competitors 21" flat TV. With this attractive PXG-2 feature, it is believe that it will helps to increase SHARP 21" flat TV market share .
- ★ PXG-2 DEMO mode is integrated into 21K-FD series to let customer to understand PXG-2 more easily and the differences within PXG OFF and ON will give customer more clear image about PXG-2. PXG-2 DEMO mode will also ease the sales person in explaining PXG-2 as the selling point to the customer.


#### a) AUTO DEMO

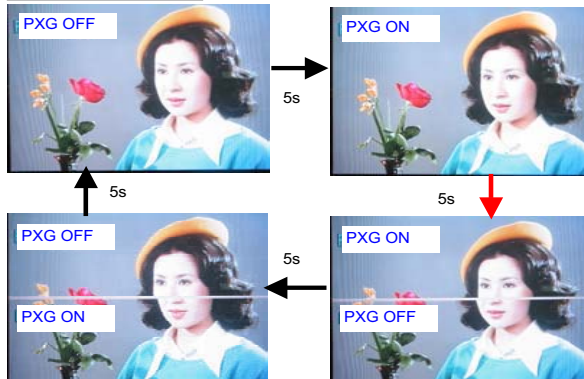

#### b) FULL SCREEN DEMO

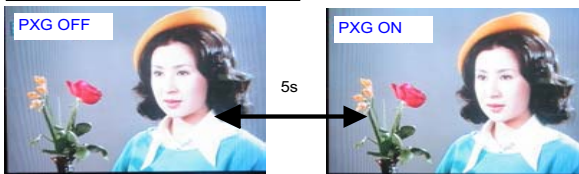

#### c) HALF SCREEN DEMO

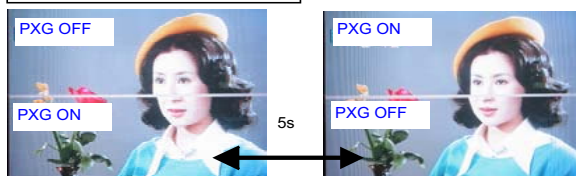

#### Procedur


- 1) To enter PXG DEMO mode, press **CH** / **CH** (on TV set) at the same time for more than 3 seconds during TV broadcast or AV input program.
- 2) Once enter to PXG DEMO mode, the AUTO DEMO mode will run automatically in 4 type of display screen (each at 5 seconds interval time).
- 3) At any DEMO mode, Press **2** → FULL SCREEN DEMO  
**3** → HALF SCREEN DEMO  
**1** → AUTO DEMO
- 4) From any mode, press **MENU/RESET** (on TV set) or **MENU** (on remote control) to change to the respectively PAUSE mode. To release it, press **MENU/RESET** or **MENU** again.
- 5) During PAUSE mode, press **Left Arrow** or **Right Arrow** to change to other display screen.
- 6) During any mode or PAUSE mode, press **CH** / **CH** (on TV set) at the same time for more than 3 seconds to cancel the PXG DEMO mode.

#### PXG-2 Technology

- ★ Generate imaginary data from 3 line real input signal data.
- 
- ★ Double digital sampling increase the vertical pixel resolution.
- 
- Input signal pixels/resolution → Output signal pixels/resolution

#### PXG-2 Output Effect

- ★ With PXG-2 technology, it helps to improve picture resolution thus increase picture sharpness and achieve a truly lifelike TV image.

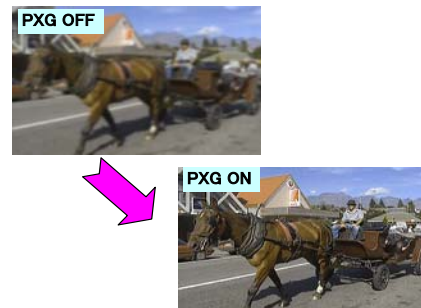

**4. ADJ ITEM: BUS SET UP (1ST & 2ND STAGE SERVICE DATA)**




| SERVICE ITEMS |                     | 21K-FD5RU |
|---------------|---------------------|-----------|
| V09           | SUB-COLOR -YUV      | 70        |
| V10           | SUB-TINT-YUV        | 55        |
| V19           | H-SHIFT 60 Hz       | -5        |
| V30           | V LINEARITY         | 33        |
| F15           | YDL-N3              | 5         |
| F20           | YDL-AV-N3           | 9         |
| F36           | SHP ANT-ONII OFFSET | -15       |
| F48           | SCM BGP SHIFT       | 1         |
| F57           | NTSC ID             | 33        |
| F60           | KILLER LEVEL        | 20        |
| F61           | KILLER ATK TIME     | 1         |
| F64           | COL-AV              | +10       |
| F67           | COL-N4              | +3        |
| F68           | COL-N3              | +3        |
| F70           | TINT-AV             | -3        |
| F71           | TINT-ADJ            | +14       |
| F74           | R-Y PHASE OFFSET    | 21        |
| F77           | G-DRI               | 63        |
| F78           | G-Y GAIN            | 3         |
| F79           | GAMMA               | 3         |
| F94           | V SYNC DET-TV       | 3         |
| F106          | AFC1 GAIN-TV        | 0         |
| F117          | RDRV-R              | +8        |
| F118          | BDRV-R              | -10       |
| F119          | RDRV-B              | -6        |
| F120          | BDRV-B              | +30       |
| F125          | G-CUT YUV OFFSET    | -3        |
| F126          | B-CUT YUV OFFSET    | 0         |
| F130          | Bright OFFSET       | 0         |
| F138          | SUB-BASS            | 0         |
| F139          | SUB-TREB            | 3         |
| F140          | AGC LEVEL ADJUST    | 4         |
| F168          | COREL YNR1          | 5         |
| F174          | SF COEF1 TV         | 7         |
| F175          | SF COEF2 TV         | 5         |
| F176          | SF COEF3 TV         | 4         |
| F180          | VC COEF1 TV         | 1         |
| F181          | VC COEF2 TV         | 1         |
| F182          | VC COEF3 TV         | 1         |
| F183          | VD COEF1 TV         | 7         |
| F184          | VD COEF2 TV         | 7         |
| F185          | VD COEF3 TV         | 7         |
| F204          | SF COEF1 YUV        | 7         |
| F205          | SF COEF2 YUV        | 5         |
| F206          | SF COEF3 YUV        | 4         |
| F210          | VC COEF1 YUV        | 2         |
| F211          | VC COEF2 YUV        | 2         |
| F212          | VC COEF3 YUV        | 2         |
| F214          | VD COEF2 YUV        | 4         |
| F221          | CONT SOFT           | 40        |
| F229          | COL DYM             | +5        |
| F241          | BASS DYM            | +5        |
| F255          | PXG_HDDL            | +10       |
| F263          | U OFFSET-PAL        | 130       |
| F264          | V OFFSET-PAL        | 130       |
| F265          | U OFFSET-N358       | 133       |
| F266          | V OFFSET-N358       | 131       |
| F267          | U OFFSET-N443       | 131       |
| F269          | U OFFSET-SECAM      | 129       |
| F270          | V OFFSET-SECAM      | 129       |
| F276          | PAL/SECAM TINT      | 73        |
| F277          | TELETEXT LEVEL      | 11        |
| F296          | OSD_HS              | 1         |

**5. ADJ ITEM: OPTION SET UP (5TH STAGE SERVICE DATA)**





| SERVICE ITEMS |                                                                                           | 21K-FD5RU |  |  |  |  |  |
|---------------|-------------------------------------------------------------------------------------------|-----------|--|--|--|--|--|
| O01           | HTL                                                                                       | 0         |  |  |  |  |  |
| O02           | HTL-POS                                                                                   | --        |  |  |  |  |  |
| O03           | HTL-VOL                                                                                   | --        |  |  |  |  |  |
| O04           | SECAM                                                                                     | 1         |  |  |  |  |  |
| O05           | N443(RF)                                                                                  | 1         |  |  |  |  |  |
| O06           | N358(RF)                                                                                  | 1         |  |  |  |  |  |
| O07           | Force-Col                                                                                 | 0         |  |  |  |  |  |
| O08           | S-SYS                                                                                     | 15        |  |  |  |  |  |
| O09           | AV                                                                                        | 1         |  |  |  |  |  |
| O10           | AV2                                                                                       | 1         |  |  |  |  |  |
| O11           | YUV                                                                                       | 1         |  |  |  |  |  |
| O12           | S-CTRL                                                                                    | 1         |  |  |  |  |  |
| O13           | NICAM                                                                                     | 1         |  |  |  |  |  |
| O14           | A2                                                                                        | 1         |  |  |  |  |  |
| O15           | TEXT                                                                                      | 1         |  |  |  |  |  |
| O16           | BIL                                                                                       | 0         |  |  |  |  |  |
| O17           | LANG                                                                                      | 9         |  |  |  |  |  |
| O18           | SERCH-SP                                                                                  | 3         |  |  |  |  |  |
| O19           | LED-CONT                                                                                  | 0         |  |  |  |  |  |
| O20           | S-BOOSTER                                                                                 | 0         |  |  |  |  |  |
| O21           | SHARP-LOGO                                                                                | 0         |  |  |  |  |  |
| O22           | YUV BKGD ADJ                                                                              | 0         |  |  |  |  |  |
| O23           | WHITE BACK                                                                                | 0         |  |  |  |  |  |
| O24           |  BOOSTER | 1         |  |  |  |  |  |
| O25           | MESSAGE                                                                                   | 0         |  |  |  |  |  |
| O26           | LNA TUNER                                                                                 | 0         |  |  |  |  |  |
| O27           | GAME                                                                                      | 0         |  |  |  |  |  |
| O28           | CHILD LOCK                                                                                | 1         |  |  |  |  |  |
| O29           | Idreama IC                                                                                | 0         |  |  |  |  |  |

## [2] ADJUSTMENT







### 1. PIF ADJUSTMENT CHECKING
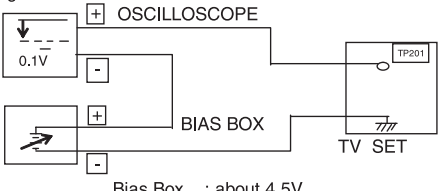
| NO | ADJUSTMENT POINT                                                                        | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | WAVEFORM OR OTHERS                                                                                                                                                                                                                                                                                                                                                                                                              |
|----|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Tuner IFT<br>( PRESET )                                                                 | <p>(1) Get the tuner ready to receive the CH. E - 9 signal, but with no signal input. Adjust the PLL data.</p> <p>(2) Connect the sweep generator's output cable to the tuner antenna. ( RF SWEEP )</p> <p>(3) Adjust the sweep generator's to 80dB<math>\mu</math>V.</p> <p>(4) Connect the response lead ( use LOW IMPEDANCE probe with wave detector ; see Fig.1 ) to the tuner's IF output terminal. ( This terminal must have the probe alone connected ).</p> <p>(5) Set the RF AGC to 0 - 6 V with no saturation with the waveform.</p> <p>(6) Adjust the tuner IF coil to obtain the waveform as shown in Fig. 2.</p> <p>Note : Be sure to keep the tuner cover in position during this adjustment.</p>           |  <p>FIG. 1</p> <p>E-9 CH</p>  <p>FIG. 2</p>                                                                                                                                                                                                               |
| 2  | RF-AGC<br>TAKE OVER POINT<br>ADJUSTMENT<br>(I2C BUS CONTROL)<br><br>(AUTO & MANUAL ADJ) | <p>(1) Receive "PAL COLOR BAR" signal.<br/>Signal Strength: 67 <math>\pm</math> 1dB<math>\mu</math>V (75 ohm open)</p> <p>(2) Connect the oscilloscope to TP201 (Tuner's AGC Terminal) as shown in figure 3-1.</p>  <p>Bias Box : about 4.5V<br/>Fig. 3-1</p> <p>(3) Call "V01" mode in service mode. Adjust the "V01" bus data to obtain the Tuner output pin drop 0.1~1.0V below maximum voltage.</p> <p>(4) Change the antenna input signal to 73 ~ 77dB<math>\mu</math>V, and make sure there is no noise.</p> <p>(5) Turn up the input signal to 90 ~ 95 dB<math>\mu</math>V to be sure that there is no cross modulation beat.</p> | <p><b>* for Auto ADJ</b></p> <p>1) Receive "PAL COLOR BAR" signal<br/>signal strength : 67 <math>\pm</math> 1 dB<math>\mu</math>V (75 ohm open).</p> <p>1) Go to service mode.</p> <p>2) Go to service data V01, press R/C to operate auto key (Hex C1) and confirm the 'OK' display on the screen.</p> <p>3) If appear NG, increase data some step and pls repeat step 2.</p> <p>4) Proceed step 4 &amp; 5 in manual mode.</p> |

### 2. PURITY ADJUSTMENT

| NO | ADJUSTMENT POINT | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | WAVEFORM OR OTHERS                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | PURITY ADJ.      | <p>(1) Receive the GREEN -ONLY signal. Adjust the beam current to ~700<math>\mu</math>A.</p> <p>(2) Degauss the CRT enough with the degaussing coil.<br/>NOTE: Follow the Job Instruction Sheet to adjust the magnetic field.<br/>(Reference: Page 3-6)</p> <p>(3) Maintain the purity magnet at the zero magnetic field and keep the static convergence roughly adjusted.</p> <p>(4) Observe the points a,b, as shown in Fig.1 - 1 through the microscope. Adjust the landings to A rank requirement.</p> <p>(5) Orient the raster rotation to 0 eastward.</p> <p>(6) Tighten up the deflection coil screws.<br/>Tightening torque : 108N <math>\pm</math> 20N ( 11Kgf <math>\pm</math> 2Kgf )</p> <p>(7) Make sure the CRT corners landing meet the A rank requirements. If not, stick the magnet sheet to correct it.</p> <p>Note : This adjustment must be done after warming up the unit for 30 minutes or longer with a beam current over 700<math>\mu</math>A.</p> <p>Note : Set to service mode by remote controller then press factory process R/C RGB key to change to RGB mono colour mode.</p> <p>* For the following colours press R/C RGB (Hex 7E) key to change.</p>  |  <p>Fig. 1 - 1</p>  <p>Fig 1 - 2 . Rank A (On the right of CRT)</p>  <p>Fig. 1 - 3 . Rank A (On the left of CRT).</p> <p>* Press R/C RGB key for 1 second in NORMAL MODE, the colour will change to RGB mono colour mode.</p> |

### 3. CONVERGENCE ADJUSTMENT
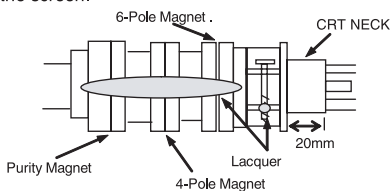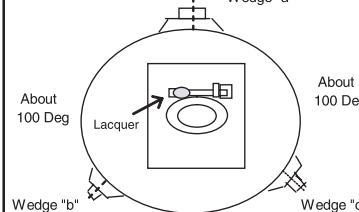
| NO | ADJUSTMENT POINT                                              | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | WAVEFORM OR OTHERS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | CONVERGENCE ADJ.<br>(To be done after the purity adjustment.) | <p>(1) Receive the "Crosshatch Pattern" signal.</p> <p>(2) Using the remote controller, call NORMAL mode.</p> <p>( Static convergence )</p> <p>(1) Turn the 4 - pole magnet to a proper opening angle in order to superpose the blue and red colours.</p> <p>(2) Turn the 6 - pole magnet to a proper opening angle in order to superpose the green colour over the blue and red colours.</p> <p>( Dynamic convergence )</p> <p>(1) Adjust the convergence on the fringes of the screen in the following steps.</p> <p>a) Fig. - a :<br/>Drive the wedge at point " a " and swing the deflection coil upward.</p> <p>b) Fig. - b :<br/>Drive the wedge at point " b " and " c " and swing the deflection coil downward.</p> <p>c) Fig. - c :<br/>Drive the " c " wedge deeper and swing the deflection coil rightward.</p> <p>d) Fig. - d :<br/>Drive the " b " wedge deeper and swing the deflection coil leftward.</p> <p>(2) Fix all the wedges on the CRT and apply glass tape over them.</p> <p>(3) Apply lacquer to the deflection yoke lock screw, magnet unit ( purity, 4 - pole, 6 - pole magnets ) and magnet unit lock screw.</p> <p>Finally received the Red - only and Blue - only signals to make sure there is no other colours on the screen.</p>  |  <p>Fig. a</p>  <p>Fig. b</p>  <p>Fig. c</p>  <p>Fig. d</p>  <p>Wedge "a"</p> <p>Wedge "b"</p> <p>Wedge "c"</p> <p>About 100 Deg</p> <p>Lacquer</p> |

### 4. H-VCO, VIF-VCO & S-TRAP for ADJUSTMENT

| NO | ADJUSTMENT POINT                                          | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | WAVEFORM OR OTHERS                                                                |
|----|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 1  | H-VCO ADJ<br>(I2C BUS CONTROL)<br>(AUTO & MANUAL ADJ)     | <p><b>(Manual Adj)</b></p> <p>(1) In No signal (RASTER) condition.</p> <p>(2) Go to service mode, choose service data <b>V03</b>.</p> <p>(3) Connect oscilloscope to <b>IC801 pin15</b>, adj <b>V03</b> until freq become <b>15.625 ± 0.15 KHz</b>.</p> <p><b>(Auto Adj)</b></p> <p>(1) In No signal (RASTER) condition.</p> <p>(2) Go to service mode.</p> <p>(3) Choose service data <b>V03</b>, by pressing R/C <b>Auto (Hex C1)</b> key, OSD will appear "OK" at screen.</p> <p>(4) If appear "NG" pls repeat step 3.</p>                                                                              |                                                                                   |
| 2  | VIF-VCO ADJ<br>(I2C BUS CONTROL)<br>(AUTO & MANUAL ADJ)   | <p><b>(Manual Adj)</b></p> <p>(1) In No signal (RASTER) condition.</p> <p>(2) Go to service mode, choose service data <b>V02</b>.</p> <p>(3) Connect oscilloscope to <b>IC801 pin9</b>, adj <b>V02</b> until voltage become <b>1.65 ± 0.5 V</b>.</p> <p><b>(Auto Adj)</b></p> <p>(1) In No signal (RASTER) condition.</p> <p>(2) Go to service mode, choose service data <b>V02</b>.</p> <p>(3) Press the R/C <b>Auto (Hex C1)</b> key, OSD will appear "OK" at screen.</p> <p>(4) If appear "NG" pls repeat step 3.</p>                                                                                   | <p>*NOTE:</p> <p>This adjustment must be done after aging at least 3 minutes.</p> |
| 3  | S-TRAP fo ADJ<br>(I2C BUS CONTROL)<br>(AUTO & MANUAL ADJ) | <p><b>(Manual Adj)</b></p> <p>(1) In No signal (RASTER) condition.</p> <p>(2) Go to service mode, choose service data <b>V21</b>.</p> <p>(3) Connect oscilloscope to <b>TP 801</b>, adj <b>V21</b> until voltage become <b>Min</b>.</p> <p>(4) After that pls adj service data <b>V20, V22, V24 same as "V21", V23 to "V21+1"</b>.</p> <p><b>(Auto Adj)</b></p> <p>(1) In No signal (RASTER) condition.</p> <p>(2) Go to service mode, choose service data <b>V21</b>.</p> <p>(3) Press the R/C <b>Auto (Hex C1)</b> key, OSD will appear "OK" at screen.</p> <p>(4) If appear "NG" pls repeat step 3.</p> |                                                                                   |



## 5. HORIZONTAL, VERTICAL, DEFLECTION LOOP and FOCUS ADJUSTMENT

| NO | ADJUSTMENT POINT                                                      | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                  | WAVEFORM OR OTHERS |
|----|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 1  | H-SHIFT<br>(I2C BUS CONTROL)<br>(to be done after purity adj)         | (1) Receive Monoscope Pattern Signal (PAL 50 Hz).<br>(2) Choose the service data <b>V13</b> .<br>(3) Adjust the <b>V13</b> bus data to have a balance position to spec of <b>A=B</b> (as attach drawing).<br>(4) If cannot make it to <b>A=B</b> , adjust from the best point so that <b>B</b> slightly smaller than <b>A</b> .                                                                                                   |                    |
| 2  | V-SHIFT<br>(I2C BUS CONTROL)<br>(to be done after purity adj)         | (1) Receive Monoscope Pattern Signal (PAL 50 Hz).<br>(2) Choose the service data <b>V12</b> .<br>(3) Adjust <b>V12</b> bus data to have a most acceptable vertical position, the monoscope pattern should be <b>Balance</b> in vertical position.<br><b>Note: B line (Monoscope middle line) must same or nearest higher position to the A mark (Tube middle mark), refer to the attach drawing.</b>                              | Figure:            |
| 3  | V-SIZE<br>(I2C BUS CONTROL)<br>(to be done after purity, V-shift adj) | (1) Receive Monoscope Pattern Signal (PAL 50 Hz).<br>(2) Choose the service data <b>V11</b> .<br>(3) Adjust <b>V11</b> bus data until the overscan become <b>10 ± 1.5 %</b> .<br><br><b>Caution 1: Pls aging TV more than 10 minutes before adjustment.</b><br><b>Caution 2: For H-shift &amp; V-shift &amp; V-size adj, after adj pls switch to Monoscope pattern signal (NTSC 60 Hz) to confirm all positions are the same.</b> |                    |
| 4  | SUB-SHARPNESS                                                         | (1) Confirm Service data <b>V08</b> is <b>44</b> .                                                                                                                                                                                                                                                                                                                                                                                |                    |
| 5  | Focus                                                                 | (1) Receive the "Monoscope Pattern" signal.<br>(2) Press R/C to set Picture NORMAL condition.<br>(3) Adjust the focus control to get the best focusing.                                                                                                                                                                                                                                                                           |                    |


## 6. SCREEN, WHITE BALANCE, SUB-BRIGHTNESS & SUB-CONTRAST (1) ADJUSTMENT

| NO | ADJUSTMENT POINT                                                        | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | WAVEFORM OR OTHERS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | SCREEN ADJUSTMENT<br>(I2C BUS CONTROL)                                  | (1) In window pattern signal condition<br>(2) Go to service mode, then select V00.<br>(3) By pressing R/C key <b>S-Mute (Hex E8)</b> , <b>R-D</b> auto switch to <b>31</b> , <b>B-D</b> auto switch to <b>31</b> , <b>R-C</b> auto switch to <b>95</b> , <b>G-C</b> auto switch to <b>95</b> , <b>B-C</b> auto switch to <b>95</b> , <b>Sub-brightness V06</b> auto switch to <b>75</b> .<br><b>Y-mute &amp; Vertical off</b> , screen will be in <b>vertical cut-off</b> condition<br>(4) Adjust the Screen so that cut-off line appear in low bright, then judge that whether the cut-off line appear in Red or Green or Blue color, in this condition between R-C & G-C & B-C, fix the data of the color appear in cut-off line and adj the other two cut-off data (Note 1) so that cut-off line color become white.<br>(5) Turn the screen VR of FBT so that cut-off line just <b>disappear</b> and use R/C by pressing key <b>S-Mute (Hex E8)</b> to <b>disable</b> the Y-mute & V-cut so that picture appear in normal mode.<br>(6) After screen Adjustment, adjust R-D to 63 and B-D to 63 for White Balance Adj. | Note 1:<br>R-CUTOFF (R-C) UP      RC key "1" (HEX 80)<br>R-CUTOFF (R-C) DOWN      RC key "4" (HEX 20)<br>G-CUTOFF (G-C) UP      RC key "2" (HEX 40)<br>G-CUTOFF (G-C) DOWN      RC key "5" (HEX A0)<br>B-CUTOFF (B-C) UP      RC key "3" (HEX C0)<br>B-CUTOFF (B-C) DOWN      RC key "6" (HEX 60)<br>R-DRIVE (R-D) UP      RC key "7" (HEX E0)<br>R-DRIVE (R-D) DOWN      RC key "Flashback" (HEX E4)<br>B-DRIVE (B-D) UP      RC key "8" (HEX 10)<br>B-DRIVE (B-D) DOWN      RC key "0" (HEX 50) |
| 2  | WHITE BALANCE ADJ<br>(to be done after screen adj)<br>(I2C BUS CONTROL) | <b>(1) WHITE (HIGH BEAM)</b> (In Window Pattern Signal)<br><b>For 21K-FD5RU</b><br>First use Minolta Color Analyzer CA100, let the gun point at <b>Dark White</b> position (as drawing attach), Adj <b>V06</b> until <b>LUMINANCE Y</b> become <b>5 cd/m<sup>2</sup></b> , then let the gun point at <b>White</b> position ( as drawing attach), Adj <b>V04</b> until <b>LUMINANCE Y</b> become: <b>200 cd/m<sup>2</sup></b> .<br><br>Adj the <b>R-D</b> & <b>B-D</b> until the axis of color temperature become <b>X=300, Y=310 7500° K (21K-FD5RU)</b><br><br><b>(2) DARK WHITE (LOW BEAM)</b> (In Window Pattern Signal)<br>Let the gun point at <b>Dark White</b> position, if the color temperature data shift away from the data adjusted in <b>step 1</b> , adjust <b>R-C</b> , <b>G-C</b> & <b>B-C</b> but <b>between them, first color appears in Screen adj item 1)-4 is fixed</b> , adj the other two so that to obtain the similar axis as above.<br><b>** Repeat step 1 &amp; 2 to get a regulated position</b>                                                                                             | <b>WINDOW PATTERN SIGNAL</b><br><br><b>*Note :</b> Signal using W/B Pattern Generator SX-1006 (IWATSU) or equivalent. Window Pattern Signal output level are as above:                                                                                                                                                                                                                                                                                                                            |


## 7. SCREEN, WHITE BALANCE, SUB-BRIGHTNESS &amp; SUB-CONTRAST (2) ADJUSTMENT

| NO | ADJUSTMENT POINT                                                                                            | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | WAVEFORM OR OTHERS                                                                                           |
|----|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| 3  | SUB-BRIGHTNESS<br>(to be done after screen,<br>white balance adj)<br>(I2C BUS CONTROL)                      | (1) In Window Pattern Signal condition.<br>(2) Using Minolta Color Analyzer CA-100, let the gun point at <b>Dark White</b> position (as attach drawing), adjust <b>V06</b> Bus data until <b>LUMINANCE Y</b> as below,<br><br><b>LUMINANCE Y = <math>3 \pm 0.2</math> cd/m<sup>2</sup> (21K-FD5RU)</b>                                                                                                                                                                                                                              | WINDOW PATTERN SIGNAL<br> |
| 4  | SUB-CONTRAST<br>(to be done after screen,<br>white balance adj,<br>sub-brightness adj)<br>(I2C BUS CONTROL) | (1) In Window Pattern Signal condition.<br>(2) Using Minolta Color Analyzer CA-100, let the gun point at <b>White</b> position (as attach drawing), adjust <b>V04</b> Bus data until <b>LUMINANCE Y</b> as below,<br>(3) Repeat SUB-BRIGHTNESS and SUB -CONTRAST adj. until all in spec.<br>(4) After adjustment , if $V04 \leq 66$ . please re-adjust from Screen adjustment.<br>This is to avoid low control range for user contrast adjustment.<br><br><b>LUMINANCE Y = <math>200 \pm 10</math> cd/m<sup>2</sup> (21K-FD5RU)</b> | WINDOW PATTERN SIGNAL<br> |
| 5  | Beam Current Check                                                                                          | (1) Receive the "Monoscope Pattern" signal, SET AS Dynamic Mode.<br>(2) Press R/C to set Picture NORMAL condition.<br>(3) Connect the DC miliammeter between TP 603 ( + ) & TP 602 ( - )<br>(Full Scale: 3mA Range).<br>(4) Beam current must be within : <b>1000 <math>\pm</math> 100<math>\mu</math>A. (21K-FD5RU)</b>                                                                                                                                                                                                            |                                                                                                              |


## 8. PAL CHROMA ADJUSTMENT
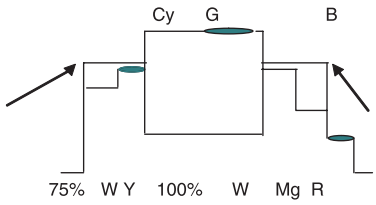
| NO | ADJUSTMENT POINT                                                                   | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                           | WAVEFORM OR OTHERS                                                                                    |
|----|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| 1  | SUB COLOUR<br>(I2C BUS CONTROL)<br>(to be done after<br>sub-picture, sub-tint adj) | (1) Receive the "PAL Color Bar" signal.<br>(2) Press R/C to set Picture Normal condition.<br>(3) Connect the oscilloscope to R-Amp Transistor Base (TP 47R)<br><br>Range : 100mV/Div (AC) (Using 10:1 Probe)<br>Sweep Time : 10 $\mu$ sec/Div<br><br>(4) Using the R/C call <b>V05</b> in SERVICE mode. Adjust <b>V05</b> bus data, so that the 75% White & Red portions of PAL Color Bar be at the <b>same level</b> shown as Fig 1-1.<br><br>(5) Clear the SERVICE mode. |  <p>Fig. 1-1</p> |

## 9. NTSC CHROMA ADJUSTMENT

| NO | ADJUSTMENT POINT              | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | WAVEFORM OR OTHERS                                                                                   |
|----|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| 1  | SUB-TINT<br>(I2C BUS CONTROL) | (1) Receive the "NTSC 3.58 Color Bar" signal thru AV in.<br>(2) Connect the oscilloscope to B-AMP Transistor Base (TP 47B).<br>Range : 100mV/Div (AC) (Use Probe 10:1)<br>Sweep time : 10 $\mu$ sec/Div<br><br>(3) In Service mode, go to <b>V07</b> , then press <b>R/C Y-mute (Hex E4)</b> or <b>FLASHBACK</b> key.<br>(4) Call the " <b>V07</b> " data in service mode. Adjust the " <b>V07</b> " bus data to obtain the waveform shown as Figure 1-1.<br>(5) Disable <b>Y-Mute</b> by pressing key ( <b>Hex E4</b> ) or <b>FLASHBACK</b> , then clear the SERVICE mode. |  <p>Fig.1-1</p> |

## 10. SECAM CHROMA ADJUSTMENT
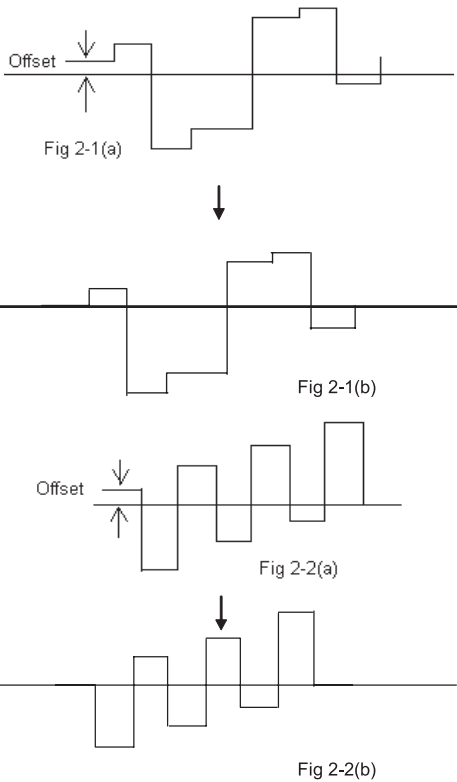
| NO | ADJUSTMENT POINT                                           | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | WAVEFORM OR OTHERS                                                                                                                                                                      |
|----|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | SECAM<br>BLACK LEVEL<br>R-Y / B-Y<br><br>(I2C BUS CONTROL) | <p>1) Receive "SECAM COLOR BAR" signal.</p> <p>2) In the service mode, select service data <b>V14</b>.</p> <p>3) Connect oscilloscope to <b>TP 801</b>.<br/>Range: <b>20mV/Div(AC)</b> (use 10:1 probe)<br/>Sweep time: <b>20usec/Div</b></p> <p>4) Adjust the <b>V14</b> so that the offset of R-Y to minimum, shown in <b>Fig 2-1(b)</b> it means adjust the offset of between No signal line and Signal line to minimum.</p> <p>5) In the service mode, select service data <b>V15</b>.</p> <p>6) Connect oscilloscope to <b>TP 801</b>.<br/>Range: <b>20mV/Div (AC)</b> (use 10:1 probe)<br/>Sweep time: <b>20usec/Div</b></p> <p>7) Adjust the <b>V15</b> so that the offset of B-Y to minimum, shown in <b>Fig 2-2(b)</b> it means adjust the offset of between No signal line and Signal line to minimum.</p> |  <p>Offset</p> <p>Fig 2-1(a)</p> <p>Fig 2-1(b)</p> <p>Offset</p> <p>Fig 2-2(a)</p> <p>Fig 2-2(b)</p> |

## 11. SIF (NICAM / IGB) ADJUSTMENT (NICAM OR IGB MODEL ONLY)

| NO | ADJUSTMENT POINT  | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | WAVEFORM OR OTHERS |
|----|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 1  | VCO COIL<br>T2300 | <p>(1) Receive "PAL COLOUR BAR" signal.</p> <p>(2) Connect DC Voltmeter to Main Board socket <b>SC304 pin 1</b>.</p> <p>(3) Check and turn T2300 counter-clockwise (Left) so that DC voltmeter appear 0V, then turn it clockwise (Right) so that DC voltmeter appear 5V.<br/>After that , turn <b>T2300</b> counter-clockwise (Left) until DC voltmeter appear <b>2.5 ± 0.1 Vdc</b></p> <p><b>** UNIT BOARD ADJUSTMENT</b></p> <p>Vcc                                    5 ± 0.1 Vdc<br/>IF Input Freq                        38.9 MHz ± 10 KHz</p> <p>Adjust T2300 until TP 2300 (NICAM Board Test Point) become 2.5 ± 0.1 Vdc.</p> <p>Check after assembly NICAM BOARD<br/>Test point: Main Board socket SC304 pin 1<br/>Preset selected reception freq (AFT OFF)<br/>Check Voltage 2.5 ± 0.1 Vdc</p> <p>Precaution: The Vcc, fo and other factors are considered in the unit board of the 1.0 V tolerance which differ from the adjustment accuracy</p> |                    |

**12. PROTECTOR OPERATION CHECKING**

| NO | ADJUSTMENT POINT | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                | WAVEFORM OR OTHERS |
|----|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 1  | H, V PROTECTOR   | (1) Receive "Monoscope Pattern" signal.<br>(2) Connect output of Bias Box to <b>D602</b> cathode (C602 positive).<br>(3) Set voltage of Bias Box to <b>18V</b> and make sure the protector is not working.<br>(4) Set voltage of Bias Box to <b>27V</b> and make sure the protector is working. |                    |
| 2  | OTHER PROTECTOR  | (1) Once finish rectified Electrolytic Capacitor short testing in + B line, check all possible damaged components on +B line.<br>(Use random selected set for inspection)                                                                                                                       |                    |

**13. A/V INPUT, OUTPUT & COMPONENT IN CHECKING**

| NO | ADJUSTMENT POINT             | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | WAVEFORM OR OTHERS                                                                                                             |
|----|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| 1  | VIDEO AND AUDIO OUTPUT CHECK | (1) Receive the "PAL Color Bar" signal (100% White Color Bar, Sound 400 Hz 100% Mod).<br><br>(2) Terminate the Video output with a 75 ohm impedance.<br>Make sure the output is as specified ( <b>1.0 Vp-p ± 3 dB</b> ).<br><br>(3) Terminate the Audio output with a 10K ohm impedance.<br>Make sure the O/P is as specified ( <b>1.5 Vp-p ± 3 dB</b> ).                                                                                                                                                     |                                                                                                                                |
| 2  | VIDEO AND AUDIO INPUT CHECK  | (1) Using the TV/VIDEO key on the remote controller, make sure that the modes change in order of TV, AV1, AV2 & TV again and the video & audio output are according to the input terminal for each mode.<br><br>(1) Using the TV/AV key on the remote controller, make sure that the modes change in order of TV, AV, & TV again and the video & audio output are according to the input terminal for each mode. If connect input to Front and Rear AV terminal, input terminal of Front AV will be selected. | <b>Note :</b><br>Only for the model which have AV2 function.<br><br><b>Note :</b><br>Only for those model which have AV1 only. |
| 3  | COMPONENT IN CHECK           | (1) Connect YUV & Audio signal to Component In terminal and Audio terminal.<br>(2) Using the TV/VIDEO key on the remote controller, press it until the modes change to COMPONENT, confirm output is appear.                                                                                                                                                                                                                                                                                                   | <b>Note :</b><br>Only for the model which have Component In function.                                                          |

**14. FUNCTION OPERATION CHECKING (1) (VIDEO & AUDIO)**

| NO | ADJUSTMENT POINT  | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                          | WAVEFORM OR OTHERS                            |
|----|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| 1  | CONTRAST Key      | (1) Receive "Monoscope Pattern" signal.<br>(2) Set MENU, then go into PICTURE mode to select CONTRAST.<br>(3) Press Volume Up/Down key to check whether the CONTRAST effect is OK or not.                                                 | <b>Note:</b><br>Please set AV mode in DYNAMIC |
| 2  | COLOUR Key        | (1) Receive "Color Bar" signal.<br>(2) Set MENU, then go into PICTURE mode to select COLOUR.<br>(3) Press Volume Up/Down key to check whether the COLOUR effect is OK or not.                                                             | <b>Note:</b><br>Please set AV mode in DYNAMIC |
| 3  | BRIGHTNESS Key    | (1) Receive "Monoscope Pattern" signal.<br>(2) Set MENU, then go into PICTURE mode to select BRIGHTNESS.<br>(3) Press Volume Up/Down key to check whether the BRIGHTNESS effect is OK or not.                                             | <b>Note:</b><br>Please set AV mode in DYNAMIC |
| 4  | TINT Key          | (1) Receive the "NTSC Colour Bar" signal thru AV in.<br>(2) Set MENU, then go into PICTURE mode to select TINT.<br>(3) Press Volume Up/Down key to check TINT, UP for GREEN direction and DOWN for PURPLE direction whether is OK or not. | <b>Note:</b><br>Please set AV mode in DYNAMIC |
| 5  | SHARPNESS Key     | (1) Receive "Monoscope Pattern" signal.<br>(2) Set MENU, then go into PICTURE mode to select SHARPNESS.<br>(3) Press Volume Up/Down key to check whether the SHARPNESS effect is OK or not.                                               | <b>Note:</b><br>Please set AV mode in DYNAMIC |
| 6  | CH DISPLAY COLOUR | (1) All Ch (1~99) will have an OSD display of the channel number in green colour under AFT ON condition.                                                                                                                                  |                                               |

## 15. FUNCTION OPERATION CHECKING (2) (VIDEO &amp; AUDIO) CONTINUED

| NO         | ADJUSTMENT POINT | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | WAVEFORM OR OTHERS |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
|------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------|------|----------|----------|----|----|----|--------|----|---|---|------------|---|---|---|------|-----|-----|-----|-----------|----|-----|---|-----|-----|-----|---|------------|-----|-----|-----|----------|-----|-----|-----|--------|----|-----|---|------|----|----|---|---------|-----|---|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7          | WHITE TEMP       | <p>(1) Receive "Monoscope Pattern" signal.</p> <p>(2) Set MENU, then go into PICTURE mode to select WHITE TEMP.</p> <p>(3) Press Volume Up/Down key to check WHITE TEMP function.<br/>The back ground will change to (shift right) bluish and (shift left) reddish.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                    |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| 8          | NORMAL Key       | <p>(1) Once in PICTURE or SOUND Mode, and the NORMAL key is pressed, all the settings will be preset to normal setting accordingly .<br/>(Normal setting value for every mode)</p> <p><b>PICTURE MODE</b></p> <table> <tr> <td>AV MODE</td><td>DYNAMIC</td><td>SOFT</td><td>STANDARD</td></tr> <tr> <td>CONTRAST</td><td>60</td><td>30</td><td>50</td></tr> <tr> <td>COLOUR</td><td>+5</td><td>0</td><td>0</td></tr> <tr> <td>BRIGHTNESS</td><td>0</td><td>0</td><td>0</td></tr> <tr> <td>TINT</td><td>Mid</td><td>Mid</td><td>Mid</td></tr> <tr> <td>SHARPNESS</td><td>+5</td><td>-10</td><td>0</td></tr> <tr> <td>ANR</td><td>OFF</td><td>OFF</td><td>0</td></tr> <tr> <td>WHITE TEMP</td><td>Mid</td><td>Mid</td><td>Mid</td></tr> </table> <p><b>SOUND MODE</b></p> <table> <tr> <td>SURROUND</td><td>OFF</td><td>OFF</td><td>OFF</td></tr> <tr> <td>TREBLE</td><td>+5</td><td>-10</td><td>0</td></tr> <tr> <td>BASS</td><td>+5</td><td>-5</td><td>0</td></tr> <tr> <td>BALANCE</td><td>Mid</td><td>0</td><td>0</td></tr> </table> | AV MODE            | DYNAMIC | SOFT | STANDARD | CONTRAST | 60 | 30 | 50 | COLOUR | +5 | 0 | 0 | BRIGHTNESS | 0 | 0 | 0 | TINT | Mid | Mid | Mid | SHARPNESS | +5 | -10 | 0 | ANR | OFF | OFF | 0 | WHITE TEMP | Mid | Mid | Mid | SURROUND | OFF | OFF | OFF | TREBLE | +5 | -10 | 0 | BASS | +5 | -5 | 0 | BALANCE | Mid | 0 | 0 | <p><b>Note:</b></p> <p>1. In NORMAL Mode, when press NORMAL key, will appear NORMAL OSD and all setting PICTURE, SOUND functions set to NORMAL.</p> <p>2. In NORMAL Mode, when press NORMAL key, AV MODE remain at current setting mode.</p> |
| AV MODE    | DYNAMIC          | SOFT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | STANDARD           |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| CONTRAST   | 60               | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 50                 |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| COLOUR     | +5               | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0                  |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| BRIGHTNESS | 0                | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0                  |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| TINT       | Mid              | Mid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Mid                |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| SHARPNESS  | +5               | -10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                  |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| ANR        | OFF              | OFF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                  |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| WHITE TEMP | Mid              | Mid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Mid                |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| SURROUND   | OFF              | OFF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | OFF                |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| TREBLE     | +5               | -10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                  |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| BASS       | +5               | -5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 0                  |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| BALANCE    | Mid              | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0                  |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |
| 9          | COLOUR SYSTEM    | <p>(1) Receive the "PAL COLOUR BAR" signal, press MENU, choose CH-SETTING to select COLOR modes except PAL, check the COLOUR is not working properly. Then, select the "PAL" mode. Check again its colour so that it is working properly.</p> <p>(2) Receive "SECAM COLOUR BAR" signal, press MENU, choose CH-SETTING to select COLOR modes except SECAM, check the COLOUR is not working properly. Then, select the "SECAM" mode. Check again its colour so that it is working properly.</p> <p>(3) Receive "NTSC 4.43" signal, press MENU, choose CH-SETTING to select COLOR modes except N443, check the COLOUR is not working properly. Then, select the N443 mode. Check again its colour so that it is working properly.</p> <p>(4) Receive "NTSC 3.58" signal, press MENU, choose CH-SETTING to select COLOR modes except N358, check the COLOUR is not working properly. Then, select the N358 mode. Check again its colour so that it is working properly.</p>                                                                |                    |         |      |          |          |    |    |    |        |    |   |   |            |   |   |   |      |     |     |     |           |    |     |   |     |     |     |   |            |     |     |     |          |     |     |     |        |    |     |   |      |    |    |   |         |     |   |   |                                                                                                                                                                                                                                              |

**16. FUNCTION OPERATION CHECKING (3) (VIDEO & AUDIO) CONTINUED**

| NO | ADJUSTMENT POINT | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | WAVEFORM OR OTHERS                                |
|----|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| 10 | SURROUND         | (1) Receive "music" sound signal.<br>(2) Set MENU, then go into SOUND MENU to select SURROUND.<br>(3) Press VOLUME UP/DOWN key to check SURROUND I, II and OFF effect.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>Note:</b><br>Please set the AV mode in DYNAMIC |
| 11 | TREBLE           | (1) Receive "music" sound signal.<br>(2) Set MENU, then go into SOUND MENU to select TREBLE.<br>(3) Press VOLUME UP/DOWN key to check whether the TREBLE effect is OK or not.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>Note:</b><br>Please set the AV mode in DYNAMIC |
| 12 | BASS             | (1) Receive "music" sound signal.<br>(2) Set MENU, then go into SOUND MENU to select BASS.<br>(3) Press VOLUME UP/DOWN key to check whether the BASS effect is OK or not.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>Note:</b><br>Please set the AV mode in DYNAMIC |
| 13 | BALANCE          | (1) Receive mono-tone signal.<br>(2) Set MENU, then go into SOUND MENU to select BALANCE.<br>(3) Press VOLUME UP/DOWN key to check whether the left to right BALANCE effect is OK or not.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>Note:</b><br>Please set the AV mode in DYNAMIC |
| 14 | SOUND SYSTEM     | (1) Receive "PAL-D/K" signal, press MENU, choose CH-SETTING then go into SOUND mode to select B/G, I, M. Check the sound output is not working properly. Select D/K and check the sound output to make sure it is working properly.<br>(2) Receive "PAL-I" signal, press MENU, choose CH-SETTING then go into SOUND mode to select B/G, D/K, M. Check the sound output is not working properly. Select I and check the sound output to make sure it is working properly.<br>(3) Receive "PAL-B/G" signal, press MENU, choose CH-SETTING then go into SOUND mode to select I, D/K, M. Check the sound output is not working properly. Select B/G and check the sound output to make sure it is working properly.<br>(4) Receive "NTSC-M" signal, press MENU, choose CH-SETTING then go into SOUND mode to select B/G, I, D/K. Check the sound output is not working properly. Select M and check the sound output to make sure it is working properly. |                                                   |

**17. FUNCTION OPERATION CHECKING (3) (VIDEO & AUDIO) CONTINUED**

| NO | ADJUSTMENT POINT            | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                                                                                                  |          |         |         |         |        |        |       | WAVEFORM OR OTHERS |
|----|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|---------|---------|--------|--------|-------|--------------------|
| 15 | NOISE MUTE CHECKING         | (1) Receive "PAL COLOUR BAR" signal.<br><br>(2) Turn up the volume control to maximum, make sure the sound is heard from the speakers. Then put the unit in no signal state.<br><br>(3) Check the sound mute is effective.<br><br>(4) Finally turn sound level of CTV to minimum. |          |         |         |         |        |        |       |                    |
| 16 | OSD LANGUAGE QUANTITY CHECK | (1) Check OSD LANGUAGE quantity and type for respect model.                                                                                                                                                                                                                       |          |         |         |         |        |        |       |                    |
|    |                             | MODEL                                                                                                                                                                                                                                                                             | QUANTITY | ENGLISH | RUSSIAN | CHINESE | FRENCH | ARABIC | MALAY |                    |
|    |                             | 21K-FD5RU                                                                                                                                                                                                                                                                         | 2        | O       | O       | -       | -      | -      | -     |                    |
|    |                             |                                                                                                                                                                                                                                                                                   |          |         |         |         |        |        |       |                    |
|    |                             |                                                                                                                                                                                                                                                                                   |          |         |         |         |        |        |       |                    |
|    |                             |                                                                                                                                                                                                                                                                                   |          |         |         |         |        |        |       |                    |
|    |                             |                                                                                                                                                                                                                                                                                   |          |         |         |         |        |        |       |                    |

**18. HEADPHONE JACK CHECKING**

| NO | ADJUSTMENT POINT          | ADJUSTMENT CONDITION / PROCEDURE                                                                                                                                                                 | WAVEFORM OR OTHERS |
|----|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 1  | HEADPHONE OUTPUT CHECKING | (1) Receive PAL COLOUR BAR with SOUND 400Hz, 100% MODULATION ( $\pm 50\text{kHz}$ Dev).<br>(2) Maximum volume, and check the headphone output with 400Hz sound and no sound output from speaker. |                    |

**19. SHOCK TEST CHECKING**

| NO | ADJUSTMENT POINT | ADJUSTMENT CONDITION / PROCEDURE                                                                            | WAVEFORM OR OTHERS |
|----|------------------|-------------------------------------------------------------------------------------------------------------|--------------------|
| 1  | SHOCK TEST       | 1. Hit at the top of TV set for two time.<br>2. Check TV set not damage and TV operation operate correctly. |                    |

**20. ROM CORRECTION CHECKING**

| NO                                                                           | ADJUSTMENT POINT     | ADJUSTMENT CONDITION / PROCEDURE                                                                                                               |     |     |     |     |    |    |    | WAVEFORM OR OTHERS                                                                                                                                                                            |  |  |
|------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|-----|----|----|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| 1                                                                            | ROM CORRECTION CHECK | (1) Go to SERVICE mode, press "MENU" key until the SERVICE mode display as in Figure 3 appeared.                                               |     |     |     |     |    |    |    | <div>INFO</div> <div>SLV200</div> <div>SLV400</div> <div>SLV500</div> <div>R1: ACTR4: ACTR7: NO</div> <div>R2: ACTR5: ACTR8: NO</div> <div>R3: ACTR6: NO</div> <div>SOFT: 0.90MICON: ZZ</div> |  |  |
|                                                                              |                      | (2) Check the ROM CORRECTION status by monitoring the screen, follow the model's setting.<br>Micon Version : RH-IXB584WJZZ (Software Ver.0.90) |     |     |     |     |    |    |    |                                                                                                                                                                                               |  |  |
|                                                                              |                      | R1                                                                                                                                             | R2  | R3  | R4  | R5  | R6 | R7 | R8 |                                                                                                                                                                                               |  |  |
|                                                                              |                      | ACT                                                                                                                                            | ACT | ACT | ACT | ACT | NO | NO | NO |                                                                                                                                                                                               |  |  |
| Note: For Nicam model, SLV5 will appear.<br>For IGR model, SLV6 will appear. |                      |                                                                                                                                                |     |     |     |     |    |    |    |                                                                                                                                                                                               |  |  |

Figure 3

# CHAPTER 4. MEMORY MAP

## [1] MEMORY MAP

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                                        |    |    |          |    |          |    | SEM POD SOFTWARE GROUP |                 | TV DESIGN ENGINEERING |         | TV PRODUCTION ENGINEERING |            |            |                              |        |
|---------------------------------------------------------------------------------------------------------------|----------------------------------------|----|----|----------|----|----------|----|------------------------|-----------------|-----------------------|---------|---------------------------|------------|------------|------------------------------|--------|
| EEPROM CHECK DATA LIST 1                                                                                      |                                        |    |    |          |    |          |    | ISSUED DATE :          |                 | ISSUED DATE :         |         | ISSUED DATE :             |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    | MANAGER                |                 | MANAGER               |         | MANAGER                   |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    | CHIEF                  |                 | CHIEF                 |         | CHIEF                     |            |            |                              |        |
| ENGINEER                                                                                                      |                                        |    |    | ENGINEER |    | ENGINEER |    |                        |                 |                       |         |                           |            |            |                              |        |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
| ADDRESS<br>(HEX)                                                                                              | DATA                                   |    |    |          |    |          |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU)  | CHASSIS |                           | CTV FINAL  |            | LAST INITIAL<br>SETTING DATA | REMARK |
|                                                                                                               | D7                                     | D6 | D5 | D4       | D3 | D2       | D1 |                        |                 |                       | D0      | CHECK DATA                | CHECK TYPE | CHECK DATA |                              |        |
| 00                                                                                                            | EEPROM INITIALIZATION JUDGEMENT BYTE-0 |    |    |          |    |          |    | 7B                     | 00-FF           |                       |         |                           |            |            |                              |        |
| 01                                                                                                            | EEPROM INITIALIZATION JUDGEMENT BYTE-1 |    |    |          |    |          |    | 75                     | 00-FF           |                       |         |                           |            |            |                              |        |
| 02                                                                                                            | EEPROM INITIALIZATION JUDGEMENT BYTE-2 |    |    |          |    |          |    | 78                     | 00-FF           |                       |         |                           |            |            |                              |        |
| 03                                                                                                            | EEPROM INITIALIZATION JUDGEMENT BYTE-3 |    |    |          |    |          |    | 74                     | 00-FF           |                       |         |                           |            |            |                              |        |
| 04                                                                                                            | ROM VERSION                            |    |    |          |    |          |    | 00                     | 00-FF           |                       |         |                           |            |            |                              |        |
| 05                                                                                                            | SOFTWARE VERSION (HIGH BYTE)           |    |    |          |    |          |    | 00                     | 00-FF           |                       |         |                           |            |            |                              |        |
| 06                                                                                                            | SOFTWARE VERSION (LOW BYTE)            |    |    |          |    |          |    | 5A                     | 00-FF           |                       |         |                           |            |            |                              |        |
| 07                                                                                                            |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
| 08                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 09                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 0A                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 0B                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 0C                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 0D                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 0E                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 0F                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 10                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 11                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 12                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 13                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 14                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 15                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 16                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 17                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 18                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 19                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 1A                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 1B                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 1C                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 1D                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 1E                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 1F                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 20                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 21                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 22                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 23                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 24                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 25                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 26                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 27                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 28                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 29                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 2A                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 2B                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 2C                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 2D                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 2E                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 2F                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 30                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 31                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 32                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 33                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 34                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 35                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 36                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 37                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 38                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 39                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 3A                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 3B                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 3C                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 3D                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 3E                                                                                                            | TUNING FREQUENCY (LOW BYTE)            |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| 3F                                                                                                            | TUNING FREQUENCY (HIGH BYTE)           |    |    |          |    |          |    |                        | 00-FF           |                       |         |                           |            |            |                              |        |
| MODEL                                                                                                         |                                        |    |    |          |    |          |    | MODEL                  |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |
|                                                                                                               |                                        |    |    |          |    |          |    |                        |                 |                       |         |                           |            |            |                              |        |

|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|------------------------------|----|----|----|----|----|----|----|------------------|------------------------|----------------------|------------|-----------------------|------------|------------|------------------------------|--------|--------|--|--|--|----------|--|--|--|--|--|
| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                              |    |    |    |    |    |    |    |                  | SEM PDD SOFTWARE GROUP |                      |            | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING    |        |        |  |  |  |          |  |  |  |  |  |
| EEPROM CHECK DATA LIST 2                                                                                      |                              |    |    |    |    |    |    |    |                  | ISSUED DATE :          |                      |            | ISSUED DATE :         |            |            | ISSUED DATE :                |        |        |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  | MANAGER                |                      |            |                       |            |            | MANAGER                      |        |        |  |  |  | MANAGER  |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  | CHIEF                  |                      |            |                       |            |            | CHIEF                        |        |        |  |  |  | CHIEF    |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  | ENGINEER               |                      |            | Lingjie               |            |            | ENGINEER                     |        |        |  |  |  | ENGINEER |  |  |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA                         |    |    |    |    |    |    |    | MICON<br>DEFAULT | EEPROM<br>RANGE        | EEPROM<br>WRITE(CPU) | CHASSIS    |                       | CTV FINAL  |            | LAST INITIAL<br>SETTING DATA | REMARK |        |  |  |  |          |  |  |  |  |  |
|                                                                                                               | D7                           | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                  |                        |                      | CHECK DATA | CHECK TYPE            | CHECK DATA | CHECK TYPE |                              |        |        |  |  |  |          |  |  |  |  |  |
| 40                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 28 |  |  |  |          |  |  |  |  |  |
| 41                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 42                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 29 |  |  |  |          |  |  |  |  |  |
| 43                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 44                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 30 |  |  |  |          |  |  |  |  |  |
| 45                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 46                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 31 |  |  |  |          |  |  |  |  |  |
| 47                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 48                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 32 |  |  |  |          |  |  |  |  |  |
| 49                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 4A                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 33 |  |  |  |          |  |  |  |  |  |
| 4B                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 4C                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 34 |  |  |  |          |  |  |  |  |  |
| 4D                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 4E                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 35 |  |  |  |          |  |  |  |  |  |
| 4F                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 50                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 36 |  |  |  |          |  |  |  |  |  |
| 51                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 52                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 37 |  |  |  |          |  |  |  |  |  |
| 53                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 54                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 38 |  |  |  |          |  |  |  |  |  |
| 55                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 56                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 39 |  |  |  |          |  |  |  |  |  |
| 57                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 58                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 40 |  |  |  |          |  |  |  |  |  |
| 59                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 5A                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 41 |  |  |  |          |  |  |  |  |  |
| 5B                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 5C                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 42 |  |  |  |          |  |  |  |  |  |
| 5D                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 5E                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 43 |  |  |  |          |  |  |  |  |  |
| 5F                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 60                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 44 |  |  |  |          |  |  |  |  |  |
| 61                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 62                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 45 |  |  |  |          |  |  |  |  |  |
| 63                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 64                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 46 |  |  |  |          |  |  |  |  |  |
| 65                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 66                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 47 |  |  |  |          |  |  |  |  |  |
| 67                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 68                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 48 |  |  |  |          |  |  |  |  |  |
| 69                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 6A                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 49 |  |  |  |          |  |  |  |  |  |
| 6B                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 6C                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 50 |  |  |  |          |  |  |  |  |  |
| 6D                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 6E                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 51 |  |  |  |          |  |  |  |  |  |
| 6F                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 70                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 52 |  |  |  |          |  |  |  |  |  |
| 71                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 72                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 53 |  |  |  |          |  |  |  |  |  |
| 73                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 74                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 54 |  |  |  |          |  |  |  |  |  |
| 75                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 76                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 55 |  |  |  |          |  |  |  |  |  |
| 77                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 78                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 56 |  |  |  |          |  |  |  |  |  |
| 79                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 7A                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 57 |  |  |  |          |  |  |  |  |  |
| 7B                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 7C                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 58 |  |  |  |          |  |  |  |  |  |
| 7D                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| 7E                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        | POS 59 |  |  |  |          |  |  |  |  |  |
| 7F                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |    |    |    |    |    |    |    |                  | 00-FF                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| MODEL                                                                                                         |                              |    |    |    |    |    |    |    |                  | MODEL                  |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |
| LETTER NO.                                                                                                    |                              |    |    |    |    |    |    |    |                  | LETTER NO.             |                      |            |                       |            |            |                              |        |        |  |  |  |          |  |  |  |  |  |

## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |    |    |    |    |    |                  | SEM PDD SOFTWARE GROUP |                      | TV DESIGN ENGINEERING |            | TV PRODUCTION ENGINEERING |            |                              |        |  |  |
|---------------------------------------------------------------------------------------------------------------|------|----|----|----|----|----|----|----|------------------|------------------------|----------------------|-----------------------|------------|---------------------------|------------|------------------------------|--------|--|--|
| EEPROM CHECK DATA LIST 3                                                                                      |      |    |    |    |    |    |    |    |                  | ISSUED DATE :          |                      | ISSUED DATE :         |            | ISSUED DATE :             |            |                              |        |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                  | MANAGER                |                      | MANAGER               |            | MANAGER                   |            |                              |        |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                  | CHIEF                  |                      | CHIEF                 |            | CHIEF                     |            |                              |        |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                  | ENGINEER               |                      | ENGINEER              |            | ENGINEER                  |            |                              |        |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |    |    |    |    |    |                  |                        |                      |                       |            |                           |            |                              |        |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |    |    |    |    |    | MICON<br>DEFAULT | EEPROM<br>RANGE        | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL                 |            | LAST INITIAL<br>SETTING DATA | REMARK |  |  |
|                                                                                                               | D7   | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                  |                        |                      | CHECK DATA            | CHECK TYPE | CHECK DATA                | CHECK TYPE |                              |        |  |  |
| 80                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 60                       |        |  |  |
| 81                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 82                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 83                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 61                       |        |  |  |
| 84                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 85                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 86                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 62                       |        |  |  |
| 87                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 88                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 89                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 63                       |        |  |  |
| 8A                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 8B                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 8C                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 64                       |        |  |  |
| 8D                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 8E                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 8F                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 65                       |        |  |  |
| 90                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 91                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 92                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 66                       |        |  |  |
| 93                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 94                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 95                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 67                       |        |  |  |
| 96                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 97                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 98                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 68                       |        |  |  |
| 99                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 9A                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 9B                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 69                       |        |  |  |
| 9C                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 9D                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| 9E                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 70                       |        |  |  |
| 9F                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| A0                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| A1                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 71                       |        |  |  |
| A2                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| A3                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| A4                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 72                       |        |  |  |
| A5                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| A6                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| A7                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 73                       |        |  |  |
| A8                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| A9                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| AA                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 74                       |        |  |  |
| AB                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| AC                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| AD                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 75                       |        |  |  |
| AE                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| AF                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| B0                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 76                       |        |  |  |
| B1                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| B2                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| B3                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 77                       |        |  |  |
| B4                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| B5                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| B6                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 78                       |        |  |  |
| B7                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| B8                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| B9                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 79                       |        |  |  |
| BA                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| BB                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| BC                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 80                       |        |  |  |
| BD                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| BE                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            |                              |        |  |  |
| BF                                                                                                            |      |    |    |    |    |    |    |    |                  | 00-FF                  |                      |                       |            |                           |            | POS 91                       |        |  |  |
| MODEL                                                                                                         |      |    |    |    |    |    |    |    |                  | MODEL                  |                      |                       |            |                           |            |                              |        |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                  |                        |                      |                       |            |                           |            |                              |        |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                  |                        |                      |                       |            |                           |            |                              |        |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                  |                        |                      |                       |            |                           |            |                              |        |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                  |                        |                      |                       |            |                           |            |                              |        |  |  |
| LETTER NO.                                                                                                    |      |    |    |    |    |    |    |    |                  | LETTER NO.             |                      |                       |            |                           |            |                              |        |  |  |

21K-FD5RU

MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                              |                    |       |             |                |                 |       |                 | SEM POD SOFTWARE GROUP |                      |                   | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |                           |                                                                    |
|---------------------------------------------------------------------------------------------------------------|------------------------------|--------------------|-------|-------------|----------------|-----------------|-------|-----------------|------------------------|----------------------|-------------------|-----------------------|------------|------------|---------------------------|---------------------------|--------------------------------------------------------------------|
| EEPROM CHECK DATA LIST 4                                                                                      |                              |                    |       |             |                |                 |       |                 | ISSUED DATE :          |                      |                   | ISSUED DATE :         |            |            | ISSUED DATE :             |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 | MANAGER                |                      |                   | MANAGER               |            |            | MANAGER                   |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 | CHIEF                  |                      |                   | CHIEF                 |            |            | CHIEF                     |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 | ENGINEER               |                      |                   | ENGINEER              |            |            | ENGINEER                  |                           |                                                                    |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                              |                    |       |             |                |                 |       |                 |                        |                      |                   |                       |            |            |                           |                           |                                                                    |
| ADDRESS (HEX)                                                                                                 | DATA                         |                    |       |             |                |                 |       |                 | MICON DEFAULT          | EEPROM RANGE         | EEPROM WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL SETTING DATA | REMARK                                                             |
|                                                                                                               | D7                           | D6                 | D5    | D4          | D3             | D2              | D1    | D0              |                        |                      |                   | CHECK DATA            | CHECK TYPE | CHECK DATA | CHECK TYPE                |                           |                                                                    |
| C0                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 92                                                             |
| C1                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| C2                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 93                                                             |
| C3                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| C4                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 94                                                             |
| C5                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| C6                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 95                                                             |
| C7                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| C8                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 96                                                             |
| C9                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| CA                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 97                                                             |
| CB                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| CC                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 98                                                             |
| CD                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| CE                                                                                                            | TUNING FREQUENCY (LOW BYTE)  |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           | POS 99                                                             |
| CF                                                                                                            | TUNING FREQUENCY (HIGH BYTE) |                    |       |             |                |                 |       |                 |                        | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| D0                                                                                                            |                              | FAVORITE CHANNEL 1 |       |             |                |                 |       |                 | 0A                     | 00-65                |                   |                       |            |            |                           |                           | POS 10                                                             |
| D1                                                                                                            |                              | FAVORITE CHANNEL 2 |       |             |                |                 |       |                 | 14                     | 00-65                |                   |                       |            |            |                           |                           | POS 20                                                             |
| D2                                                                                                            |                              | FAVORITE CHANNEL 3 |       |             |                |                 |       |                 | 1E                     | 00-65                |                   |                       |            |            |                           |                           | POS 30                                                             |
| D3                                                                                                            |                              | FAVORITE CHANNEL 4 |       |             |                |                 |       |                 | 28                     | 00-65                |                   |                       |            |            |                           |                           | POS 40                                                             |
| D4                                                                                                            | POS 7                        | POS 6              | POS 5 | POS4        | POS 3          | POS 2           | POS 1 | POS 0           | FF                     | 00-FF                |                   |                       |            |            |                           |                           | 1= AFT ON, 0=AFT OFF                                               |
| D5                                                                                                            | POS15                        | POS14              | POS13 | POS12       | POS11          | POS10           | POS 9 | POS 8           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| D6                                                                                                            | POS23                        | POS22              | POS21 | POS20       | POS19          | POS18           | POS17 | POS16           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| D7                                                                                                            | POS31                        | POS30              | POS29 | POS28       | POS27          | POS26           | POS25 | POS24           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| D8                                                                                                            | POS39                        | POS38              | POS37 | POS36       | POS35          | POS34           | POS33 | POS32           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| D9                                                                                                            | POS47                        | POS46              | POS45 | POS44       | POS43          | POS42           | POS41 | POS40           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| DA                                                                                                            | POS55                        | POS54              | POS53 | POS52       | POS51          | POS50           | POS49 | POS48           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| DB                                                                                                            | POS63                        | POS62              | POS61 | POS60       | POS59          | POS58           | POS57 | POS56           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| DC                                                                                                            | POS71                        | POS70              | POS69 | POS68       | POS67          | POS66           | POS65 | POS64           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| DD                                                                                                            | POS79                        | POS78              | POS77 | POS76       | POS75          | POS74           | POS73 | POS72           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| DE                                                                                                            | POS87                        | POS86              | POS85 | POS84       | POS83          | POS82           | POS81 | POS80           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| DF                                                                                                            | POS95                        | POS94              | POS93 | POS92       | POS91          | POS90           | POS89 | POS88           | FF                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| E0                                                                                                            |                              |                    |       |             | POS99          | POS98           | POS97 | POS96           | 0F                     | 00-0F                |                   |                       |            |            |                           |                           |                                                                    |
| E1                                                                                                            | S-Booster (SOFT)             | S-Booster (DYM)    | ANR   | LOCK TV     | LOCK GAME      | ANR             |       | S-Booster (STD) | 41                     | 00-1F                |                   |                       |            |            |                           |                           | S-Booster(SOFT)=F242<br>S-Booster(STD)=F243<br>S-Booster(DYM)=F244 |
| E2                                                                                                            | Blue Back                    | 1/2 digit          | TEXT  |             |                | LANGUAGE        |       |                 | 41                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| E3                                                                                                            | AV MODE                      |                    |       | LAST VOLUME |                |                 |       |                 | 40                     | 00-BC                |                   |                       |            |            |                           |                           | 00 : STANDARD<br>01 : DYNAMIC<br>10 : SOFT                         |
| E4                                                                                                            | POS 7                        | POS 6              | POS 5 | POS4        | POS 3          | POS 2           | POS 1 | POS 0           | 01                     | 00-FF                |                   |                       |            |            |                           |                           | 1= SKIP ON, 0=SKIP OFF                                             |
| E5                                                                                                            | POS15                        | POS14              | POS13 | POS12       | POS11          | POS10           | POS 9 | POS 8           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| E6                                                                                                            | POS23                        | POS22              | POS21 | POS20       | POS19          | POS18           | POS17 | POS16           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| E7                                                                                                            | POS31                        | POS30              | POS29 | POS28       | POS27          | POS26           | POS25 | POS24           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| E8                                                                                                            | POS39                        | POS38              | POS37 | POS36       | POS35          | POS34           | POS33 | POS32           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| E9                                                                                                            | POS47                        | POS46              | POS45 | POS44       | POS43          | POS42           | POS41 | POS40           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| EA                                                                                                            | POS55                        | POS54              | POS53 | POS52       | POS51          | POS50           | POS49 | POS48           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| EB                                                                                                            | POS63                        | POS62              | POS61 | POS60       | POS59          | POS58           | POS57 | POS56           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| EC                                                                                                            | POS71                        | POS70              | POS69 | POS68       | POS67          | POS66           | POS65 | POS64           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| ED                                                                                                            | POS79                        | POS78              | POS77 | POS76       | POS75          | POS74           | POS73 | POS72           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| EE                                                                                                            | POS87                        | POS86              | POS85 | POS84       | POS83          | POS82           | POS81 | POS80           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| EF                                                                                                            | POS95                        | POS94              | POS93 | POS92       | POS91          | POS90           | POS89 | POS88           | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| F0                                                                                                            |                              |                    |       |             | POS99          | POS98           | POS97 | POS96           | 00                     | 00-0F                |                   |                       |            |            |                           |                           |                                                                    |
| F1                                                                                                            | POWER                        |                    |       |             |                |                 |       |                 | AA                     | AA(On), 55(Off)      |                   |                       |            |            |                           |                           |                                                                    |
| F2                                                                                                            | ON TIMER VOLUME              |                    |       |             |                |                 |       |                 | FF                     | 00-3C, FF            |                   |                       |            |            |                           |                           |                                                                    |
| F3                                                                                                            | ON TIMER CHANNEL             |                    |       |             |                |                 |       |                 | FF                     | 00-65, FF            |                   |                       |            |            |                           |                           |                                                                    |
| F4                                                                                                            | SLV2 (HIGH)                  |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| F5                                                                                                            | SLV2 (LOW)                   |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| F6                                                                                                            | SLV4 (HIGH)                  |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| F7                                                                                                            | SLV4 (LOW)                   |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| F8                                                                                                            | SLV5 (HIGH)                  |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| F9                                                                                                            | SLV5 (LOW)                   |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| FA                                                                                                            | SLV6 (HIGH)                  |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| FB                                                                                                            | SLV6 (LOW)                   |                    |       |             |                |                 |       |                 | 00                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| FC                                                                                                            |                              |                    |       |             | Message Screen | Message Display | TV/AV |                 | 00                     | 0(TV), 1(AV), 2(AV2) |                   |                       |            |            |                           |                           |                                                                    |
| FD                                                                                                            | LAST CHANNEL POSITION        |                    |       |             |                |                 |       |                 | 01                     | 00-63                |                   |                       |            |            |                           |                           |                                                                    |
| FE                                                                                                            | FLASH BACK POSITION          |                    |       |             |                |                 |       |                 | 01                     | 00-FF                |                   |                       |            |            |                           |                           |                                                                    |
| FF                                                                                                            |                              |                    |       |             |                |                 |       |                 |                        |                      |                   |                       |            |            |                           |                           |                                                                    |
| MODEL                                                                                                         |                              |                    |       |             |                |                 |       |                 | MODEL                  |                      |                   |                       |            |            |                           |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 |                        |                      |                   |                       |            |            |                           |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 |                        |                      |                   |                       |            |            |                           |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 |                        |                      |                   |                       |            |            |                           |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 |                        |                      |                   |                       |            |            |                           |                           |                                                                    |
|                                                                                                               |                              |                    |       |             |                |                 |       |                 |                        |                      |                   |                       |            |            |                           |                           |                                                                    |

4-5

### MEMORY MAP (Continued)

|           |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |
|-----------|--|--|--|--|--|--|--|-----------|--|--|--|--|--|--|--|--|
| MODEL     |  |  |  |  |  |  |  | MODEL     |  |  |  |  |  |  |  |  |
|           |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |
|           |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |
|           |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |
|           |  |  |  |  |  |  |  |           |  |  |  |  |  |  |  |  |
| LETTER NO |  |  |  |  |  |  |  | LETTER NO |  |  |  |  |  |  |  |  |

4-7

### MEMORY MAP (Continued)

4-8

## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |    |                                          |                           |                           | SEM PDD SOFTWARE GROUP |                    | TV DESIGN ENGINEERING |         | TV PRODUCTION ENGINEERING |            |            |                              |        |
|---------------------------------------------------------------------------------------------------------------|------|----|----|----|------------------------------------------|---------------------------|---------------------------|------------------------|--------------------|-----------------------|---------|---------------------------|------------|------------|------------------------------|--------|
| EEPROM CHECK DATA LIST 9                                                                                      |      |    |    |    |                                          |                           |                           | ISSUED DATE :          |                    | ISSUED DATE :         |         | ISSUED DATE :             |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           | MANAGER                |                    | MANAGER               |         | MANAGER                   |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           | CHIEF                  |                    | CHIEF                 |         | CHIEF                     |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           | ENGINEER               |                    | ENGINEER              |         | ENGINEER                  |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           | Lingjia                |                    |                       |         |                           |            |            |                              |        |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |    |                                          |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |    |                                          |                           |                           | MICON<br>DEFAULT       | EEPROM<br>RANGE    | EEPROM<br>WRITE(CPU)  | CHASSIS |                           | CTV FINAL  |            | LAST INITIAL<br>SETTING DATA | REMARK |
|                                                                                                               | D7   | D6 | D5 | D4 | D3                                       | D2                        | D1                        |                        |                    |                       | D0      | CHECK DATA                | CHECK TYPE | CHECK DATA |                              |        |
| 200                                                                                                           |      |    |    |    | COL SOFT (F227)                          |                           |                           | 1E                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 201                                                                                                           |      |    |    |    | COL STD (F228)                           |                           |                           | 1E                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 202                                                                                                           |      |    |    |    | COL DYM (F229)                           |                           |                           | 28                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 203                                                                                                           |      |    |    |    | SHARP SOFT (F230)                        |                           |                           | 14                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 204                                                                                                           |      |    |    |    | SHARP STD (F231)                         |                           |                           | 1E                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 205                                                                                                           |      |    |    |    | SHARP DYM (F232)                         |                           |                           | 23                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 206                                                                                                           |      |    |    |    | TREBLE SOFT (F236)                       |                           |                           | 14                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 207                                                                                                           |      |    |    |    | TREBLE STD (F237)                        |                           |                           | 1E                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 208                                                                                                           |      |    |    |    | TREBLE DYM (F238)                        |                           |                           | 23                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 209                                                                                                           |      |    |    |    | BASS SOFT (F239)                         |                           |                           | 19                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 20A                                                                                                           |      |    |    |    | BASS STD (F240)                          |                           |                           | 1E                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 20B                                                                                                           |      |    |    |    | BASS DYM (F241)                          |                           |                           | 28                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 20C                                                                                                           |      |    |    |    | AC-FAIL-WO-Bright (F245)                 |                           |                           | FF                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 20D                                                                                                           |      |    |    |    | WO-Bright-after-WO-TIME (F246)           |                           |                           | FF                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 20E                                                                                                           |      |    |    |    | WO-CONTRAST-after-WO-TIME (F247)         |                           |                           | 7F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 20F                                                                                                           |      |    |    |    | WO-Bright-before-WO-TIME (F248)          |                           |                           | FF                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 210                                                                                                           |      |    |    |    | WO-CONTRAST-before-WO-TIME (F249)        |                           |                           | 7F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 211                                                                                                           |      |    |    |    | WO-TIME (F250)                           |                           |                           | 00                     | 00-1F              |                       |         |                           |            |            |                              |        |
| 212                                                                                                           |      |    |    |    | BASS OFFSET (F251)                       |                           |                           | 1E                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 213                                                                                                           |      |    |    |    | TREBLE OFFSET (F252)                     |                           |                           | 1E                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 214                                                                                                           |      |    |    |    | U OFFSET-Black&White Signal or YUV (F75) |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 215                                                                                                           |      |    |    |    | V OFFSET-Black&White Signal or YUV (F76) |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 216                                                                                                           |      |    |    |    | U OFFSET-PAL (F263)                      |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 217                                                                                                           |      |    |    |    | V OFFSET-PAL (F264)                      |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 218                                                                                                           |      |    |    |    | U OFFSET-N358 (F265)                     |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 219                                                                                                           |      |    |    |    | V OFFSET-N358 (F266)                     |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 21A                                                                                                           |      |    |    |    | U OFFSET-N443 (F267)                     |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 21B                                                                                                           |      |    |    |    | V OFFSET-N443 (F268)                     |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 21C                                                                                                           |      |    |    |    | U OFFSET-SECAM (F269)                    |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 21D                                                                                                           |      |    |    |    | V OFFSET-SECAM (F270)                    |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 21E                                                                                                           |      |    |    |    | AFC1 GAIN-NOSYNC(F274)                   |                           |                           | 00                     | 00-07              |                       |         |                           |            |            |                              |        |
| 21F                                                                                                           |      |    |    |    | RF-AGC WAIT TIME( F275 )                 |                           |                           | 00                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 220                                                                                                           |      |    |    |    | PAL/SECAM TINT( F276 )                   |                           |                           | 3F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 221                                                                                                           |      |    |    |    |                                          |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
| 222                                                                                                           |      |    |    |    |                                          |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
| 223                                                                                                           |      |    |    |    | PassWord 1st Digit                       |                           |                           | 00                     | 00-99              |                       |         |                           |            |            |                              |        |
| 224                                                                                                           |      |    |    |    | PassWord 3rd Digit                       |                           |                           | 00                     | 00-99              |                       |         |                           |            |            |                              |        |
| 225                                                                                                           |      |    |    |    | PassWord 4th Digit                       |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
| 226                                                                                                           |      |    |    |    | B-CUT<br>YUV<DB><br>(V00)                | G-CUT<br>YUV<DB><br>(V00) | R-CUT<br>YUV<DB><br>(V00) | B-CUT<DB><br>(V00)     | G-CUT<DB><br>(V00) | R-CUT<DB><br>(V00)    |         |                           |            |            |                              |        |
| 227                                                                                                           |      |    |    |    | R-DRIVE (V00)                            |                           |                           | 1F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 228                                                                                                           |      |    |    |    | B-DRIVE (V00)                            |                           |                           | 1F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 229                                                                                                           |      |    |    |    | R-CUTOFF (V00)                           |                           |                           | 5F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 22A                                                                                                           |      |    |    |    | G-CUTOFF (V00)                           |                           |                           | 5F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 22B                                                                                                           |      |    |    |    | B-CUTOFF (V00)                           |                           |                           | 5F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 22C                                                                                                           |      |    |    |    | RF-AGC (V01)                             |                           |                           | 32                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 22D                                                                                                           |      |    |    |    | VIF-VCO (V02)                            |                           |                           | 3F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 22E                                                                                                           |      |    |    |    |                                          |                           |                           | 07                     | 00-0F              |                       |         |                           |            |            |                              |        |
| 22F                                                                                                           |      |    |    |    | SUB CONTRAST (V04)                       |                           |                           | 41                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 230                                                                                                           |      |    |    |    | SUB COLOUR (V05)                         |                           |                           | 3F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 231                                                                                                           |      |    |    |    | SUB BRIGHTNESS (V06)                     |                           |                           | 4B                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 232                                                                                                           |      |    |    |    | SUB TINT (V07)                           |                           |                           | 3F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 233                                                                                                           |      |    |    |    | SUB SHARPNESS (V08)                      |                           |                           | 2C                     | 00-3F              |                       |         |                           |            |            |                              |        |
| 234                                                                                                           |      |    |    |    | SUB-COLOUR-YUV (V09)                     |                           |                           | 37                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 235                                                                                                           |      |    |    |    | SUB-TINT-YUV (V10)                       |                           |                           | 3F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 236                                                                                                           |      |    |    |    | V-SIZE-50Hz (V11)                        |                           |                           | 26                     | 00-3F              |                       |         |                           |            |            |                              |        |
| 237                                                                                                           |      |    |    |    |                                          |                           |                           | 07                     | 00-0F              |                       |         |                           |            |            |                              |        |
| 238                                                                                                           |      |    |    |    | H-SHIFT-50Hz (V13)                       |                           |                           | 3F                     | 00-7F              |                       |         |                           |            |            |                              |        |
| 239                                                                                                           |      |    |    |    | SECAM BR (V14)                           |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 23A                                                                                                           |      |    |    |    | SECAM BB (V15)                           |                           |                           | 7F                     | 00-FF              |                       |         |                           |            |            |                              |        |
| 23B                                                                                                           |      |    |    |    | SUB VOLUME (V16)                         |                           |                           | 3C                     | 00-3C              |                       |         |                           |            |            |                              |        |
| 23C                                                                                                           |      |    |    |    | V-SIZE-60Hz (V17)                        |                           |                           | 22                     | 00-3E              |                       |         |                           |            |            |                              |        |
| 23D                                                                                                           |      |    |    |    |                                          |                           |                           | 04                     | 00-0E              |                       |         |                           |            |            |                              |        |
| 23E                                                                                                           |      |    |    |    | H-SHIFT-60Hz (V19)                       |                           |                           | 0B                     | 00-1E              |                       |         |                           |            |            |                              |        |
| 23F                                                                                                           |      |    |    |    | S-TRAP-BG (V20)                          |                           |                           | 0F                     | 00-1F              |                       |         |                           |            |            |                              |        |
| MODEL                                                                                                         |      |    |    |    |                                          |                           |                           | MODEL                  |                    |                       |         |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |                                          |                           |                           |                        |                    |                       |         |                           |            |            |                              |        |
| LETTER NO.                                                                                                    |      |    |    |    |                                          |                           |                           | LETTER NO.             |                    |                       |         |                           |            |            |                              |        |

### MEMORY MAP (Continued)

4 – 10

## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |       |       |         |        |          |        |          |          |                  | SEM PDD SOFTWARE GROUP   |                      |            | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING    |        |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|-------|-------|---------|--------|----------|--------|----------|----------|------------------|--------------------------|----------------------|------------|-----------------------|------------|------------|------------------------------|--------|--|--|--|--|
| EEPROM CHECK DATA LIST 11                                                                                     |       |       |         |        |          |        |          |          |                  | ISSUED DATE :22 Feb 2005 |                      |            | ISSUED DATE :         |            |            | ISSUED DATE :                |        |  |  |  |  |
|                                                                                                               |       |       |         |        |          |        |          |          |                  | MANAGER                  |                      |            |                       |            |            | MANAGER                      |        |  |  |  |  |
|                                                                                                               |       |       |         |        |          |        |          |          |                  | CHIEF                    |                      |            |                       |            |            | CHIEF                        |        |  |  |  |  |
|                                                                                                               |       |       |         |        |          |        |          |          |                  | ENGINEER                 |                      |            | Lingjia               |            |            | ENGINEER                     |        |  |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |       |       |         |        |          |        |          |          |                  |                          |                      |            |                       |            |            |                              |        |  |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA  |       |         |        |          |        |          |          | MICON<br>DEFAULT | EEPROM<br>RANGE          | EEPROM<br>WRITE(CPU) | CHASSIS    |                       | CTV FINAL  |            | LAST INITIAL<br>SETTING DATA | REMARK |  |  |  |  |
|                                                                                                               | D7    | D6    | D5      | D4     | D3       | D2     | D1       | D0       |                  |                          |                      | CHECK DATA | CHECK TYPE            | CHECK DATA | CHECK TYPE |                              |        |  |  |  |  |
| 280                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 12                       |        |  |  |  |  |
| 281                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 13                       |        |  |  |  |  |
| 282                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 14                       |        |  |  |  |  |
| 283                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 15                       |        |  |  |  |  |
| 284                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 16                       |        |  |  |  |  |
| 285                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 17                       |        |  |  |  |  |
| 286                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 18                       |        |  |  |  |  |
| 287                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 19                       |        |  |  |  |  |
| 288                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 20                       |        |  |  |  |  |
| 289                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 21                       |        |  |  |  |  |
| 28A                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 22                       |        |  |  |  |  |
| 28B                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 23                       |        |  |  |  |  |
| 28C                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 24                       |        |  |  |  |  |
| 28D                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 25                       |        |  |  |  |  |
| 28E                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 26                       |        |  |  |  |  |
| 28F                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 27                       |        |  |  |  |  |
| 290                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 28                       |        |  |  |  |  |
| 291                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 29                       |        |  |  |  |  |
| 292                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 30                       |        |  |  |  |  |
| 293                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 31                       |        |  |  |  |  |
| 294                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 32                       |        |  |  |  |  |
| 295                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 33                       |        |  |  |  |  |
| 296                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 34                       |        |  |  |  |  |
| 297                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 35                       |        |  |  |  |  |
| 298                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 36                       |        |  |  |  |  |
| 299                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 37                       |        |  |  |  |  |
| 29A                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 38                       |        |  |  |  |  |
| 29B                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 39                       |        |  |  |  |  |
| 29C                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 40                       |        |  |  |  |  |
| 29D                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 41                       |        |  |  |  |  |
| 29E                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 42                       |        |  |  |  |  |
| 29F                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 43                       |        |  |  |  |  |
| 2A0                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 44                       |        |  |  |  |  |
| 2A1                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 45                       |        |  |  |  |  |
| 2A2                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 46                       |        |  |  |  |  |
| 2A3                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 47                       |        |  |  |  |  |
| 2A4                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 48                       |        |  |  |  |  |
| 2A5                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 49                       |        |  |  |  |  |
| 2A6                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 50                       |        |  |  |  |  |
| 2A7                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 51                       |        |  |  |  |  |
| 2A8                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 52                       |        |  |  |  |  |
| 2A9                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 53                       |        |  |  |  |  |
| 2AA                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 54                       |        |  |  |  |  |
| 2AB                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 55                       |        |  |  |  |  |
| 2AC                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 56                       |        |  |  |  |  |
| 2AD                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 57                       |        |  |  |  |  |
| 2AE                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 58                       |        |  |  |  |  |
| 2AF                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 59                       |        |  |  |  |  |
| 2B0                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 60                       |        |  |  |  |  |
| 2B1                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 61                       |        |  |  |  |  |
| 2B2                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 62                       |        |  |  |  |  |
| 2B3                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 0-FF                     |                      |            |                       |            |            | POS 63                       |        |  |  |  |  |
| 2B4                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 64                       |        |  |  |  |  |
| 2B5                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 65                       |        |  |  |  |  |
| 2B6                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 66                       |        |  |  |  |  |
| 2B7                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 67                       |        |  |  |  |  |
| 2B8                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 68                       |        |  |  |  |  |
| 2B9                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 69                       |        |  |  |  |  |
| 2BA                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 70                       |        |  |  |  |  |
| 2BB                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 71                       |        |  |  |  |  |
| 2BC                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 72                       |        |  |  |  |  |
| 2BD                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 73                       |        |  |  |  |  |
| 2BE                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 74                       |        |  |  |  |  |
| 2BF                                                                                                           | A2 FM | A2 ST | A2 BIL1 | NCM FM | NCM MONO | NCM ST | NCM BIL2 | NCM BIL1 | 4C               | 00-FF                    |                      |            |                       |            |            | POS 75                       |        |  |  |  |  |
| MODEL                                                                                                         |       |       |         |        |          |        |          |          |                  | MODEL                    |                      |            |                       |            |            |                              |        |  |  |  |  |
|                                                                                                               |       |       |         |        |          |        |          |          |                  |                          |                      |            |                       |            |            |                              |        |  |  |  |  |
|                                                                                                               |       |       |         |        |          |        |          |          |                  |                          |                      |            |                       |            |            |                              |        |  |  |  |  |
|                                                                                                               |       |       |         |        |          |        |          |          |                  |                          |                      |            |                       |            |            |                              |        |  |  |  |  |
|                                                                                                               |       |       |         |        |          |        |          |          |                  |                          |                      |            |                       |            |            |                              |        |  |  |  |  |
| LETTER NO.                                                                                                    |       |       |         |        |          |        |          |          |                  | LETTER NO.               |                      |            |                       |            |            |                              |        |  |  |  |  |

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                                      |       |         |        |                     |        |          |          | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |              |            |        |  |  |          |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|--------------------------------------|-------|---------|--------|---------------------|--------|----------|----------|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|--------------|------------|--------|--|--|----------|--|--|--|--|--|
| EEPROM CHECK DATA LIST 12                                                                                     |                                      |       |         |        |                     |        |          |          | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |              |            |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          | MANAGER                |                 |                      |                       |            |            | MANAGER                   |              |            |        |  |  | MANAGER  |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          | CHIEF                  |                 |                      |                       |            |            | CHIEF                     |              |            |        |  |  | CHIEF    |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          | ENGINEER               |                 |                      | Lingjie               |            |            | ENGINEER                  |              |            |        |  |  | ENGINEER |  |  |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                                      |       |         |        |                     |        |          |          |                        |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA                                 |       |         |        |                     |        |          |          | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL |            | REMARK |  |  |          |  |  |  |  |  |
|                                                                                                               | D7                                   | D6    | D5      | D4     | D3                  | D2     | D1       | D0       |                        |                 |                      | CHECK DATA            | CHECK TYPE | CHECK DATA | CHECK TYPE                | SETTING DATA |            |        |  |  |          |  |  |  |  |  |
| 2C0                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 76     |        |  |  |          |  |  |  |  |  |
| 2C1                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 77     |        |  |  |          |  |  |  |  |  |
| 2C2                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 78     |        |  |  |          |  |  |  |  |  |
| 2C3                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 79     |        |  |  |          |  |  |  |  |  |
| 2C4                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 80     |        |  |  |          |  |  |  |  |  |
| 2C5                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 81     |        |  |  |          |  |  |  |  |  |
| 2C6                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 82     |        |  |  |          |  |  |  |  |  |
| 2C7                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 83     |        |  |  |          |  |  |  |  |  |
| 2C8                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 84     |        |  |  |          |  |  |  |  |  |
| 2C9                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 85     |        |  |  |          |  |  |  |  |  |
| 2CA                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 86     |        |  |  |          |  |  |  |  |  |
| 2CB                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 87     |        |  |  |          |  |  |  |  |  |
| 2CC                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 88     |        |  |  |          |  |  |  |  |  |
| 2CD                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 89     |        |  |  |          |  |  |  |  |  |
| 2CE                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 90     |        |  |  |          |  |  |  |  |  |
| 2CF                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 91     |        |  |  |          |  |  |  |  |  |
| 2D0                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 92     |        |  |  |          |  |  |  |  |  |
| 2D1                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 93     |        |  |  |          |  |  |  |  |  |
| 2D2                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 94     |        |  |  |          |  |  |  |  |  |
| 2D3                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 95     |        |  |  |          |  |  |  |  |  |
| 2D4                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 96     |        |  |  |          |  |  |  |  |  |
| 2D5                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 97     |        |  |  |          |  |  |  |  |  |
| 2D6                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 98     |        |  |  |          |  |  |  |  |  |
| 2D7                                                                                                           | A2 FM                                | A2 ST | A2 BIL1 | NCM FM | NCM MONO            | NCM ST | NCM BIL2 | NCM BIL1 | 4C                     | 00-FF           |                      |                       |            |            |                           |              | POS 99     |        |  |  |          |  |  |  |  |  |
| 2D8                                                                                                           | ROM CORRECTION-1 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-1 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2D9                                                                                                           | ROM CORRECTION-1 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2DA                                                                                                           | ROM CORRECTION-1 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2DB                                                                                                           | ROM CORRECTION-1 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2DC                                                                                                           | ROM CORRECTION-1 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2DD                                                                                                           | ROM CORRECTION-2 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-2 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2DE                                                                                                           | ROM CORRECTION-2 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2DF                                                                                                           | ROM CORRECTION-2 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E0                                                                                                           | ROM CORRECTION-2 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E1                                                                                                           | ROM CORRECTION-2 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E2                                                                                                           | ROM CORRECTION-3 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-3 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2E3                                                                                                           | ROM CORRECTION-3 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E4                                                                                                           | ROM CORRECTION-3 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E5                                                                                                           | ROM CORRECTION-3 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E6                                                                                                           | ROM CORRECTION-3 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E7                                                                                                           | ROM CORRECTION-4 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-4 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2E8                                                                                                           | ROM CORRECTION-4 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2E9                                                                                                           | ROM CORRECTION-4 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2EA                                                                                                           | ROM CORRECTION-4 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2EB                                                                                                           | ROM CORRECTION-4 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2EC                                                                                                           | ROM CORRECTION-5 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-5 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2ED                                                                                                           | ROM CORRECTION-5 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2EE                                                                                                           | ROM CORRECTION-5 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2EF                                                                                                           | ROM CORRECTION-5 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F0                                                                                                           | ROM CORRECTION-5 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F1                                                                                                           | ROM CORRECTION-6 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-6 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2F2                                                                                                           | ROM CORRECTION-6 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F3                                                                                                           | ROM CORRECTION-6 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F4                                                                                                           | ROM CORRECTION-6 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F5                                                                                                           | ROM CORRECTION-6 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F6                                                                                                           | ROM CORRECTION-7 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-7 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2F7                                                                                                           | ROM CORRECTION-7 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F8                                                                                                           | ROM CORRECTION-7 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2F9                                                                                                           | ROM CORRECTION-7 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2FA                                                                                                           | ROM CORRECTION-7 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2FB                                                                                                           | ROM CORRECTION-8 HIGH BYTE ADDRESS   |       |         |        | ROM CORRECTION-8 ID |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              | Valid (*A) |        |  |  |          |  |  |  |  |  |
| 2FC                                                                                                           | ROM CORRECTION-8 MIDDLE BYTE ADDRESS |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2FD                                                                                                           | ROM CORRECTION-8 LOW BYTE ADDRESS    |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2FE                                                                                                           | ROM CORRECTION-8 DATA LENGTH         |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| 2FF                                                                                                           | ROM CORRECTION-8 CHECKSUM            |       |         |        |                     |        |          |          |                        | 00-FF           |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| MODEL                                                                                                         |                                      |       |         |        |                     |        |          |          | MODEL                  |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          |                        |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          |                        |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          |                        |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          |                        |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                      |       |         |        |                     |        |          |          |                        |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |
| LETTER NO.                                                                                                    |                                      |       |         |        |                     |        |          |          | LETTER NO.             |                 |                      |                       |            |            |                           |              |            |        |  |  |          |  |  |  |  |  |

## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                 | TV DESIGN ENGINEERING |            | TV PRODUCTION ENGINEERING |            |            |                              |        |
|---------------------------------------------------------------------------------------------------------------|------|----|----|----|----|----|----|----|------------------------|-----------------|-----------------------|------------|---------------------------|------------|------------|------------------------------|--------|
| EEPROM CHECK DATA LIST 13                                                                                     |      |    |    |    |    |    |    |    | ISSUED DATE :          |                 | ISSUED DATE :         |            | ISSUED DATE :             |            |            |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    | MANAGER                |                 | MANAGER               |            | MANAGER                   |            |            |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    | CHIEF                  |                 | CHIEF                 |            | CHIEF                     |            |            |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    | ENGINEER               |                 | ENGINEER              |            | ENGINEER                  |            |            |                              |        |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |    |    |    |    |    |                        |                 |                       |            |                           |            |            |                              |        |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |    |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU)  | CHASSIS    |                           | CTV FINAL  |            | LAST INITIAL<br>SETTING DATA | REMARK |
|                                                                                                               | D7   | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                        |                 |                       | CHECK DATA | CHECK TYPE                | CHECK DATA | CHECK TYPE |                              |        |
| 300                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 301                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 302                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 303                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 304                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 305                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 306                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 307                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 308                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 309                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 30A                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 30B                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 30C                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 30D                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 30E                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 30F                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 310                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 311                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 312                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 313                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 314                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 315                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 316                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 317                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 318                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 319                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 31A                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 31B                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 31C                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 31D                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 31E                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 31F                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 320                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 321                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 322                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 323                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 324                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 325                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 326                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 327                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 328                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 329                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 32A                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 32B                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 32C                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 32D                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 32E                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 32F                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 330                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 331                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 332                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 333                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 334                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 335                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 336                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 337                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 338                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 339                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 33A                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 33B                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 33C                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 33D                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 33E                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| 33F                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                       |            |                           |            |            |                              |        |
| MODEL                                                                                                         |      |    |    |    |    |    |    |    | MODEL                  |                 |                       |            |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                       |            |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                       |            |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                       |            |                           |            |            |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                       |            |                           |            |            |                              |        |
| LETTER NO.                                                                                                    |      |    |    |    |    |    |    |    | LETTER NO.             |                 |                       |            |                           |            |            |                              |        |

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |                       |    |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |                              |        |
|---------------------------------------------------------------------------------------------------------------|------|----|----|-----------------------|----|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|------------------------------|--------|
| EEPROM CHECK DATA LIST 14                                                                                     |      |    |    |                       |    |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    | MANAGER                |                 |                      | MANAGER               |            |            | MANAGER                   |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    | CHIEF                  |                 |                      | CHIEF                 |            |            | CHIEF                     |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    | ENGINEER               |                 |                      | ENGINEER              |            |            | ENGINEER                  |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    | Lingjia                |                 |                      |                       |            |            |                           |                              |        |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |                       |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL<br>SETTING DATA | REMARK |
|                                                                                                               | D7   | D6 | D5 | D4                    | D3 | D2 | D1 | D0 |                        |                 |                      | CHECK DATA            | CHECK TYPE | CHECK DATA | CHECK TYPE                |                              |        |
| 340                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 341                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 342                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 343                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 344                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 345                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 346                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 347                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 348                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 349                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 34A                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 34B                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 34C                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 34D                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 34E                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 34F                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 350                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 351                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 352                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 353                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 354                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 355                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 356                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 357                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 358                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 359                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 35A                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 35B                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 35C                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 35D                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 35E                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 35F                                                                                                           |      |    |    | ROM CORRECTION-3 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 360                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 361                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 362                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 363                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 364                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 365                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 366                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 367                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 368                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 369                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 36A                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 36B                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 36C                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 36D                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 36E                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 36F                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 370                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 371                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 372                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 373                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 374                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 375                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 376                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 377                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 378                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 379                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 37A                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 37B                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 37C                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 37D                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 37E                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 37F                                                                                                           |      |    |    | ROM CORRECTION-4 CODE |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| MODEL                                                                                                         |      |    |    |                       |    |    |    |    | MODEL                  |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |                       |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |

4-15

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |                              |        |
|---------------------------------------------------------------------------------------------------------------|------|----|----|----|----|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|------------------------------|--------|
| EEPROM CHECK DATA LIST 16                                                                                     |      |    |    |    |    |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    | MANAGER                |                 |                      | MANAGER               |            |            | MANAGER                   |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    | CHIEF                  |                 |                      | CHIEF                 |            |            | CHIEF                     |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    | ENGINEER               |                 | Lingjia              | ENGINEER              |            |            | ENGINEER                  |                              |        |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |    |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL<br>SETTING DATA | REMARK |
|                                                                                                               | D7   | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                        |                 |                      | CHECK DATA            | CHECK TYPE | CHECK DATA | CHECK TYPE                |                              |        |
| 3C0                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C1                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C2                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C3                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C4                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C5                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C6                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C7                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C8                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3C9                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3CA                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3CB                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3CC                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3CD                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3CE                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3CF                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D0                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D1                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D2                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D3                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D4                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D5                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D6                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D7                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D8                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3D9                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3DA                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3DB                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3DC                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3DD                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3DE                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3DF                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E0                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E1                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E2                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E3                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E4                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E5                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E6                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E7                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E8                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3E9                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3EA                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3EB                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3EC                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3ED                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3EE                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3EF                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F0                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F1                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F2                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F3                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F4                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F5                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F6                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F7                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F8                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3F9                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3FA                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3FB                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3FC                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3FD                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3FE                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| 3FF                                                                                                           |      |    |    |    |    |    |    |    |                        | 00-FF           |                      |                       |            |            |                           |                              |        |
| MODEL                                                                                                         |      |    |    |    |    |    |    |    | MODEL                  |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |

## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |                              |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |                              |        |            |  |  |
|---------------------------------------------------------------------------------------------------------------|------|----|----|------------------------------|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|------------------------------|--------|------------|--|--|
| EEPROM CHECK DATA LIST 17                                                                                     |      |    |    |                              |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    | MANAGER                |                 |                      | MANAGER               |            |            | MANAGER                   |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    | CHIEF                  |                 |                      | CHIEF                 |            |            | CHIEF                     |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    | ENGINEER               |                 |                      | ENGINEER              |            |            | ENGINEER                  |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    | Lingjia                |                 |                      |                       |            |            |                           |                              |        |            |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |                              |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |                              |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL<br>SETTING DATA | REMARK |            |  |  |
|                                                                                                               | D7   | D6 | D5 | D4                           | D3 | D2 | D1 |                        |                 |                      | D0                    | CHECK DATA | CHECK TYPE | CHECK DATA                |                              |        | CHECK TYPE |  |  |
| 400                                                                                                           |      |    |    | Inbox Message - Character 01 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 401                                                                                                           |      |    |    | Inbox Message - Character 02 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 402                                                                                                           |      |    |    | Inbox Message - Character 03 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 403                                                                                                           |      |    |    | Inbox Message - Character 04 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 404                                                                                                           |      |    |    | Inbox Message - Character 05 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 405                                                                                                           |      |    |    | Inbox Message - Character 06 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 406                                                                                                           |      |    |    | Inbox Message - Character 07 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 407                                                                                                           |      |    |    | Inbox Message - Character 08 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 408                                                                                                           |      |    |    | Inbox Message - Character 09 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 409                                                                                                           |      |    |    | Inbox Message - Character 10 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 40A                                                                                                           |      |    |    | Inbox Message - Character 11 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 40B                                                                                                           |      |    |    | Inbox Message - Character 12 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 40C                                                                                                           |      |    |    | Inbox Message - Character 13 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 40D                                                                                                           |      |    |    | Inbox Message - Character 14 |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 40E                                                                                                           |      |    |    | Inbox Message - Character 15 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 40F                                                                                                           |      |    |    | Inbox Message - Character 16 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 410                                                                                                           |      |    |    | Inbox Message - Character 17 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 411                                                                                                           |      |    |    | Inbox Message - Character 18 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 412                                                                                                           |      |    |    | Inbox Message - Character 19 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 413                                                                                                           |      |    |    | Inbox Message - Character 20 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 414                                                                                                           |      |    |    | Inbox Message - Character 21 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 415                                                                                                           |      |    |    | Inbox Message - Character 22 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 416                                                                                                           |      |    |    | Inbox Message - Character 23 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 417                                                                                                           |      |    |    | Inbox Message - Character 24 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 418                                                                                                           |      |    |    | Inbox Message - Character 25 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 419                                                                                                           |      |    |    | Inbox Message - Character 26 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 41A                                                                                                           |      |    |    | Inbox Message - Character 27 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 41B                                                                                                           |      |    |    | Inbox Message - Character 28 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 41C                                                                                                           |      |    |    | Inbox Message - Character 29 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 41D                                                                                                           |      |    |    | Inbox Message - Character 30 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 41E                                                                                                           |      |    |    | Inbox Message - Character 31 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 41F                                                                                                           |      |    |    | Inbox Message - Character 32 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 420                                                                                                           |      |    |    | Inbox Message - Character 33 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 421                                                                                                           |      |    |    | Inbox Message - Character 34 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 422                                                                                                           |      |    |    | Inbox Message - Character 35 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 423                                                                                                           |      |    |    | Inbox Message - Character 36 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 424                                                                                                           |      |    |    | Inbox Message - Character 37 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 425                                                                                                           |      |    |    | Inbox Message - Character 38 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 426                                                                                                           |      |    |    | Inbox Message - Character 39 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 427                                                                                                           |      |    |    | Inbox Message - Character 40 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 428                                                                                                           |      |    |    | Inbox Message - Character 41 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 429                                                                                                           |      |    |    | Inbox Message - Character 42 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 42A                                                                                                           |      |    |    | Inbox Message - Character 43 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 42B                                                                                                           |      |    |    | Inbox Message - Character 44 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 42C                                                                                                           |      |    |    | Inbox Message - Character 45 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 42D                                                                                                           |      |    |    | Inbox Message - Character 46 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 42E                                                                                                           |      |    |    | Inbox Message - Character 47 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 42F                                                                                                           |      |    |    | Inbox Message - Character 48 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 430                                                                                                           |      |    |    | Inbox Message - Character 49 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 431                                                                                                           |      |    |    | Inbox Message - Character 50 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 432                                                                                                           |      |    |    | Inbox Message - Character 51 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 433                                                                                                           |      |    |    | Inbox Message - Character 52 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 434                                                                                                           |      |    |    | Inbox Message - Character 53 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 435                                                                                                           |      |    |    | Inbox Message - Character 54 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 436                                                                                                           |      |    |    | Inbox Message - Character 55 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 437                                                                                                           |      |    |    | Inbox Message - Character 56 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 438                                                                                                           |      |    |    | Inbox Message - Character 57 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 439                                                                                                           |      |    |    | Inbox Message - Character 58 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 43A                                                                                                           |      |    |    | Inbox Message - Character 59 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 43B                                                                                                           |      |    |    | Inbox Message - Character 60 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 43C                                                                                                           |      |    |    | Inbox Message - Character 61 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 43D                                                                                                           |      |    |    | Inbox Message - Character 62 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 43E                                                                                                           |      |    |    | Inbox Message - Character 63 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 43F                                                                                                           |      |    |    | Inbox Message - Character 64 |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| MODEL                                                                                                         |      |    |    |                              |    |    |    | MODEL                  |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |      |    |    |                              |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                              |    |    |    |    |    |    |    |                  | SEM PDD SOFTWARE GROUP |                      |            | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING    |        |  |  |  |  |          |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|------------------------------|----|----|----|----|----|----|----|------------------|------------------------|----------------------|------------|-----------------------|------------|------------|------------------------------|--------|--|--|--|--|----------|--|--|--|--|--|
| EEPROM CHECK DATA LIST 18                                                                                     |                              |    |    |    |    |    |    |    |                  | ISSUED DATE :          |                      |            | ISSUED DATE :         |            |            | ISSUED DATE :                |        |  |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  | MANAGER                |                      |            |                       |            |            | MANAGER                      |        |  |  |  |  | MANAGER  |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  | CHIEF                  |                      |            |                       |            |            | CHIEF                        |        |  |  |  |  | CHIEF    |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  | ENGINEER               |                      |            | Lingjia               |            |            | ENGINEER                     |        |  |  |  |  | ENGINEER |  |  |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA                         |    |    |    |    |    |    |    | MICON<br>DEFAULT | EEPROM<br>RANGE        | EEPROM<br>WRITE(CPU) | CHASSIS    |                       | CTV FINAL  |            | LAST INITIAL<br>SETTING DATA | REMARK |  |  |  |  |          |  |  |  |  |  |
|                                                                                                               | D7                           | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                  |                        |                      | CHECK DATA | CHECK TYPE            | CHECK DATA | CHECK TYPE |                              |        |  |  |  |  |          |  |  |  |  |  |
| 440                                                                                                           | Inbox Message - Character 65 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 441                                                                                                           | Inbox Message - Character 66 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 442                                                                                                           | Inbox Message - Character 67 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 443                                                                                                           | Inbox Message - Character 68 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 444                                                                                                           | Inbox Message - Character 69 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 445                                                                                                           | Inbox Message - Character 70 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 446                                                                                                           | Inbox Message - Character 71 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 447                                                                                                           | Inbox Message - Character 72 |    |    |    |    |    |    |    | FF               | 0-FF                   |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 448                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 449                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 44A                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 44B                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 44C                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 44D                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 44E                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 44F                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 450                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 451                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 452                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 453                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 454                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 455                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 456                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 457                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 458                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 459                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 45A                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 45B                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 45C                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 45D                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 45E                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 45F                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 460                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 461                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 462                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 463                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 464                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 465                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 466                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 467                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 468                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 469                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 46A                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 46B                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 46C                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 46D                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 46E                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 46F                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 470                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 471                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 472                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 473                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 474                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 475                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 476                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 477                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 478                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 479                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 47A                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 47B                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 47C                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 47D                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 47E                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| 47F                                                                                                           |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
| MODEL                                                                                                         |                              |    |    |    |    |    |    |    | MODEL            |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |
|                                                                                                               |                              |    |    |    |    |    |    |    |                  |                        |                      |            |                       |            |            |                              |        |  |  |  |  |          |  |  |  |  |  |

## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                                    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |                              |        |            |  |  |
|---------------------------------------------------------------------------------------------------------------|------------------------------------|----|----|----|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|------------------------------|--------|------------|--|--|
| EEPROM CHECK DATA LIST 19                                                                                     |                                    |    |    |    |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    | MANAGER                |                 |                      | MANAGER               |            |            | MANAGER                   |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    | CHIEF                  |                 |                      | CHIEF                 |            |            | CHIEF                     |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    | ENGINEER               |                 |                      | ENGINEER              |            |            | ENGINEER                  |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    | Lingjia                |                 |                      |                       |            |            |                           |                              |        |            |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA                               |    |    |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL<br>SETTING DATA | REMARK |            |  |  |
|                                                                                                               | D7                                 | D6 | D5 | D4 | D3 | D2 | D1 |                        |                 |                      | D0                    | CHECK DATA | CHECK TYPE | CHECK DATA                |                              |        | CHECK TYPE |  |  |
| 480                                                                                                           | Message Favorite One- Character 01 |    |    |    |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 481                                                                                                           | Message Favorite One- Character 02 |    |    |    |    |    |    | FF                     | 00-FF           |                      |                       |            |            |                           |                              |        |            |  |  |
| 482                                                                                                           | Message Favorite One- Character 03 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 483                                                                                                           | Message Favorite One- Character 04 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 484                                                                                                           | Message Favorite One- Character 05 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 485                                                                                                           | Message Favorite One- Character 06 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 486                                                                                                           | Message Favorite One- Character 07 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 487                                                                                                           | Message Favorite One- Character 08 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 488                                                                                                           | Message Favorite One- Character 09 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 489                                                                                                           | Message Favorite One- Character 10 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 48A                                                                                                           | Message Favorite One- Character 11 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 48B                                                                                                           | Message Favorite One- Character 12 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 48C                                                                                                           | Message Favorite One- Character 13 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 48D                                                                                                           | Message Favorite One- Character 14 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 48E                                                                                                           | Message Favorite One- Character 15 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 48F                                                                                                           | Message Favorite One- Character 16 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 490                                                                                                           | Message Favorite One- Character 17 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 491                                                                                                           | Message Favorite One- Character 18 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 492                                                                                                           | Message Favorite One- Character 19 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 493                                                                                                           | Message Favorite One- Character 20 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 494                                                                                                           | Message Favorite One- Character 21 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 495                                                                                                           | Message Favorite One- Character 22 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 496                                                                                                           | Message Favorite One- Character 23 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 497                                                                                                           | Message Favorite One- Character 24 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 498                                                                                                           | Message Favorite One- Character 25 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 499                                                                                                           | Message Favorite One- Character 26 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 49A                                                                                                           | Message Favorite One- Character 27 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 49B                                                                                                           | Message Favorite One- Character 28 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 49C                                                                                                           | Message Favorite One- Character 29 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 49D                                                                                                           | Message Favorite One- Character 30 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 49E                                                                                                           | Message Favorite One- Character 31 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 49F                                                                                                           | Message Favorite One- Character 32 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A0                                                                                                           | Message Favorite One- Character 33 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A1                                                                                                           | Message Favorite One- Character 34 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A2                                                                                                           | Message Favorite One- Character 35 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A3                                                                                                           | Message Favorite One- Character 36 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A4                                                                                                           | Message Favorite One- Character 37 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A5                                                                                                           | Message Favorite One- Character 38 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A6                                                                                                           | Message Favorite One- Character 39 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A7                                                                                                           | Message Favorite One- Character 40 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A8                                                                                                           | Message Favorite One- Character 41 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4A9                                                                                                           | Message Favorite One- Character 42 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4AA                                                                                                           | Message Favorite One- Character 43 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4AB                                                                                                           | Message Favorite One- Character 44 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4AC                                                                                                           | Message Favorite One- Character 45 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4AD                                                                                                           | Message Favorite One- Character 46 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4AE                                                                                                           | Message Favorite One- Character 47 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4AF                                                                                                           | Message Favorite One- Character 48 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B0                                                                                                           | Message Favorite One- Character 49 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B1                                                                                                           | Message Favorite One- Character 50 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B2                                                                                                           | Message Favorite One- Character 51 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B3                                                                                                           | Message Favorite One- Character 52 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B4                                                                                                           | Message Favorite One- Character 53 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B5                                                                                                           | Message Favorite One- Character 54 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B6                                                                                                           | Message Favorite One- Character 55 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B7                                                                                                           | Message Favorite One- Character 56 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B8                                                                                                           | Message Favorite One- Character 57 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4B9                                                                                                           | Message Favorite One- Character 58 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4BA                                                                                                           | Message Favorite One- Character 59 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4BB                                                                                                           | Message Favorite One- Character 60 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4BC                                                                                                           | Message Favorite One- Character 61 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4BD                                                                                                           | Message Favorite One- Character 62 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4BE                                                                                                           | Message Favorite One- Character 63 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| 4BF                                                                                                           | Message Favorite One- Character 64 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |                              |        |            |  |  |
| MODEL                                                                                                         |                                    |    |    |    |    |    |    | MODEL                  |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |                              |        |            |  |  |
| LETTER NO.                                                                                                    |                                    |    |    |    |    |    |    | LETTER NO.             |                 |                      |                       |            |            |                           |                              |        |            |  |  |

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                                    |    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |              |  |        |  |  |          |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|------------------------------------|----|----|----|----|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|--------------|--|--------|--|--|----------|--|--|--|--|--|
| EEPROM CHECK DATA LIST 20                                                                                     |                                    |    |    |    |    |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |    | MANAGER                |                 |                      |                       |            |            | MANAGER                   |              |  |        |  |  | MANAGER  |  |  |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |    | CHIEF                  |                 |                      |                       |            |            | CHIEF                     |              |  |        |  |  | CHIEF    |  |  |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |    | ENGINEER               |                 |                      |                       |            |            | ENGINEER                  |              |  |        |  |  | ENGINEER |  |  |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA                               |    |    |    |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL |  | REMARK |  |  |          |  |  |  |  |  |
|                                                                                                               | D7                                 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                        |                 |                      | CHECK DATA            | CHECK TYPE | CHECK DATA | CHECK TYPE                | SETTING DATA |  |        |  |  |          |  |  |  |  |  |
| 4C0                                                                                                           | Message Favorite One- Character 65 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C1                                                                                                           | Message Favorite One- Character 66 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C2                                                                                                           | Message Favorite One- Character 67 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C3                                                                                                           | Message Favorite One- Character 68 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C4                                                                                                           | Message Favorite One- Character 69 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C5                                                                                                           | Message Favorite One- Character 70 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C6                                                                                                           | Message Favorite One- Character 71 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C7                                                                                                           | Message Favorite One- Character 72 |    |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C8                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4C9                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4CA                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4CB                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4CC                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4CD                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4CE                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4CF                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D0                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D1                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D2                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D3                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D4                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D5                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D6                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D7                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D8                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4D9                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4DA                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4DB                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4DC                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4DD                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4DE                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4DF                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E0                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E1                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E2                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E3                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E4                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E5                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E6                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E7                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E8                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4E9                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4EA                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4EB                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4EC                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4ED                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4EE                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4EF                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F0                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F1                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F2                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F3                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F4                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F5                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F6                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F7                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F8                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4F9                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4FA                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4FB                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4FC                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4FD                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4FE                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 4FF                                                                                                           |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| MODEL                                                                                                         |                                    |    |    |    |    |    |    |    | MODEL                  |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| LETTER NO.                                                                                                    |                                    |    |    |    |    |    |    |    | LETTER NO.             |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |

4-21

|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
|---------------------------------------------------------------------------------------------------------------|------------------------------------|----|----|----|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|--------------|--------------|--|--|--|
| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                                    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |              |              |  |  |  |
| EEPROM CHECK DATA LIST 22                                                                                     |                                    |    |    |    |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |              |              |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    | MANAGER                |                 |                      |                       | MANAGER    |            |                           |              | MANAGER      |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    | CHIEF                  |                 |                      |                       | CHIEF      |            |                           |              | CHIEF        |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    | ENGINEER               |                 | Lingjia              |                       | ENGINEER   |            |                           |              | ENGINEER     |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA                               |    |    |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL |              |  |  |  |
|                                                                                                               | D7                                 | D6 | D5 | D4 | D3 | D2 | D1 | D0                     |                 |                      |                       | CHECK DATA | CHECK TYPE | CHECK DATA                | CHECK TYPE   | SETTING DATA |  |  |  |
| 540                                                                                                           | Message Favorite Two- Character 65 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 541                                                                                                           | Message Favorite Two- Character 66 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 542                                                                                                           | Message Favorite Two- Character 67 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 543                                                                                                           | Message Favorite Two- Character 68 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 544                                                                                                           | Message Favorite Two- Character 69 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 545                                                                                                           | Message Favorite Two- Character 70 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 546                                                                                                           | Message Favorite Two- Character 71 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 547                                                                                                           | Message Favorite Two- Character 72 |    |    |    |    |    |    | FF                     | 0-FF            |                      |                       |            |            |                           |              |              |  |  |  |
| 548                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 549                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 54A                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 54B                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 54C                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 54D                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 556                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 54F                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 550                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 551                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 552                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 553                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 554                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 555                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 556                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 557                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 558                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 559                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 55A                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 55B                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 55C                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 55D                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 55E                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 55F                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 560                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 561                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 562                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 563                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 564                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 565                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 566                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 567                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 568                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 569                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 56A                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 56B                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 56C                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 56D                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 56E                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 56F                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 570                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 571                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 572                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 573                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 574                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 575                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 576                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 577                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 578                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 579                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 57A                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 57B                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 57C                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 57D                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 57E                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| 57F                                                                                                           |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
| MODEL                                                                                                         |                                    |    |    |    |    |    |    | MODEL                  |                 |                      |                       |            |            |                           |              |              |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |
|                                                                                                               |                                    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |              |  |  |  |

4 - 23

|                                                                                                               |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
|---------------------------------------------------------------------------------------------------------------|--------------------------------------|----|----|----|----|----|----|----|------------------------|--------|------------|---------------|------------|---------------------------|------------|--------------|--------|----------|--|--|--|
| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                                      |    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |        |            |               |            | TV PRODUCTION ENGINEERING |            |              |        |          |  |  |  |
| EEPROM CHECK DATA LIST 24                                                                                     |                                      |    |    |    |    |    |    |    | ISSUED DATE :          |        |            | ISSUED DATE : |            | ISSUED DATE :             |            |              |        |          |  |  |  |
|                                                                                                               |                                      |    |    |    |    |    |    |    | MANAGER                |        |            |               |            | MANAGER                   |            |              |        | MANAGER  |  |  |  |
|                                                                                                               |                                      |    |    |    |    |    |    |    | SUPERVISOR             |        |            |               |            | CHIEF                     |            |              |        | CHIEF    |  |  |  |
|                                                                                                               |                                      |    |    |    |    |    |    |    | ENGINEER               |        |            | Lingjia       |            | ENGINEER                  |            |              |        | ENGINEER |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| ADDRESS (HEX)                                                                                                 | DATA                                 |    |    |    |    |    |    |    | MICON                  | EEPROM | EEPROM     | CHASSIS       |            | CTV FINAL                 |            | LAST INITIAL |        |          |  |  |  |
|                                                                                                               | D7                                   | D6 | D5 | D4 | D3 | D2 | D1 | D0 | DEFAULT                | RANGE  | WRITE(CPU) | CHECK DATA    | CHECK TYPE | CHECK DATA                | CHECK TYPE | SETTING DATA | REMARK |          |  |  |  |
| 5C0                                                                                                           | Message Favorite Three- Character 65 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C1                                                                                                           | Message Favorite Three- Character 66 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C2                                                                                                           | Message Favorite Three- Character 67 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C3                                                                                                           | Message Favorite Three- Character 68 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C4                                                                                                           | Message Favorite Three- Character 69 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C5                                                                                                           | Message Favorite Three- Character 70 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C6                                                                                                           | Message Favorite Three- Character 71 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C7                                                                                                           | Message Favorite Three- Character 72 |    |    |    |    |    |    |    | FF                     | 0-FF   |            |               |            |                           |            |              |        |          |  |  |  |
| 5C8                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5C9                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5CA                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5CB                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5CC                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5CD                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5CE                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5CF                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D0                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D1                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D2                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D3                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D4                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D5                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D6                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D7                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D8                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5D9                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5DA                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5DB                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5DC                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5DD                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5DE                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5DF                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E0                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E1                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E2                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E3                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E4                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E5                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E6                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E7                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E8                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5E9                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5EA                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5EB                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5EC                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5ED                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5EE                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5EF                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F0                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F1                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F2                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F3                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F4                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F5                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F6                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F7                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F8                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5F9                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5FA                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5FB                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5FC                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5FD                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5FE                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| 5FF                                                                                                           |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
| MODEL                                                                                                         |                                      |    |    |    |    |    |    |    | MODEL                  |        |            |               |            |                           |            |              |        |          |  |  |  |
|                                                                                                               |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
|                                                                                                               |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
|                                                                                                               |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |
|                                                                                                               |                                      |    |    |    |    |    |    |    |                        |        |            |               |            |                           |            |              |        |          |  |  |  |

## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |                                    |           |            |    |    |            |                | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |              |              |        |  |  |          |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|------------------------------------|-----------|------------|----|----|------------|----------------|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|--------------|--------------|--------|--|--|----------|--|--|--|--|--|
| EEPROM CHECK DATA LIST 25                                                                                     |                                    |           |            |    |    |            |                | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |              |              |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |           |            |    |    |            |                | MANAGER                |                 |                      |                       |            |            | MANAGER                   |              |              |        |  |  | MANAGER  |  |  |  |  |  |
|                                                                                                               |                                    |           |            |    |    |            |                | CHIEF                  |                 |                      |                       |            |            | CHIEF                     |              |              |        |  |  | CHIEF    |  |  |  |  |  |
|                                                                                                               |                                    |           |            |    |    |            |                | ENGINEER               |                 |                      | Lingjia               |            |            | ENGINEER                  |              |              |        |  |  | ENGINEER |  |  |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA                               |           |            |    |    |            |                | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL | REMARK       |        |  |  |          |  |  |  |  |  |
|                                                                                                               | D7                                 | D6        | D5         | D4 | D3 | D2         | D1             | D0                     |                 |                      |                       | CHECK DATA | CHECK TYPE | CHECK DATA                | CHECK TYPE   | SETTING DATA |        |  |  |          |  |  |  |  |  |
| 600                                                                                                           | TELETEXT LEVEL (F277)              |           |            |    |    |            |                | 08                     | 00-10           |                      |                       |            |            |                           |              |              | C100D4 |  |  |          |  |  |  |  |  |
| 601                                                                                                           | クロックライン自動調整レジスタ (F278)             |           |            |    |    |            |                | 01                     | 00-FF           |                      |                       |            |            |                           |              |              | C1114C |  |  |          |  |  |  |  |  |
| 602                                                                                                           | クロックラインキラーレベル設定レジスタ (F279)         |           |            |    |    |            |                | 00                     | 00-FF           |                      |                       |            |            |                           |              |              | C11151 |  |  |          |  |  |  |  |  |
| 603                                                                                                           | CSYNCスライスレベル設定レジスタ (F280)          |           |            |    |    |            |                | 70                     | 00-FF           |                      |                       |            |            |                           |              |              | C111CD |  |  |          |  |  |  |  |  |
| 604                                                                                                           | AFC収束範囲設定レジスタ (F281)               |           |            |    |    |            |                | 13                     | 00-FF           |                      |                       |            |            |                           |              |              | C111D1 |  |  |          |  |  |  |  |  |
| 605                                                                                                           | F特調整レジスタ (F282)                    |           |            |    |    |            |                | A4                     | 00-FF           |                      |                       |            |            |                           |              |              | C112A5 |  |  |          |  |  |  |  |  |
| 606                                                                                                           | EPG用ADオフセット調整レジスタ (F283)           |           |            |    |    |            |                | D4                     | 00-FF           |                      |                       |            |            |                           |              |              | C112F9 |  |  |          |  |  |  |  |  |
| 607                                                                                                           | EPG用ADゲイン調整レジスタ (F284)             |           |            |    |    |            |                | C1                     | 00-FF           |                      |                       |            |            |                           |              |              | C112FD |  |  |          |  |  |  |  |  |
| 608                                                                                                           | クロックゲート調整器電時リセット                   | クロックライン制限 | VPSコンペアマスク |    |    | WSSコンペアマスク |                | 3B                     | 00-7F           |                      |                       |            |            |                           |              |              | F285   |  |  |          |  |  |  |  |  |
| 609                                                                                                           | レジスタ設定値 (F286)                     |           |            |    |    |            |                | 84                     | 00-FF           |                      |                       |            |            |                           |              |              | C11105 |  |  |          |  |  |  |  |  |
| 60A                                                                                                           | レジスタ設定値 (F287)                     |           |            |    |    |            |                | 84                     | 00-FF           |                      |                       |            |            |                           |              |              | C11105 |  |  |          |  |  |  |  |  |
| 60B                                                                                                           | TELETEXTフレーミングゲート開始位置設定レジスタ (F288) |           |            |    |    |            |                | 74                     | 00-FF           |                      |                       |            |            |                           |              |              | C111FD |  |  |          |  |  |  |  |  |
| 60C                                                                                                           | TELETEXTフレーミングゲート終了位置設定レジスタ (F289) |           |            |    |    |            |                | AA                     | 00-FF           |                      |                       |            |            |                           |              |              | C11201 |  |  |          |  |  |  |  |  |
| 60D                                                                                                           | TELETEXTクロックゲート開始位置設定レジスタ (F290)   |           |            |    |    |            |                | 6C                     | 00-FF           |                      |                       |            |            |                           |              |              | C11205 |  |  |          |  |  |  |  |  |
| 60E                                                                                                           | TELETEXTクロックゲート終了位置設定レジスタ (F291)   |           |            |    |    |            |                | 80                     | 00-FF           |                      |                       |            |            |                           |              |              | C11209 |  |  |          |  |  |  |  |  |
| 60F                                                                                                           | TELETEXT用ADオフセット調整レジスタ (F292)      |           |            |    |    |            |                | CF                     | 00-FF           |                      |                       |            |            |                           |              |              | C112C1 |  |  |          |  |  |  |  |  |
| 610                                                                                                           | TELETEXT用ADゲイン調整レジスタ (F293)        |           |            |    |    |            |                | 8C                     | 00-FF           |                      |                       |            |            |                           |              |              | C112C5 |  |  |          |  |  |  |  |  |
| 611                                                                                                           | CCD(N)データレジスタ1 (F294)              |           |            |    |    |            |                | 94                     | 00-FF           |                      |                       |            |            |                           |              |              | C11129 |  |  |          |  |  |  |  |  |
| 612                                                                                                           | VPSデータレジスタ1 (F295)                 |           |            |    |    |            |                | 03                     | 00-FF           |                      |                       |            |            |                           |              |              | C11159 |  |  |          |  |  |  |  |  |
| 613                                                                                                           |                                    |           |            |    |    |            | TEXT_MD (F297) | OSD_HS (F298)          | 00              | 00-03                |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 614                                                                                                           | V-BLK TOP SHIFT (F298)             |           |            |    |    |            |                | 03                     | 00-0F           |                      |                       |            |            |                           |              |              | C1001C |  |  |          |  |  |  |  |  |
| 615                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 616                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 617                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 618                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 619                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 61A                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 61B                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 61C                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 61D                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 61E                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 61F                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 620                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 621                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 622                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 623                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 624                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 625                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 626                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 627                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 628                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 629                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 62A                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 62B                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 62C                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 62D                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 62E                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 62F                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 630                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 631                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 632                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 633                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 634                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 635                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 636                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 637                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 638                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 639                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 63A                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 63B                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 63C                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 63D                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 63E                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| 63F                                                                                                           |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| MODEL                                                                                                         |                                    |           |            |    |    |            |                | MODEL                  |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
|                                                                                                               |                                    |           |            |    |    |            |                |                        |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |
| LETTER NO.                                                                                                    |                                    |           |            |    |    |            |                | LETTER NO.             |                 |                      |                       |            |            |                           |              |              |        |  |  |          |  |  |  |  |  |

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            |            | TV PRODUCTION ENGINEERING    |        |            |
|---------------------------------------------------------------------------------------------------------------|------|----|----|----|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|------------|------------------------------|--------|------------|
| EEPROM CHECK DATA LIST 26                                                                                     |      |    |    |    |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            |            | ISSUED DATE :                |        |            |
|                                                                                                               |      |    |    |    |    |    |    | MANAGER                |                 |                      | MANAGER               |            |            | MANAGER    |                              |        |            |
|                                                                                                               |      |    |    |    |    |    |    | CHIEF                  |                 |                      | CHIEF                 |            |            | CHIEF      |                              |        |            |
|                                                                                                               |      |    |    |    |    |    |    | ENGINEER               |                 |                      | ENGINEER              |            |            | ENGINEER   |                              |        |            |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |            | LAST INITIAL<br>SETTING DATA | REMARK |            |
|                                                                                                               | D7   | D6 | D5 | D4 | D3 | D2 | D1 |                        |                 |                      | D0                    | CHECK DATA | CHECK TYPE | CHECK DATA |                              |        | CHECK TYPE |
| 640                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 641                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 642                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 643                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 644                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 645                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 646                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 647                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 648                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 649                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 64A                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 64B                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 64C                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 64D                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 64E                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 64F                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 650                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 651                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 652                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 653                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 654                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 655                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 656                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 657                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 658                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 659                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 65A                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 65B                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 65C                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 65D                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 65E                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 65F                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 660                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 661                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 662                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 663                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 664                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 665                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 666                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 667                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 668                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 669                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 66A                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 66B                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 66C                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 66D                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 66E                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 66F                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 670                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 671                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 672                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 673                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 674                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 675                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 676                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 677                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 678                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 679                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 67A                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 67B                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 67C                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 67D                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 67E                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| 67F                                                                                                           |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| MODEL                                                                                                         |      |    |    |    |    |    |    | MODEL                  |                 |                      |                       |            |            |            |                              |        |            |
|                                                                                                               |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
|                                                                                                               |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
|                                                                                                               |      |    |    |    |    |    |    |                        |                 |                      |                       |            |            |            |                              |        |            |
| LETTER NO.                                                                                                    |      |    |    |    |    |    |    | LETTER NO.             |                 |                      |                       |            |            |            |                              |        |            |


## MEMORY MAP (Continued)

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |      |    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                 |                      | TV DESIGN ENGINEERING |            |            | TV PRODUCTION ENGINEERING |              |  |        |  |  |          |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|------|----|----|----|----|----|----|----|------------------------|-----------------|----------------------|-----------------------|------------|------------|---------------------------|--------------|--|--------|--|--|----------|--|--|--|--|--|
| EEPROM CHECK DATA LIST 27                                                                                     |      |    |    |    |    |    |    |    | ISSUED DATE :          |                 |                      | ISSUED DATE :         |            |            | ISSUED DATE :             |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    | MANAGER                |                 |                      |                       |            |            | MANAGER                   |              |  |        |  |  | MANAGER  |  |  |  |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    | CHIEF                  |                 |                      |                       |            |            | CHIEF                     |              |  |        |  |  | CHIEF    |  |  |  |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    | ENGINEER               |                 |                      | Lingjia               |            |            | ENGINEER                  |              |  |        |  |  | ENGINEER |  |  |  |  |  |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| ADDRESS<br>(HEX)                                                                                              | DATA |    |    |    |    |    |    |    | MICON<br>DEFAULT       | EEPROM<br>RANGE | EEPROM<br>WRITE(CPU) | CHASSIS               |            | CTV FINAL  |                           | LAST INITIAL |  | REMARK |  |  |          |  |  |  |  |  |
|                                                                                                               | D7   | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                        |                 |                      | CHECK DATA            | CHECK TYPE | CHECK DATA | CHECK TYPE                | SETTING DATA |  |        |  |  |          |  |  |  |  |  |
| 680                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 681                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 682                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 683                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 684                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 685                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 686                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 687                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 688                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 689                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 68A                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 68B                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 68C                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 68D                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 68E                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 68F                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 690                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 691                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 692                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 693                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 694                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 695                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 696                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 697                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 698                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 699                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 69A                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 69B                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 69C                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 69D                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 69E                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 69F                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A0                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A1                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A2                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A3                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A4                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A5                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A6                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A7                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A8                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6A9                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6AA                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6AB                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6AC                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6AD                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6AE                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6AF                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B0                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B1                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B2                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B3                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B4                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B5                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B6                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B7                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B8                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6B9                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6BA                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6BB                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6BC                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6BD                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6BE                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| 6BF                                                                                                           |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| MODEL                                                                                                         |      |    |    |    |    |    |    |    | MODEL                  |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
|                                                                                                               |      |    |    |    |    |    |    |    |                        |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |
| LETTER NO.                                                                                                    |      |    |    |    |    |    |    |    | LETTER NO.             |                 |                      |                       |            |            |                           |              |  |        |  |  |          |  |  |  |  |  |

| MODEL : IXB584WJZZ (GA5 TEXT)                                                                                 |    |    |    |    |    |    |    | SEM PDD SOFTWARE GROUP |                  | TV DESIGN ENGINEERING |                      | TV PRODUCTION ENGINEERING        |  |                                    |  |                              |        |
|---------------------------------------------------------------------------------------------------------------|----|----|----|----|----|----|----|------------------------|------------------|-----------------------|----------------------|----------------------------------|--|------------------------------------|--|------------------------------|--------|
| EEPROM CHECK DATA LIST 28                                                                                     |    |    |    |    |    |    |    | ISSUED DATE :          |                  | ISSUED DATE :         |                      | ISSUED DATE :                    |  |                                    |  |                              |        |
|                                                                                                               |    |    |    |    |    |    |    | MANAGER                |                  | MANAGER               |                      | MANAGER                          |  |                                    |  |                              |        |
|                                                                                                               |    |    |    |    |    |    |    | CHIEF                  |                  | CHIEF                 |                      | CHIEF                            |  |                                    |  |                              |        |
|                                                                                                               |    |    |    |    |    |    |    | ENGINEER               |                  | ENGINEER              |                      | ENGINEER                         |  |                                    |  |                              |        |
| SLAVE ADDRESS : A0(00-FF) A2(100-1FF) A4(200-2FF) A6(300-3FF) A8(400-4FF) AA(500-5FF) AC(600-6FF) AE(700-7FF) |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| ADDRESS<br>(HEX)                                                                                              | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0                     | MICON<br>DEFAULT | EEPROM<br>RANGE       | EEPROM<br>WRITE(CPU) | CHASSIS<br>CHECK DATA CHECK TYPE |  | CTV FINAL<br>CHECK DATA CHECK TYPE |  | LAST INITIAL<br>SETTING DATA | REMARK |
| 6C0                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C1                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C2                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C3                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C4                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C5                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C6                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C7                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C8                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6C9                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6CA                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6CB                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6CC                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6CD                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6CE                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6CF                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D0                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D1                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D2                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D3                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D4                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D5                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D6                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D7                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D8                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6D9                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6DA                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6DB                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6DC                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6DD                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6DE                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6DF                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E0                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E1                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E2                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E3                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E4                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E5                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E6                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E7                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E8                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6E9                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6EA                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6EB                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6EC                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6ED                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6EE                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6EF                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F0                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F1                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F2                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F3                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F4                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F5                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F6                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F7                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F8                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6F9                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6FA                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6FB                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6FC                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6FD                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6FE                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| 6FF                                                                                                           |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| MODEL                                                                                                         |    |    |    |    |    |    |    | MODEL                  |                  |                       |                      |                                  |  |                                    |  |                              |        |
|                                                                                                               |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
|                                                                                                               |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
|                                                                                                               |    |    |    |    |    |    |    |                        |                  |                       |                      |                                  |  |                                    |  |                              |        |
| LETTER NO.                                                                                                    |    |    |    |    |    |    |    | LETTER NO.             |                  |                       |                      |                                  |  |                                    |  |                              |        |


# CHAPTER 5. TROUBLE SHOOTING

## [1] TROUBLE SHOOTING

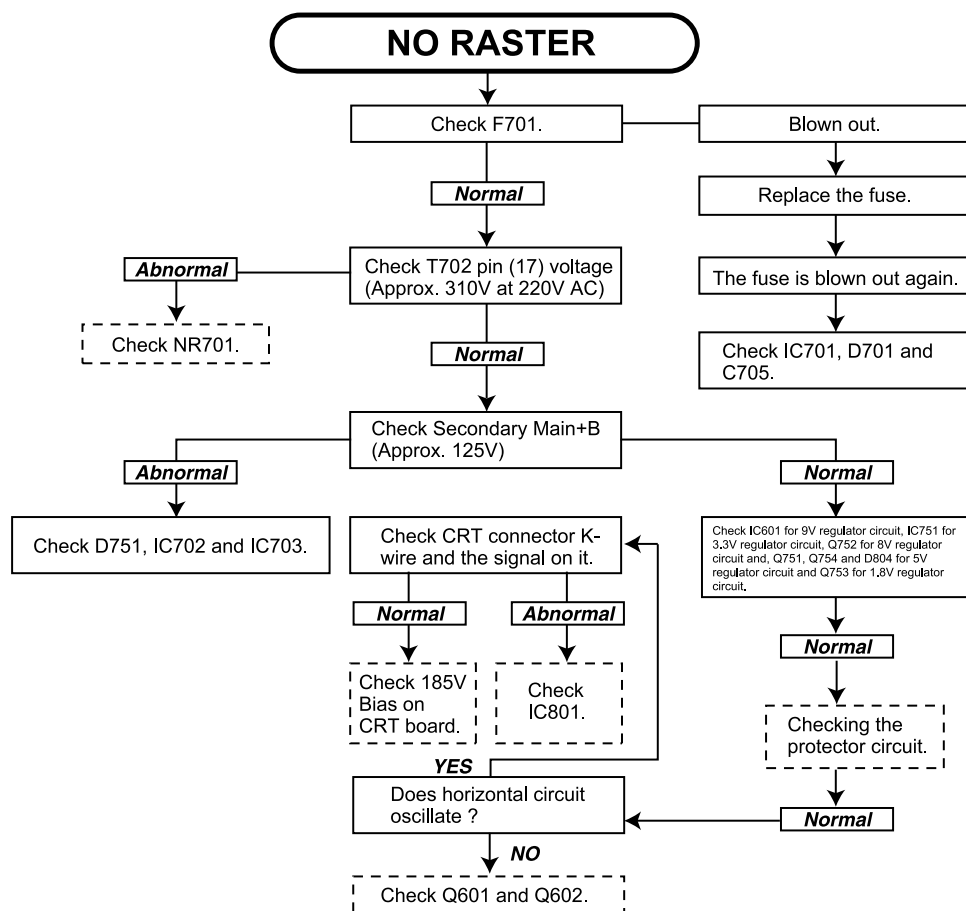


### CIRCUITS TO BE CHECKED:

- Tuner.
- PIF.
- Automatic Gain Control.
- (5V), (32V) Power Source.

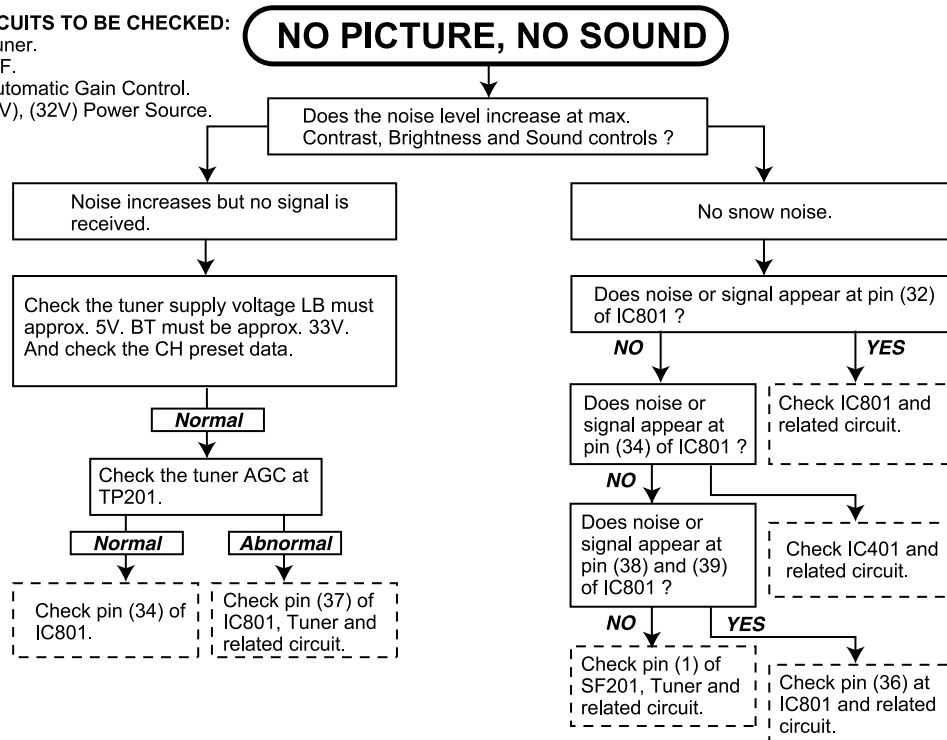

**CIRCUITS TO BE CHECKED:**

- Audio Output Circuit.

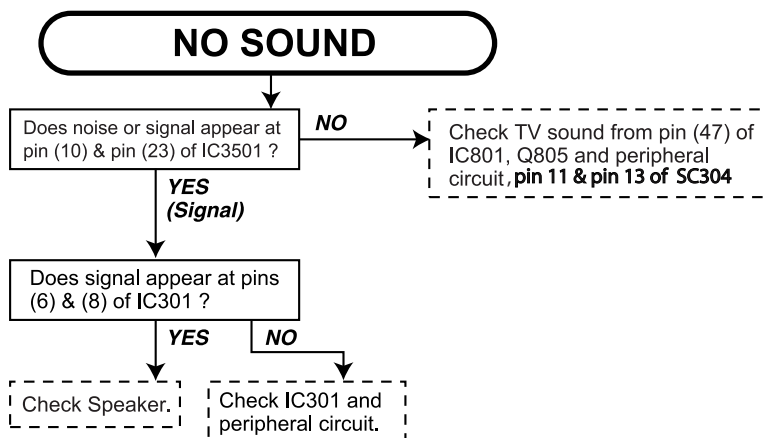

**NEITHER VERTICAL NOR  
HORIZONTAL SYNCHRONIZATION**

**CIRCUIT TO BE CHECKED:**

- Sync. Separator Circuit.

Check pins (8), (11), (15)  
and (16) of IC801.

**DEFECTIVE VERTICAL AMP.  
AND VERTICAL LINEARITY**

Re-adjust vertical size.  
(Bus Data)

Vertical linearity and size are  
abnormal.

Check R503, R506, R513,  
R520 and C515.

**NO VERTICAL SCAN**



Check IC501 bias.

**Normal**

Check C511.


**Abnormal**

Check IC501.

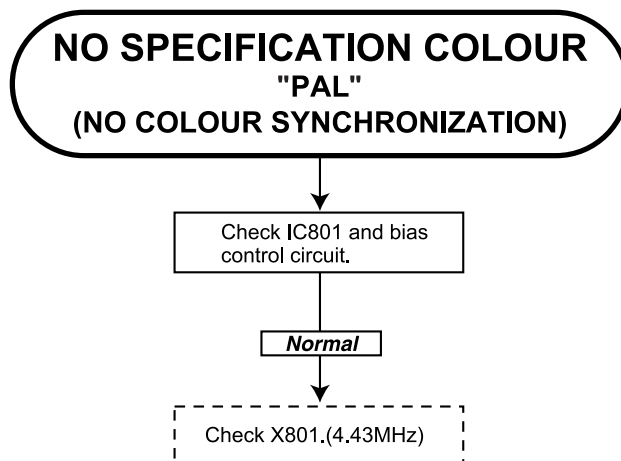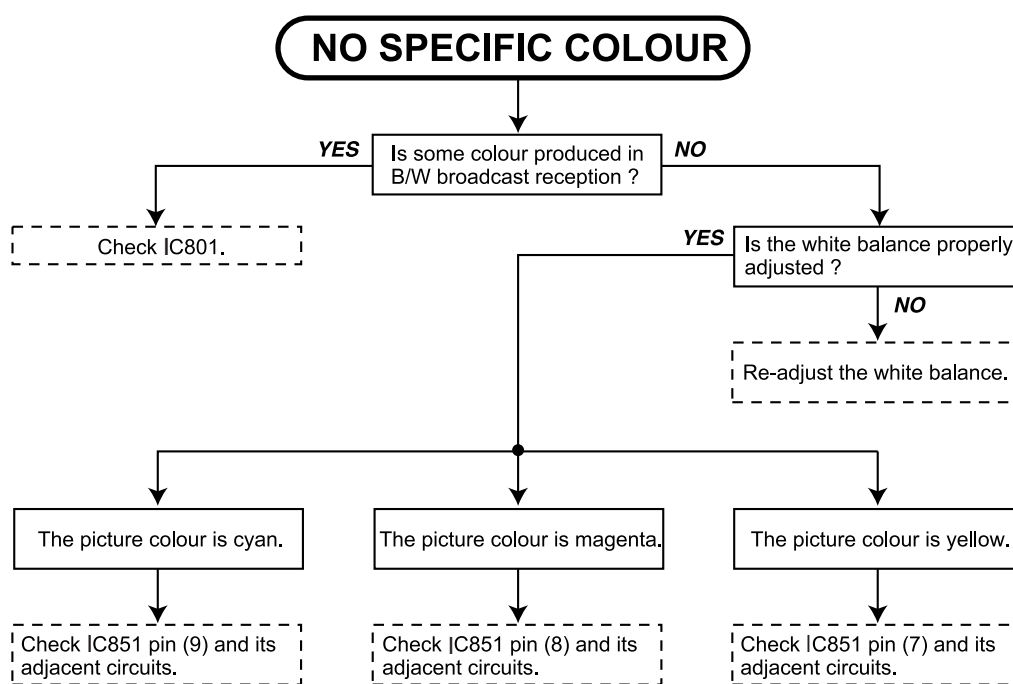


# CHAPTER 6. SOLID STATE DEVICE BASE DIAGRAM

## [1] SOLID STATE DEVICE BASE DIAGRAM

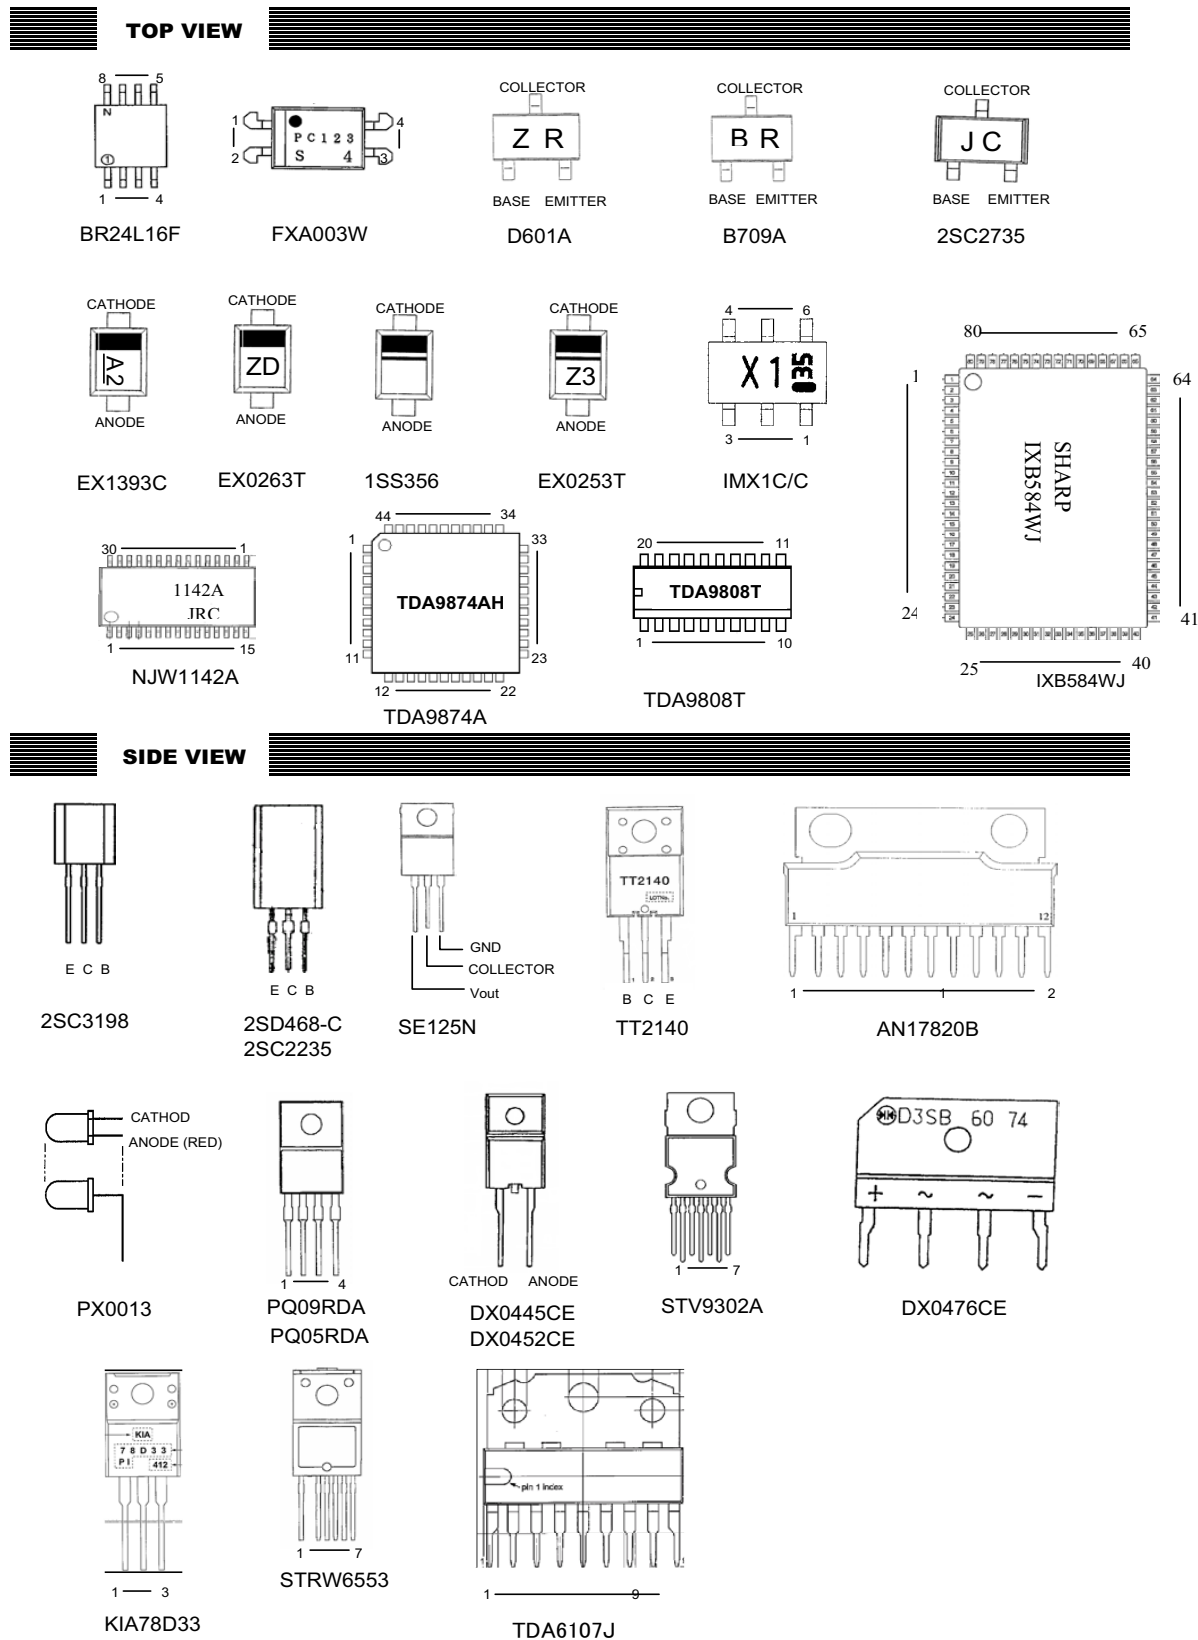


## CHAPTER 7. CHASSIS LAYOUT


## [1] CHASSIS LAYOUT

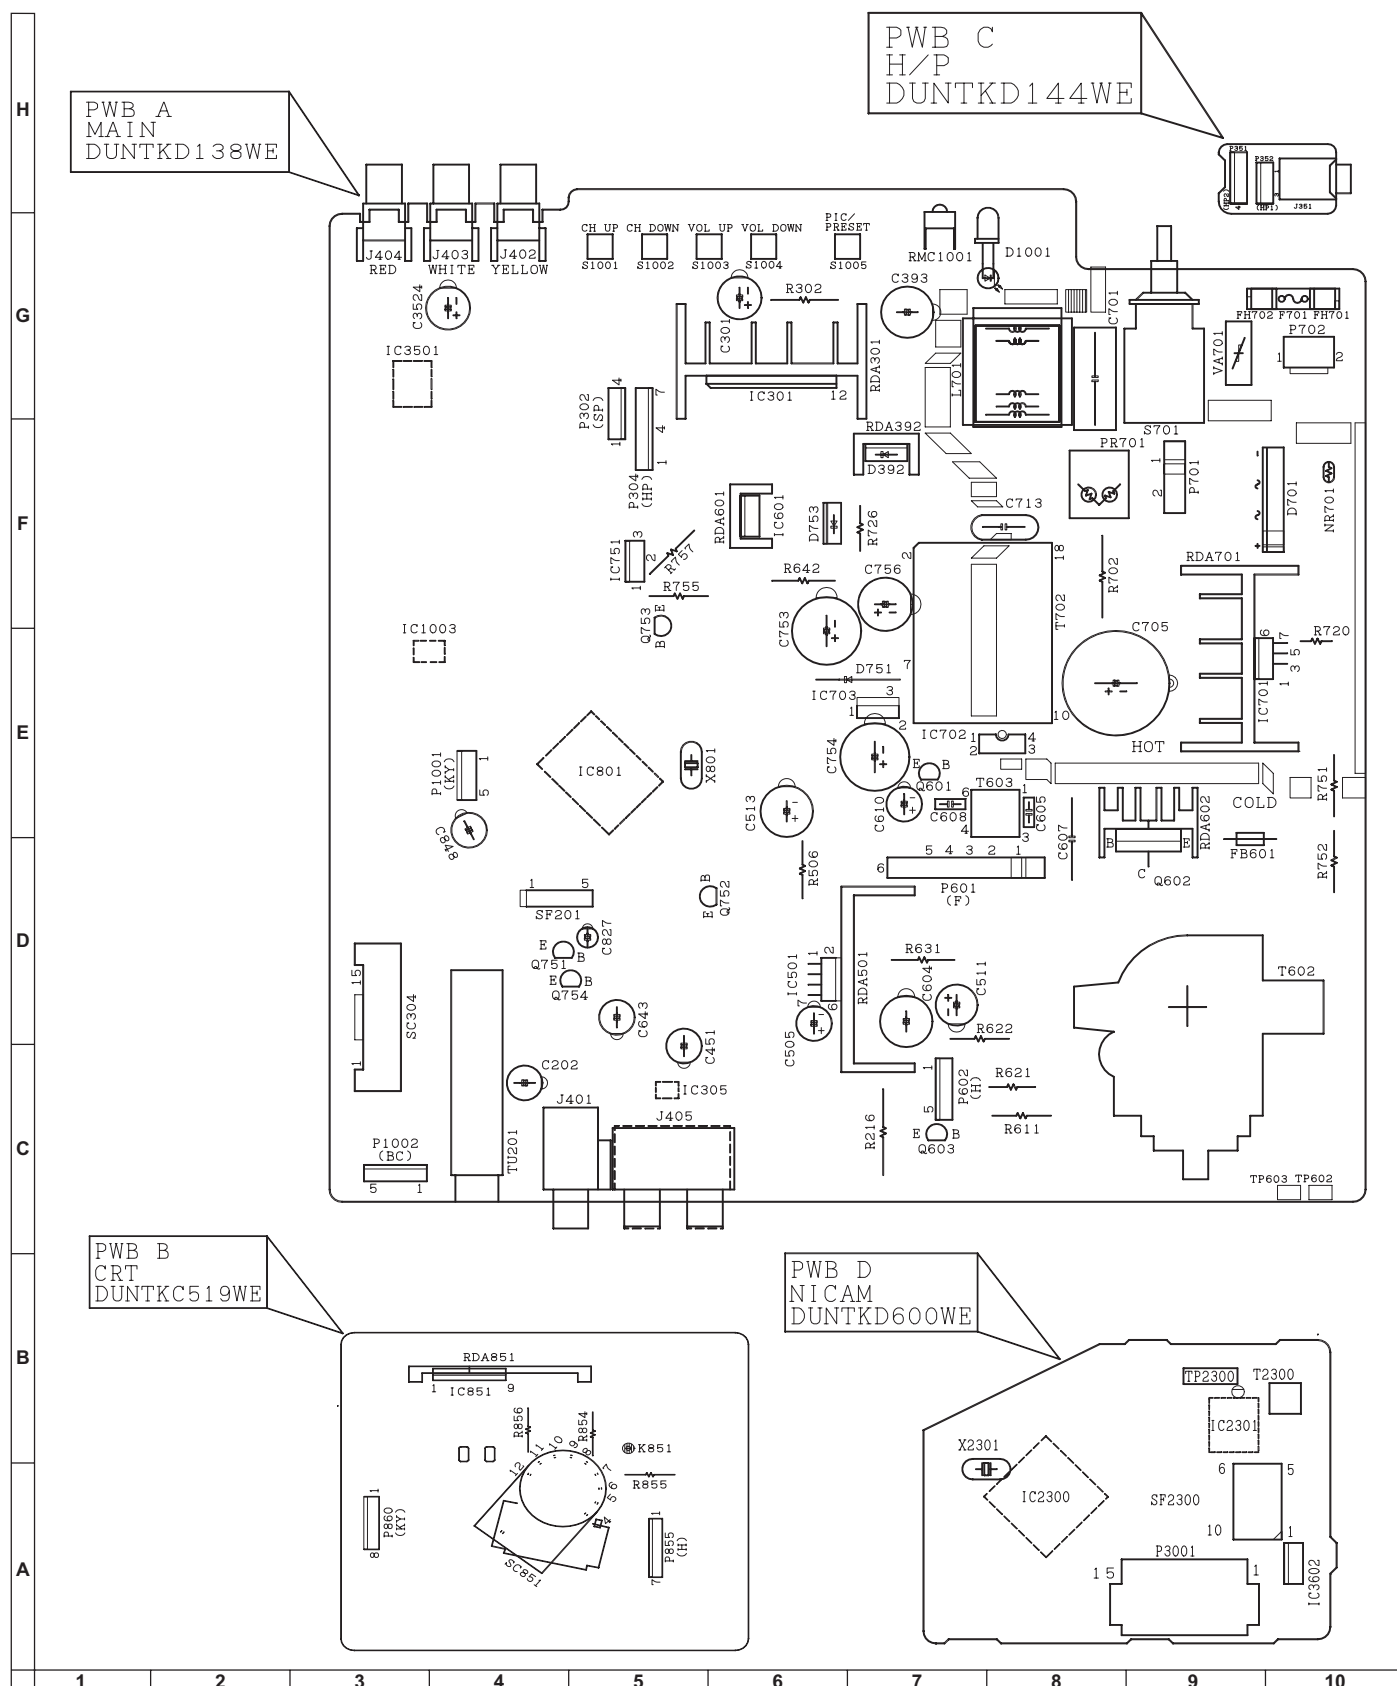


### [1] BLOCK DIAGRAM: MAIN UNIT

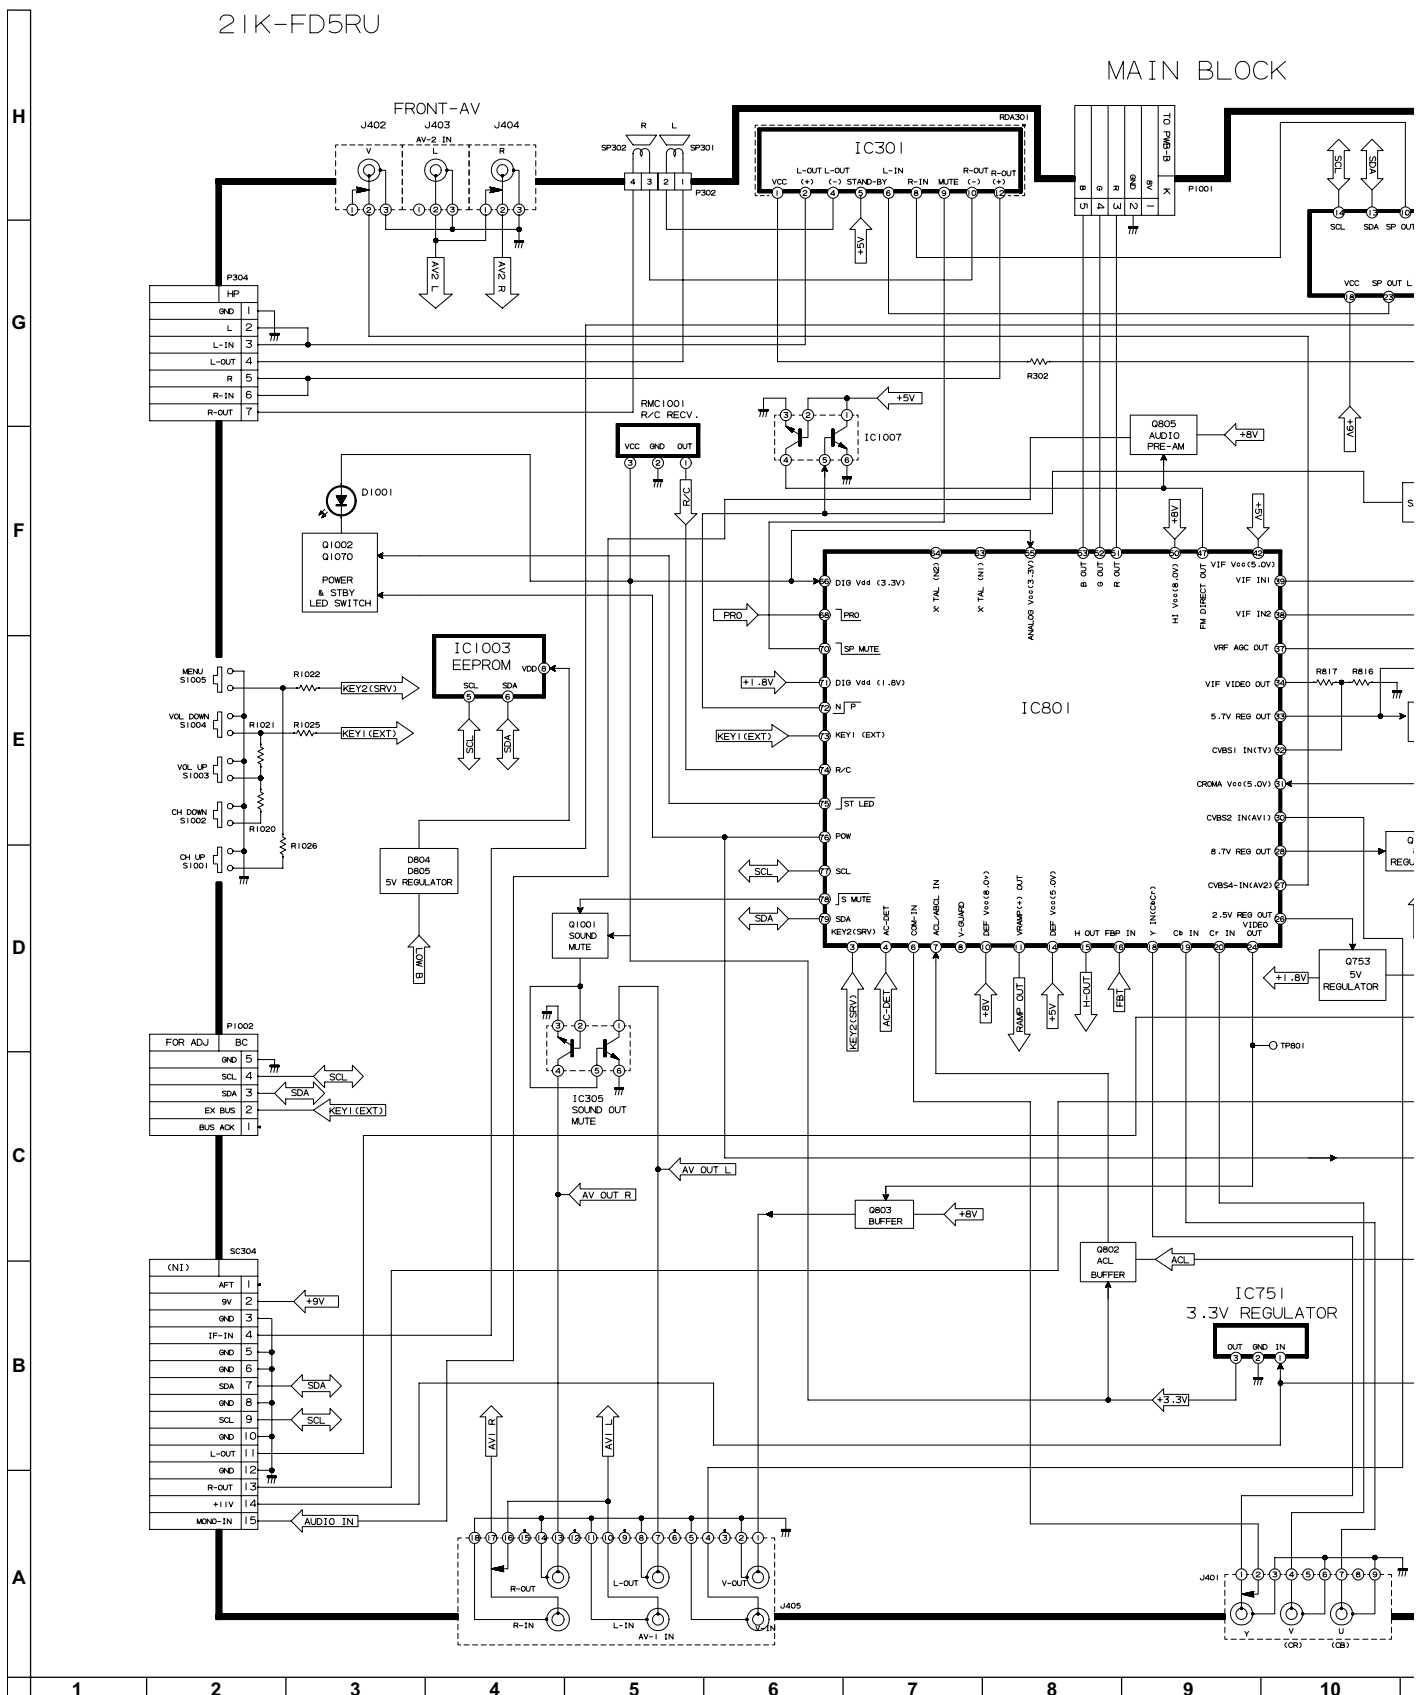


CK

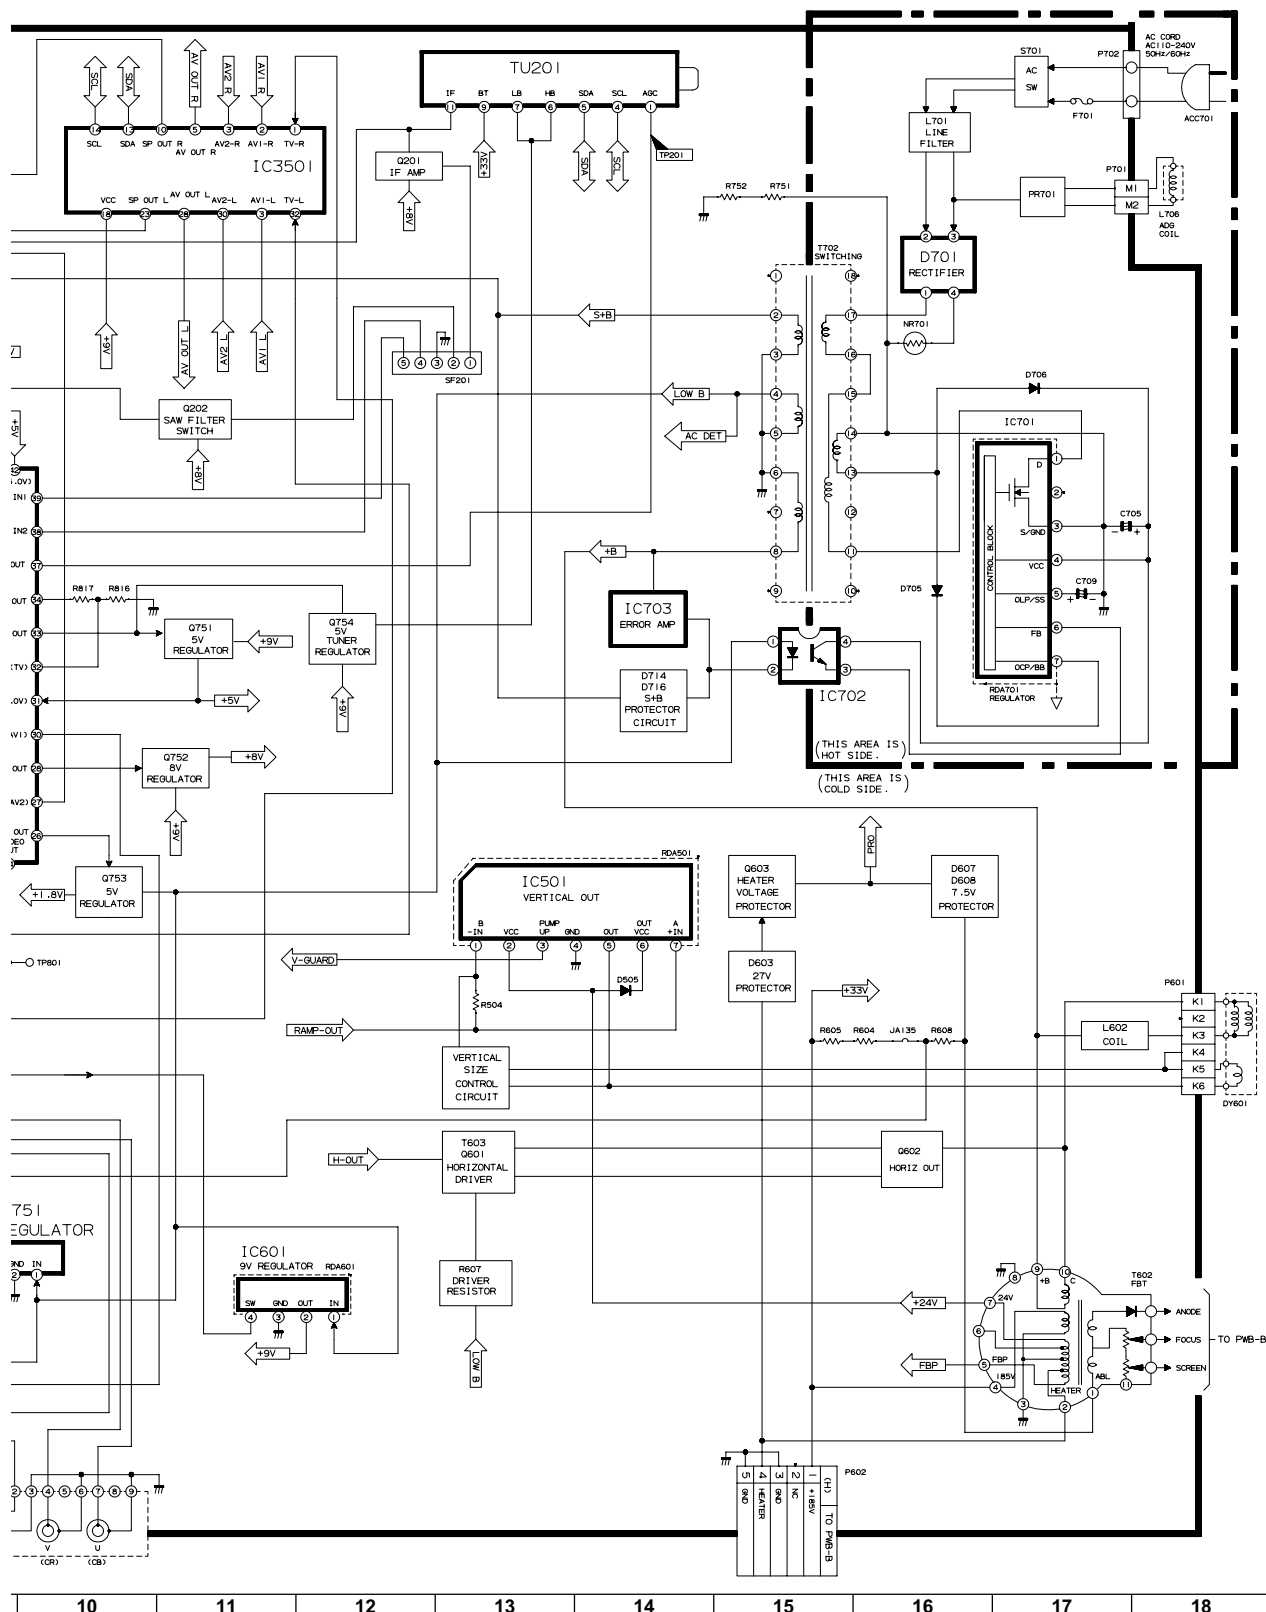


[2] BLOCK DIAGRAM: CRT UNIT

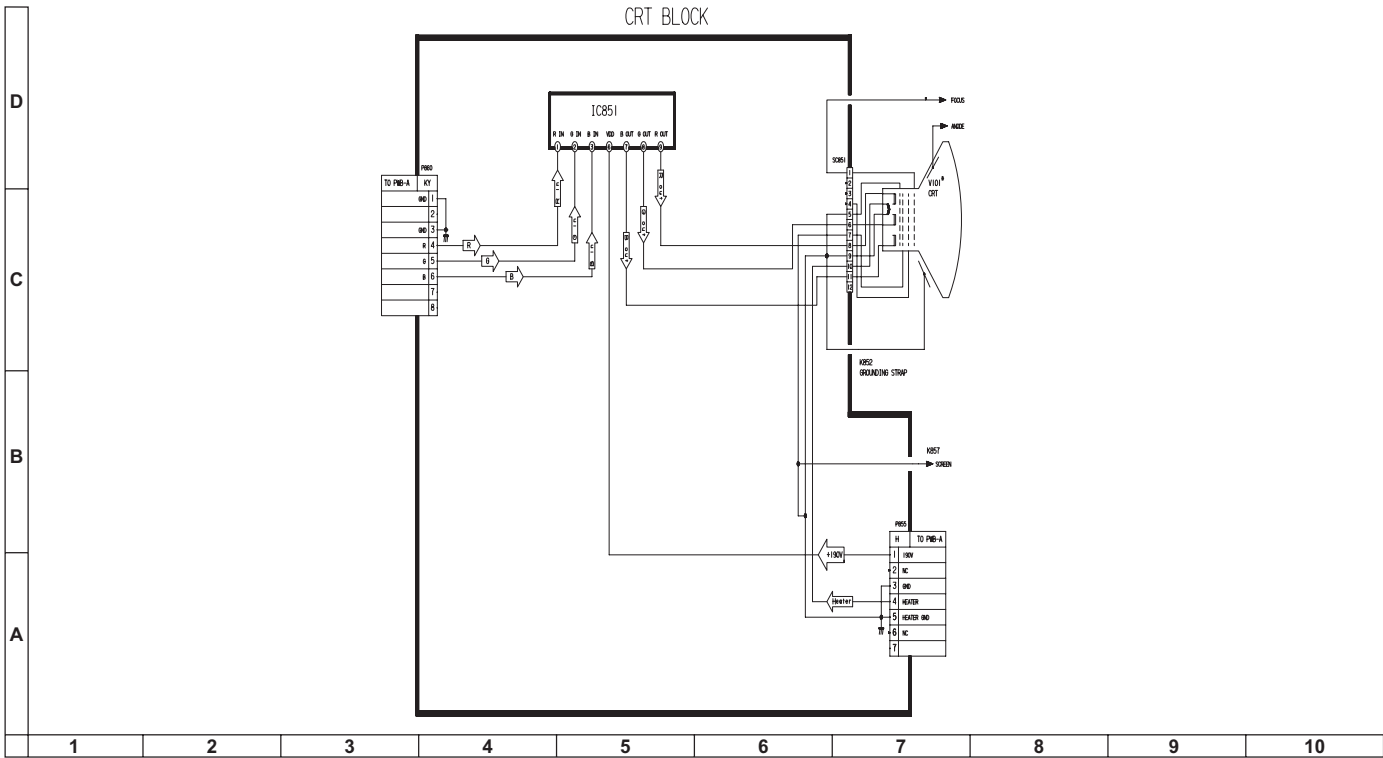

[3] BLOCK DIAGRAM: HEADPHONE UNIT

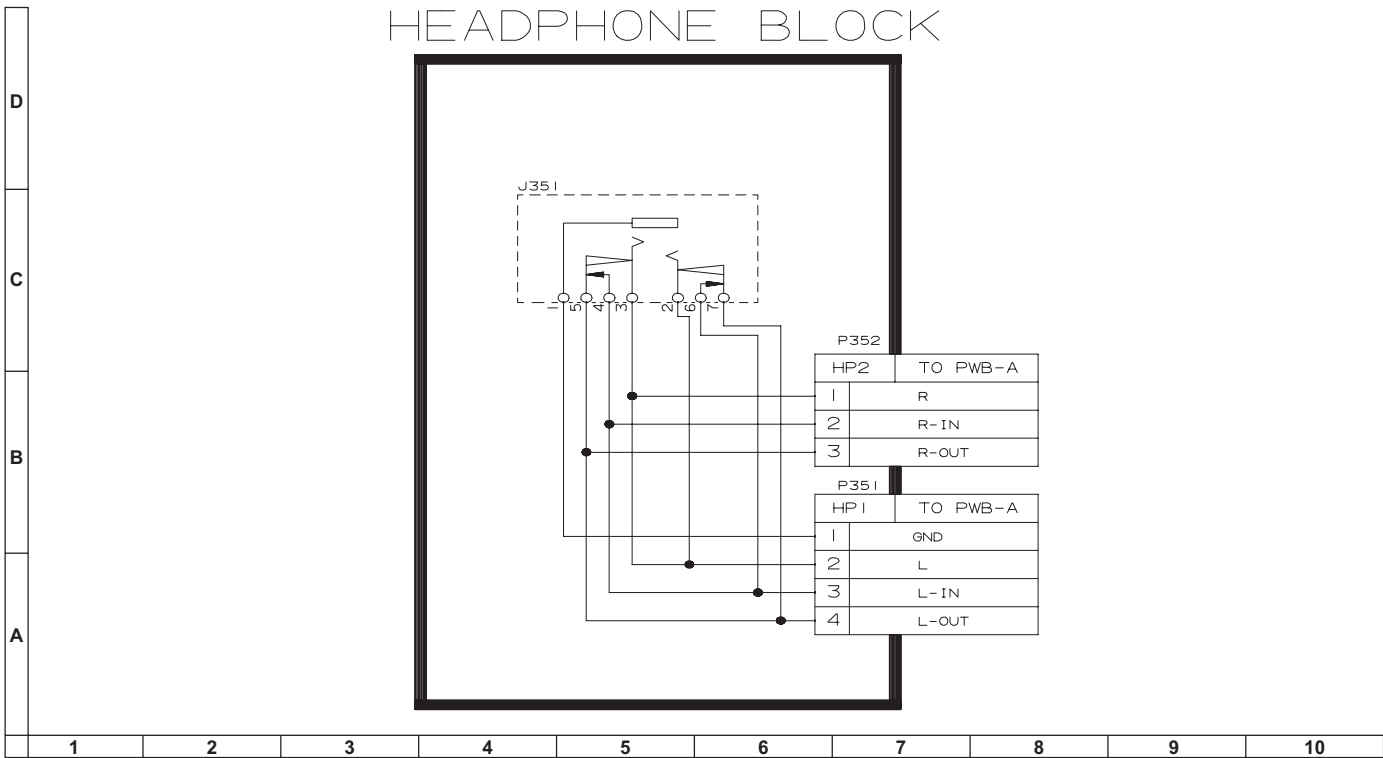

## [4] BLOCK DIAGRAM: NICAM UNIT

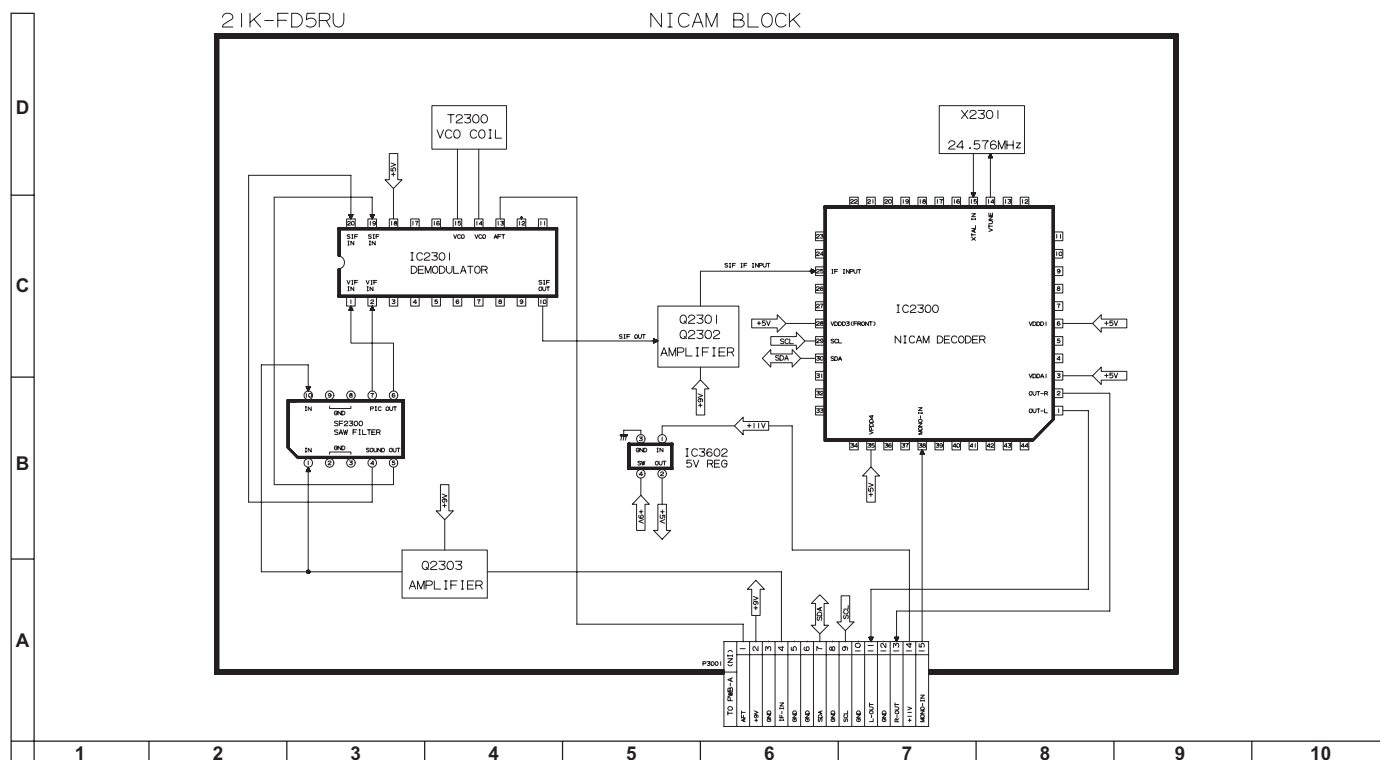

## CHAPTER 9. DESCRIPTION OF SCHEMATIC DIAGRAM

### [1] DESCRIPTION OF SCHEMATIC DIAGRAM

#### SAFETY NOTES:

1. DISCONNECT THE AC PLUG FROM THE AC OUTLET BEFORE REPLACING PARTS.
2. SEMICONDUCTOR HEAT SINKS SHOULD BE REGARDED AS POTENTIAL SHOCK HAZARDS WHEN THE CHASSIS IS OPERATING.

#### IMPORTANT SAFETY NOTICE:

PARTS MARKED WITH "  " (  ) ARE IMPORTANT FOR MAINTAINING THE SAFETY OF THE SET. BE SURE TO REPLACE THESE PARTS WITH SPECIFIED ONES FOR MAINTAINING THE SAFETY AND PERFORMANCE OF THE SET.

#### SERVICE PRECAUTION:

THE AREA ENCLOSED BY THIS LINE ( — - — ) IS DIRECTLY CONNECTED WITH AC MAINS VOLTAGE. WHEN SERVICING THE AREA, CONNECT AN ISOLATING TRANSFORMER BETWEEN TV RECEIVER AND AC LINE TO ELIMINATE HAZARD OF ELECTRIC SHOCK.

#### NOTES:

1. The unit of resistance "ohm" is omitted.  
(K = 1000 ohms, M = Mega ohm).
2. All resistors are 1/16 watt, unless otherwise noted.
3. All capacitors are  $\mu\text{F}$ , unless otherwise noted.  
(P =  $\mu\mu\text{F}$ ).

#### VOLTAGE MEASUREMENT CONDITIONS:
















1. Voltages in parenthesis measured with no signal.
2. Voltages without parenthesis measured with 3mV B & W or Colour signal.
3. All the voltages in each point are measured with VTVM.

#### WAVEFORM MEASUREMENT CONDITIONS:

1. The colour bar generator signal of 1.0V peak applied at pin (32) of IC801.
2. Approximately 4V AGC bias.


# CHAPTER 10. WAVEFORM

## [1] WAVEFORMS




CHAPTER 11. SCHEMATIC DIAGRAM


[1] SCHEMATIC DIAGRAM: CRT UNIT

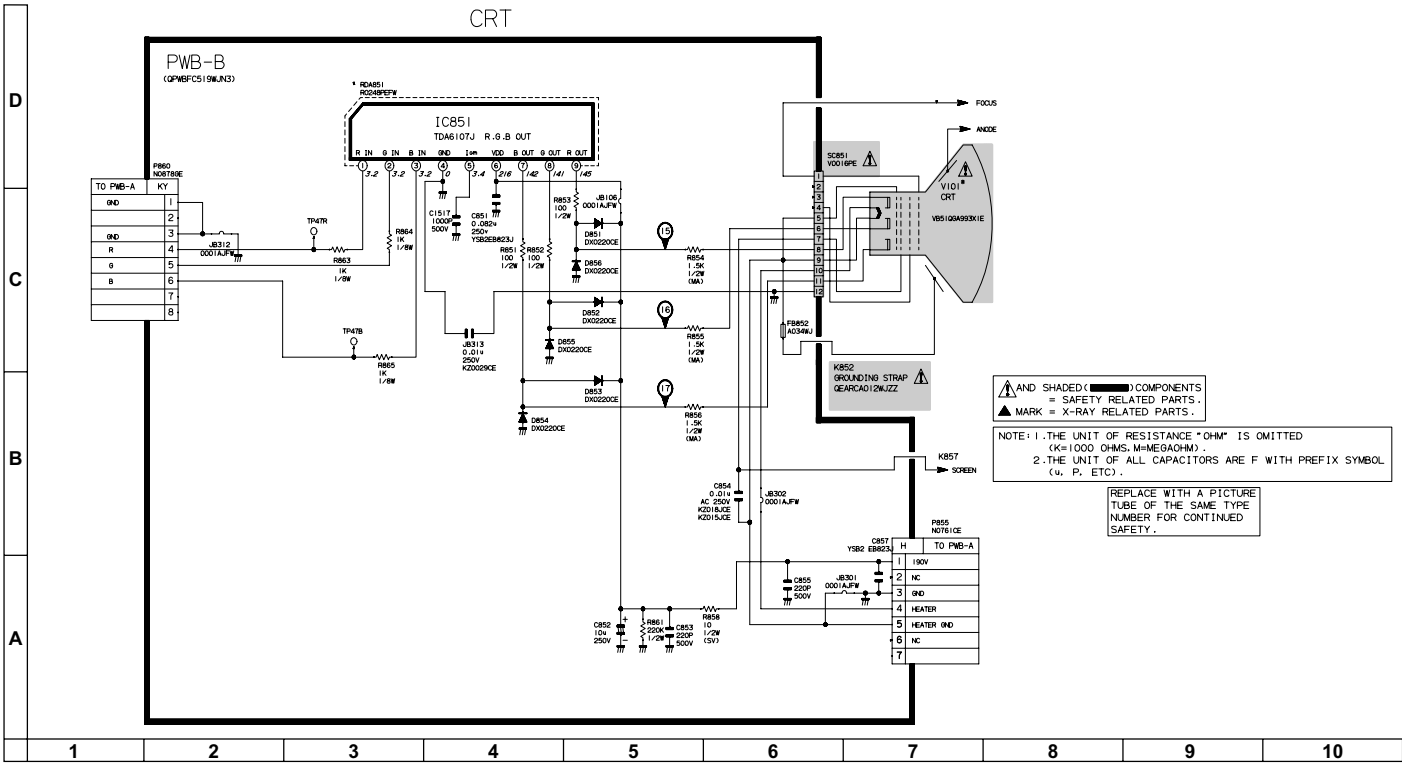

[2] SCHEMATIC DIAGRAM: HEADPHONE UNIT

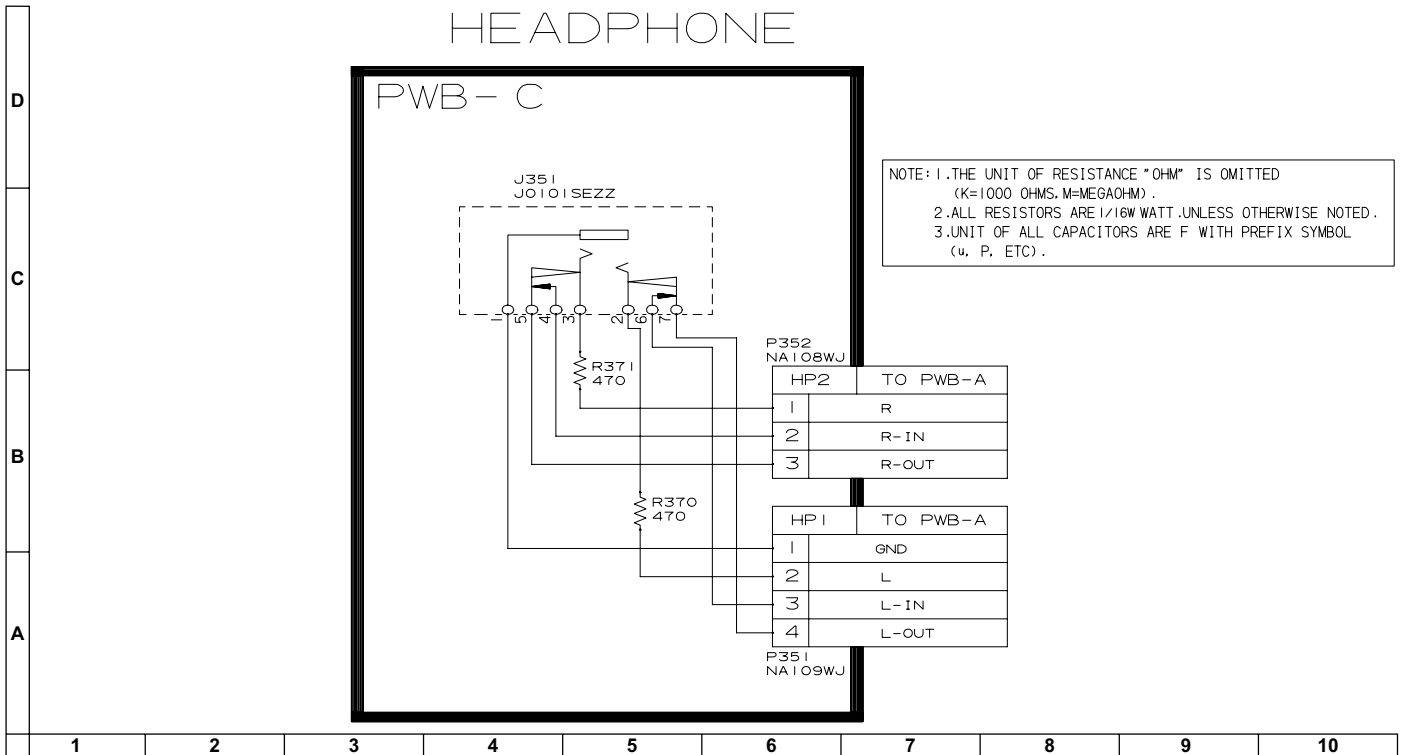


## [3] SCHEMATIC DIAGRAM: NICAM UNIT

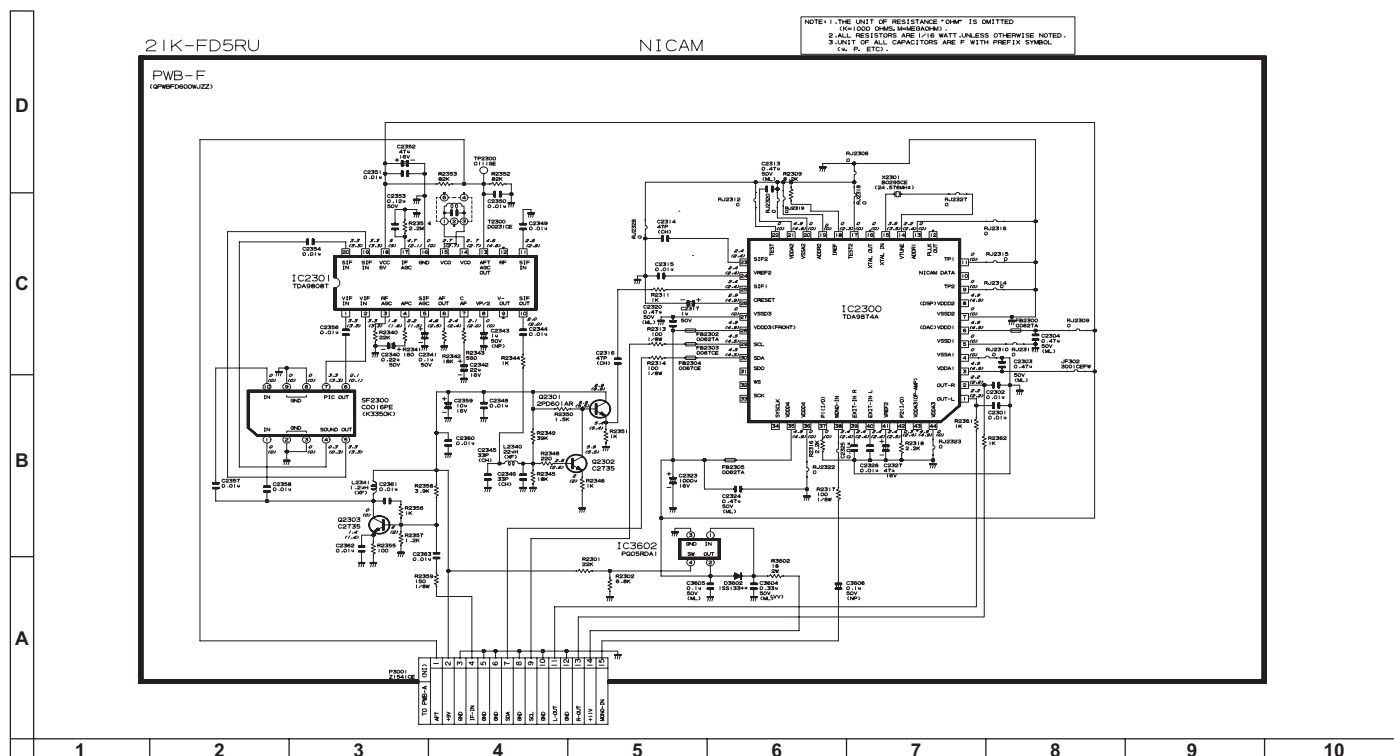



NOTE 1: THE UNIT OF RESISTANCE "OHM" IS OMITTED.  
 2. ALL RESISTORS ARE 1/8WATT UNLESS OTHERWISE NOTED.  
 3. UNIT OF ALL CAPACITORS ARE F WITH PREFIX SYMBOL.  
 (e.g., P, ETC.)

AND SHADED COMPONENTS  
 = SAFETY RELATED PARTS.  
 \* MARK = X-RAY RELATED PARTS.

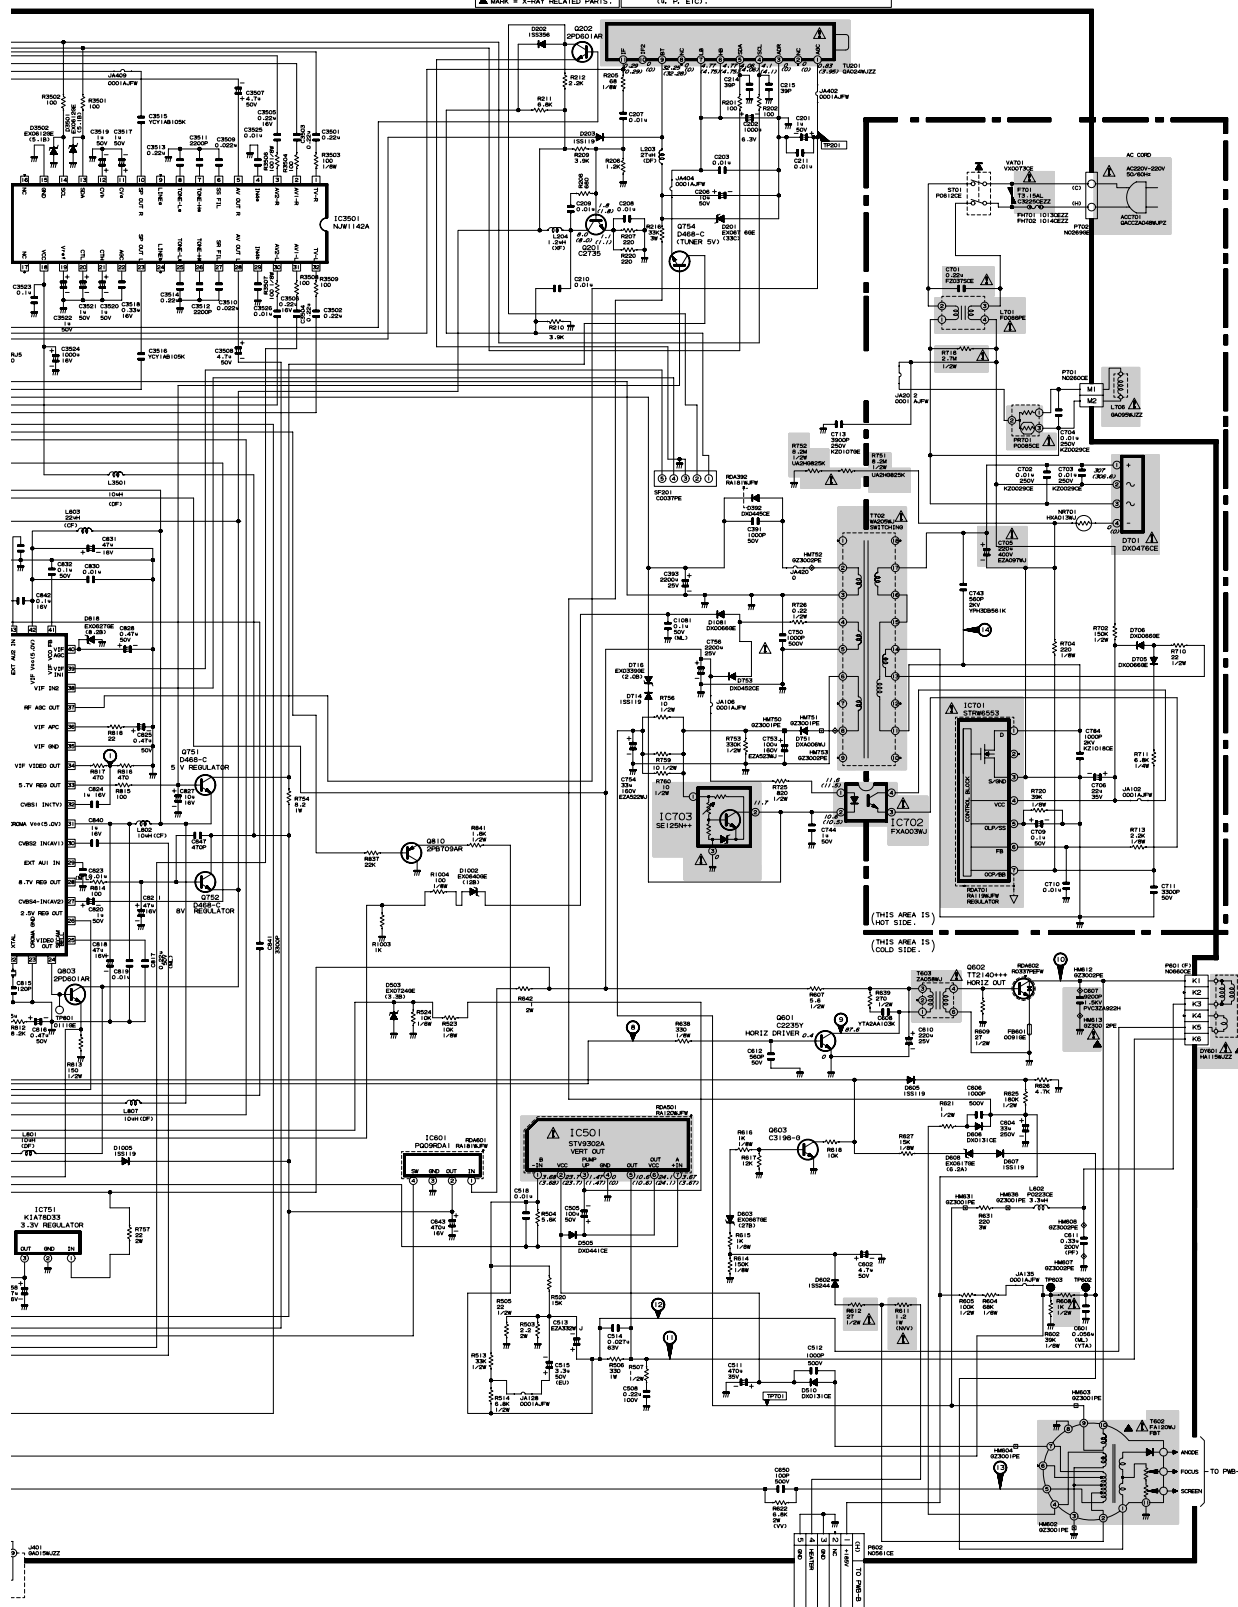


|    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|
| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|----|----|----|----|----|----|----|----|----|----|

# CHAPTER 12. PRINTED WIRING BOARD ASSEMBLIES


## [1] PWB-A: MAIN UNIT


### 1. MAIN UNIT (Component Side)

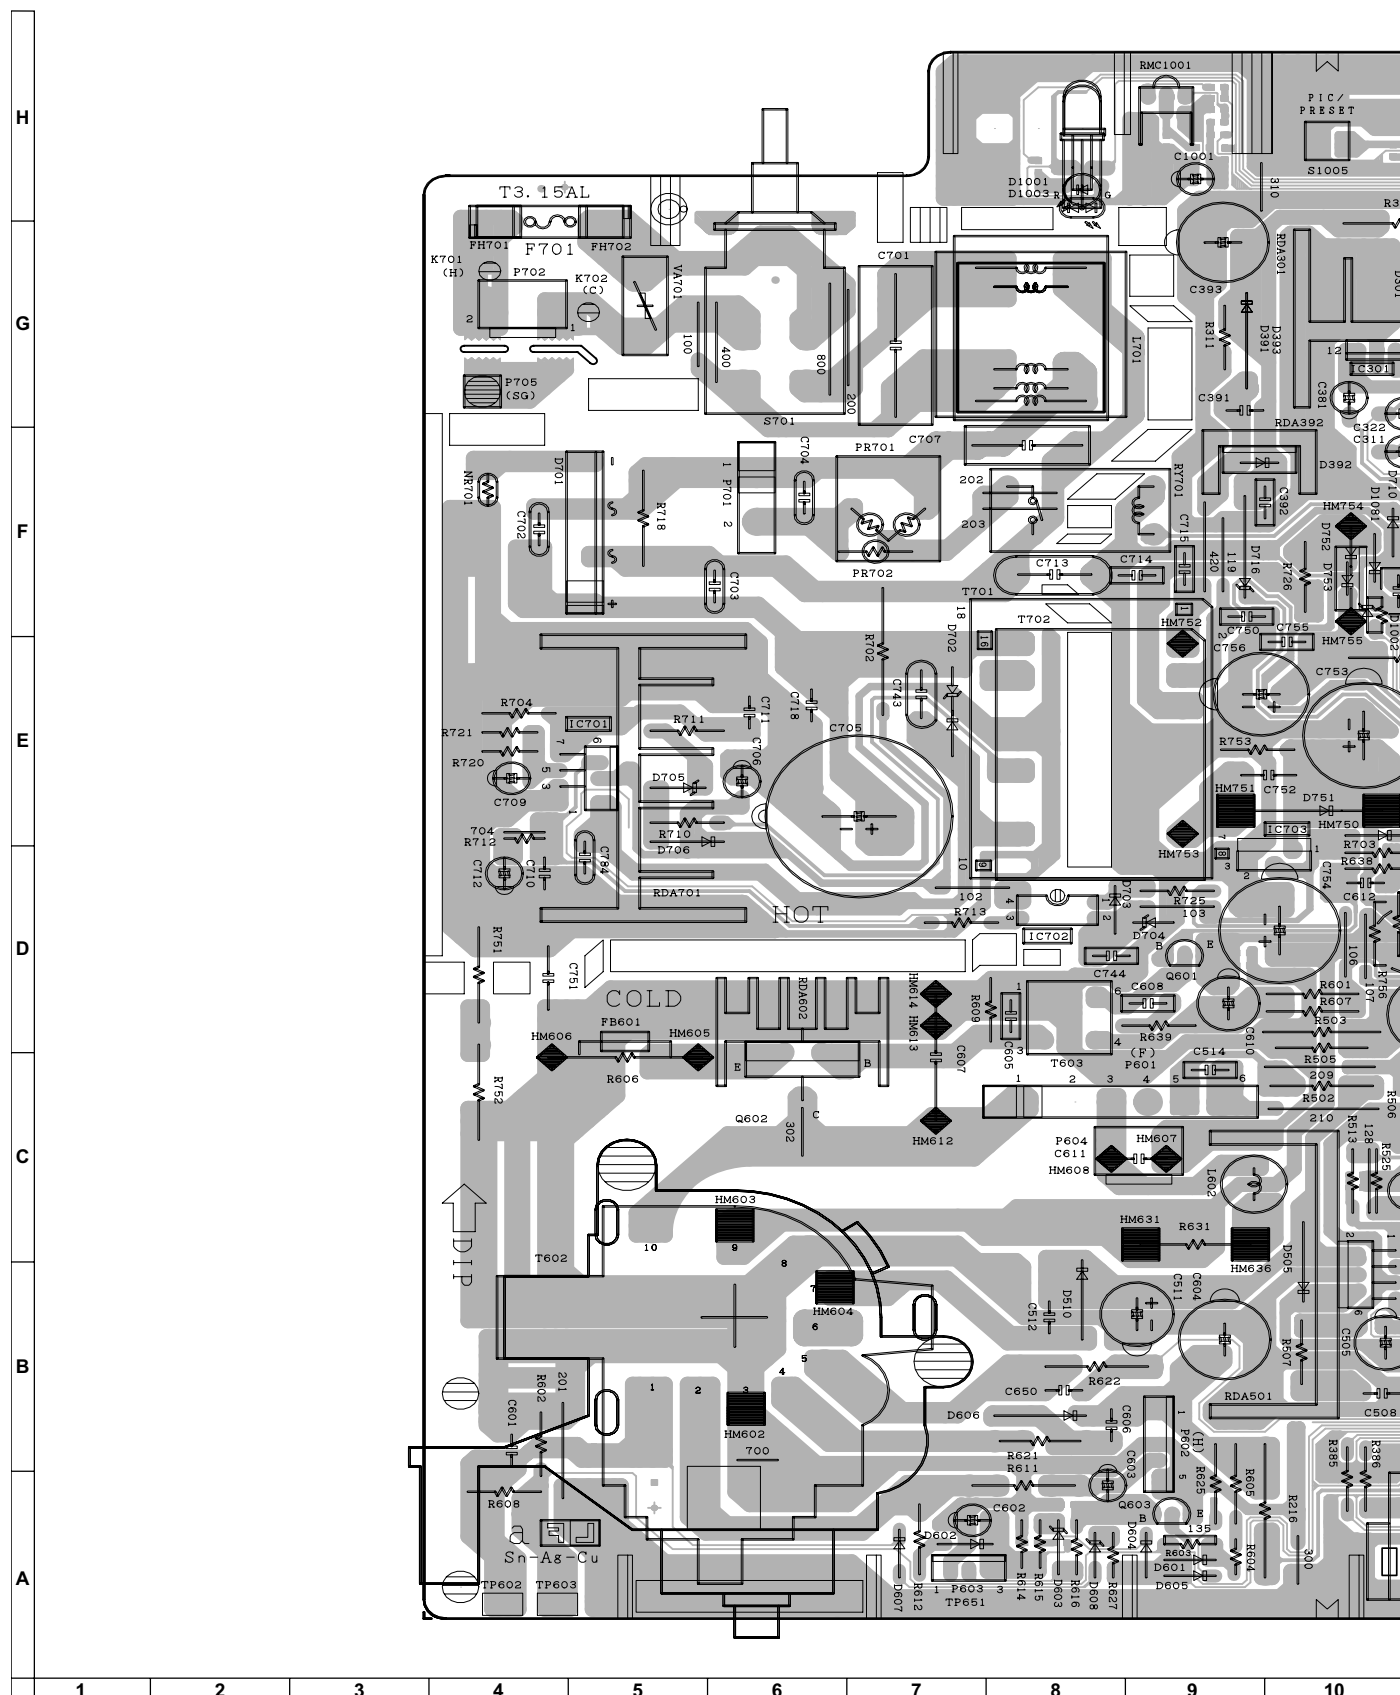





## 2. MAIN UNIT (Chip Parts Side)

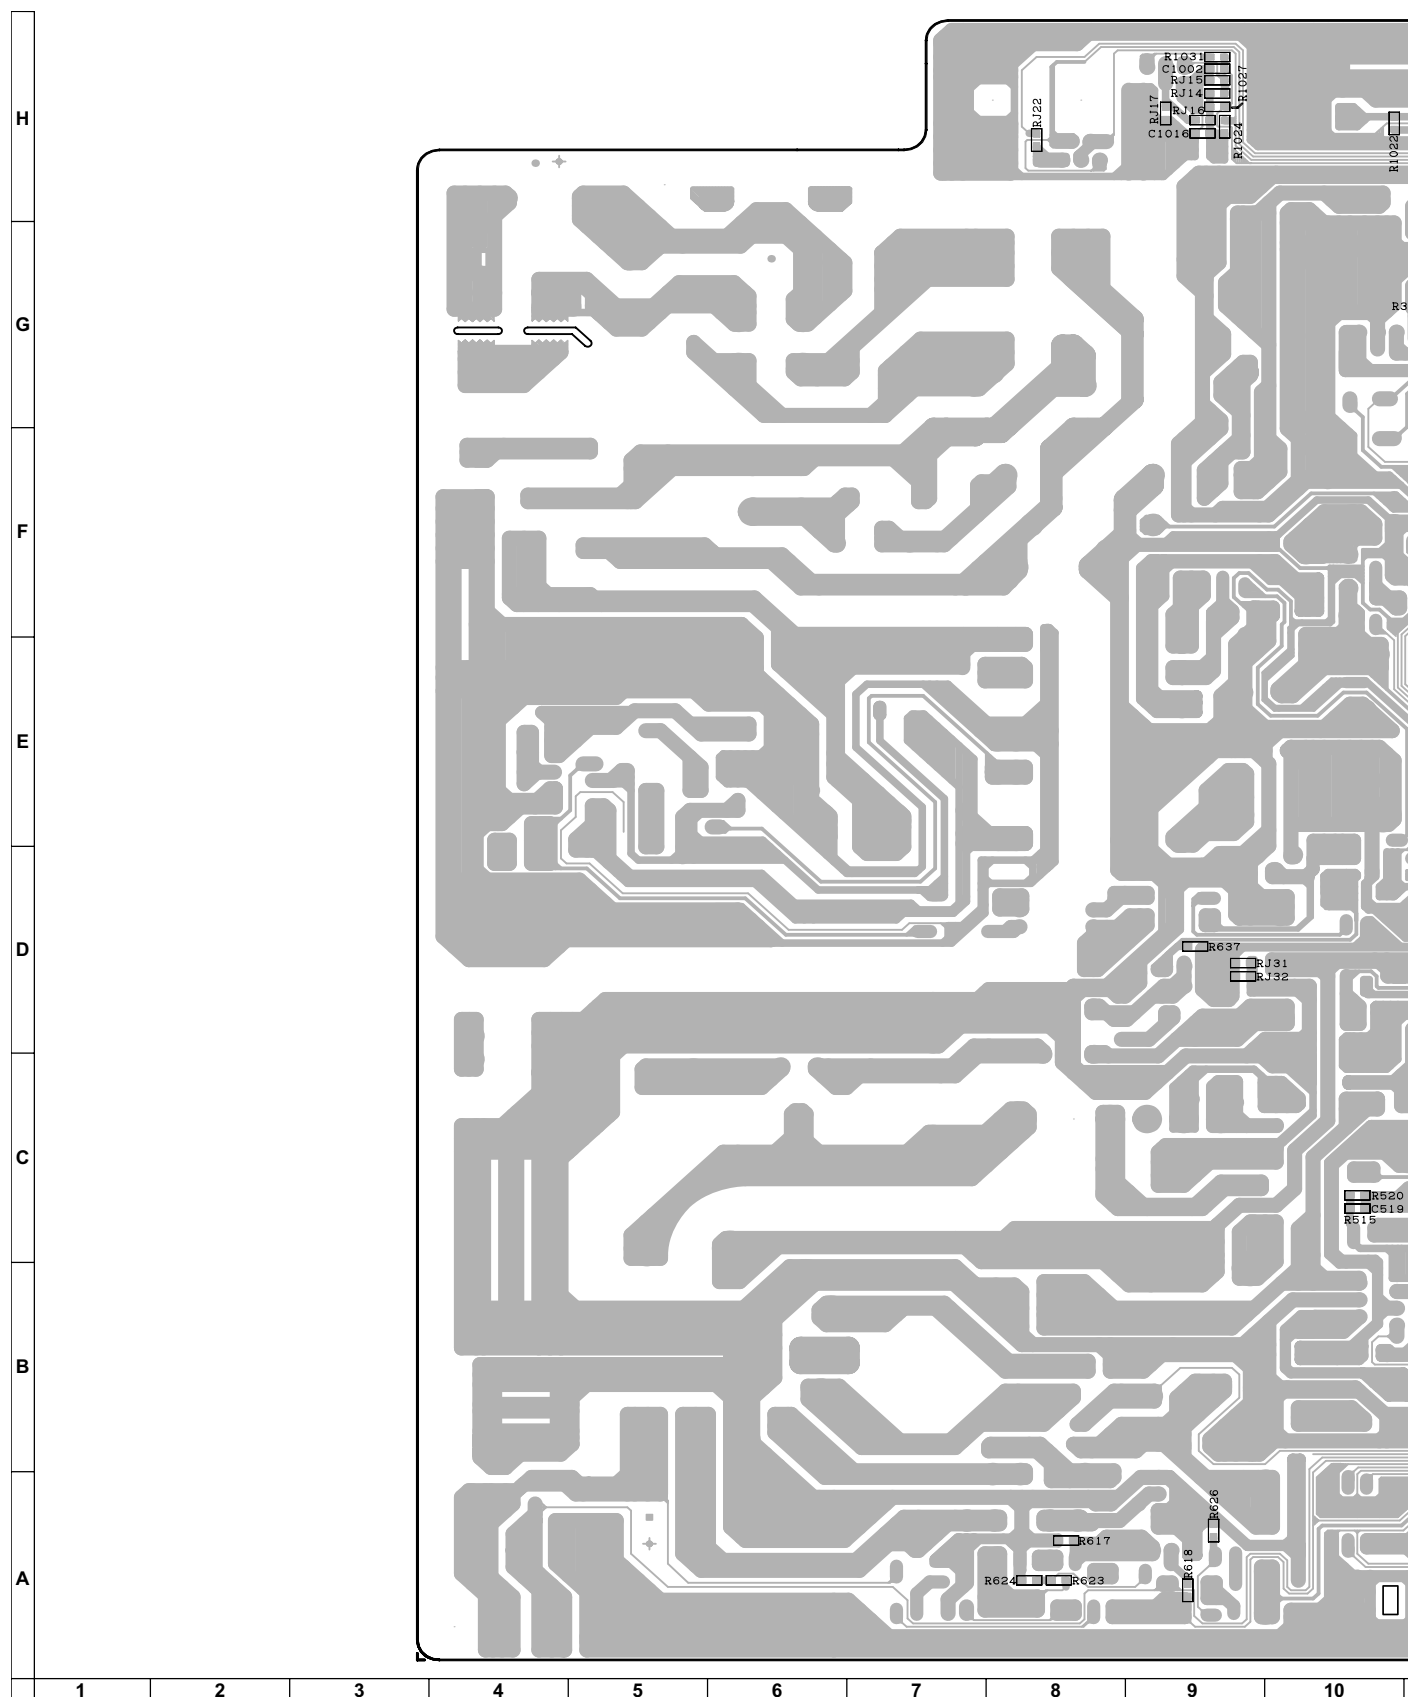

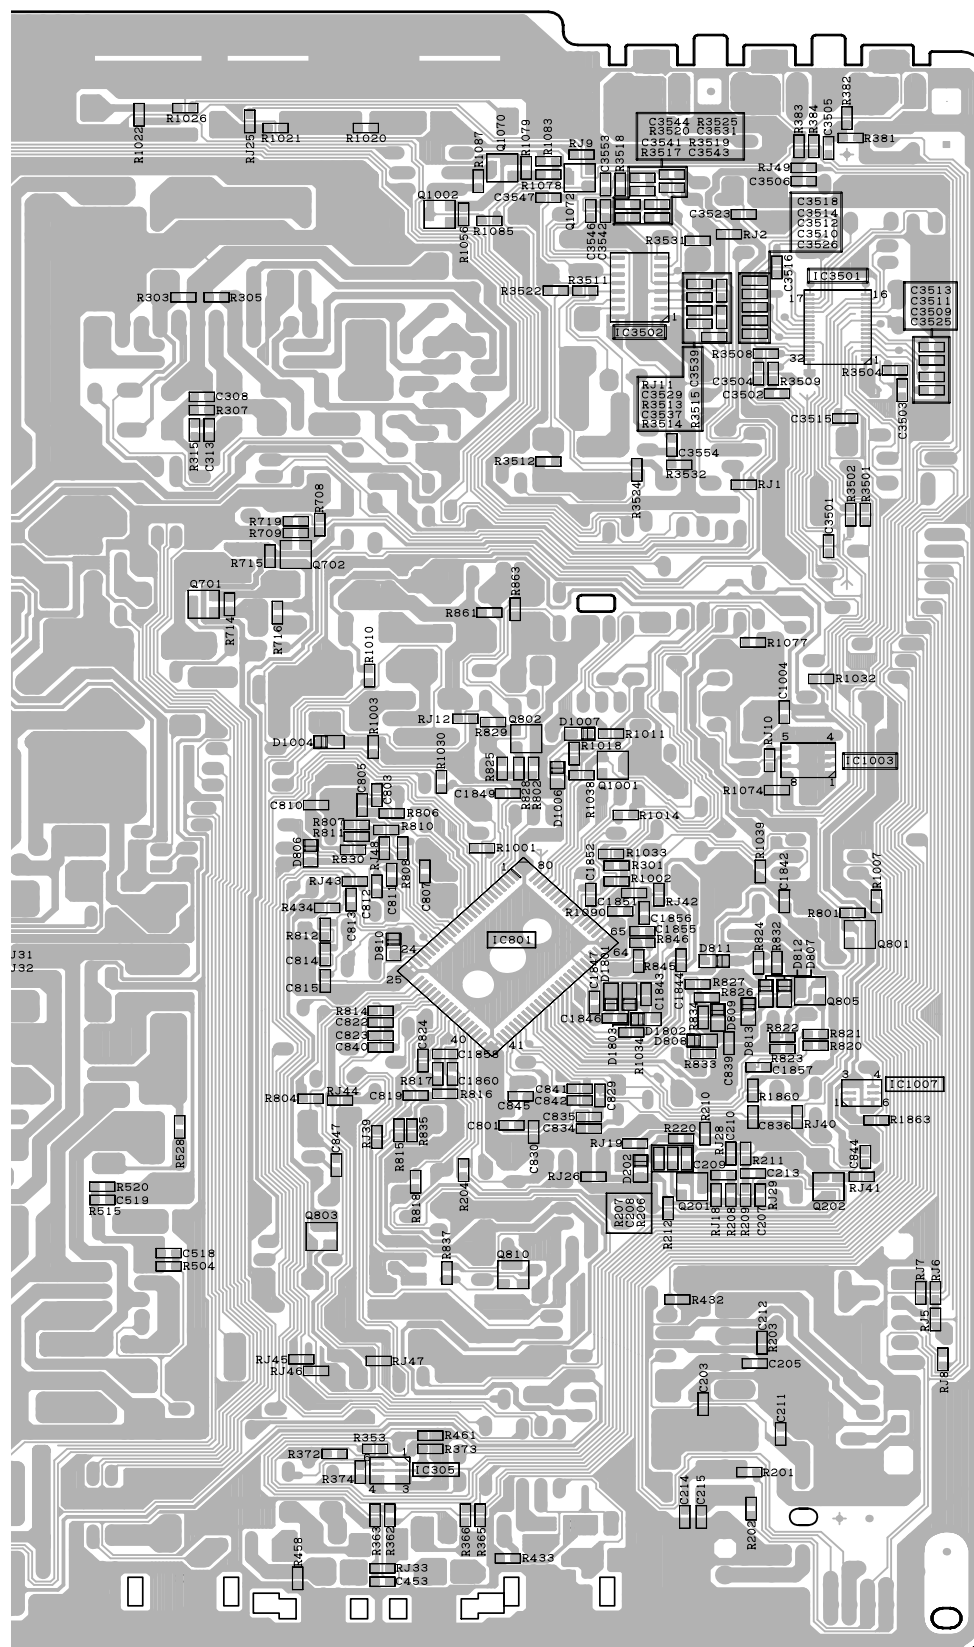


|    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|
| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|----|----|----|----|----|----|----|----|----|----|

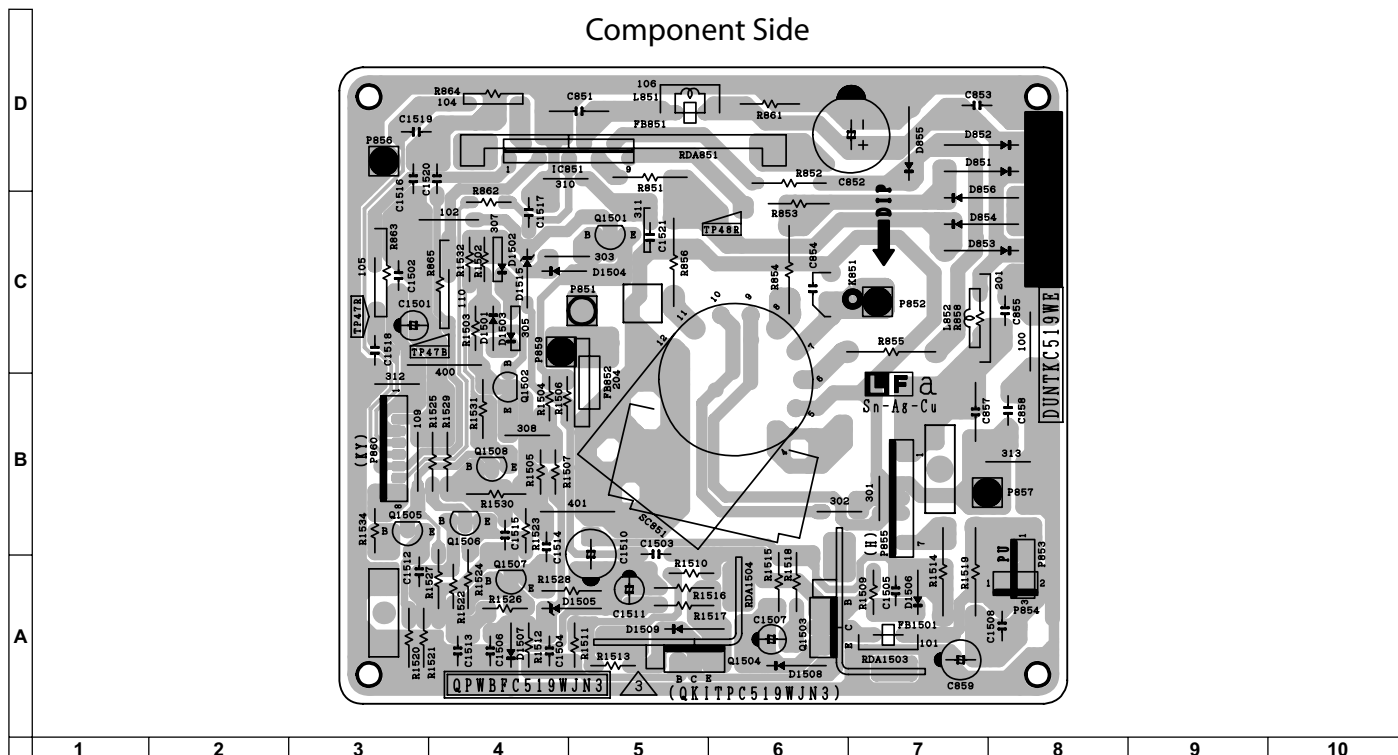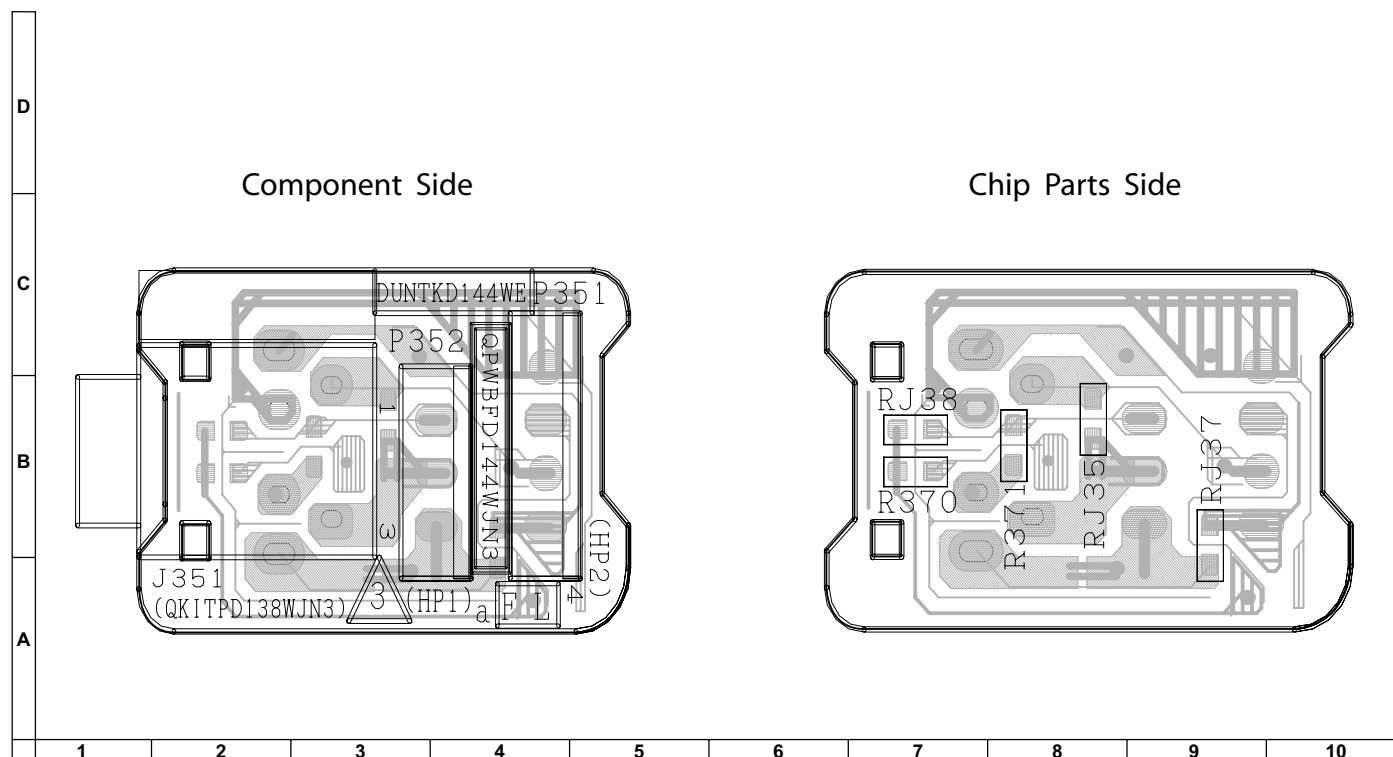
**[2] PWB-B: CRT UNIT****1. CRT UNIT (Component Side)****[3] PWB-C: HEADPHONE UNIT****1. HEADPHONE UNIT (Component Side) (Chip Parts Side)**

#### [4] PWB-D: NICAM UNIT

### 1. NICAM UNIT ( Component Side )

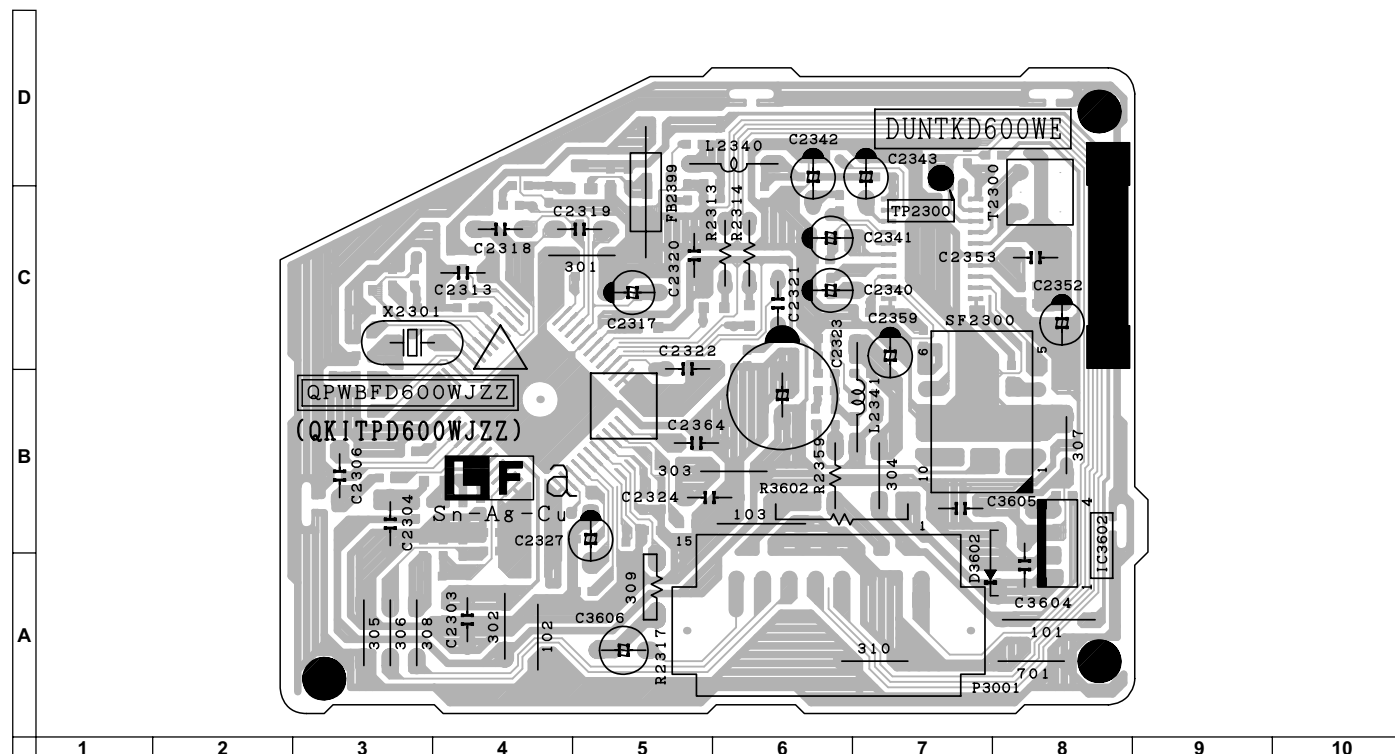

## 2. NICAM UNIT ( Chip Parts Side )

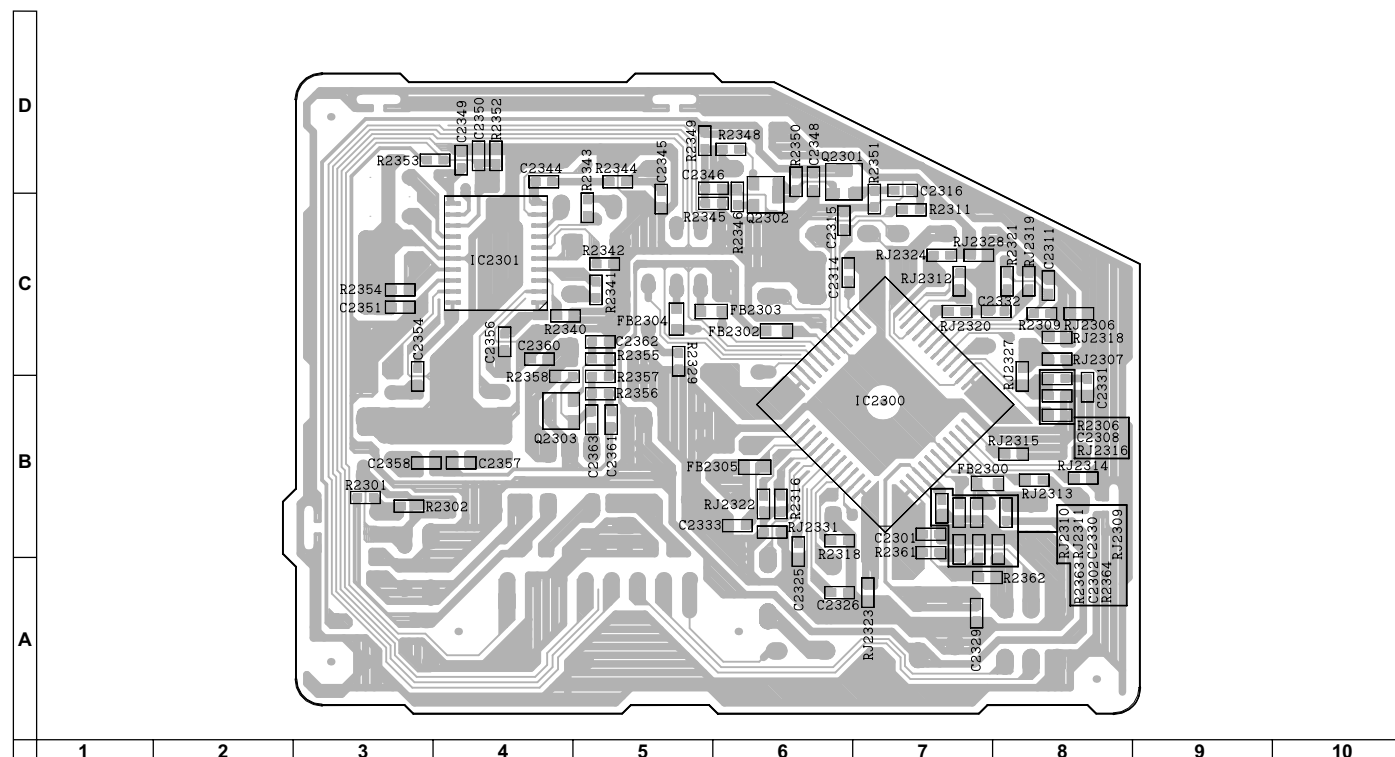

# SHARP PARTS GUIDE

No. S360921KFD5RU

## MODEL 21K-FD5RU

### CONTENTS

- |                                        |                          |
|----------------------------------------|--------------------------|
| [1] PICTURE TUBE                       | [6] NICAM/A2             |
| [2] PRINTED WIRING BOARD<br>ASSEMBLIES | [7] MISCELLANEOUS PARTS  |
| [3] MAIN UNIT                          | [8] SUPPLIED ACCESSORIES |
| [4] CRT UNIT                           | [9] CABINET PARTS        |
| [5] HEADPHONE UNIT                     | [10] PACKING PARTS       |
|                                        | ■ INDEX                  |

Parts marked with "△" are important for maintaining the safety of the set. Be sure to replace these parts with specified ones for maintaining the safety and performance of the set.

| NO.                                        | PARTS CODE    | PRICE RANK      | NEW MARK | PART RANK | DESCRIPTION             |
|--------------------------------------------|---------------|-----------------|----------|-----------|-------------------------|
| <b>[1] PICTURE TUBE</b>                    |               |                 |          |           |                         |
| △                                          | VB51QGA993X1E |                 |          | R         | Pictube Tube (SEMI-ITC) |
| △                                          | RCiLGA095WJZZ | AM              |          | R         | Degaussing Coil         |
|                                            | QEARCA012WJZZ | AG              |          | R         | Ground Part             |
|                                            | PMAGF3046CEZZ | AF              |          | R         | Purity Magnet           |
| <b>[2] PRINTED WIRING BOARD ASSEMBLIES</b> |               |                 |          |           |                         |
|                                            | DUNTKD138WEA4 | -               |          | -         | MAIN Unit               |
|                                            | DUNTKC519WEC6 | -               |          | -         | CRT Unit                |
|                                            | DUNTKD144WEA4 | -               |          | -         | HEADPHONE Unit          |
|                                            | DUNTKD600WEA1 | -               |          | -         | NICAM/A2                |
| <b>[3] MAIN UNIT</b>                       |               |                 |          |           |                         |
| △                                          | TU201         | RTUNQA024WJZZ   | AX       |           | R Tuner                 |
|                                            | IC301         | VHiAN17820B-1   | AL       |           | R IC, AN17820B          |
|                                            | IC305         | VSiMX1C/C// -1Y | AC       |           | R IC, IMX1C             |
| △                                          | IC501         | VHiSTV9302A-1   | AH       |           | R IC, STV9302A          |
|                                            | IC601         | VHiPQ09RDA1-1   | AF       |           | R IC, PQ090RDA1SZ       |
| △                                          | IC701         | VHiSTRW6553-1   | AN       |           | R IC, STRW6553          |
| △                                          | IC702         | RH-FXA003WJZZ   | AD       |           | R IC, PC123Y82          |
| △                                          | IC703         | VHiSE125N+-F    | AG       |           | R IC, SE125N            |
|                                            | IC751         | VHiKiA78D33-1   | AF       |           | R IC, KIA78D33          |
|                                            | IC801         | RH-iXB584WJZZ   |          |           | R IC, iXB584W           |
|                                            | IC1003        | VHiBR24L16F-1Y  | AE       |           | R IC, BR24L16F-WE2      |
|                                            | IC1007        | VSiMX1C/C// -1Y | AC       |           | R IC, IMX1C             |
|                                            | IC3501        | VHiNJW1142A-1Y  | AM       |           | R IC, NJW1142A          |
|                                            | Q201          | VS2SC2735//1EY  | AC       |           | R Transistor, 2SC2735   |
|                                            | Q202          | VS2PD601AR/-1Y  | AB       |           | R Transistor, 2PD601AR  |
|                                            | Q601          | VS2SC2235Y/1E+  | AE       |           | R Transistor, 2SC2235Y  |
|                                            | Q602          | VSTT2140++-F    | AG       |           | R Transistor, TT2140    |
|                                            | Q603          | VS2SC3198-G-1+  | AA       |           | R Transistor, 2SC3198   |
|                                            | Q751          | VS2SD468-C/-1+  | AD       |           | R Transistor, 2SD468    |
|                                            | Q752          | VS2SD468-C/-1+  | AD       |           | R Transistor, 2SD468    |
|                                            | Q753          | VS2SD468-C/-1+  | AD       |           | R Transistor, 2SD468    |
|                                            | Q754          | VS2SD468-C/-1+  | AD       |           | R Transistor, 2SD468    |
|                                            | Q801          | VS2PD601AR/-1Y  | AB       |           | R Transistor, 2PD601AR  |
|                                            | Q802          | VS2PB709AR/-1Y  | AB       |           | R Transistor, 2PB709AR  |
|                                            | Q803          | VS2PD601AR/-1Y  | AB       |           | R Transistor, 2PD601AR  |
|                                            | Q805          | VS2PB709AR/-1Y  | AB       |           | R Transistor, 2PB709AR  |
|                                            | Q810          | VS2PB709AR/-1Y  | AB       |           | R Transistor, 2PB709AR  |
|                                            | Q1001         | VS2PD601AR/-1Y  | AB       |           | R Transistor, 2PD601AR  |
|                                            | Q1002         | VS2PD601AR/-1Y  | AB       |           | R Transistor, 2PD601AR  |
|                                            | Q1070         | VS2PD601AR/-1Y  | AB       |           | R Transistor, 2PD601AR  |
|                                            | D201          | RH-EX0676GEZZY  | AA       |           | R Zener Diode, 33V      |
|                                            | D202          | VHD1SS356// -1Y | AC       |           | R Diode, 1SS356         |
|                                            | D203          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D301          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D392          | RH-DX0445CEZZ   | AL       |           | R Diode, DX0445CE       |
|                                            | D503          | RH-EX0724GEZZY  | AB       |           | R Zener Diode, 3.53V    |
|                                            | D505          | RH-DX0441CEZZY  | AC       |           | R Diode, DX0441CE       |
|                                            | D510          | RH-DX0131CEZZY  | AC       |           | R Diode, DX0131CE       |
|                                            | D602          | VHD1SS244// -1Y | AB       |           | R Diode, 1SS244         |
|                                            | D603          | RH-EX0667GEZZY  | AA       |           | R Zener Diode, 27V      |
|                                            | D605          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D606          | RH-DX0131CEZZY  | AC       |           | R Diode, DX0131CE       |
|                                            | D607          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D608          | RH-EX0617GEZZY  | AA       |           | R Zener Diode, 6.2V     |
| △                                          | D701          | RH-DX0476CEZZ   | AG       |           | R Diode, DX0476CE       |
|                                            | D705          | RH-DX0066GEZZY  | AC       |           | R Diode, DX0066CE       |
|                                            | D706          | RH-DX0066GEZZY  | AC       |           | R Diode, DX0066CE       |
|                                            | D714          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D716          | RH-EX0339GEZZY  | AB       |           | R Diode, EX0339GE       |
|                                            | D751          | RH-DXA006WJZZ   | AD       |           | R Diode, DXA006WJ       |
|                                            | D753          | RH-DX0452CEZZ   |          |           | R Diode, DX0452CE       |
|                                            | D801          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D802          | RH-EX0630GEZZY  | AA       |           | R Zener Diode, 9.1V     |
|                                            | D803          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D804          | RH-EX0606GEZZY  | AB       |           | R Zener Diode, 4.43V    |
|                                            | D805          | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D806          | RH-EX1393CEZZY  | AB       |           | R Zener Diode, 5.2V     |
|                                            | D811          | RH-EX0263TAZZY  | AC       |           | R Zener Diode, 8.1V     |
|                                            | D812          | RH-EX0263TAZZY  | AC       |           | R Zener Diode, 8.1V     |
|                                            | D813          | RH-EX0263TAZZY  | AC       |           | R Zener Diode, 8.1V     |
|                                            | D817          | RH-EX0615GEZZY  | AA       |           | R Zener Diode, 5.73V    |
|                                            | D818          | RH-EX0627GEZZY  | AA       |           | R Zener Diode, 8.19V    |
|                                            | D819          | RH-EX0612GEZZY  | AB       |           | R Zener Diode, 5.1V     |
|                                            | D820          | RH-EX0625GEZZY  | AB       |           | R Zener Diode, 7.67V    |
|                                            | D1001         | RH-PX0013PEZZ   | AC       |           | R Diode, Photodiode     |
|                                            | D1002         | RH-EX0640GEZZY  | AA       |           | R Zener Diode, 12.03V   |
|                                            | D1005         | VHD1SS119// -1Y | AA       |           | R Diode, 1SS119         |
|                                            | D1006         | RH-EX1393CEZZY  | AB       |           | R Zener Diode, 5.2V     |
|                                            | D1007         | RH-EX1393CEZZY  | AB       |           | R Zener Diode, 5.2V     |
|                                            | D1081         | RH-DX0066GEZZY  | AC       |           | R Diode, DX0066CE       |
|                                            | D1801         | RH-EX0253TAZZY  | AC       |           | R Zener Diode, 3.53V    |
|                                            | D1802         | RH-EX0253TAZZY  | AC       |           | R Zener Diode, 3.53V    |

| NO.                  | PARTS CODE            | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION                        |
|----------------------|-----------------------|------------|----------|-----------|------------------------------------|
| <b>[3] MAIN UNIT</b> |                       |            |          |           |                                    |
|                      | D1803 RH-EX0253TAZZY  | AC         |          | R         | Zener Diode , 3.53V                |
|                      | D3501 RH-EX0612GEZZY  | AB         |          | R         | Zener Diode , 5.1V                 |
|                      | D3502 RH-EX0612GEZZY  | AB         |          | R         | Zener Diode , 5.1V                 |
| △                    | VA701 RH-VX0073CEZZ   | AD         |          | R         | Varistor                           |
| △                    | PR701 RMP TP0085CEZZ  | AL         |          | R         | Packaged Circuit                   |
|                      | X801 RCRSAA019WJZZ    | AF         |          | R         | Crystal                            |
|                      | X802 RCRSAA067WJZZ    |            |          | R         | Crystal                            |
|                      | L203 VP-DF270K0000Y   | AB         |          | R         | Peaking 27mH                       |
|                      | L204 VP-XF1R2K0000Y   | AB         |          | R         | Peaking 1.2mH                      |
|                      | L602 RC i LP0223CEZZ  | AE         |          | R         | Coil                               |
| △                    | L701 RC i LFA187WJZZ  | AD         |          | R         | Coil                               |
|                      | L801 VP-DF100K0000Y   | AB         |          | R         | Peaking 10mH                       |
|                      | L802 VP-CF100K0000Y   | AB         |          | R         | Peaking 10mH                       |
|                      | L803 VP-CF220K0000Y   | AB         |          | R         | Peaking 22mH                       |
|                      | L804 VP-CF100K0000Y   | AB         |          | R         | Peaking 10mH                       |
|                      | L805 VP-CF330K0000Y   | AB         |          | R         | Peaking 33mH                       |
|                      | L806 VP-DF100K0000Y   | AB         |          | R         | Peaking 10mH                       |
|                      | L807 VP-DF100K0000Y   | AB         |          | R         | Peaking 10mH                       |
|                      | L3501 VP-DF100K0000Y  | AB         |          | R         | Peaking 10mH                       |
|                      | SF201 RF i LC0037PEZZ | AP         |          | R         | Filter                             |
| △                    | T602 RTRNFA120WJZZ    | AW         |          | R         | H-Volt Transformer                 |
| △                    | T603 RTRNZA058WJZZ    | AD         |          | R         | Transformer                        |
| △                    | T702 RTRNWA205WJZZ    | AK         |          | R         | Transformer                        |
|                      | C201 VCEA0A1HW105M+   | AB         |          | R         | 1 50V Electrolytic                 |
|                      | C202 VCEA0A0JW108M+   | AC         |          | R         | 1000 6.3V Electrolytic             |
|                      | C203 VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C206 VCEA0A1HW106M+   | AB         |          | R         | 10 50V Electrolytic                |
|                      | C207 VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C208 VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C209 VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C210 VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C211 VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C214 VCCCCY1HH390JY   | AA         |          | R         | 39p 50 Ceramic                     |
|                      | C215 VCCCCY1HH390JY   | AA         |          | R         | 39p 50 Ceramic                     |
|                      | C301 VCEA0A1EW477M+   | AD         |          | R         | 470 25V Electrolytic               |
|                      | C304 VCEA0A1HW475M+   | AB         |          | R         | 4.7 50V Electrolytic               |
|                      | C308 VCKYCY1HB682KY   | AA         |          | R         | 6800p 50V Ceramic                  |
|                      | C310 VCEA0A1HW224M+   | AB         |          | R         | 0.22 50V Electrolytic              |
|                      | C311 VCEA0A1HW224M+   | AB         |          | R         | 0.22 50V Electrolytic              |
|                      | C313 VCKYCY1HB682KY   | AB         |          | R         | 6800p 50V Ceramic                  |
|                      | C319 VCEA0A1CW106M+   | AB         |          | R         | 10 16V Electrolytic                |
|                      | C320 VCEA0A1CW106M+   | AB         |          | R         | 10 16V Electrolytic                |
|                      | C322 VCEA0A1HW475M+   | AB         |          | R         | 4.7 50V Electrolytic               |
|                      | C383 VCEA0A1CW106M+   | AB         |          | R         | 10 16V Electrolytic                |
|                      | C387 VCEA0A1CW106M+   | AB         |          | R         | 10 16V Electrolytic                |
|                      | C391 VCKYPA1HB102K+   | AA         |          | R         | 1000p 50V Ceramic                  |
|                      | C393 VCEA0A1EW228M+   | AE         |          | R         | 2200 25V Electrolytic              |
|                      | C451 VCEA0A1CW477M+   | AC         |          | R         | 470 16V Electrolytic               |
|                      | C505 VCEA0A1HW107M+   | AB         |          | R         | 100 50V Electrolytic               |
|                      | C508 VCFYAA2AA224J+   | AD         |          | R         | 0.22 100V Mylar                    |
|                      | C511 VCEA0A1VW477M+   | AB         |          | R         | 470 35V Electrolytic               |
|                      | C512 VCKYPA2HB102K+   | AB         |          | R         | 1000p 500V Ceramic                 |
|                      | C513 RC-EZA332WJZZ+   | AD         |          | R         | Capacitor                          |
|                      | C514 VCFYSA1JB273J+   | AC         |          | R         | 0.27 6.3V Mylar                    |
|                      | C515 VCEACA1HC335J+   | AC         |          | R         | 3.3 50V Electrolytic               |
|                      | C518 VCKYCY1HB103KY   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C601 VCQYTA1HM563J+   | AB         |          | R         | 0.056 50V Mylar                    |
|                      | C602 VCEA0A1HW475M+   | AB         |          | R         | 4.7 50V Electrolytic               |
|                      | C604 VCEA0A2EW336M+   | AD         |          | R         | 33 250V Electrolytic               |
|                      | C606 VCKYPA2HB102K+   | AB         |          | R         | 1000p 500V Ceramic                 |
| △                    | C607 VCFPVC3ZA902H    | AD         |          | R         | 9000p 1.8kV Metalized Polypro Film |
|                      | C608 VCQYTA2AA103K+   | AC         |          | R         | 0.01 100V Mylar                    |
|                      | C610 VCEA0A1EW227M+   | AB         |          | R         | 220 25V Electrolytic               |
|                      | C611 VCFPVC2DB334J    | AD         |          | R         | 0.33 200V Metalized Polypro Film   |
|                      | C612 VCKYPA1HB561K+   | AA         |          | R         | 560p 50V Ceramic                   |
|                      | C643 VCEA0A1CW477M+   | AC         |          | R         | 470 16V Electrolytic               |
|                      | C650 VCKYPA2HB101K+   | AB         |          | R         | 100p 500V Ceramic                  |
| △                    | C701 RC-FZ031SCEZZ    | AD         |          | R         | Capacitor                          |
|                      | C702 RC-KZ0029CEZZ+   | AC         |          | R         | 0.01 250V Ceramic                  |
|                      | C703 RC-KZ0029CEZZ+   | AC         |          | R         | 0.01 250V Ceramic                  |
|                      | C704 RC-KZ0029CEZZ+   | AC         |          | R         | 0.01 250V Ceramic                  |
| △                    | C705 RC-EZA097WJZZ    | AM         |          | R         | 220 400V Electrolytic              |
|                      | C706 VCEA0A1VW226M+   | AB         |          | R         | 22 35V Electrolytic                |
|                      | C709 VCEA0A1HW104M+   | AB         |          | R         | 0.1 50V Electrolytic               |
|                      | C710 VCKYPA1HF103Z+   | AA         |          | R         | 0.01 50V Ceramic                   |
|                      | C711 VCKYPA1HB332K+   | AB         |          | R         | 3300p 50V Ceramic                  |
|                      | C713 RC-KZ0102GEZZ    | AE         |          | R         | Capacitor                          |
|                      | C743 VCKYPH3DB561K    | AC         |          | R         | 560p 2kV Ceramic                   |
|                      | C744 VCFYFA1HA105J+   | AE         |          | R         | 1 50V Mylar                        |
| △                    | C750 VCKYPA2HB102K+   | AB         |          | R         | 1000p 500V Ceramic                 |
|                      | C753 RC-EZA523WJZZ    | AD         |          | R         | Capacitor                          |
|                      | C754 RC-EZA522WJZZ    | AD         |          | R         | Capacitor                          |
|                      | C756 VCEA0A1EW228M+   | AE         |          | R         | 2200 25V Electrolytic              |
|                      | C758 VCEA0A1CW476M+   | AB         |          | R         | 47 16V Electrolytic                |

| NO.                  | PARTS CODE     | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION            |
|----------------------|----------------|------------|----------|-----------|------------------------|
| <b>[3] MAIN UNIT</b> |                |            |          |           |                        |
| C784                 | RC-KZ1018CEZZ+ | AC         |          | R         | 1000p 2kV Ceramic      |
| C802                 | VCEA0A1AW107M+ | AB         |          | R         | 100 10V Electrolytic   |
| C803                 | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C804                 | VCEACA1HC474M+ | AC         |          | R         | 0.47 50V Electrolytic  |
| C805                 | VCKYCY1HB153KY | AA         |          | R         | 0.15 50V Ceramic       |
| C806                 | VCEA9M1CW476M+ | AB         |          | R         | 47 16V Electrolytic    |
| C807                 | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C809                 | VCEA0A1CW476M+ | AB         |          | R         | 47 16V Electrolytic    |
| C810                 | VCKYCY1HF103ZY | AA         |          | R         | 0.01 50V Ceramic       |
| C811                 | VCKYCY1CF105ZY | AA         |          | R         | 1 16V Ceramic          |
| C812                 | VCKYCY1HB104KY | AA         |          | R         | 0.1 50V Ceramic        |
| C813                 | VCKYCY1HB104KY | AA         |          | R         | 0.1 50V Ceramic        |
| C814                 | VCKYCY1HF153ZY | AA         |          | R         | 0.015 50V Ceramic      |
| C815                 | VCCCCY1HH121JY | AA         |          | R         | 120p 50V Ceramic       |
| C816                 | VCEA9M1HW474M+ | AB         |          | R         | 0.47 50V Electrolytic  |
| C817                 | VCFYFA1HA224J+ | AB         |          | R         | 0.22 50V MyLAR         |
| C818                 | VCEA0A1CW476M+ | AB         |          | R         | 47 16V Electrolytic    |
| C819                 | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C820                 | VCEA0A1HW105M+ | AB         |          | R         | 1 50V Electrolytic     |
| C821                 | VCEA0A1CW476M+ | AB         |          | R         | 47 16V Electrolytic    |
| C823                 | VCKYCY1HF103ZY | AA         |          | R         | 0.01 50V Ceramic       |
| C824                 | VCKYCY1CF105ZY | AA         |          | R         | 1 16V Ceramic          |
| C825                 | VCEA0A1HW474M+ | AB         |          | R         | 0.47 50V Electrolytic  |
| C827                 | VCEA0A1CW106M+ | AB         |          | R         | 10 16V Electrolytic    |
| C828                 | VCEA0A1HW474M+ | AB         |          | R         | 0.47 50V Electrolytic  |
| C830                 | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C831                 | VCEA9M1CW476M+ | AB         |          | R         | 47 16V Electrolytic    |
| C832                 | VCFYFA1HA104J+ | AA         |          | R         | 0.1 50V Mylar          |
| C833                 | VCEA9M1HW104M+ | AC         |          | R         | 0.1 50V Electrolytic   |
| C834                 | VCKYCY1CF104ZY | AA         |          | R         | 0.1 16V Ceramic        |
| C835                 | VCKYCY1HF103ZY | AA         |          | R         | 0.01 50V Ceramic       |
| C836                 | VCKYCY1HB222KY | AA         |          | R         | 2200p 50V Ceramic      |
| C838                 | VCKYPA1HB102K+ | AA         |          | R         | 1000p 50V Ceramic      |
| C837                 | VCFYFA1HA224J+ | AA         |          | R         | 0.22 50V MyLAR         |
| C839                 | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C840                 | VCKYCY1CF105ZY | AA         |          | R         | 1 16V Ceramic          |
| C841                 | VCKYCY1HB332KY | AA         |          | R         | 3300p 50V Ceramic      |
| C842                 | VCKYCY1CF104ZY | AA         |          | R         | 0.1 16V Ceramic        |
| C843                 | VCEA0A1HW106M+ | AB         |          | R         | 10 50V Electrolytic    |
| C847                 | VCKYCY1HB471KY | AA         |          | R         | 470p 50V Ceramic       |
| C848                 | VCEA0A1CW477M+ | AC         |          | R         | 470 16V Electrolytic   |
| C1001                | VCEA0A1AW107M+ | AB         |          | R         | 100 10V Electrolytic   |
| C1002                | VCKYCY1HB681KY | AA         |          | R         | 680p 50V Ceramic       |
| C1003                | VCEA0A1CW106M+ | AB         |          | R         | 10 16V Electrolytic    |
| C1004                | VCKYCY1CF474ZY | AB         |          | R         | 0.47 16V Ceramic       |
| C1006                | VCEA0A1HW225M+ | AB         |          | R         | 2.2 50V Electrolytic   |
| C1016                | VCKYCY1EF104ZY | AA         |          | R         | 0.1 25V Ceramic        |
| C1081                | VQYTA1HM104J+  | AB         |          | R         | 0.1 50V Ceramic        |
| C1840                | VCEA0A1CW477M+ | AC         |          | R         | 470 16V Electrolytic   |
| C1841                | VCEA0A1CW477M+ | AC         |          | R         | 470 16V Electrolytic   |
| C1842                | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C1843                | VCKYCY1HB104KY | AA         |          | R         | 0.1 50V Ceramic        |
| C1844                | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C1845                | VCEA0A0JW477M+ | AC         |          | R         | 470 6.3V Electrolytic  |
| C1846                | VCKYCY1HB104KY | AA         |          | R         | 0.1 50V Ceramic        |
| C1847                | VCKYCY1CB273KY | AB         |          | R         | 0.027 16V Ceramic      |
| C1848                | VCEA0A1HW106M+ | AB         |          | R         | 10 50V Electrolytic    |
| C1849                | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C1851                | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C1852                | VCKYCY1HB103KY | AA         |          | R         | 0.01 50V Ceramic       |
| C1853                | VCEA0A0JW108M+ | AC         |          | R         | 1000 6.3V Electrolytic |
| C1854                | VCEA0A1CW476M+ | AB         |          | R         | 47 16V Electrolytic    |
| C1855                | VCCCCY1HH200JY |            |          |           |                        |
| C1856                | VCCCCY1HH200JY |            |          |           |                        |
| C1857                | VCKYCY1HB182KY | AA         |          | R         | 1800p 50V Ceramic      |
| C3501                | VCKYCY1HF224ZY | AA         |          | R         | 0.22 50V Ceramic       |
| C3502                | VCKYCY1HF224ZY | AA         |          | R         | 0.22 50V Ceramic       |
| C3503                | VCKYCY1HF224ZY | AA         |          | R         | 0.22 50V Ceramic       |
| C3504                | VCKYCY1HF224ZY | AA         |          | R         | 0.22 50V Ceramic       |
| C3505                | VCKYCY1CF224ZY | AA         |          | R         | 0.22 16V Ceramic       |
| C3506                | VCKYCY1CF224ZY | AA         |          | R         | 0.22 16V Ceramic       |
| C3507                | VCEA0A1HW475M+ | AB         |          | R         | 4.7 50V Electrolytic   |
| C3508                | VCEA0A1HW475M+ | AB         |          | R         | 4.7 50V Electrolytic   |
| C3509                | VCKYCY1HF223ZY | AB         |          | R         | 0.022 50V Ceramic      |
| C3510                | VCKYCY1HF223ZY | AB         |          | R         | 0.022 50V Ceramic      |
| C3511                | VCKYCY1HB222KY | AA         |          | R         | 2200p 50V Ceramic      |
| C3512                | VCKYCY1HB222KY | AA         |          | R         | 2200p 50V Ceramic      |
| C3513                | VCKYCY1HF224ZY | AA         |          | R         | 0.22 50V Ceramic       |
| C3514                | VCKYCY1HF224ZY | AA         |          | R         | 0.22 50V Ceramic       |
| C3515                | VCKYCY1AB105KY | AA         |          | R         | 1 10V Ceramic          |
| C3516                | VCKYCY1AB105KY | AA         |          | R         | 1 10V Ceramic          |
| C3517                | VCEA0A1HW105M+ | AB         |          | R         | 1 50V Electrolytic     |
| C3518                | VCKYCY1CF334ZY | AB         |          | R         | 0.33 16V Ceramic       |
| C3519                | VCEA0A1HW105M+ | AB         |          | R         | 1 50V Electrolytic     |
| C3520                | VCEA0A1HW105M+ | AB         |          | R         | 1 50V Electrolytic     |

| NO.                  | PARTS CODE     | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION            |
|----------------------|----------------|------------|----------|-----------|------------------------|
| <b>[3] MAIN UNIT</b> |                |            |          |           |                        |
| C3521                | VCEA0A1HW105M+ | AB         |          | R         | 1 50V Electrolytic     |
| C3522                | VCEA0A1HW105M+ | AB         |          | R         | 1 50V Electrolytic     |
| C3523                | VCKYCY1HB104KY | AA         |          | R         | 0.1 50V Ceramic        |
| C3524                | VCEA0A1CW108M+ | AD         |          | R         | 1000 16V Electrolytic  |
| C3525                | VCKYCY1HF103ZY | AA         |          | R         | 0.01 50V Ceramic       |
| C3526                | VCKYCY1HF103ZY | AA         |          | R         | 0.01 50V Ceramic       |
| RJ1                  | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ6                  | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ7                  | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ9                  | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ10                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ14                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ17                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ39                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ41                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ42                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ44                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ45                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ46                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ47                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ48                 | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| R201                 | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R202                 | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R205                 | VRD-RA2BE680JY | AA         |          | R         | 68 1/8W Carbon         |
| R206                 | VRS-CY1JF122JY | AA         |          | R         | 1.2k 1/16W Metal Oxide |
| R207                 | VRS-CY1JF221JY | AA         |          | R         | 220 1/16W Metal Oxide  |
| R208                 | VRS-CY1JF681JY | AA         |          | R         | 680 1/16W Metal Oxide  |
| R209                 | VRS-CY1JF392JY | AA         |          | R         | 3.9k 1/16W Metal Oxide |
| R210                 | VRS-CY1JF392JY | AA         |          | R         | 3.9k 1/16W Metal Oxide |
| R211                 | VRS-CY1JF682JY | AA         |          | R         | 6.8k 1/16W Metal Oxide |
| R212                 | VRS-CY1JF222JY | AA         |          | R         | 2.2k 1/16W Metal Oxide |
| R216                 | VRS-RG3LB333J+ | AC         |          | R         | 33k 3W Metal Oxide     |
| R220                 | VRS-CY1JF221JY | AA         |          | R         | 220 1/16W Metal Oxide  |
| R301                 | VRS-CY1JF102JY | AA         |          | R         | 1k 1/16W Metal Oxide   |
| R302                 | VRN-RL3DBR10J+ | AB         |          | R         | 1 2.0W Metal Oxide     |
| R303                 | VRS-CY1JF473JY | AA         |          | R         | 47k 1/16W Metal Oxide  |
| R304                 | VRD-RA2BE683JY | AA         |          | R         | 68k 1/8W Carbon        |
| R305                 | VRS-CY1JF274JY | AA         |          | R         | 270k 1/16W Metal Oxide |
| R307                 | VRS-CY1JF182JY | AA         |          | R         | 1.8k 1/16W Metal Oxide |
| R308                 | VRD-RA2BE822JY | AA         |          | R         | 8.2k 1/8W Carbon       |
| R314                 | VRD-RA2BE822JY | AA         |          | R         | 8.2k 1/8W Carbon       |
| R315                 | VRS-CY1JF182JY | AA         |          | R         | 1.8k 1/16W Metal Oxide |
| R318                 | VRD-RA2BE680JY | AA         |          | R         | 68 1/8W Carbon         |
| R319                 | VRD-RA2BE680JY | AA         |          | R         | 68 1/8W Carbon         |
| R353                 | VRS-CY1JF102JY | AA         |          | R         | 1k 1/16W Metal Oxide   |
| R356                 | VRD-RA2BE102JY | AA         |          | R         | 1k 1/8W Carbon         |
| R362                 | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R366                 | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R372                 | VRS-CY1JF104JY | AA         |          | R         | 100k 1/16W Metal Oxide |
| R373                 | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R374                 | VRS-CY1JF104JY | AA         |          | R         | 100k 1/16W Metal Oxide |
| R376                 | VRD-RA2BE472JY | AA         |          | R         | 4.7k 1/8W Carbon       |
| R382                 | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R384                 | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R431                 | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R432                 | VRS-CY1JF750JY | AA         |          | R         | 75 1/16W Metal Oxide   |
| R433                 | VRS-CY1JF750JY | AA         |          | R         | 75 1/16W Metal Oxide   |
| R434                 | VRS-CY1JF750JY | AA         |          | R         | 75 1/16W Metal Oxide   |
| R435                 | VRD-RA2BE750JY | AA         |          | R         | 75 1/8W Carbon         |
| R458                 | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R459                 | VRD-RA2EE750JY | AA         |          | R         | 75 1/4W Carbon         |
| R461                 | VRS-CY1JF750JY | AA         |          | R         | 75 1/16W Metal Oxide   |
| R462                 | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R503                 | VRN-VV3DB2R2J  | AB         |          | R         | 2.2 2W Metal Oxide     |
| R504                 | VRS-CY1JF562JY | AA         |          | R         | 5.6k 1/16W Metal Oxide |
| R505                 | VRD-RM2HD220JY | AA         |          | R         | 22 1/2W Carbon         |
| R506                 | VRS-RG3AB331J+ | AB         |          | R         | 330 1W Metal Oxide     |
| R507                 | VRD-RM2HD1R0JY | AA         |          | R         | 1 1/2W Carbon          |
| R513                 | VRD-RM2HD333JY | AB         |          | R         | 33k 1/2W Carbon        |
| R514                 | VRD-RM2HD682JY | AA         |          | R         | 6.8k 1/2W Carbon       |
| R520                 | VRS-CY1JF153JY | AA         |          | R         | 15k 1/16W Metal Oxide  |
| R523                 | VRD-RA2BE103JY | AA         |          | R         | 10k 1/8W Carbon        |
| R524                 | VRD-RA2BE103JY | AA         |          | R         | 10k 1/8W Carbon        |
| R602                 | VRD-RA2BE393JY | AA         |          | R         | 39k 1/8W Carbon        |
| R604                 | VRD-RA2BE683JY | AA         |          | R         | 68k 1/8W Carbon        |
| R605                 | VRD-RM2HD104JY | AA         |          | R         | 100k 1/2W Carbon       |
| R607                 | VRD-RM2HD5R6JY | AA         |          | R         | 5.6 1/2W Carbon        |
| R608                 | VRD-RM2HD102JY | AA         |          | R         | 1k 1/2W Carbon         |
| R609                 | VRD-RM2HD270JY | AA         |          | R         | 27 1/2W Carbon         |
| R611                 | VRN-RL3AB1R2J+ | AB         |          | R         | 1.2 1W Metal Film      |
| R612                 | VRD-RM2HD270JY | AA         |          | R         | 27 1/2W Carbon         |
| R614                 | VRD-RA2BE154JY | AA         |          | R         | 150k 1/8W Carbon       |
| R615                 | VRD-RA2BE102JY | AA         |          | R         | 1k 1/8W Carbon         |
| R616                 | VRD-RA2BE102JY | AA         |          | R         | 1k 1/8W Carbon         |
| R617                 | VRS-CY1JF123JY | AA         |          | R         | 12k 1/16W Metal Oxide  |


| NO.                  | PARTS CODE     | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION            |
|----------------------|----------------|------------|----------|-----------|------------------------|
| <b>[3] MAIN UNIT</b> |                |            |          |           |                        |
| R618                 | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R621                 | VRN-RL2HC1R0J+ | AB         |          | R         | 1 1/2W Metal Film      |
| R622                 | VRS-VV3DB682J  | AA         |          | R         | 6.8k 2W Metal Oxide    |
| R625                 | VRD-RM2HD184JY | AA         |          | R         | 180k 1/2W Carbon       |
| R626                 | VRS-CY1JF472JY | AA         |          | R         | 4.7k 1/16W Metal Oxide |
| R627                 | VRD-RA2BE153JY | AA         |          | R         | 15k 1/8W Carbon        |
| R631                 | VRS-KT3LB221J  | AE         |          | R         | 220 3W Metal Oxide     |
| R638                 | VRD-RA2BE331JY | AA         |          | R         | 330 1/8W Carbon        |
| R639                 | VRD-RM2HD271JY | AA         |          | R         | 270 1/2W Carbon        |
| R642                 | VRN-RL3DB1R0J+ | AB         |          | R         | 1 2W Metal Film        |
| R702                 | VRD-RM2HD154JY | AA         |          | R         | 150k 1/2W Carbon       |
| R704                 | VRD-RA2BE221JY | AA         |          | R         | 220 1/8W Carbon        |
| R710                 | VRD-RM2HD220JY | AA         |          | R         | 22 1/2W Carbon         |
| R711                 | VRD-RA2EE682JY | AA         |          | R         | 6.8k 1/4W Carbon       |
| R713                 | VRD-RA2BE222JY | AA         |          | R         | 2.2k 1/8W Carbon       |
| R720                 | VRD-RA2BE393GY | AA         |          | R         | 39k 1/8W Carbon        |
| R725                 | VRD-RM2HD821JY | AA         |          | R         | 820 1/2W Carbon        |
| R726                 | VRN-RL2HCR47J+ | AB         |          | R         | 0.47 1/2W Metal Film   |
| R751                 | VRC-UA2HG825KY | AA         |          | R         | 8.2M 1/2W Solid        |
| R752                 | VRC-UA2HG825KY | AA         |          | R         | 8.2M 1/2W Solid        |
| R753                 | VRD-RM2HD334JY | AA         |          | R         | 330k 1/2W Carbon       |
| R754                 | VRN-RL3AB8R2J+ | AB         |          | R         | 8.2 1W Metal Film      |
| R755                 | VRS-RG3DB151J+ | AB         |          | R         | 150 2W Metal Oxide     |
| R756                 | VRD-RM2HD100JY | AA         |          | R         | 10 1/2W Carbon         |
| R757                 | VRS-VV3DB220J  | AA         |          | R         | 22 2W Metal Oxide      |
| R759                 | VRD-RM2HD100JY | AA         |          | R         | 10 1/2W Carbon         |
| R760                 | VRD-RM2HD100JY | AA         |          | R         | 10 1/2W Carbon         |
| R801                 | VRS-CY1JF102JY | AA         |          | R         | 1k 1/16W Metal Oxide   |
| R803                 | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R804                 | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R805                 | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R806                 | VRS-CY1JF822JY | AA         |          | R         | 8.2k 1/16W Metal Oxide |
| R807                 | VRS-CY1JF124JY | AA         |          | R         | 120k 1/16W Metal Oxide |
| R808                 | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R809                 | VRD-RA2BE123JY | AA         |          | R         | 12k 1/8W Carbon        |
| R810                 | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R811                 | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R812                 | VRS-CY1JF822JY | AA         |          | R         | 8.2k 1/16W Metal Oxide |
| R813                 | VRD-RM2HD151JY | AA         |          | R         | 150 1/2W Carbon        |
| R814                 | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R815                 | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R816                 | VRS-CY1JF471JY | AA         |          | R         | 470 1/16W Metal Oxide  |
| R817                 | VRS-CY1JF471JY | AA         |          | R         | 470 1/16W Metal Oxide  |
| R818                 | VRS-CY1JF220JY | AA         |          | R         | 22 1/16W Metal Oxide   |
| R819                 | VRD-RA2BE223JY | AA         |          | R         | 22k 1/8W Carbon        |
| R820                 | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R822                 | VRS-CY1JF181JY | AA         |          | R         | 180 1/16W Metal Oxide  |
| R823                 | VRS-CY1JF272JY | AA         |          | R         | 2.7k 1/16W Metal Oxide |
| R824                 | VRS-CY1JF181JY | AA         |          | R         | 180 1/16W Metal Oxide  |
| R825                 | VRS-CY1JF473JY | AA         |          | R         | 47k 1/16W Metal Oxide  |
| R826                 | VRS-CY1JF181JY | AA         |          | R         | 180 1/16W Metal Oxide  |
| R827                 | VRS-CY1JF181JY | AA         |          | R         | 180 1/16W Metal Oxide  |
| R828                 | VRS-CY1JF392JY | AA         |          | R         | 3.9k 1/16W Metal Oxide |
| R829                 | VRS-CY1JF473JY | AA         |          | R         | 47k 1/16W Metal Oxide  |
| R830                 | VRS-CY1JF472JY | AA         |          | R         | 4.7k 1/16W Metal Oxide |
| R832                 | VRS-CY1JF182JY | AA         |          | R         | 1.8k 1/16W Metal Oxide |
| R833                 | VRS-CY1JF182JY | AA         |          | R         | 1.8k 1/16W Metal Oxide |
| R834                 | VRS-CY1JF182JY | AA         |          | R         | 1.8k 1/16W Metal Oxide |
| R837                 | VRS-CY1JF223JY | AA         |          | R         | 22k 1/16W Metal Oxide  |
| R840                 | VRD-RA2EE102JY | AA         |          | R         | 1k 1/4W Carbon         |
| R841                 | VRD-RM2HD182JY | AA         |          | R         | 1.8k 1/2W Carbon       |
| R845                 | VRS-CY1JF105JY | AA         |          | R         | 1M 1/16W Metal Oxide   |
| R846                 | VRS-CY1JF102JY | AA         |          | R         | 1k 1/16W Metal Oxide   |
| R858                 | VRS-SV2HC100J  | AA         |          | R         | 10 1/2W Metal Oxide    |
| R1001                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R1002                | VRS-CY1JF000JY | AA         |          | R         | 0 1/16W Metal Oxide    |
| R1003                | VRS-CY1JF102JY | AA         |          | R         | 1k 1/16W Metal Oxide   |
| R1004                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R1006                | VRD-RA2BE332JY | AA         |          | R         | 3.3k 1/8W Carbon       |
| R1007                | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R1008                | VRD-RA2BE470JY | AA         |          | R         | 47 1/8W Carbon         |
| R1009                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R1010                | VRS-CY1JF104JY | AA         |          | R         | 100k 1/16W Metal Oxide |
| R1011                | VRS-CY1JF183JY | AA         |          | R         | 18k 1/16W Metal Oxide  |
| R1012                | VRD-RA2BE183JY | AA         |          | R         | 18k 1/8W Carbon        |
| R1013                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R1014                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R1015                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R1016                | VRD-RA2BE332JY | AA         |          | R         | 3.3k 1/8W Carbon       |
| R1017                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R1018                | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R1019                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R1020                | VRS-CY1JF183JY | AA         |          | R         | 18k 1/16W Metal Oxide  |
| R1021                | VRS-CY1JF822JY | AA         |          | R         | 8.2k 1/16W Metal Oxide |
| R1022                | VRS-CY1JF183JY | AA         |          | R         | 18k 1/16W Metal Oxide  |

| NO.                  | PARTS CODE     | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION            |
|----------------------|----------------|------------|----------|-----------|------------------------|
| <b>[3] MAIN UNIT</b> |                |            |          |           |                        |
| R1024                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R1025                | VRD-RA2BE103JY | AA         |          | R         | 10k 1/8W Carbon        |
| R1026                | VRS-CY1JF183JY | AA         |          | R         | 18k 1/16W Metal Oxide  |
| R1027                | VRS-CY1JF104JY | AA         |          | R         | 100k 1/16W Metal Oxide |
| R1028                | VRD-RA2BE181JY | AA         |          | R         | 180 1/8W Carbon        |
| R1029                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R1030                | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R1031                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R1032                | VRS-CY1JF222JY | AA         |          | R         | 2.2k 1/16W Metal Oxide |
| R1034                | VRS-CY1JF470JY | AA         |          | R         | 47 1/16W Metal Oxide   |
| R1038                | VRS-CY1JF562JY | AA         |          | R         | 5.6k 1/16W Metal Oxide |
| R1039                | VRS-CY1JF102JY | AA         |          | R         | 1k 1/16W Metal Oxide   |
| R1056                | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R1074                | VRS-CY1JF222JY | AA         |          | R         | 2.2k 1/16W Metal Oxide |
| R1078                | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R1079                | VRS-CY1JF332JY | AA         |          | R         | 3.3k 1/16W Metal Oxide |
| R1087                | VRS-CY1JF181JY | AA         |          | R         | 180 1/16W Metal Oxide  |
| R1863                | VRS-CY1JF103JY | AA         |          | R         | 10k 1/16W Metal Oxide  |
| R3501                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R3502                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R3503                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R3504                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R3506                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R3507                | VRD-RA2BE101JY | AA         |          | R         | 100 1/8W Carbon        |
| R3508                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| R3509                | VRS-CY1JF101JY | AA         |          | R         | 100 1/16W Metal Oxide  |
| SC304                | QSOCZ1541CEZZ  | AD         |          | R         | Socket , 15 Pin        |
| △ S701               | QSW-P0612CEZZ  | AG         |          | R         | Switch,POWER           |
| S1001                | QSW-K0202PEZZ+ | AC         |          | R         | Switch,CH UP           |
| S1002                | QSW-K0202PEZZ+ | AC         |          | R         | Switch,CH DOWN         |
| S1003                | QSW-K0202PEZZ+ | AC         |          | R         | Switch,VOL UP          |
| S1004                | QSW-K0202PEZZ+ | AC         |          | R         | Switch,VOL DOWN        |
| △ S1005              | QSW-K0202PEZZ+ | AC         |          | R         | Switch,MENU            |
| F701                 | QFS-C3225CEZZ  | AC         |          | R         | Fuse , 3.15A 250V      |
| FB601                | RBLN-0091GEZZY | AB         |          | R         | Balun                  |
| FH701                | QFSDH1013CEZZ+ | AC         |          | R         | Fuse Holder            |
| FH702                | QFSDH1014CEZZ+ | AC         |          | R         | Fuse Holder            |
| J401                 | QJAKGA015WJZZ  | AH         |          | R         | Jack , 5 Pin           |
| J402                 | QJAKE0211CE04  | AD         |          | R         | AV-2 In Jack           |
| J403                 | QJAKE0211CE09  | AD         |          | R         | AV-2 In Jack           |
| J404                 | QJAKE0210CE02  | AC         |          | R         | Jack                   |
| J405                 | QTANJ0644CEZZ  | AM         |          | R         | Jack                   |
| P302                 | QPLGN0461CEZZA | AB         |          | R         | Plug , 4Pin(HP)        |
| P304                 | QPLGN0761CEZZA | AC         |          | R         | Plug                   |
| P601                 | QPLGN0660CEZZ  | AC         |          | R         | Plug , 6Pin(K1-6)      |
| P602                 | QPLGN0561CEZZA | AB         |          | R         | Plug , 5Pin(H)         |
| P701                 | QPLGN0260CEZZ  | AC         |          | R         | Plug , 2Pin(M)         |
| P702                 | QPLGN0269GEZZ  | AB         |          | R         | Plug                   |
| P1001                | QPLGN0578GEZZ  | AB         |          | R         | Plug , 5Pin(K)         |
| P1002                | QPLGN0561CEZZ  | AB         |          | R         | Plug , 5Pin(BC)        |
| RMC1001              | RRMCUA024WJZZ  | AG         |          | R         | Remote Receiver        |
| RDA301               | PRDARA119WJFW  | AF         |          | R         | HEAT SINK , IC301      |
| RDA392               | PRDARA181WJFW  | AC         |          | R         | HEAT SINK , D392       |
| RDA501               | PRDARA120WJFW  | AD         |          | R         | HEAT SINK , IC501      |
| RDA601               | PRDARA181WJFW  | AC         |          | R         | HEAT SINK , IC601      |
| RDA602               | PRDAR0337PEFW  | AD         |          | R         | HEAT SINK , Q602       |
| RDA701               | PRDARA119WJFW  | AF         |          | R         | HEAT SINK , IC701      |
| NR701                | RH-HXA013WJZZ+ | AD         |          | R         | Thermistor             |
| <b>[4] CRT UNIT</b>  |                |            |          |           |                        |
| IC851                | VHiTDA6107J-1  | AM         |          | R         | IC , TDA6107J          |
| D851                 | RH-DX0220CEZZY | AB         |          | R         | Diode , DX0220CE       |
| D852                 | RH-DX0220CEZZY | AB         |          | R         | Diode , DX0220CE       |
| D853                 | RH-DX0220CEZZY | AB         |          | R         | Diode , DX0220CE       |
| D854                 | RH-DX0220CEZZY | AB         |          | R         | Diode , DX0220CE       |
| D855                 | RH-DX0220CEZZY | AB         |          | R         | Diode , DX0220CE       |
| D856                 | RH-DX0220CEZZY | AB         |          | R         | Diode , DX0220CE       |
| C851                 | VCFYSB2EB823J  | AD         |          | R         | 0.082 250V Mylar       |
| C852                 | VCEA0A2EW106M+ | AD         |          | R         | 10 250V Electrolytic   |
| C853                 | VCKYPA2HB221K+ | AB         |          | R         | 220p 500V Ceramic      |
| C854                 | RC-KZ018JCEZZ  | AC         |          | R         | 0.1 250V Porcelain     |
| C855                 | VCKYPA2HB221K+ | AB         |          | R         | 220p 500V Ceramic      |
| C857                 | VCFYSB2EB823J  | AD         |          | R         | 0.082 250V Mylar       |
| C1517                | VCKYPA2HB102K+ | AA         |          | R         | 1000p 500V Ceramic     |
| R851                 | VRD-RM2HD101JY | AA         |          | R         | 100 1/8W Carbon        |
| R852                 | VRD-RM2HD101JY | AA         |          | R         | 100 1/8W Carbon        |
| R853                 | VRD-RM2HD101JY | AA         |          | R         | 100 1/8W Carbon        |
| R854                 | VRC-MA2HG152KY | AA         |          | R         | 1.5k 1/2W Solid        |
| R855                 | VRC-MA2HG152KY | AA         |          | R         | 1.5k 1/2W Solid        |
| R856                 | VRC-MA2HG152KY | AA         |          | R         | 1.5k 1/2W Solid        |
| R858                 | VRS-SV2HC100J  | AA         |          | R         | 10 1/2W Metal Oxide    |
| △ R861               | VRD-RM2HD224JY | AA         |          | R         | 220k 1/2W Carbon       |
| △ R863               | VRD-RA2BE102JY | AA         |          | R         | 1k 1/8W Carbon         |
| R864                 | VRD-RA2BE102JY | AA         |          | R         | 1k 1/8W Carbon         |

| NO.                       | PARTS CODE       | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION            |
|---------------------------|------------------|------------|----------|-----------|------------------------|
| <b>[4] CRT UNIT</b>       |                  |            |          |           |                        |
| R865                      | VRD-RA2BE102JY   | AA         |          | R         | 1k 1/8W Carbon         |
| RDA851                    | PRDAR0248PEFW    | AF         |          | R         | HEAT SINK , IC851      |
| FB852                     | RBLN-A034WJZZY   | AA         |          | R         | Balun                  |
| P855                      | QPLGN0761CEZZ    | AA         |          | R         | Socket , 7 Pin         |
| P860                      | QPLGN0878GEZZ    | AC         |          | R         | Socket , 8 Pin         |
| SC851                     | QSOCVA023WJZZ    |            |          | R         | Socket , 12 Pin        |
| <b>[5] HEADPHONE UNIT</b> |                  |            |          |           |                        |
| R370                      | VRS-CY1JF471JY   | AA         |          | R         | 470 1/16W Metal Oxide  |
| R371                      | VRS-CY1JF471JY   | AA         |          | R         | 470 1/16W Metal Oxide  |
| J351                      | QJAKJ0101SEZZ    | AE         |          | R         | Jack , 7 Pin           |
| P351                      | QPLGNA109WJZZ    | AB         |          | R         | Plug , 4 Pin           |
| P352                      | QPLGNA108WJZZ    | AB         |          | R         | Plug , 3 Pin           |
| <b>[6] NICAM/A2</b>       |                  |            |          |           |                        |
| IC2300                    | VH i TDA9874A-1Q | BB         |          | R         | IC , TDA9874A          |
| IC2301                    | VH i TDA9808T-1Y | AR         |          | R         | IC , TDA9808T          |
| IC3602                    | VH i PQ05RDA1-1  | AF         |          | R         | IC , PQ05RDA1          |
| Q2301                     | VS2PD601AR/-1Y   | AB         |          | R         | Transistor , 2PD601AR  |
| Q2302                     | VS2SC2735//1EY   | AC         |          | R         | Transistor , 2SC2735   |
| Q2303                     | VS2SC2735//1EY   | AC         |          | R         | Transistor , 2SC2735   |
| D3602                     | VHD1SS119//1Y    | AA         |          | R         | Diode , 1SS119         |
| X2301                     | RCRSB0295CEZZ    | AH         |          | R         | Crystal                |
| L2340                     | VP-XF220K0000Y   | AB         |          | R         | Coil                   |
| L2341                     | VP-XF1R2M0000Y   | AB         |          | R         | Coil                   |
| SF2300                    | RF i LC0016PEZZ  | AS         |          | R         | Filter                 |
| T2300                     | RC i LD0231CEZZ  | AF         |          | R         | Transformer            |
| TP2300                    | QLUGP0111GEFW    | AA         |          | R         | Test Point Pin         |
| C2301                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2302                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2303                     | VCFYFA1HA474J+   | AC         |          | R         | 0.47 50V Mylar         |
| C2304                     | VCFYFA1HA474J+   | AC         |          | R         | 0.47 50V Mylar         |
| C2313                     | VCFYFA1HA474J+   | AC         |          | R         | 0.47 50V Mylar         |
| C2314                     | VCCCCY1HH470JY   | AA         |          | R         | 47p 50V Ceramic        |
| C2315                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2316                     | VCCCCY1HH470JY   | AA         |          | R         | 47p 50V Ceramic        |
| C2317                     | VCEA0A1HW105M+   | AB         |          | R         | 1 50V Electrolytic     |
| C2320                     | VCFYFA1HA474J+   | AC         |          | R         | 0.47 50V Mylar         |
| C2323                     | VCEA0A1CW108M+   | AD         |          | R         | 1000 16V               |
| C2324                     | VCFYFA1HA474J+   | AC         |          | R         | 0.47 50V Mylar         |
| C2325                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2326                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2327                     | VCEA0A1CW476M+   | AB         |          | R         | 47 16V Electrolytic    |
| C2340                     | VCEA0A1HW224M+   | AB         |          | R         | 0.22 50V Electrolytic  |
| C2341                     | VCEA0A1HW104M+   | AB         |          | R         | 0.1 50V Electrolytic   |
| C2342                     | VCEA0A1CW226M+   | AB         |          | R         | 22 16V Electrolytic    |
| C2343                     | VCE9GA1HW105M+   | AB         |          | R         | 1 50V Electrolytic     |
| C2344                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2352                     | VCEA0A1CW476M+   | AB         |          | R         | 47 16V Electrolytic    |
| C2353                     | VCFYFA1HA124J+   | AC         |          | R         | 0.12 50V Mylar         |
| C2345                     | VCCCCY1HH330JY   | AA         |          | R         | 33p 50V Ceramic        |
| C2346                     | VCCCCY1HH330JY   | AA         |          | R         | 33p 50V Ceramic        |
| C2348                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2349                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2350                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2351                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2354                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2356                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2357                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2358                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2359                     | VCEA0A1CW106M+   | AA         |          | R         | 10 16V Electrolytic    |
| C2360                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2361                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2362                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C2363                     | VCKYCY1HF103ZY   | AA         |          | R         | 0.01 50V Ceramic       |
| C3604                     | VCFYFA1HA334J+   | AA         |          | R         | 0.33 50V Mylar         |
| C3605                     | VCCYTA1HM104J+   | AB         |          | R         | 0.1 50V Ceramic        |
| C3606                     | VCE9GA1HW104M+   | AB         |          | R         | 0.1 50V Electrolytic   |
| RJ2309                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2310                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2311                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2312                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2314                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2315                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2316                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2318                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2319                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2320                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2322                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2323                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2327                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2328                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| RJ2331                    | VRS-CY1JF000JY   | AA         |          | R         | 0 1/16W Metal Oxide    |
| R2301                     | VRS-CY1JF223JY   | AA         |          | R         | 22k 1/16W Metal Oxide  |
| R2302                     | VRS-CY1JF682JY   | AA         |          | R         | 6.8k 1/16W Metal Oxide |


| NO.                             | PARTS CODE          | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION                  |
|---------------------------------|---------------------|------------|----------|-----------|------------------------------|
| <b>[6] NICAM/A2</b>             |                     |            |          |           |                              |
| R2309                           | VRS-CY1JF822JY      | AA         |          | R         | 8.2k 1/16W Metal Oxide       |
| R2311                           | VRS-CY1JF102JY      | AA         |          | R         | 1k 1/16W Metal Oxide         |
| R2313                           | VRD-RA2BE101JY      | AA         |          | R         | 100 1/8W Carbon              |
| R2314                           | VRD-RA2BE101JY      | AA         |          | R         | 100 1/8W Carbon              |
| R2316                           | VRS-CY1JF222JY      | AA         |          | R         | 2.2k 1/16W Metal Oxide       |
| R2317                           | VRD-RA2BE101JY      | AA         |          | R         | 100 1/8W Carbon              |
| R2318                           | VRS-CY1JF222JY      | AA         |          | R         | 2.2k 1/16W Metal Oxide       |
| R2340                           | VRS-CY1JF223JY      | AA         |          | R         | 22k 1/16W Metal Oxide        |
| R2341                           | VRS-CY1JF181JY      | AA         |          | R         | 180 1/16W Metal Oxide        |
| R2342                           | VRS-CY1JF183JY      | AA         |          | R         | 18k 1/16W Metal Oxide        |
| R2343                           | VRS-CY1JF561JY      | AA         |          | R         | 560 1/16W Metal Oxide        |
| R2344                           | VRS-CY1JF102JY      | AA         |          | R         | 1k 1/16W Metal Oxide         |
| R2345                           | VRS-CY1JF183JY      | AA         |          | R         | 180 1/16W Metal Oxide        |
| R2348                           | VRS-CY1JF221JY      | AA         |          | R         | 220 1/16W Metal Oxide        |
| R2346                           | VRS-CY1JF102JY      | AA         |          | R         | 1k 1/16W Metal Oxide         |
| R2349                           | VRS-CY1JF393JY      | AA         |          | R         | 39k 1/16W Metal Oxide        |
| R2350                           | VRS-CY1JF152JY      | AA         |          | R         | 1.5k 1/16W Metal Oxide       |
| R2351                           | VRS-CY1JF102JY      | AA         |          | R         | 1k 1/16W Metal Oxide         |
| R2352                           | VRS-CY1JF823JY      | AA         |          | R         | 82k 1/16W Metal Oxide        |
| R2353                           | VRS-CY1JF823JY      | AA         |          | R         | 82k 1/16W Metal Oxide        |
| R2354                           | VRS-CY1JF225JY      | AA         |          | R         | 22 1/16W Metal Oxide         |
| R2355                           | VRS-CY1JF101JY      | AA         |          | R         | 100 1/16W Metal Oxide        |
| R2356                           | VRS-CY1JF102JY      | AA         |          | R         | 1k 1/16W Metal Oxide         |
| R2357                           | VRS-CY1JF122JY      | AA         |          | R         | 1.2k 1/16W Metal Oxide       |
| R2358                           | VRS-CY1JF392JY      | AA         |          | R         | 3.9k 1/16W Metal Oxide       |
| R2359                           | VRD-RA2BE151JY      | AA         |          | R         | 150 1/8W Carbon              |
| R2361                           | VRS-CY1JF102JY      | AA         |          | R         | 1k 1/16W Metal Oxide         |
| R2362                           | VRS-CY1JF102JY      | AA         |          | R         | 1k 1/16W Metal Oxide         |
| R3602                           | VRS-VV3DB180J       | AA         |          | R         | 18 2W Metal Oxide            |
| SF2300                          | RFILC0016PEZZ       | AB         |          | R         | Filter                       |
| FB2300                          | RBLN-0062TAZZY      | AB         |          | R         | Balun                        |
| FB2302                          | RBLN-0062TAZZY      | AB         |          | R         | Balun                        |
| FB2305                          | RBLN-0062TAZZY      | AB         |          | R         | Balun                        |
| FB2303                          | RBLN-0067CEZZY      | AB         |          | R         | Balun                        |
| FB2304                          | RBLN-0067CEZZY      | AB         |          | R         | Balun                        |
| P3001                           | QPLGZ1541CEZZ       | AD         |          | R         | Plug , 15Pin                 |
| -                               | PSLDMA097WJFW       | AD         |          | R         | Shield Case                  |
| <b>[7] MISCELLANEOUS PARTS</b>  |                     |            |          |           |                              |
| △                               | QACCBAA048WJPZ      |            |          | R         | AC CORD                      |
|                                 | SP301 VSP1206PB81WA | AP         |          | R         | SPEAKER 16 OHM               |
|                                 | QCNW-B266WJZZ       | AF         |          | R         | H/P WIRE                     |
|                                 | QCNW-D985WJZZ       | AE         |          | R         | H-WIRE                       |
|                                 | QCNW-D986WJZZ       | AE         |          | R         | K-WIRE                       |
|                                 | QCNW-D818WJPZ       | AF         |          | R         | SP WIRE                      |
| <b>[8] SUPPLIED ACCESSORIES</b> |                     |            |          |           |                              |
|                                 | RRMCG1577PESB       |            |          | R         | Infrared Remote Control Unit |
|                                 | TGAN-A101WJZZ       |            |          | R         | Warranty Card                |
|                                 | TINS-C150WJZZ       |            |          | R         | Operation Manual             |
|                                 |                     |            |          |           |                              |

[9] CABINET PARTS

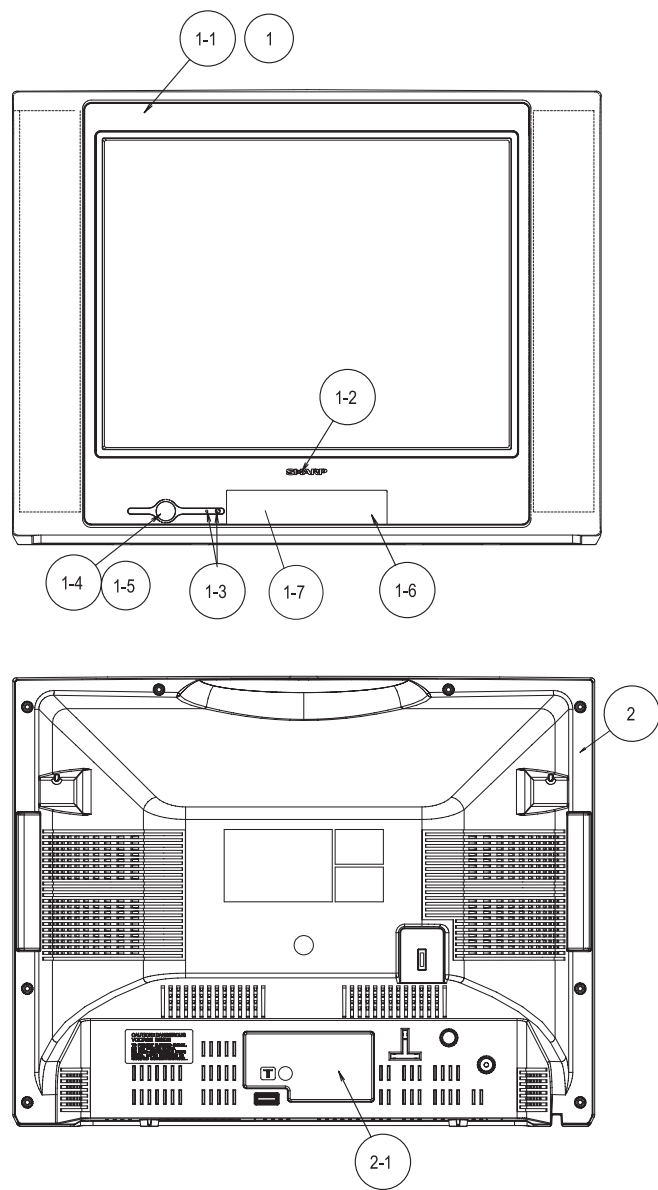

| NO.               | PARTS CODE    | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION            |
|-------------------|---------------|------------|----------|-----------|------------------------|
| [9] CABINET PARTS |               |            |          |           |                        |
| 1                 | CCABAB153WEV0 |            |          | R         | Front Cabinet Ass'y    |
| 1-1               | Not Available | -          |          | -         | Front Cabinet          |
| 1-2               | HBDBG3155CESA | AF         |          | R         | SHARP Badge            |
| 1-3               | GCOVAB341WJSA | AC         |          | R         | LED , R/C Cover        |
| 1-4               | CBTN-A484WEV0 | AG         |          | R         | Power Button Ass'y     |
| 1-5               | MSPRCA067WJFW | AB         |          | R         | Power Button Spring    |
| 1-6               | GDORFA166WJSA | AK         |          | R         | Door                   |
| 1-7               | HiNDPB380WJZZ | AE         |          | R         | Indication Plate       |
| 2                 | CCABBA631WEV0 | BE         |          | R         | Rear Cabinet Ass'y     |
| 2-1               | HiNDPB418WJZZ | AF         |          | R         | Indication Plate(Rear) |

[10] PACKING PARTS

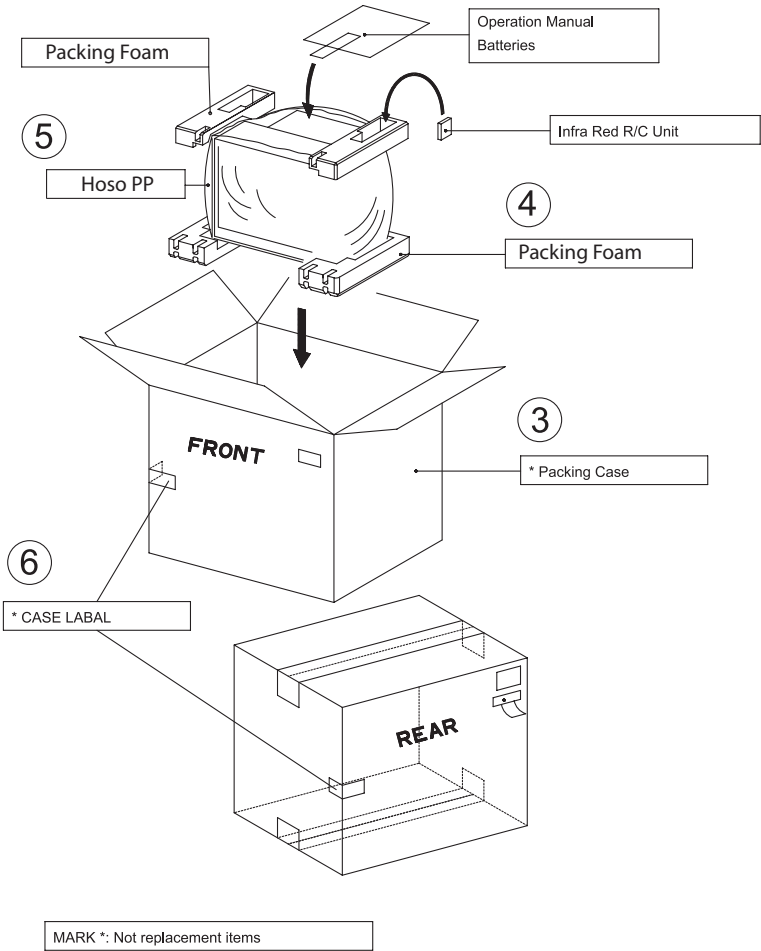

| NO.                | PARTS CODE    | PRICE RANK | NEW MARK | PART RANK | DESCRIPTION  |
|--------------------|---------------|------------|----------|-----------|--------------|
| [10] PACKING PARTS |               |            |          |           |              |
| 3                  | SPAKCC274WJZZ | -          |          | -         | Packing Case |
| 4                  | SPAKXA841WJZZ | -          |          | -         | Packing Foam |
| 5                  | SPAKPA771WJZZ | -          |          | -         | Hoso PP      |
| 6                  | TLABZB080WJZZ | -          |          | -         | Case Label   |

## INDEX

| PARTS CODE     | No.      | PRICE<br>RANK | NEW<br>MARK | PART<br>RANK |
|----------------|----------|---------------|-------------|--------------|
| <b>【 C 】</b>   |          |               |             |              |
| CBTN-A484WEV0  | 9-1-4    | AG            |             | R            |
| CCABAB153WEV0  | 9-1      |               |             | R            |
| CCABBA631WEV0  | 9-2      | BE            |             | R            |
| <b>【 D 】</b>   |          |               |             |              |
| DUNTKC519WEC6  | 2-       | -             |             | -            |
| DUNTKD138WEA4  | 2-       | -             |             | -            |
| DUNTKD144WEA4  | 2-       | -             |             | -            |
| DUNTKD600WEA1  | 2-       | -             |             | -            |
| <b>【 G 】</b>   |          |               |             |              |
| GCOVAB341WJSA  | 9-1-3    | AC            |             | R            |
| GDORFA166WJSA  | 9-1-6    | AK            |             | R            |
| <b>【 H 】</b>   |          |               |             |              |
| HBDGB3155CESA  | 9-1-2    | AF            |             | R            |
| HINDPB380WJZZ  | 9-1-7    | AE            |             | R            |
| HINDPB418WJZZ  | 9-2-1    | AF            |             | R            |
| <b>【 M 】</b>   |          |               |             |              |
| MSPRCA067WJFW  | 9-1-5    | AB            |             | R            |
| <b>【 N 】</b>   |          |               |             |              |
| Not Available  | 9-1-1    | -             |             | -            |
| <b>【 P 】</b>   |          |               |             |              |
| PMAGF3046CEZZ  | 1-       | AF            |             | R            |
| PRDAR0248PEFW  | 4-RDA851 | AF            |             | R            |
| PRDAR0337PEFW  | 3-RDA602 | AD            |             | R            |
| PRDARA119WJFW  | 3-RDA301 | AF            |             | R            |
| "              | 3-RDA701 | AF            |             | R            |
| PRDARA120WJFW  | 3-RDA501 | AD            |             | R            |
| PRDARA181WJFW  | 3-RDA392 | AC            |             | R            |
| "              | 3-RDA601 | AC            |             | R            |
| PSLDMA097WJFW  | 6--      | AD            |             | R            |
| <b>【 Q 】</b>   |          |               |             |              |
| QACCB048WJPZ   | 7-       |               |             | R            |
| QCNW-B266WJZZ  | 7-       | AF            |             | R            |
| QCNW-D818WJPZ  | 7-       | AF            |             | R            |
| QCNW-D985WJZZ  | 7-       | AE            |             | R            |
| QCNW-D986WJZZ  | 7-       | AE            |             | R            |
| QEARCA012WJZZ  | 1-       | AG            |             | R            |
| QFS-C3225CEZZ  | 3-F701   | AC            |             | R            |
| QFSHD1013CEZZ+ | 3-FH701  | AC            |             | R            |
| QFSHD1014CEZZ+ | 3-FH702  | AC            |             | R            |
| QJAKE0210CE02  | 3-J404   | AC            |             | R            |
| QJAKE0211CE04  | 3-J402   | AD            |             | R            |
| QJAKE0211CE09  | 3-J403   | AD            |             | R            |
| QJAKGA015WJZZ  | 3-J401   | AH            |             | R            |
| QJAKJ0101SEZZ  | 5-J351   | AE            |             | R            |
| QLUGP0111GEFW  | 6-TP2300 | AA            |             | R            |
| QPLGN0260CEZZ  | 3-P701   | AC            |             | R            |
| QPLGN0269GEZZ  | 3-P702   | AB            |             | R            |
| QPLGN0461CEZZA | 3-P302   | AB            |             | R            |
| QPLGN0561CEZZ  | 3-P1002  | AB            |             | R            |
| QPLGN0561CEZZA | 3-P602   | AB            |             | R            |
| QPLGN0578GEZZ  | 3-P1001  | AB            |             | R            |
| QPLGN0660CEZZ  | 3-P601   | AC            |             | R            |
| QPLGN0761CEZZ  | 4-P855   | AA            |             | R            |
| QPLGN0761CEZZA | 3-P304   | AC            |             | R            |
| QPLGN0878GEZZ  | 4-P860   | AC            |             | R            |
| QPLGNA108WJZZ  | 5-P352   | AB            |             | R            |
| QPLGNA109WJZZ  | 5-P351   | AB            |             | R            |
| QPLGZ1541CEZZ  | 6-P3001  | AD            |             | R            |
| QSOCVA023WJZZ  | 4-SC851  |               |             | R            |
| QSOCZ1541CEZZ  | 3-SC304  | AD            |             | R            |
| QSW-K0202PEZZ+ | 3-S1001  | AC            |             | R            |
| "              | 3-S1002  | AC            |             | R            |
| "              | 3-S1003  | AC            |             | R            |
| "              | 3-S1004  | AC            |             | R            |
| "              | 3-S1005  | AC            |             | R            |
| QSW-P0612CEZZ  | 3-S701   | AG            |             | R            |
| QTANJ0644CEZZ  | 3-J405   | AM            |             | R            |
| <b>【 R 】</b>   |          |               |             |              |
| RBLN-0062TAZZY | 6-FB2300 | AB            |             | R            |
| "              | 6-FB2302 | AB            |             | R            |
| "              | 6-FB2305 | AB            |             | R            |
| RBLN-0067CEZZY | 6-FB2303 | AB            |             | R            |
| "              | 6-FB2304 | AB            |             | R            |
| RBLN-0091GEZZY | 3-FB601  | AB            |             | R            |
| RBLN-A034WJZZY | 4-FB852  | AA            |             | R            |
| RC-EZA097WJZZ  | 3-C705   | AM            |             | R            |
| RC-EZA332WJZZ+ | 3-C513   | AD            |             | R            |
| RC-EZA522WJZZ  | 3-C754   | AD            |             | R            |

| PARTS CODE     | No.       | PRICE<br>RANK | NEW<br>MARK | PART<br>RANK |
|----------------|-----------|---------------|-------------|--------------|
| RC-EZA523WJZZ  | 3-C753    | AD            |             | R            |
| RC-FZ031SCEZZ  | 3-C701    | AD            |             | R            |
| RCILD0231CEZZ  | 6-T2300   | AF            |             | R            |
| RCILFA187WJZZ  | 3-L701    | AD            |             | R            |
| RCILGA095WJZZ  | 1-        | AM            |             | R            |
| RCILP0223CEZZ  | 3-L602    | AE            |             | R            |
| RC-KZ0029CEZZ+ | 3-C702    | AC            |             | R            |
| "              | 3-C703    | AC            |             | R            |
| "              | 3-C704    | AC            |             | R            |
| RC-KZ0102GEZZ  | 3-C713    | AE            |             | R            |
| RC-KZ018JCEZZ  | 4-C854    | AC            |             | R            |
| RC-KZ1018CEZZ+ | 3-C784    | AC            |             | R            |
| RCRSAA019WJZZ  | 3-X801    | AF            |             | R            |
| RCRSAA067WJZZ  | 3-X802    |               |             | R            |
| RCRSB0295CEZZ  | 6-X2301   | AH            |             | R            |
| RFILC0016PEZZ  | 6-SF2300  | AB            |             | R            |
| "              | 6-SF2300  | AS            |             | R            |
| RFILC0037PEZZ  | 3-SF201   | AP            |             | R            |
| RH-DX0066GEZZY | 3-D705    | AC            |             | R            |
| "              | 3-D706    | AC            |             | R            |
| "              | 3-D1081   | AC            |             | R            |
| RH-DX0131CEZZY | 3-D510    | AC            |             | R            |
| "              | 3-D606    | AC            |             | R            |
| RH-DX0220CEZZY | 4-D851    | AB            |             | R            |
| "              | 4-D852    | AB            |             | R            |
| "              | 4-D853    | AB            |             | R            |
| "              | 4-D854    | AB            |             | R            |
| "              | 4-D855    | AB            |             | R            |
| "              | 4-D856    | AB            |             | R            |
| RH-DX0441CEZZY | 3-D505    | AC            |             | R            |
| RH-DX0445CEZZ  | 3-D392    | AL            |             | R            |
| RH-DX0452CEZZ  | 3-D753    |               |             | R            |
| RH-DX0476CEZZ  | 3-D701    | AG            |             | R            |
| RH-DXA006WJZZ  | 3-D751    | AD            |             | R            |
| RH-EX0253TAZZY | 3-D1801   | AC            |             | R            |
| "              | 3-D1802   | AC            |             | R            |
| "              | 3-D1803   | AC            |             | R            |
| RH-EX0263TAZZY | 3-D811    | AC            |             | R            |
| "              | 3-D812    | AC            |             | R            |
| "              | 3-D813    | AC            |             | R            |
| RH-EX0339GEZZY | 3-D716    | AB            |             | R            |
| RH-EX0606GEZZY | 3-D804    | AB            |             | R            |
| RH-EX0612GEZZY | 3-D819    | AB            |             | R            |
| "              | 3-D3501   | AB            |             | R            |
| "              | 3-D3502   | AB            |             | R            |
| RH-EX0615GEZZY | 3-D817    | AA            |             | R            |
| RH-EX0617GEZZY | 3-D608    | AA            |             | R            |
| RH-EX0625GEZZY | 3-D820    | AB            |             | R            |
| RH-EX0627GEZZY | 3-D818    | AA            |             | R            |
| RH-EX0630GEZZY | 3-D802    | AA            |             | R            |
| RH-EX0640GEZZY | 3-D1002   | AA            |             | R            |
| RH-EX0667GEZZY | 3-D603    | AA            |             | R            |
| RH-EX0676GEZZY | 3-D201    | AA            |             | R            |
| RH-EX0724GEZZY | 3-D503    | AB            |             | R            |
| RH-EX1393CEZZY | 3-D806    | AB            |             | R            |
| "              | 3-D1006   | AB            |             | R            |
| "              | 3-D1007   | AB            |             | R            |
| RH-FXA003WJZZ  | 3-IC702   | AD            |             | R            |
| RH-HXA013WJZZ+ | 3-NR701   | AD            |             | R            |
| RH-IXB584WJZZ  | 3-IC801   |               |             | R            |
| RH-PX0013PEZZ  | 3-D1001   | AC            |             | R            |
| RH-VX0073CEZZ  | 3-VA701   | AD            |             | R            |
| RMPTP0085CEZZ  | 3-PR701   | AL            |             | R            |
| RRMCG1577PESB  | 8-        |               |             | R            |
| RRMCUA024WJZZ  | 3-RMC1001 | AG            |             | R            |
| RTRNFA120WJZZ  | 3-T602    | AW            |             | R            |
| RTRNWA205WJZZ  | 3-T702    | AK            |             | R            |
| RTRNZA058WJZZ  | 3-T603    | AD            |             | R            |
| RTUNQA024WJZZ  | 3-TU201   | AX            |             | R            |
| <b>【 S 】</b>   |           |               |             |              |
| SPAKCC274WJZZ  | 10-3      | -             |             | -            |
| SPAKPA771WJZZ  | 10-5      | -             |             | -            |
| SPAKXA841WJZZ  | 10-4      | -             |             | -            |
| <b>【 T 】</b>   |           |               |             |              |
| TCAUAA005WJZZ  | 8-        | AA            |             | R            |
| TGAN-A101WJZZ  | 8-        |               |             | R            |
| TINS-C150WJZZ  | 8-        |               |             | R            |
| TLABZB080WJZZ  | 10-6      | -             |             | -            |
| <b>【 V 】</b>   |           |               |             |              |

| PARTS CODE     | No.     | PRICE RANK | NEW MARK | PART RANK |
|----------------|---------|------------|----------|-----------|
| VB51QGA993X1E  | 1-      |            |          | R         |
| VCCCCY1HH121JY | 3-C815  | AA         |          | R         |
| VCCCCY1HH200JY | 3-C1855 |            |          |           |
| "              | 3-C1856 |            |          |           |
| VCCCCY1HH330JY | 6-C2345 | AA         |          | R         |
| "              | 6-C2346 | AA         |          | R         |
| VCCCCY1HH390JY | 3-C214  | AA         |          | R         |
| "              | 3-C215  | AA         |          | R         |
| VCCCCY1HH470JY | 6-C2314 | AA         |          | R         |
| "              | 6-C2316 | AA         |          | R         |
| VCE9GA1HW104M+ | 6-C3606 | AB         |          | R         |
| VCE9GA1HW105M+ | 6-C2343 | AB         |          | R         |
| VCEA0A0JW108M+ | 3-C202  | AC         |          | R         |
| "              | 3-C1853 | AC         |          | R         |
| VCEA0A0JW477M+ | 3-C1845 | AC         |          | R         |
| VCEA0A1AW107M+ | 3-C802  | AB         |          | R         |
| "              | 3-C1001 | AB         |          | R         |
| VCEA0A1CW106M+ | 3-C319  | AB         |          | R         |
| "              | 3-C320  | AB         |          | R         |
| "              | 3-C383  | AB         |          | R         |
| "              | 3-C387  | AB         |          | R         |
| "              | 3-C827  | AB         |          | R         |
| "              | 3-C1003 | AB         |          | R         |
| "              | 6-C2359 | AA         |          | R         |
| VCEA0A1CW108M+ | 3-C3524 | AD         |          | R         |
| "              | 6-C2323 | AD         |          | R         |
| VCEA0A1CW226M+ | 6-C2342 | AB         |          | R         |
| VCEA0A1CW476M+ | 3-C758  | AB         |          | R         |
| "              | 3-C809  | AB         |          | R         |
| "              | 3-C818  | AB         |          | R         |
| "              | 3-C821  | AB         |          | R         |
| "              | 3-C1854 | AB         |          | R         |
| "              | 6-C2327 | AB         |          | R         |
| "              | 6-C2352 | AB         |          | R         |
| VCEA0A1CW477M+ | 3-C451  | AC         |          | R         |
| "              | 3-C643  | AC         |          | R         |
| "              | 3-C848  | AC         |          | R         |
| "              | 3-C1840 | AC         |          | R         |
| "              | 3-C1841 | AC         |          | R         |
| VCEA0A1EW227M+ | 3-C610  | AB         |          | R         |
| VCEA0A1EW228M+ | 3-C393  | AE         |          | R         |
| "              | 3-C756  | AE         |          | R         |
| VCEA0A1EW477M+ | 3-C301  | AD         |          | R         |
| VCEA0A1HW104M+ | 3-C709  | AB         |          | R         |
| "              | 6-C2341 | AB         |          | R         |
| VCEA0A1HW105M+ | 3-C201  | AB         |          | R         |
| "              | 3-C820  | AB         |          | R         |
| "              | 3-C3517 | AB         |          | R         |
| "              | 3-C3519 | AB         |          | R         |
| "              | 3-C3520 | AB         |          | R         |
| "              | 3-C3521 | AB         |          | R         |
| "              | 3-C3522 | AB         |          | R         |
| "              | 6-C2317 | AB         |          | R         |
| VCEA0A1HW106M+ | 3-C206  | AB         |          | R         |
| "              | 3-C843  | AB         |          | R         |
| "              | 3-C1848 | AB         |          | R         |
| VCEA0A1HW107M+ | 3-C505  | AB         |          | R         |
| VCEA0A1HW224M+ | 3-C310  | AB         |          | R         |
| "              | 3-C311  | AB         |          | R         |
| "              | 6-C2340 | AB         |          | R         |
| VCEA0A1HW225M+ | 3-C1006 | AB         |          | R         |
| VCEA0A1HW474M+ | 3-C825  | AB         |          | R         |
| "              | 3-C828  | AB         |          | R         |
| VCEA0A1HW475M+ | 3-C304  | AB         |          | R         |
| "              | 3-C322  | AB         |          | R         |
| "              | 3-C602  | AB         |          | R         |
| "              | 3-C3507 | AB         |          | R         |
| "              | 3-C3508 | AB         |          | R         |
| VCEA0A1VW226M+ | 3-C706  | AB         |          | R         |
| VCEA0A1VW477M+ | 3-C511  | AB         |          | R         |
| VCEA0A2EW106M+ | 4-C852  | AD         |          | R         |
| VCEA0A2EW336M+ | 3-C604  | AD         |          | R         |
| VCEA9M1CW476M+ | 3-C806  | AB         |          | R         |
| "              | 3-C831  | AB         |          | R         |
| VCEA9M1HW104M+ | 3-C833  | AC         |          | R         |
| VCEA9M1HW474M+ | 3-C816  | AB         |          | R         |
| VCEACA1HC335J+ | 3-C515  | AC         |          | R         |
| VCEACA1HC474M+ | 3-C804  | AC         |          | R         |
| VCFPVC2DB334J  | 3-C611  | AD         |          | R         |
| VCFPVC3ZA902H  | 3-C607  | AD         |          | R         |
| VCFYAA2AA224J+ | 3-C508  | AD         |          | R         |
| VCFYFA1HA104J+ | 3-C832  | AA         |          | R         |

| PARTS CODE     | No.     | PRICE RANK | NEW MARK | PART RANK |
|----------------|---------|------------|----------|-----------|
| VCFYFA1HA105J+ | 3-C744  | AE         |          | R         |
| VCFYFA1HA124J+ | 6-C2353 | AC         |          | R         |
| VCFYFA1HA224J+ | 3-C817  | AB         |          | R         |
| "              | 3-C837  | AA         |          | R         |
| VCFYFA1HA334J+ | 6-C3604 | AA         |          | R         |
| VCFYFA1HA474J+ | 6-C2303 | AC         |          | R         |
| "              | 6-C2304 | AC         |          | R         |
| "              | 6-C2313 | AC         |          | R         |
| "              | 6-C2320 | AC         |          | R         |
| "              | 6-C2324 | AC         |          | R         |
| VCFYSA1JB273J+ | 3-C514  | AC         |          | R         |
| VCFYSB2EB823J  | 4-C851  | AD         |          | R         |
| "              | 4-C857  | AD         |          | R         |
| VCKYCY1AB105KY | 3-C3515 | AA         |          | R         |
| "              | 3-C3516 | AA         |          | R         |
| VCKYCY1CB273KY | 3-C1847 | AB         |          | R         |
| VCKYCY1CF104ZY | 3-C834  | AA         |          | R         |
| "              | 3-C842  | AA         |          | R         |
| VCKYCY1CF105ZY | 3-C811  | AA         |          | R         |
| "              | 3-C824  | AA         |          | R         |
| "              | 3-C840  | AA         |          | R         |
| VCKYCY1CF224ZY | 3-C3505 | AA         |          | R         |
| "              | 3-C3506 | AA         |          | R         |
| VCKYCY1CF334ZY | 3-C3518 | AB         |          | R         |
| VCKYCY1CF474ZY | 3-C1004 | AB         |          | R         |
| VCKYCY1EF104ZY | 3-C1016 | AA         |          | R         |
| VCKYCY1HB103KY | 3-C518  | AA         |          | R         |
| "              | 3-C803  | AA         |          | R         |
| "              | 3-C807  | AA         |          | R         |
| "              | 3-C819  | AA         |          | R         |
| "              | 3-C830  | AA         |          | R         |
| "              | 3-C839  | AA         |          | R         |
| "              | 3-C1842 | AA         |          | R         |
| "              | 3-C1844 | AA         |          | R         |
| "              | 3-C1849 | AA         |          | R         |
| "              | 3-C1851 | AA         |          | R         |
| "              | 3-C1852 | AA         |          | R         |
| VCKYCY1HB104KY | 3-C812  | AA         |          | R         |
| "              | 3-C813  | AA         |          | R         |
| "              | 3-C1843 | AA         |          | R         |
| "              | 3-C1846 | AA         |          | R         |
| "              | 3-C3523 | AA         |          | R         |
| VCKYCY1HB153KY | 3-C805  | AA         |          | R         |
| VCKYCY1HB182KY | 3-C1857 | AA         |          | R         |
| VCKYCY1HB222KY | 3-C836  | AA         |          | R         |
| "              | 3-C3511 | AA         |          | R         |
| "              | 3-C3512 | AA         |          | R         |
| VCKYCY1HB332KY | 3-C841  | AA         |          | R         |
| VCKYCY1HB471KY | 3-C847  | AA         |          | R         |
| VCKYCY1HB681KY | 3-C1002 | AA         |          | R         |
| VCKYCY1HB682KY | 3-C308  | AA         |          | R         |
| "              | 3-C313  | AB         |          | R         |
| VCKYCY1HF103ZY | 3-C203  | AA         |          | R         |
| "              | 3-C207  | AA         |          | R         |
| "              | 3-C208  | AA         |          | R         |
| "              | 3-C209  | AA         |          | R         |
| "              | 3-C210  | AA         |          | R         |
| "              | 3-C211  | AA         |          | R         |
| "              | 3-C810  | AA         |          | R         |
| "              | 3-C823  | AA         |          | R         |
| "              | 3-C835  | AA         |          | R         |
| "              | 3-C3525 | AA         |          | R         |
| "              | 3-C3526 | AA         |          | R         |
| "              | 6-C2301 | AA         |          | R         |
| "              | 6-C2302 | AA         |          | R         |
| "              | 6-C2315 | AA         |          | R         |
| "              | 6-C2325 | AA         |          | R         |
| "              | 6-C2326 | AA         |          | R         |
| "              | 6-C2344 | AA         |          | R         |
| "              | 6-C2348 | AA         |          | R         |
| "              | 6-C2349 | AA         |          | R         |
| "              | 6-C2350 | AA         |          | R         |
| "              | 6-C2351 | AA         |          | R         |
| "              | 6-C2354 | AA         |          | R         |
| "              | 6-C2356 | AA         |          | R         |
| "              | 6-C2357 | AA         |          | R         |
| "              | 6-C2358 | AA         |          | R         |
| "              | 6-C2360 | AA         |          | R         |
| "              | 6-C2361 | AA         |          | R         |
| "              | 6-C2362 | AA         |          | R         |
| "              | 6-C2363 | AA         |          | R         |
| VCKYCY1HF153ZY | 3-C814  | AA         |          | R         |

| PARTS CODE     | No.      | PRICE RANK | NEW MARK | PART RANK |
|----------------|----------|------------|----------|-----------|
| VCKYCY1HF223ZY | 3-C3509  | AB         |          | R         |
| "              | 3-C3510  | AB         |          | R         |
| VCKYCY1HF224ZY | 3-C3501  | AA         |          | R         |
| "              | 3-C3502  | AA         |          | R         |
| "              | 3-C3503  | AA         |          | R         |
| "              | 3-C3504  | AA         |          | R         |
| "              | 3-C3513  | AA         |          | R         |
| "              | 3-C3514  | AA         |          | R         |
| VCKYPA1HB102K+ | 3-C391   | AA         |          | R         |
| "              | 3-C838   | AA         |          | R         |
| VCKYPA1HB332K+ | 3-C711   | AB         |          | R         |
| VCKYPA1HB561K+ | 3-C612   | AA         |          | R         |
| VCKYPA1HF103Z+ | 3-C710   | AA         |          | R         |
| VCKYPA2HB101K+ | 3-C650   | AB         |          | R         |
| VCKYPA2HB102K+ | 3-C512   | AB         |          | R         |
| "              | 3-C606   | AB         |          | R         |
| "              | 3-C750   | AB         |          | R         |
| "              | 4-C1517  | AA         |          | R         |
| VCKYPA2HB221K+ | 4-C853   | AB         |          | R         |
| "              | 4-C855   | AB         |          | R         |
| VCKYPH3DB561K  | 3-C743   | AC         |          | R         |
| VCQYTA1HM104J+ | 3-C1081  | AB         |          | R         |
| "              | 6-C3605  | AB         |          | R         |
| VCQYTA1HM563J+ | 3-C601   | AB         |          | R         |
| VCQYTA2AA103K+ | 3-C608   | AC         |          | R         |
| VHD1SS119/-1Y  | 3-D203   | AA         |          | R         |
| "              | 3-D301   | AA         |          | R         |
| "              | 3-D605   | AA         |          | R         |
| "              | 3-D607   | AA         |          | R         |
| "              | 3-D714   | AA         |          | R         |
| "              | 3-D801   | AA         |          | R         |
| "              | 3-D803   | AA         |          | R         |
| "              | 3-D805   | AA         |          | R         |
| "              | 3-D1005  | AA         |          | R         |
| "              | 6-D3602  | AA         |          | R         |
| VHD1SS244/-1Y  | 3-D602   | AB         |          | R         |
| VHD1SS356/-1Y  | 3-D202   | AC         |          | R         |
| VHiAN17820B-1  | 3-IC301  | AL         |          | R         |
| VHiBR24L16F-1Y | 3-iC1003 | AE         |          | R         |
| VHiKiA78D33-1  | 3-iC751  | AF         |          | R         |
| VHiNJW1142A-1Y | 3-iC3501 | AM         |          | R         |
| VHiPQ05RDA1-1  | 6-iC3602 | AF         |          | R         |
| VHiPQ09RDA1-1  | 3-iC601  | AF         |          | R         |
| VHiSE125N++-F  | 3-iC703  | AG         |          | R         |
| VHiSTRW6553-1  | 3-iC701  | AN         |          | R         |
| VHiSTV9302A-1  | 3-iC501  | AH         |          | R         |
| VHiTDA6107J-1  | 4-iC851  | AM         |          | R         |
| VHiTDA9808T-1Y | 6-iC2301 | AR         |          | R         |
| VHiTDA9874A-1Q | 6-iC2300 | BB         |          | R         |
| VP-CF100K0000Y | 3-L802   | AB         |          | R         |
| "              | 3-L804   | AB         |          | R         |
| VP-CF220K0000Y | 3-L803   | AB         |          | R         |
| VP-CF330K0000Y | 3-L805   | AB         |          | R         |
| VP-DF100K0000Y | 3-L801   | AB         |          | R         |
| "              | 3-L806   | AB         |          | R         |
| "              | 3-L807   | AB         |          | R         |
| "              | 3-L3501  | AB         |          | R         |
| VP-DF270K0000Y | 3-L203   | AB         |          | R         |
| VP-XF1R2K0000Y | 3-L204   | AB         |          | R         |
| VP-XF1R2M0000Y | 6-L2341  | AB         |          | R         |
| VP-XF220K0000Y | 6-L2340  | AB         |          | R         |
| VRC-MA2HG152KY | 4-R854   | AA         |          | R         |
| "              | 4-R855   | AA         |          | R         |
| "              | 4-R856   | AA         |          | R         |
| VRC-UA2HG825KY | 3-R751   | AA         |          | R         |
| "              | 3-R752   | AA         |          | R         |
| VRD-RA2BE101JY | 3-R431   | AA         |          | R         |
| "              | 3-R462   | AA         |          | R         |
| "              | 3-R803   | AA         |          | R         |
| "              | 3-R805   | AA         |          | R         |
| "              | 3-R1004  | AA         |          | R         |
| "              | 3-R1009  | AA         |          | R         |
| "              | 3-R1013  | AA         |          | R         |
| "              | 3-R1015  | AA         |          | R         |
| "              | 3-R1017  | AA         |          | R         |
| "              | 3-R1019  | AA         |          | R         |
| "              | 3-R1029  | AA         |          | R         |
| "              | 3-R3503  | AA         |          | R         |
| "              | 3-R3506  | AA         |          | R         |
| "              | 3-R3507  | AA         |          | R         |
| "              | 6-R2313  | AA         |          | R         |
| "              | 6-R2314  | AA         |          | R         |

| PARTS CODE     | No.     | PRICE RANK | NEW MARK | PART RANK |
|----------------|---------|------------|----------|-----------|
| "              | 6-R2317 | AA         |          | R         |
| VRD-RA2BE102JY | 3-R356  | AA         |          | R         |
| "              | 3-R615  | AA         |          | R         |
| "              | 3-R616  | AA         |          | R         |
| "              | 4-R863  | AA         |          | R         |
| "              | 4-R864  | AA         |          | R         |
| "              | 4-R865  | AA         |          | R         |
| VRD-RA2BE103JY | 3-R523  | AA         |          | R         |
| "              | 3-R524  | AA         |          | R         |
| "              | 3-R1025 | AA         |          | R         |
| VRD-RA2BE123JY | 3-R809  | AA         |          | R         |
| VRD-RA2BE151JY | 6-R2359 | AA         |          | R         |
| VRD-RA2BE153JY | 3-R627  | AA         |          | R         |
| VRD-RA2BE154JY | 3-R614  | AA         |          | R         |
| VRD-RA2BE181JY | 3-R1028 | AA         |          | R         |
| VRD-RA2BE183JY | 3-R1012 | AA         |          | R         |
| VRD-RA2BE221JY | 3-R704  | AA         |          | R         |
| VRD-RA2BE222JY | 3-R713  | AA         |          | R         |
| VRD-RA2BE223JY | 3-R819  | AA         |          | R         |
| VRD-RA2BE331JY | 3-R638  | AA         |          | R         |
| VRD-RA2BE332JY | 3-R1006 | AA         |          | R         |
| "              | 3-R1016 | AA         |          | R         |
| VRD-RA2BE393GY | 3-R720  | AA         |          | R         |
| VRD-RA2BE393JY | 3-R602  | AA         |          | R         |
| VRD-RA2BE470JY | 3-R1008 | AA         |          | R         |
| VRD-RA2BE472JY | 3-R376  | AA         |          | R         |
| VRD-RA2BE680JY | 3-R205  | AA         |          | R         |
| "              | 3-R318  | AA         |          | R         |
| "              | 3-R319  | AA         |          | R         |
| VRD-RA2BE683JY | 3-R304  | AA         |          | R         |
| "              | 3-R604  | AA         |          | R         |
| VRD-RA2BE750JY | 3-R435  | AA         |          | R         |
| VRD-RA2BE822JY | 3-R308  | AA         |          | R         |
| "              | 3-R314  | AA         |          | R         |
| VRD-RA2EE102JY | 3-R840  | AA         |          | R         |
| VRD-RA2EE682JY | 3-R711  | AA         |          | R         |
| VRD-RA2EE750JY | 3-R459  | AA         |          | R         |
| VRD-RM2HD100JY | 3-R756  | AA         |          | R         |
| "              | 3-R759  | AA         |          | R         |
| "              | 3-R760  | AA         |          | R         |
| VRD-RM2HD101JY | 4-R851  | AA         |          | R         |
| "              | 4-R852  | AA         |          | R         |
| "              | 4-R853  | AA         |          | R         |
| VRD-RM2HD102JY | 3-R608  | AA         |          | R         |
| VRD-RM2HD104JY | 3-R605  | AA         |          | R         |
| VRD-RM2HD151JY | 3-R813  | AA         |          | R         |
| VRD-RM2HD154JY | 3-R702  | AA         |          | R         |
| VRD-RM2HD182JY | 3-R841  | AA         |          | R         |
| VRD-RM2HD184JY | 3-R625  | AA         |          | R         |
| VRD-RM2HD1R0JY | 3-R507  | AA         |          | R         |
| VRD-RM2HD220JY | 3-R505  | AA         |          | R         |
| "              | 3-R710  | AA         |          | R         |
| VRD-RM2HD224JY | 4-R861  | AA         |          | R         |
| VRD-RM2HD270JY | 3-R609  | AA         |          | R         |
| "              | 3-R612  | AA         |          | R         |
| VRD-RM2HD271JY | 3-R639  | AA         |          | R         |
| VRD-RM2HD333JY | 3-R513  | AB         |          | R         |
| VRD-RM2HD334JY | 3-R753  | AA         |          | R         |
| VRD-RM2HD5R6JY | 3-R607  | AA         |          | R         |
| VRD-RM2HD682JY | 3-R514  | AA         |          | R         |
| VRD-RM2HD821JY | 3-R725  | AA         |          | R         |
| VRN-RL2HC1R0J+ | 3-R621  | AB         |          | R         |
| VRN-RL2HCR47J+ | 3-R726  | AB         |          | R         |
| VRN-RL3AB1R2J+ | 3-R611  | AB         |          | R         |
| VRN-RL3AB8R2J+ | 3-R754  | AB         |          | R         |
| VRN-RL3DB1R0J+ | 3-R642  | AB         |          | R         |
| VRN-RL3DBR10J+ | 3-R302  | AB         |          | R         |
| VRN-VV3DB2R2J  | 3-R503  | AB         |          | R         |
| VRS-CY1JF000JY | 3-RJ1   | AA         |          | R         |
| "              | 3-RJ6   | AA         |          | R         |
| "              | 3-RJ7   | AA         |          | R         |
| "              | 3-RJ9   | AA         |          | R         |
| "              | 3-RJ10  | AA         |          | R         |
| "              | 3-RJ14  | AA         |          | R         |
| "              | 3-RJ17  | AA         |          | R         |
| "              | 3-RJ39  | AA         |          | R         |
| "              | 3-RJ41  | AA         |          | R         |
| "              | 3-RJ42  | AA         |          | R         |
| "              | 3-RJ44  | AA         |          | R         |
| "              | 3-RJ45  | AA         |          | R         |
| "              | 3-RJ46  | AA         |          | R         |
| "              | 3-RJ47  | AA         |          | R         |

| PARTS CODE     | No.      | PRICE RANK | NEW MARK | PART RANK |
|----------------|----------|------------|----------|-----------|
| "              | 3-RJ48   | AA         |          | R         |
| "              | 3-R1002  | AA         |          | R         |
| "              | 6-RJ2309 | AA         |          | R         |
| "              | 6-RJ2310 | AA         |          | R         |
| "              | 6-RJ2311 | AA         |          | R         |
| "              | 6-RJ2312 | AA         |          | R         |
| "              | 6-RJ2314 | AA         |          | R         |
| "              | 6-RJ2315 | AA         |          | R         |
| "              | 6-RJ2316 | AA         |          | R         |
| "              | 6-RJ2318 | AA         |          | R         |
| "              | 6-RJ2319 | AA         |          | R         |
| "              | 6-RJ2320 | AA         |          | R         |
| "              | 6-RJ2322 | AA         |          | R         |
| "              | 6-RJ2323 | AA         |          | R         |
| "              | 6-RJ2327 | AA         |          | R         |
| "              | 6-RJ2328 | AA         |          | R         |
| "              | 6-RJ2331 | AA         |          | R         |
| VRS-CY1JF101JY | 3-R201   | AA         |          | R         |
| "              | 3-R202   | AA         |          | R         |
| "              | 3-R804   | AA         |          | R         |
| "              | 3-R808   | AA         |          | R         |
| "              | 3-R814   | AA         |          | R         |
| "              | 3-R815   | AA         |          | R         |
| "              | 3-R820   | AA         |          | R         |
| "              | 3-R1001  | AA         |          | R         |
| "              | 3-R1014  | AA         |          | R         |
| "              | 3-R1024  | AA         |          | R         |
| "              | 3-R1031  | AA         |          | R         |
| "              | 3-R3501  | AA         |          | R         |
| "              | 3-R3502  | AA         |          | R         |
| "              | 3-R3504  | AA         |          | R         |
| "              | 3-R3508  | AA         |          | R         |
| "              | 3-R3509  | AA         |          | R         |
| "              | 6-R2355  | AA         |          | R         |
| VRS-CY1JF102JY | 3-R301   | AA         |          | R         |
| "              | 3-R353   | AA         |          | R         |
| "              | 3-R801   | AA         |          | R         |
| "              | 3-R846   | AA         |          | R         |
| "              | 3-R1003  | AA         |          | R         |
| "              | 3-R1039  | AA         |          | R         |
| "              | 6-R2311  | AA         |          | R         |
| "              | 6-R2344  | AA         |          | R         |
| "              | 6-R2346  | AA         |          | R         |
| "              | 6-R2351  | AA         |          | R         |
| "              | 6-R2356  | AA         |          | R         |
| "              | 6-R2361  | AA         |          | R         |
| "              | 6-R2362  | AA         |          | R         |
| VRS-CY1JF103JY | 3-R373   | AA         |          | R         |
| "              | 3-R458   | AA         |          | R         |
| "              | 3-R618   | AA         |          | R         |
| "              | 3-R810   | AA         |          | R         |
| "              | 3-R811   | AA         |          | R         |
| "              | 3-R1018  | AA         |          | R         |
| "              | 3-R1030  | AA         |          | R         |
| "              | 3-R1863  | AA         |          | R         |
| VRS-CY1JF104JY | 3-R372   | AA         |          | R         |
| "              | 3-R374   | AA         |          | R         |
| "              | 3-R1010  | AA         |          | R         |
| "              | 3-R1027  | AA         |          | R         |
| VRS-CY1JF105JY | 3-R845   | AA         |          | R         |
| VRS-CY1JF122JY | 3-R206   | AA         |          | R         |
| "              | 6-R2357  | AA         |          | R         |
| VRS-CY1JF123JY | 3-R617   | AA         |          | R         |
| VRS-CY1JF124JY | 3-R807   | AA         |          | R         |
| VRS-CY1JF152JY | 6-R2350  | AA         |          | R         |
| VRS-CY1JF153JY | 3-R520   | AA         |          | R         |
| VRS-CY1JF181JY | 3-R822   | AA         |          | R         |
| "              | 3-R824   | AA         |          | R         |
| "              | 3-R826   | AA         |          | R         |
| "              | 3-R827   | AA         |          | R         |
| "              | 3-R1087  | AA         |          | R         |
| "              | 6-R2341  | AA         |          | R         |
| VRS-CY1JF182JY | 3-R307   | AA         |          | R         |
| "              | 3-R315   | AA         |          | R         |
| "              | 3-R832   | AA         |          | R         |
| "              | 3-R833   | AA         |          | R         |
| "              | 3-R834   | AA         |          | R         |
| VRS-CY1JF183JY | 3-R1011  | AA         |          | R         |
| "              | 3-R1020  | AA         |          | R         |
| "              | 3-R1022  | AA         |          | R         |
| "              | 3-R1026  | AA         |          | R         |
| "              | 6-R2342  | AA         |          | R         |

| PARTS CODE     | No.     | PRICE RANK | NEW MARK | PART RANK |
|----------------|---------|------------|----------|-----------|
| "              | 6-R2345 | AA         |          | R         |
| VRS-CY1JF220JY | 3-R818  | AA         |          | R         |
| VRS-CY1JF221JY | 3-R207  | AA         |          | R         |
| "              | 3-R220  | AA         |          | R         |
| "              | 6-R2348 | AA         |          | R         |
| VRS-CY1JF222JY | 3-R212  | AA         |          | R         |
| "              | 3-R1032 | AA         |          | R         |
| "              | 3-R1074 | AA         |          | R         |
| "              | 6-R2316 | AA         |          | R         |
| "              | 6-R2318 | AA         |          | R         |
| VRS-CY1JF223JY | 3-R837  | AA         |          | R         |
| "              | 6-R2301 | AA         |          | R         |
| "              | 6-R2340 | AA         |          | R         |
| VRS-CY1JF225JY | 6-R2354 | AA         |          | R         |
| VRS-CY1JF272JY | 3-R823  | AA         |          | R         |
| VRS-CY1JF274JY | 3-R305  | AA         |          | R         |
| VRS-CY1JF332JY | 3-R362  | AA         |          | R         |
| "              | 3-R366  | AA         |          | R         |
| "              | 3-R382  | AA         |          | R         |
| "              | 3-R384  | AA         |          | R         |
| "              | 3-R1007 | AA         |          | R         |
| "              | 3-R1056 | AA         |          | R         |
| "              | 3-R1078 | AA         |          | R         |
| "              | 3-R1079 | AA         |          | R         |
| VRS-CY1JF392JY | 3-R209  | AA         |          | R         |
| "              | 3-R210  | AA         |          | R         |
| "              | 3-R828  | AA         |          | R         |
| "              | 6-R2358 | AA         |          | R         |
| VRS-CY1JF393JY | 6-R2349 | AA         |          | R         |
| VRS-CY1JF470JY | 3-R1034 | AA         |          | R         |
| VRS-CY1JF471JY | 3-R816  | AA         |          | R         |
| "              | 3-R817  | AA         |          | R         |
| "              | 5-R370  | AA         |          | R         |
| "              | 5-R371  | AA         |          | R         |
| VRS-CY1JF472JY | 3-R626  | AA         |          | R         |
| "              | 3-R830  | AA         |          | R         |
| VRS-CY1JF473JY | 3-R303  | AA         |          | R         |
| "              | 3-R825  | AA         |          | R         |
| "              | 3-R829  | AA         |          | R         |
| VRS-CY1JF561JY | 6-R2343 | AA         |          | R         |
| VRS-CY1JF562JY | 3-R504  | AA         |          | R         |
| "              | 3-R1038 | AA         |          | R         |
| VRS-CY1JF681JY | 3-R208  | AA         |          | R         |
| VRS-CY1JF682JY | 3-R211  | AA         |          | R         |
| "              | 6-R2302 | AA         |          | R         |
| VRS-CY1JF750JY | 3-R432  | AA         |          | R         |
| "              | 3-R433  | AA         |          | R         |
| "              | 3-R434  | AA         |          | R         |
| "              | 3-R461  | AA         |          | R         |
| VRS-CY1JF822JY | 3-R806  | AA         |          | R         |
| "              | 3-R812  | AA         |          | R         |
| "              | 3-R1021 | AA         |          | R         |
| "              | 6-R2309 | AA         |          | R         |
| VRS-CY1JF823JY | 6-R2352 | AA         |          | R         |
| "              | 6-R2353 | AA         |          | R         |
| VRS-KT3LB221J  | 3-R631  | AE         |          | R         |
| VRS-RG3AB331J+ | 3-R506  | AB         |          | R         |
| VRS-RG3DB151J+ | 3-R755  | AB         |          | R         |
| VRS-RG3LB333J+ | 3-R216  | AC         |          | R         |
| VRS-SV2HC100J  | 3-R858  | AA         |          | R         |
| "              | 4-R858  | AA         |          | R         |
| VRS-VV3DB180J  | 6-R3602 | AA         |          | R         |
| VRS-VV3DB220J  | 3-R757  | AA         |          | R         |
| VRS-VV3DB682J  | 3-R622  | AA         |          | R         |
| VS2PB709AR/-1Y | 3-Q802  | AB         |          | R         |
| "              | 3-Q805  | AB         |          | R         |
| "              | 3-Q810  | AB         |          | R         |
| VS2PD601AR/-1Y | 3-Q202  | AB         |          | R         |
| "              | 3-Q801  | AB         |          | R         |
| "              | 3-Q803  | AB         |          | R         |
| "              | 3-Q1001 | AB         |          | R         |
| "              | 3-Q1002 | AB         |          | R         |
| "              | 3-Q1070 | AB         |          | R         |
| "              | 6-Q2301 | AB         |          | R         |
| VS2SC2235Y/1E+ | 3-Q601  | AE         |          | R         |
| VS2SC2735//1EY | 3-Q201  | AC         |          | R         |
| "              | 6-Q2302 | AC         |          | R         |
| "              | 6-Q2303 | AC         |          | R         |
| VS2SC3198-G-1+ | 3-Q603  | AA         |          | R         |
| VS2SD468-C/-1+ | 3-Q751  | AD         |          | R         |
| "              | 3-Q752  | AD         |          | R         |
| "              | 3-Q753  | AD         |          | R         |

21K-FD5RU

| PARTS CODE     | No.      | PRICE<br>RANK | NEW<br>MARK | PART<br>RANK |
|----------------|----------|---------------|-------------|--------------|
| "              | 3-Q754   | AD            |             | R            |
| VSiMX1C/C//~1Y | 3-iC305  | AC            |             | R            |
| "              | 3-iC1007 | AC            |             | R            |
| VSP1206PB81WA  | 7-SP301  | AP            |             | R            |
| VSTT2140+++~F  | 3-Q602   | AG            |             | R            |



**COPYRIGHT © 2006 BY SHARP CORPORATION**

**ALL RIGHTS RESERVED.**

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission of the publisher.

RQ0009-S

March. 2006 Printed in Malaysia

|                                   |
|-----------------------------------|
| Design and Production Information |
|-----------------------------------|

|             |
|-------------|
| Design :SEM |
|-------------|

|                  |
|------------------|
| Production :SREC |
|------------------|

CHS.SREC

SHARP-ROXY ELECTRONICS  
CORPORATION (M) SDN. BHD  
PQA CENTRE  
Batu Pahat, Johor, Malaysia  
P.O.BOX 513