

COMPAL CONFIDENTIAL

MODEL NAME : **JAL10**

PCB NO : **LA4151P(DAA00000Q1L)**

BOM P/N :

M09 Lola UMA uFCBGA Mobile Penryn Intel Cantiga GM + ICH9M

2008-07-4

REV : 1.0

- @ : Nopop Component
- 1@ : Use TCM only
- 2@ : Use TAA only
- 3@ : Use BROADCOM TPM only
- 4@ : Use without TAA only
- 5@ : Use with BKT only
- 6@ : Use without BKT only
- 7@ : Use disable TPM only
- 8@ : Use with TCM depop
- 9@ : Use with ZTE TCM
- 10@ : Use with Jetway TCM

MB PCB

Part Number	Description
DAA00000Q1L	PCB 83S LA-4151P REV0 M/B

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.




DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Cover Sheet			
Title	LA-4151P		
Size	Document Number	Rev	
Date: Friday, July 04, 2008	Sheet 1 of 57	1.0	

Block Diagram
Compal confidential
Model : JAL10

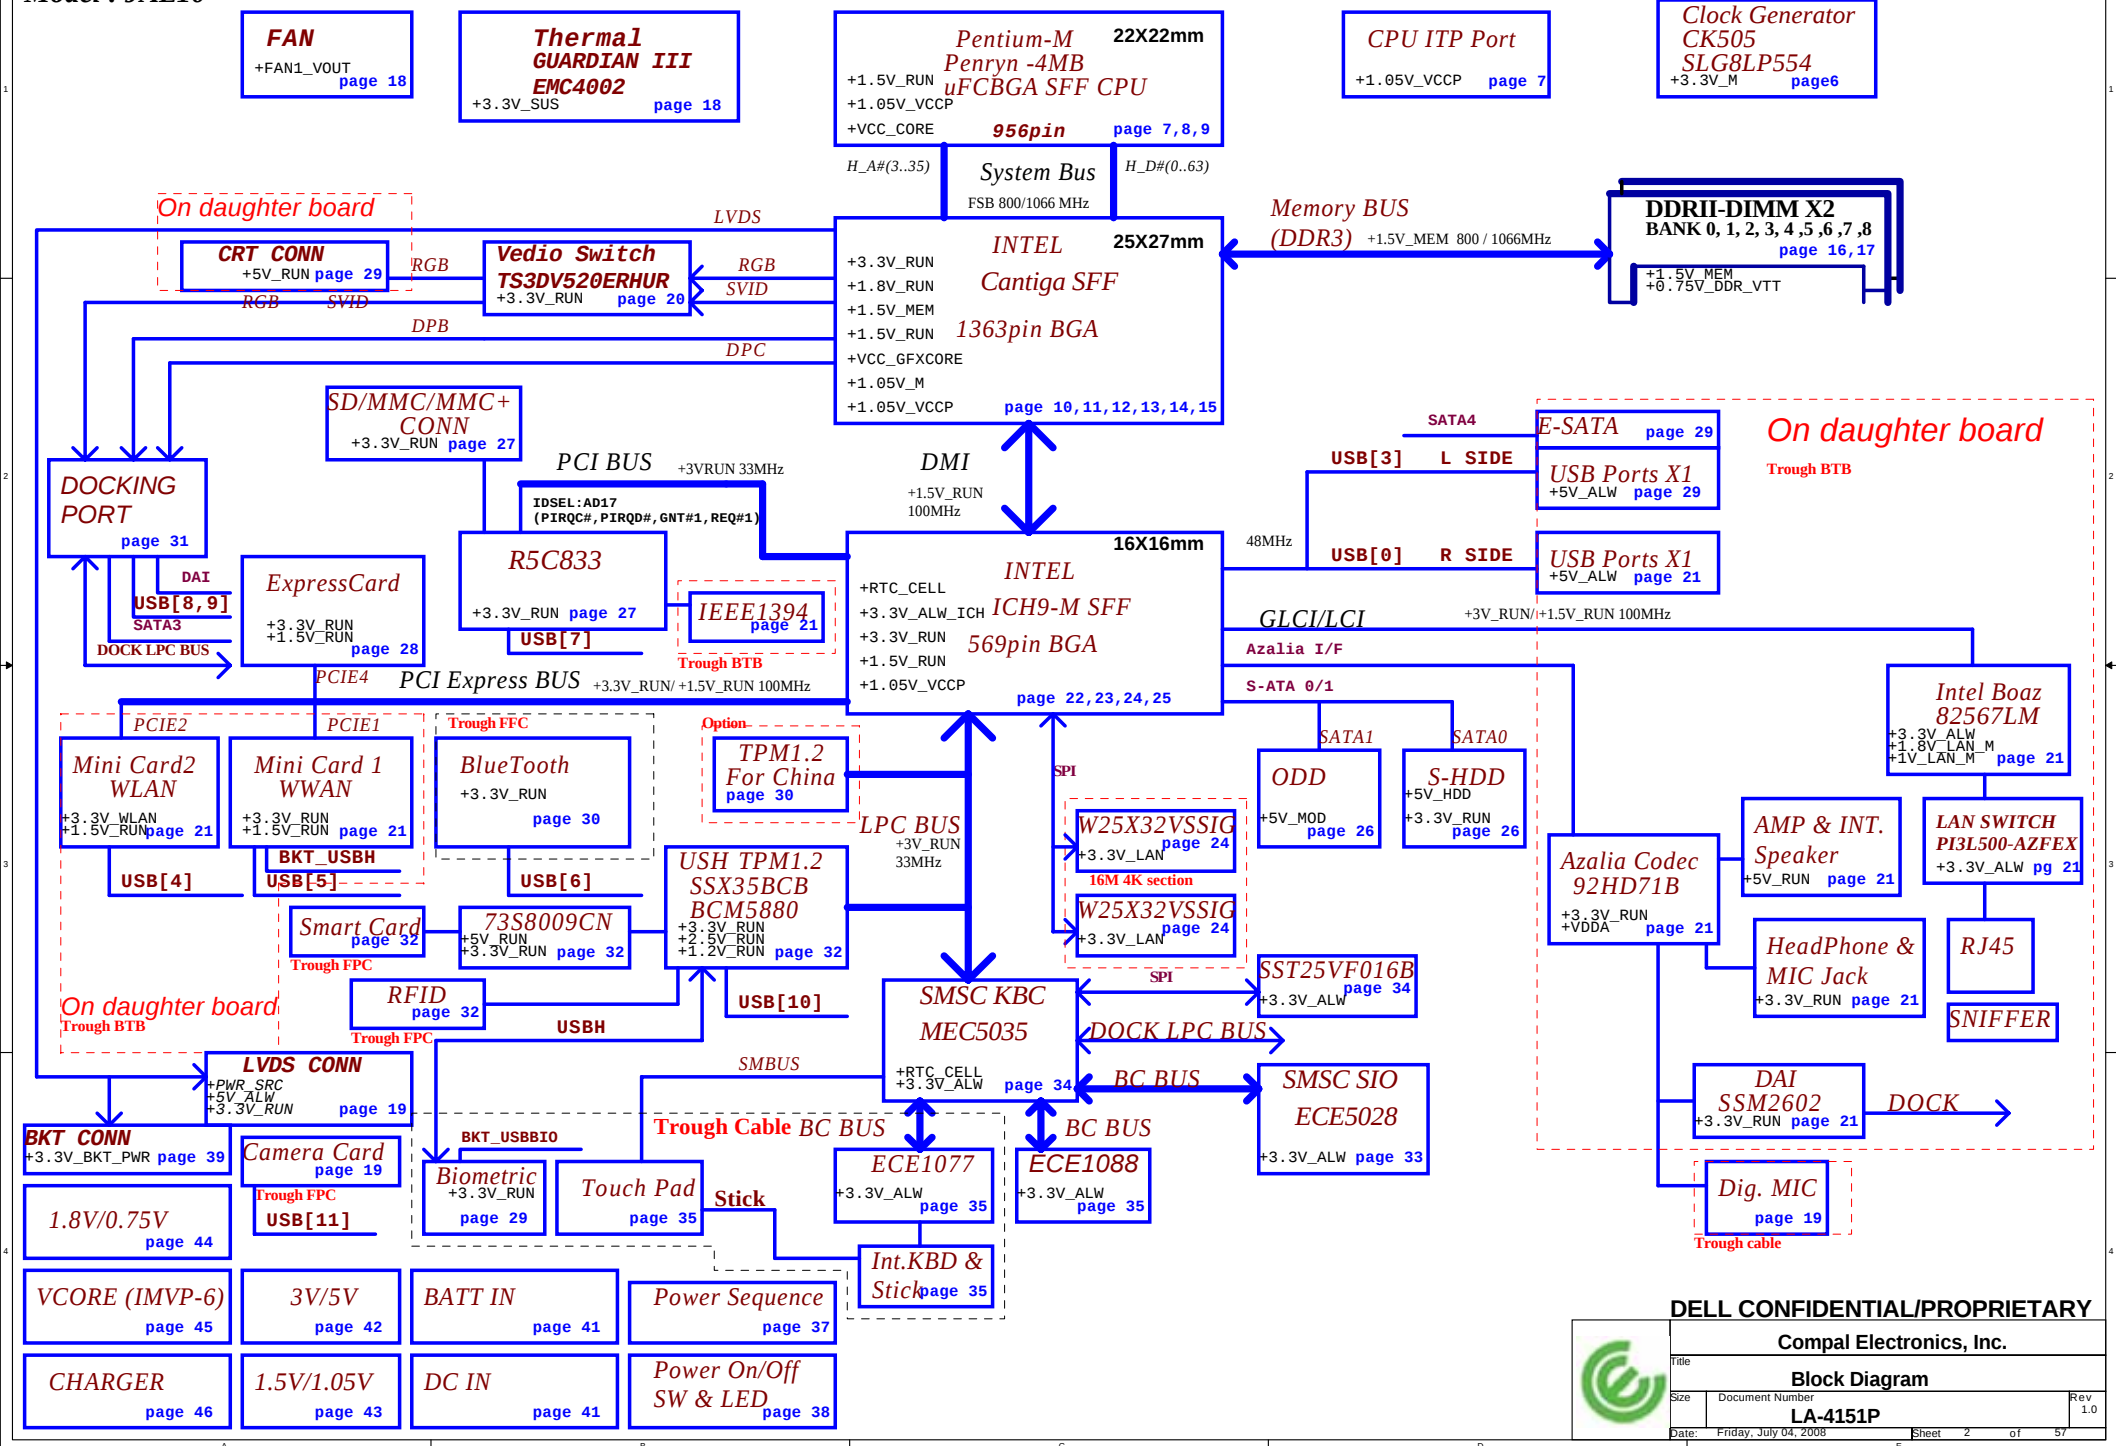

POWER STATES

Signal State	SLP S3#	SLP S4#	SLP S5#	S4 STATE#	SLP M#	ALWAYS PLANE	M PLANE	SUS PLANE	RUN PLANE	CLOCKS
S0 (Full ON) / M0	HIGH	HIGH	HIGH	HIGH	HIGH	ON	ON	ON	ON	ON
S3 (Suspend to RAM) / M1	LOW	HIGH	HIGH	HIGH	HIGH	ON	ON	ON	OFF	ON
S4 (Suspend to DISK) / M1	LOW	HIGH	HIGH	LOW	HIGH	ON	ON	ON	OFF	ON
S5 (SOFT OFF) / M1	LOW	HIGH	LOW	LOW	HIGH	ON	ON	ON	OFF	ON
S3 (Suspend to RAM) / M-OFF	LOW	HIGH	HIGH	HIGH	LOW	ON	OFF	ON	OFF	OFF
S4 (Suspend to DISK) / M-OFF	LOW	LOW	HIGH	LOW	LOW	ON	OFF	OFF	OFF	OFF
S5 (SOFT OFF) / M-OFF	LOW	LOW	LOW	LOW	LOW	ON	OFF	OFF	OFF	OFF

PM TABLE

power plane State	+15V_ALW +5V_ALW +3.3V_ALW_ICH +3.3V_RTC_LDO	+3.3V_SUS +1.5V_MEM	+5V_RUN +3.3V_RUN +2.5V_RUN +1.5V_RUN +1.8V_RUN +0.75V_DDR_VTT +VCC_GFXCORE +VCC_CORE +1.05V_VCCP	+3.3V_M +1.05V_M	+3.3V_M +1.05V_M (M-OFF)	+3.3V_RUN_ WWAN_PWR +3.3V_RUN_ BKT_PWR +3.3V_BKT _PWR +INV_PWR_SRC +LCDVDD
S0	ON	ON	ON	ON	ON	ON
S3	ON	ON	OFF	ON	OFF	OFF
S5 S4/AC	ON	OFF	OFF	ON	OFF	OFF
S5 S4/AC don't exist	OFF	OFF	OFF	OFF	OFF	OFF
BlackTop mode	ON	OFF	OFF	OFF	OFF	ON

PCI TABLE

PCI DEVICE	IDSEL	REQ#/GNT#	PIRQ
R5C833	AD17	REQ#1 / GNT#1	PIRQ[C..D]

ICH9-M	USB PORT#	DESTINATION
	0	JUSB1 (Ext Right Side Top)
	1	BLT mode
	2	None
	3	JESATA1 (Ext Left Side Bottom)
	4	WLAN
	5	WWAN
	6	BT
	7	Express card
	8	DOCKING
	9	DOCKING
	10	USH->BIO
	11	Camera


PCI EXPRESS	DESTINATION
Lane 1	MINI CARD-1 WWAN
Lane 2	MINI CARD-2 WLAN
Lane 3	None
Lane 4	EXPRESS CARD
Lane 5	None
Lane 6	10/100/1G LAN

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title	Index and Config.		
Size	Document Number	Rev	1.0
Date:	Friday, July 04, 2008	Sheet	3 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


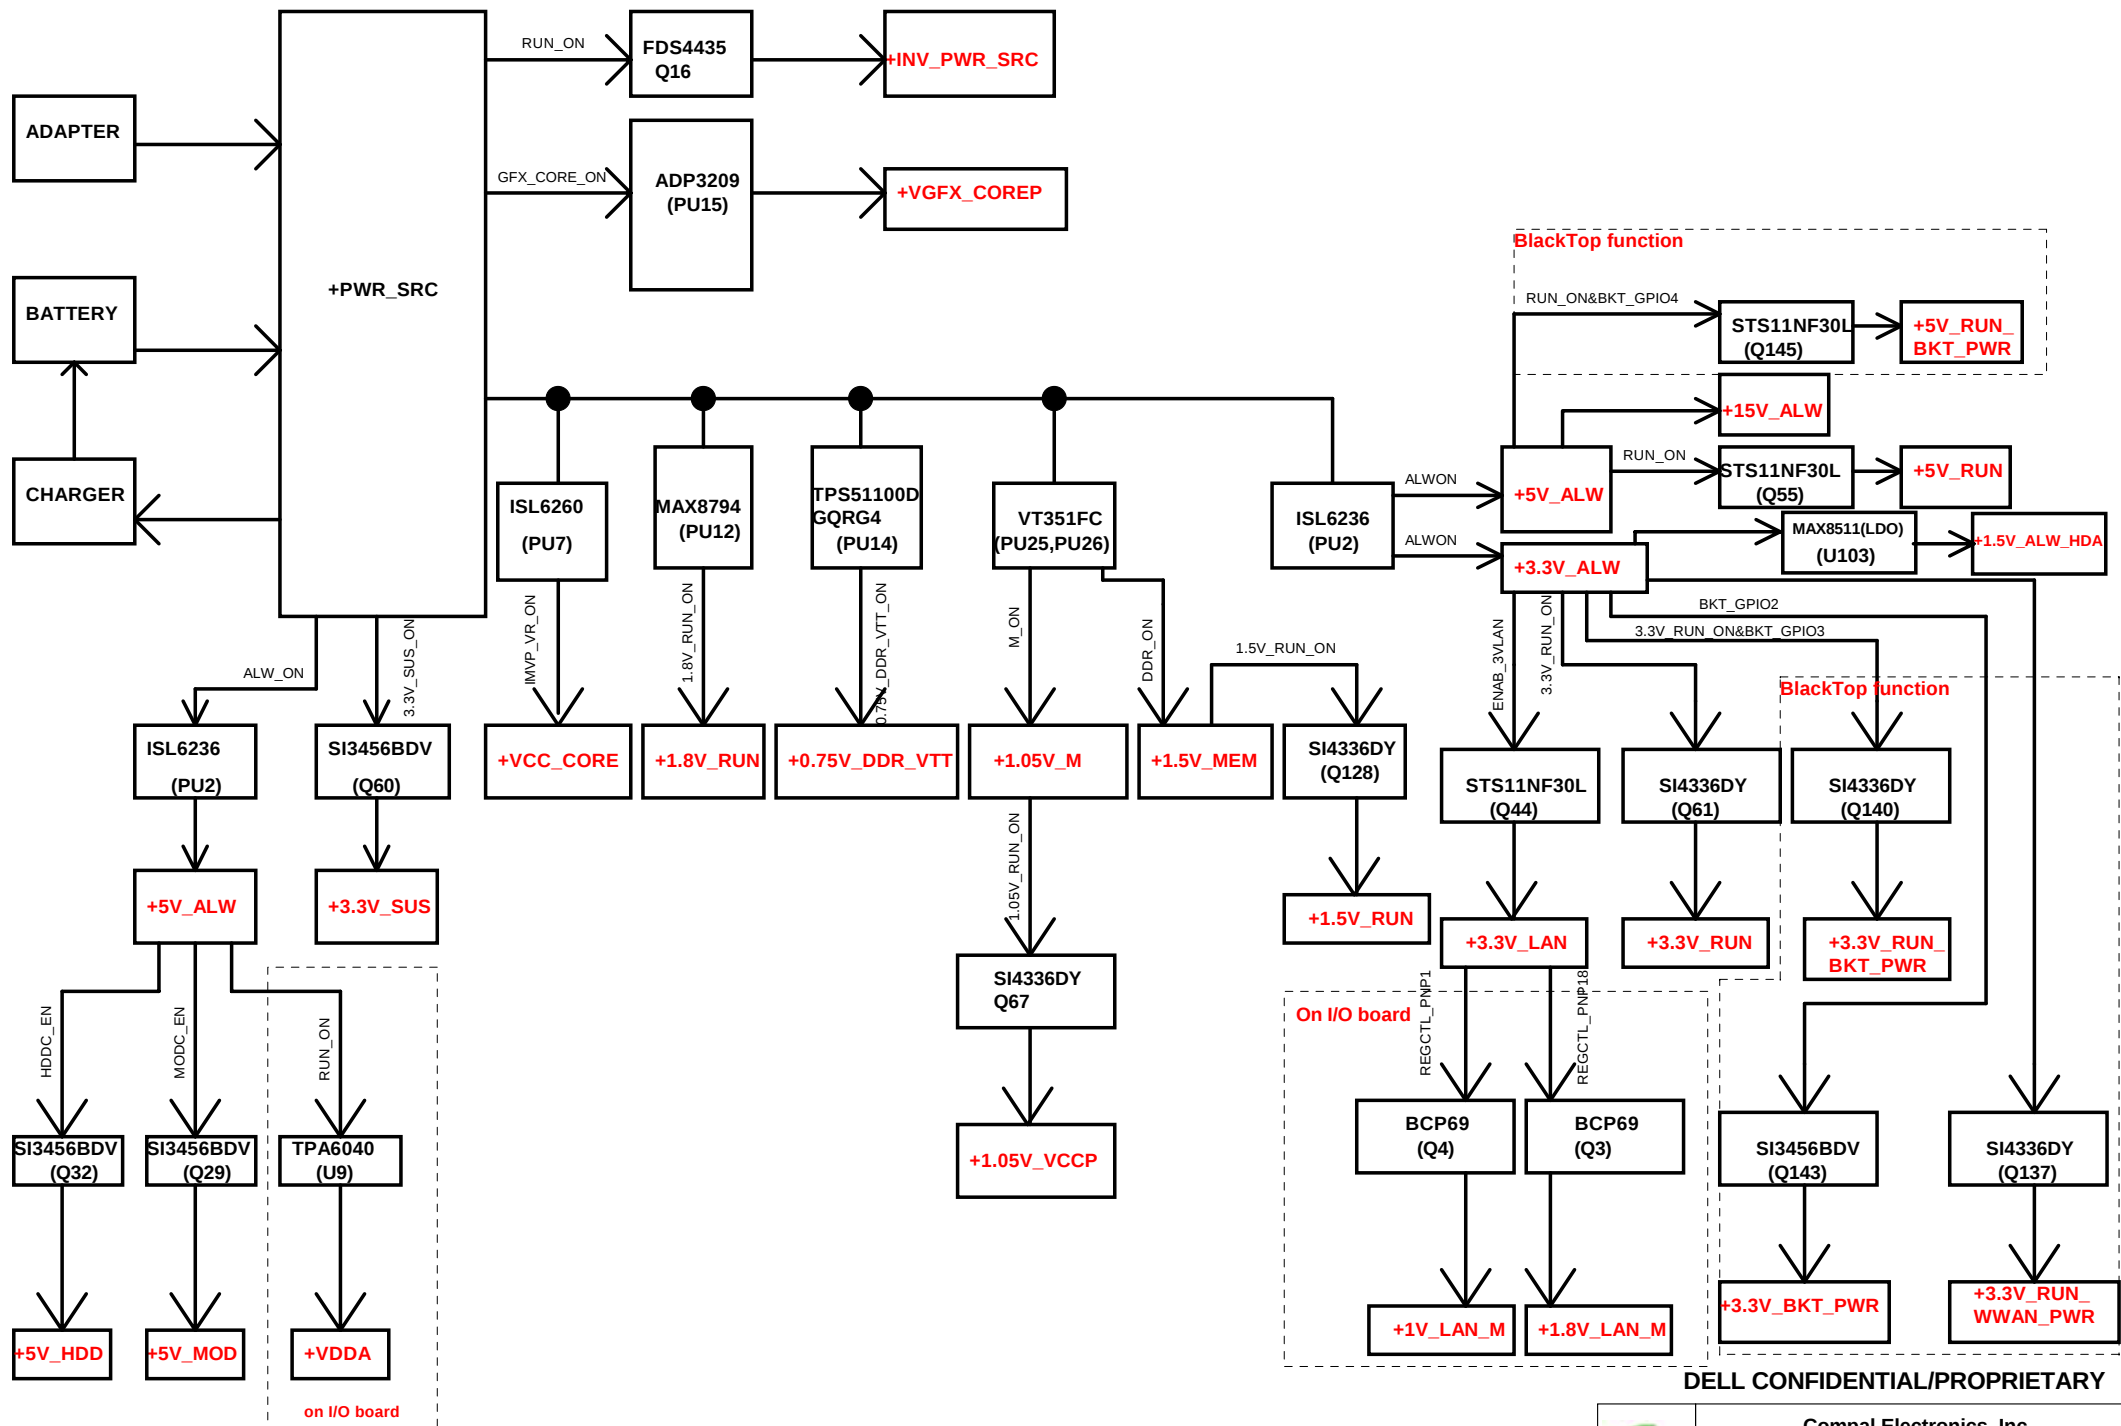


DELL CONFIDENTIAL/PROPRIETARY

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.




Compal Electronics, Inc.			
Power Rail			
Size	Document Number	Rev	
	LA-4151P	1.0	
Date:	Friday, July 04, 2008	Sheet	4 of 57

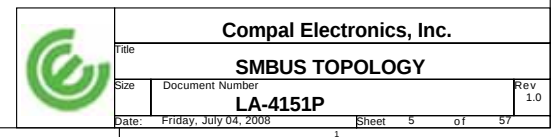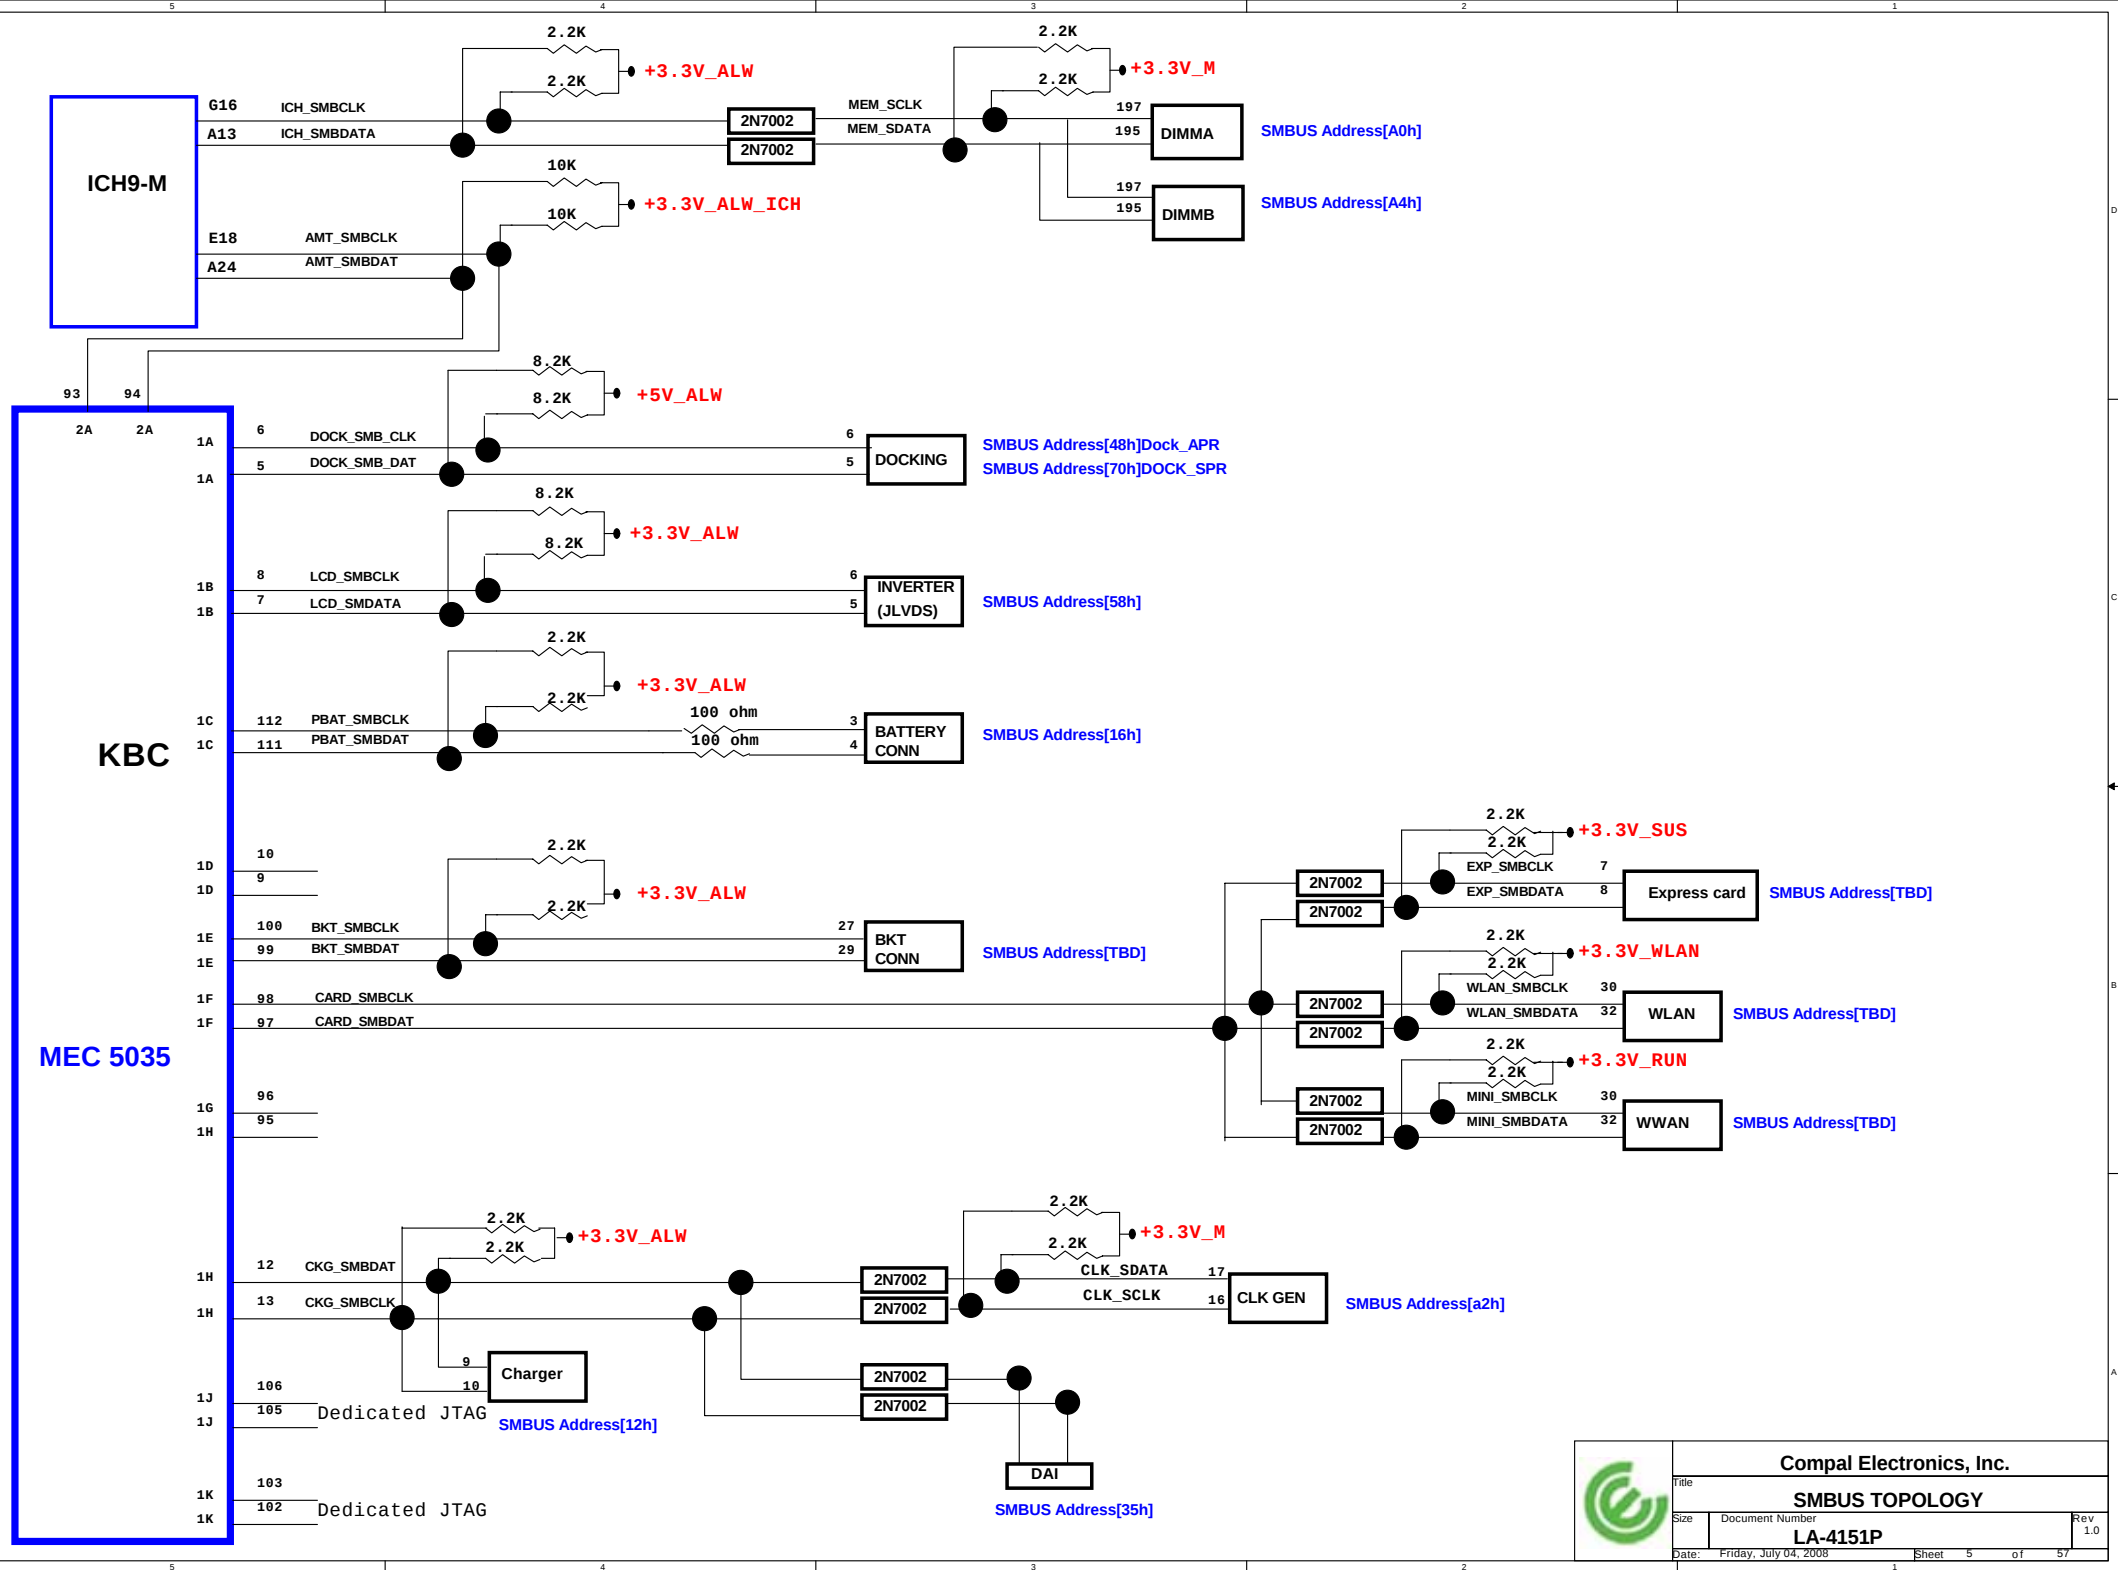





PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

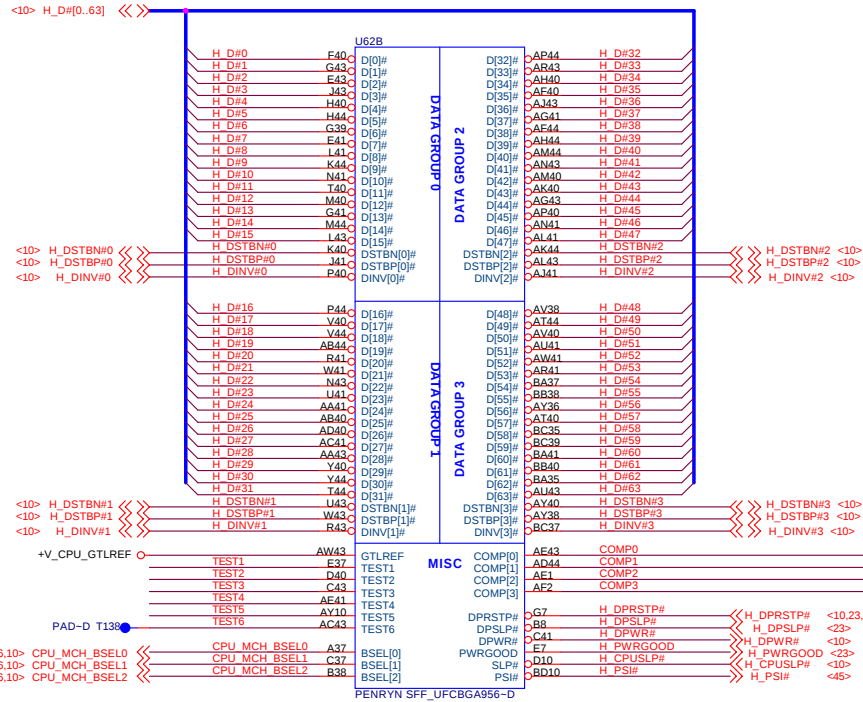



Resistor placed within 0.5" of CPU pin. Trace should be at least 25 mils away from any other toggling signal. COMP0, COMP2 trace should be 27.4 ohm. COMP1, COMP3 should be 55 ohm.



For the purpose of testability, route these signals through a ground referenced $Z_0 = 55\text{ohm}$ trace that ends in a via that is near a GND via and is accessible through an oscilloscope connection.




FSB	BCLK	BSEL2	BSEL1	BSEL0
533	133	0	0	1
667	166	0	1	1
800	200	0	1	0
1067	266	0	0	0

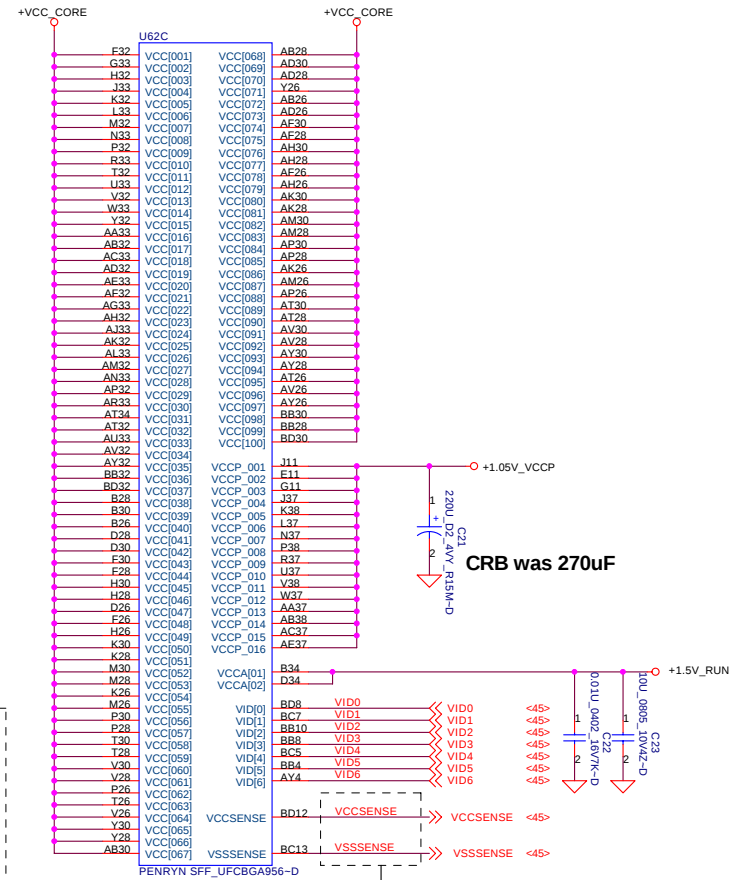

Length match within 25 mils, $Z_0=27.4\text{ ohm}$

Place R75 and R76 near CPU

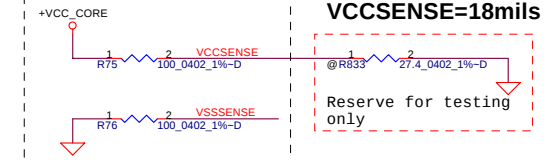

Route VCCSENSE and VSSSENSE trace at 27.4 ohms, 7 mils spacing and R75&R76 keep to pad max 1 inch

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

Penryn Processor(2/2)

LA-4151P

Title	Document Number	Rev
LA-4151P	LA-4151P	1.0
Date: Friday, July 04, 2008	Sheet 8 of 57	

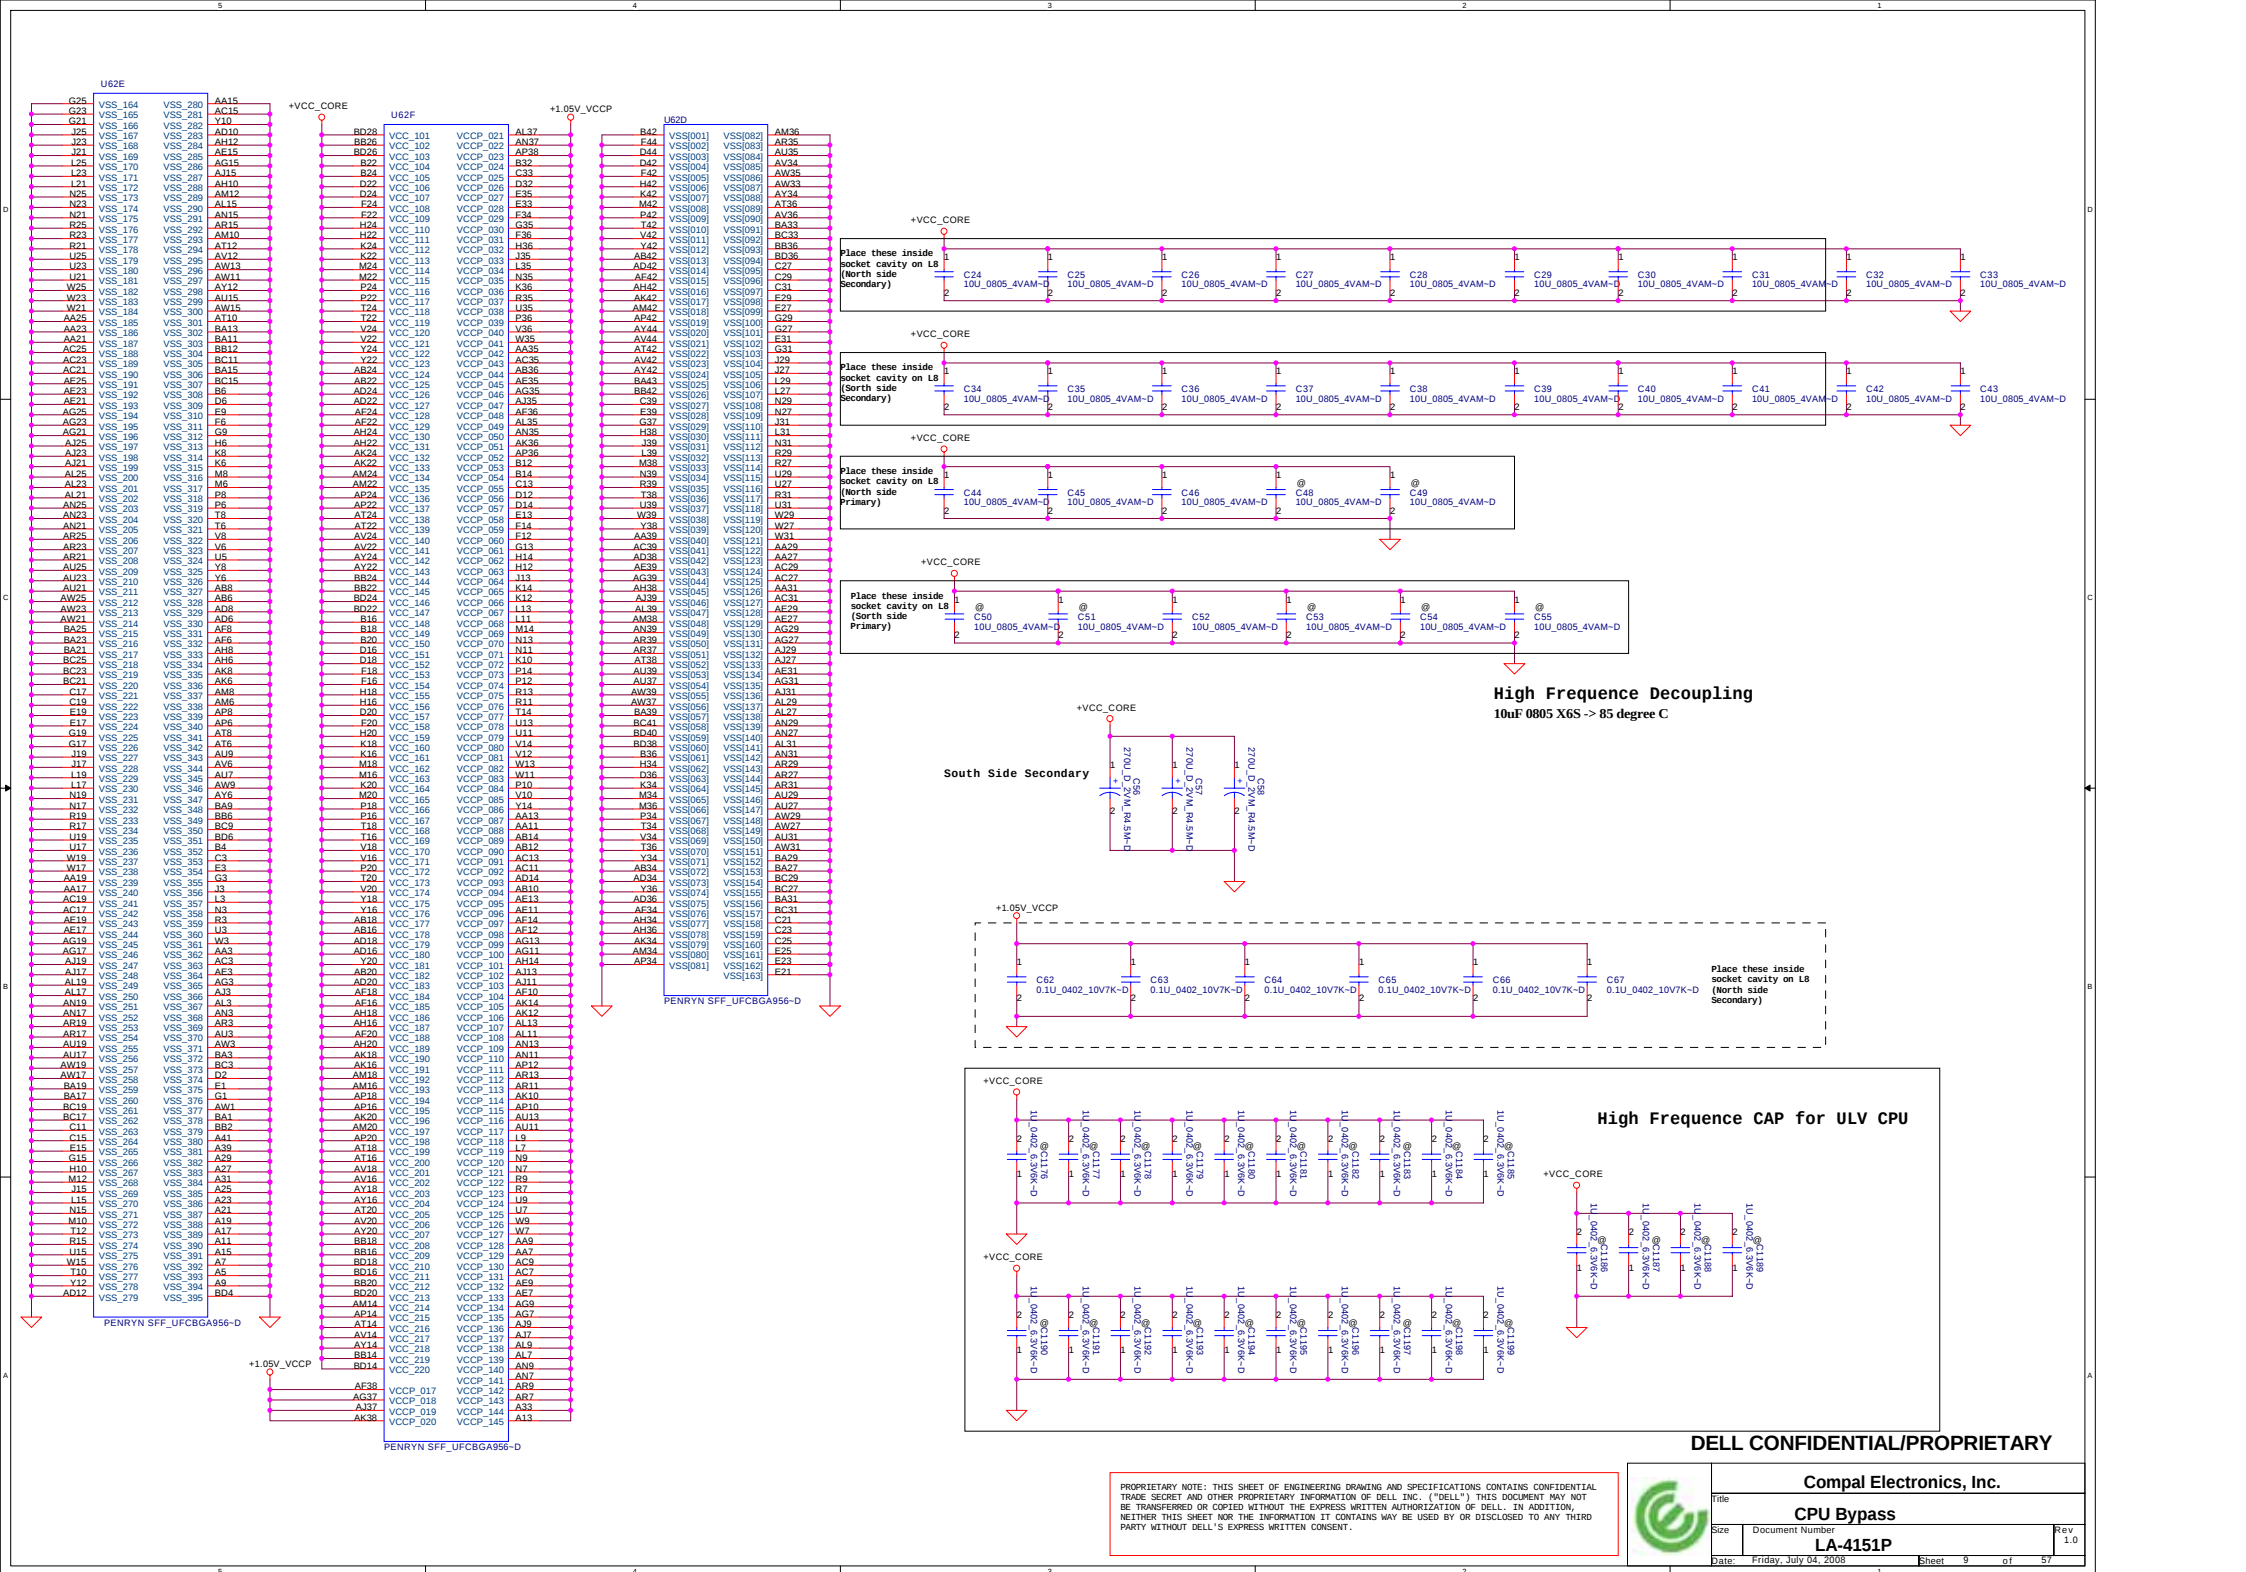

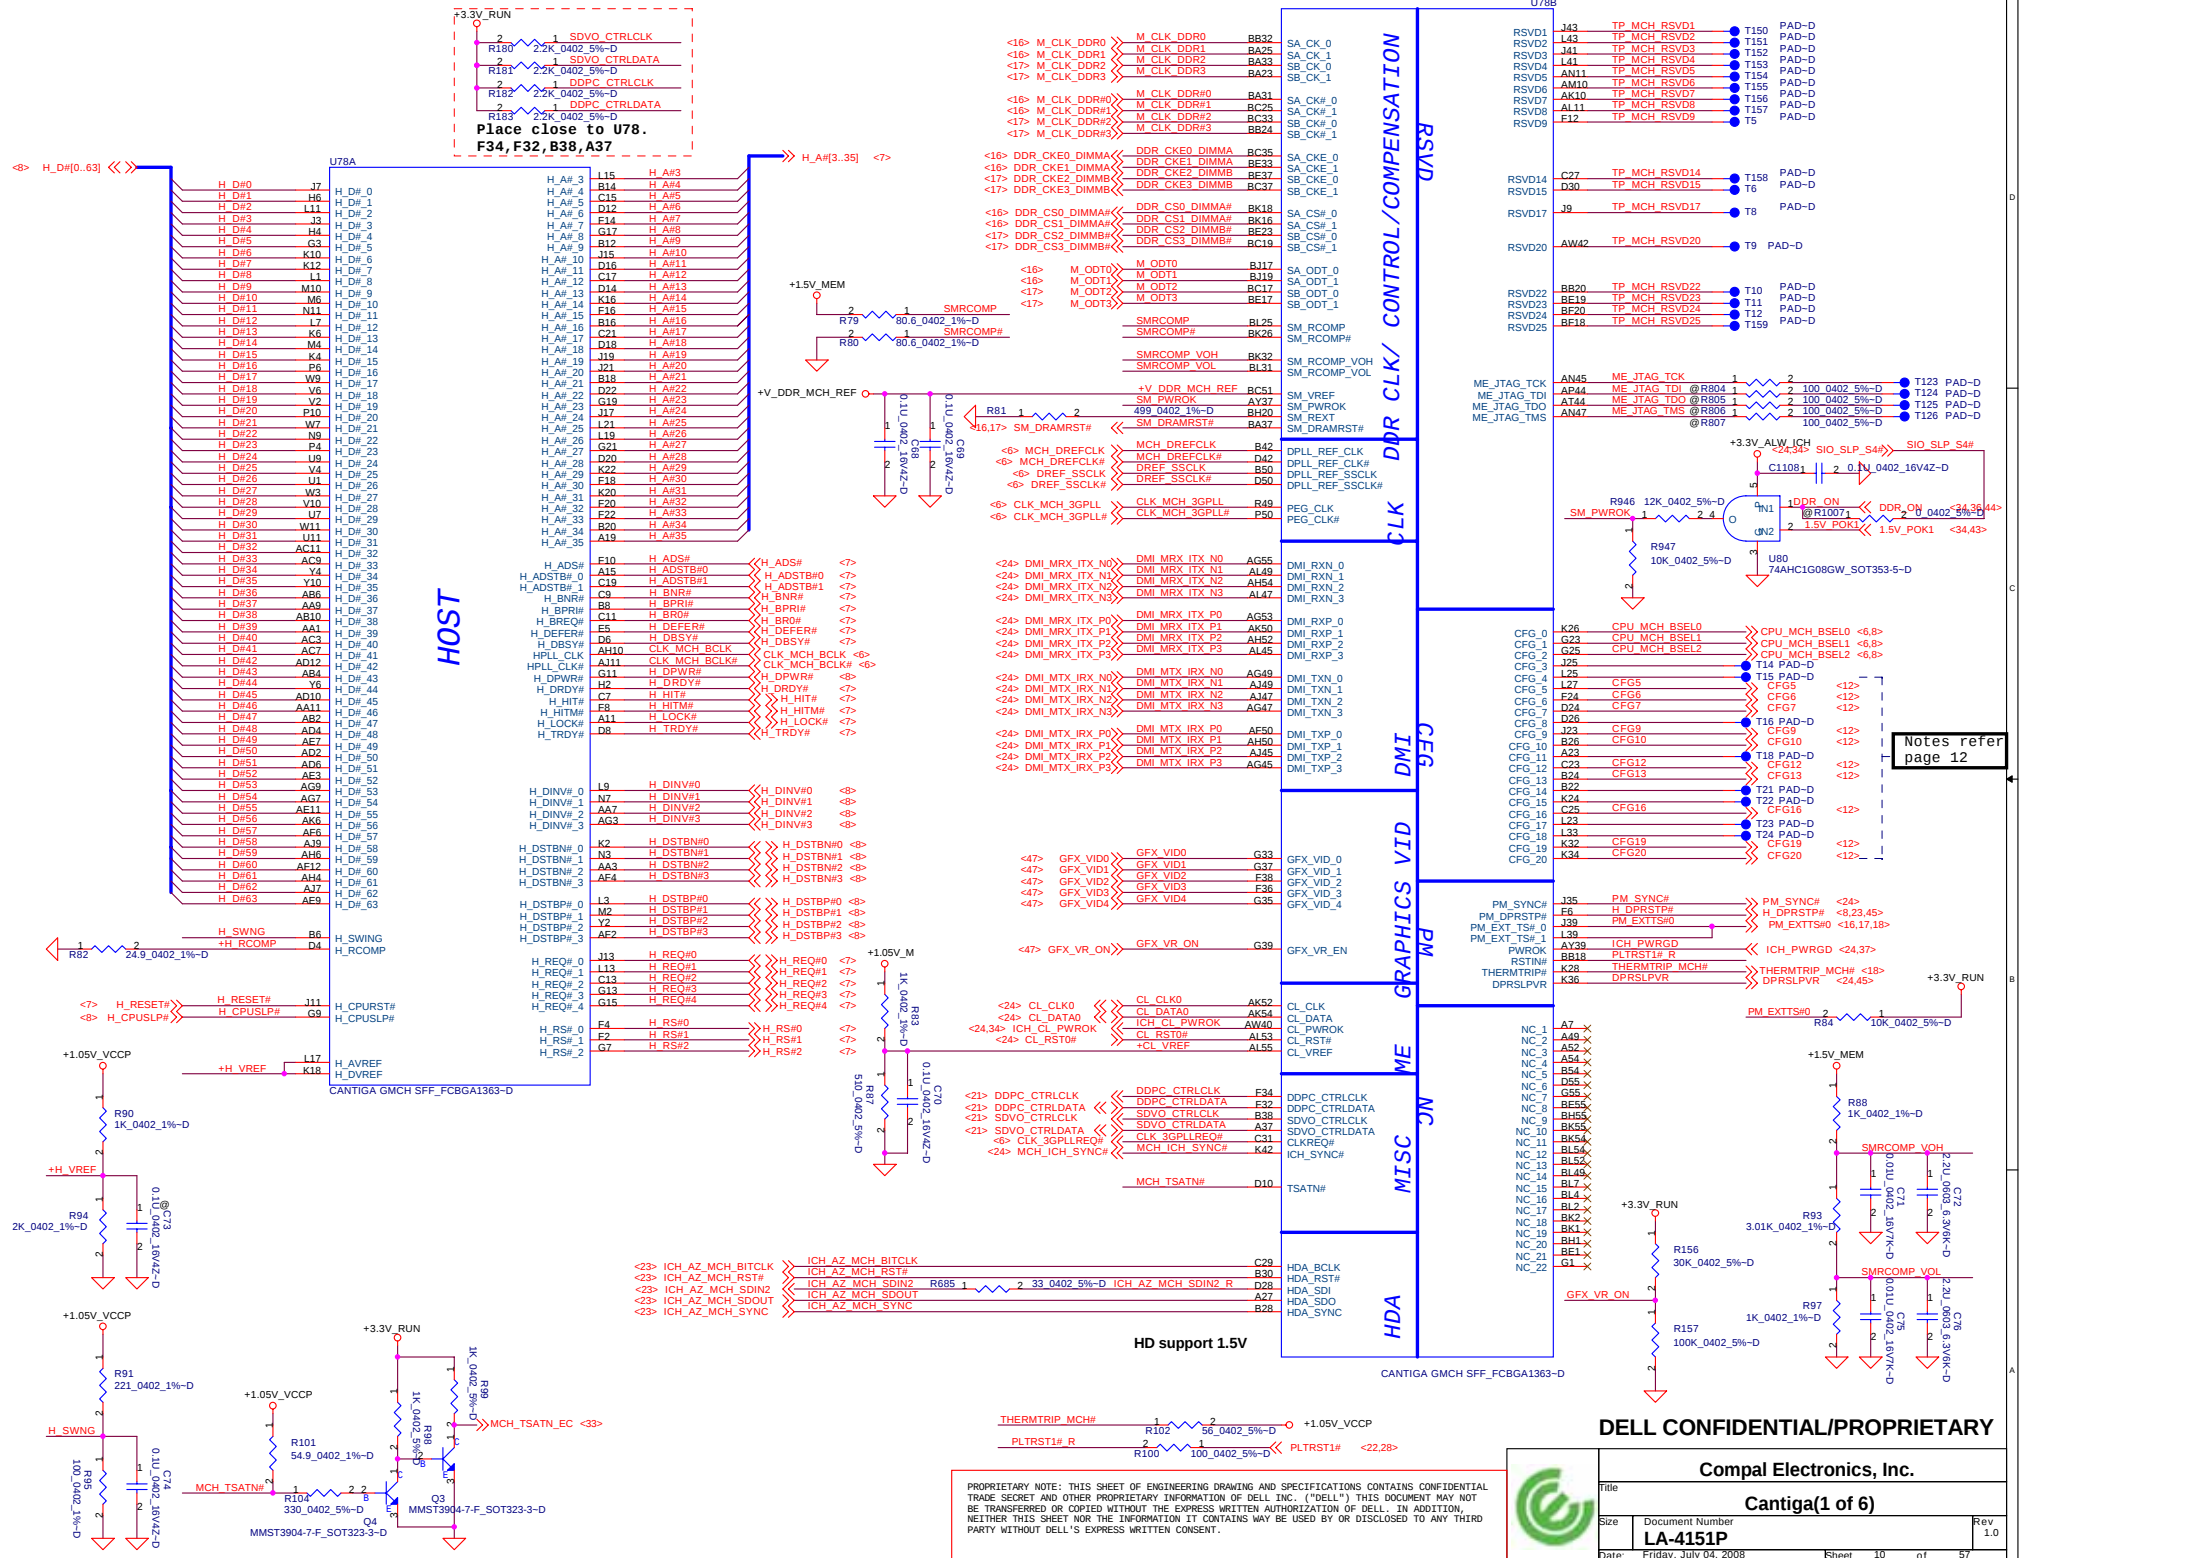


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Cantiga(1 of 6)

File	Document Number	Rev
LA-4151P	LA-4151P	1.0
Date	Friday, July 04, 2008	Sheet 10 of 57


PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

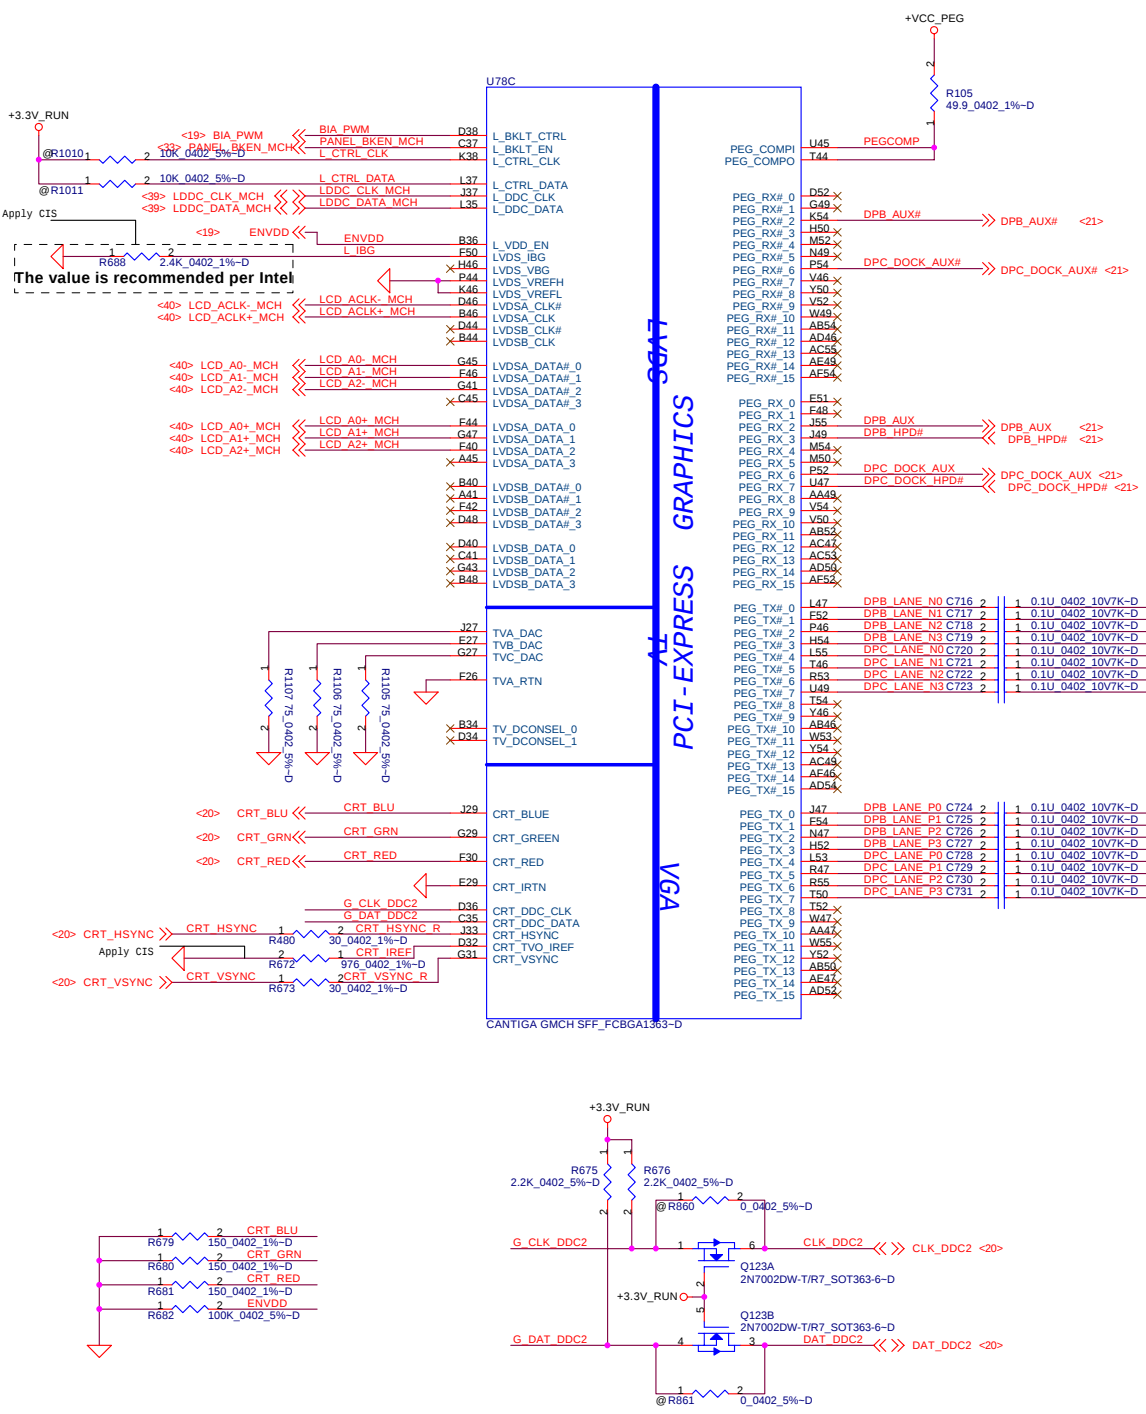

Strap Pin Table		
CFG5	DMI X2 Select	Low = DMI x 2 High = DMI x 4 (Default)
CFG6	iTPM Host Interface	Low = iTPM enable High = iTPM disable(Default)
CFG7	Management Engine Crypto Strap	Low = TLS cipher suite with no confidentiality High = TLS cipher suite with confidentiality(Default)
CFG9	PCI Express Graphic Lane	Low = Reverse Lane High = Normal Operation(Default)
CFG16	FSB Dynamic ODT	Low=Dynamic ODT Disable High=Dynamic ODT Enable(default)
CFG19	DMI Lane Reversal	Low=Normal (default) High=Lane Reversed
CFG20	SDVO/PCIE Concurrent Operation	Low=Only SDVO or PCIe1 is operational (default) High=SDVO and PCIe1 are operating simultaneously via PEG port
SDVO_CTRL_DATA		Low=No SDVO Device Present (default) High=SDVO Device Present
DDPC_CTRLDATA		Low=DisplayPort disabled (default) High=DisplayPort device present

XOR/ALLZ/Clock Un-gating		
CG13	CG12	configuration
0	0	Reserved
1	0	XOR Mode Enabled
0	1	All-Z Mode Enabled
1	1	Normal Operation(default)

CG10(PCIE Loopback enable)	
Low= Enables High= Disable(default)	

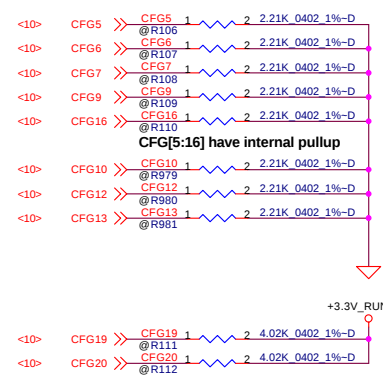



CFG[19:20] have internal pulldown

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.	
Cantiga(3 of 6)	
File	Document Number
LA-4151P	Rev 1.0
Date: Friday, July 04, 2008	Sheet 12 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND/OR OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



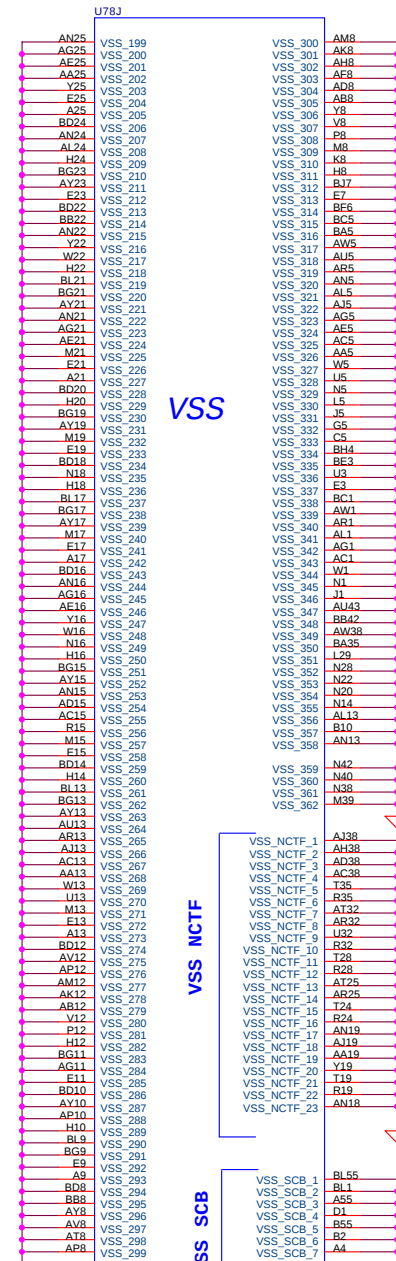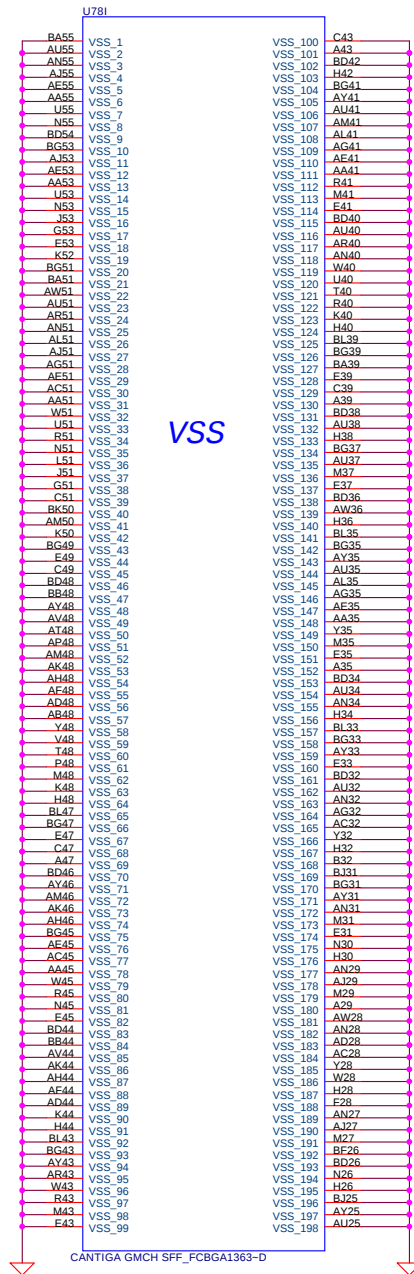

CANTIGA GMCH SFF_FCBGA1363-D




PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title			Cantiga(6 of 6)	
Size	Document Number	Rev		1.0
LA-4151P				
Date:	Friday, July 04, 2008	Sheet	15	of 57




1.0



Sheet 16 of 57

<11> DDR_B_DQS#0[0..7] <<>>
 <11> DDR_B_D[0..63] <<>>
 <11> DDR_B_DM[0..7] <<>>
 <11> DDR_B_DQS#0[0..7] <<>>
 <11> DDR_B_MA[0..14] <<>>

Layout Note:
Place near JDIMMB

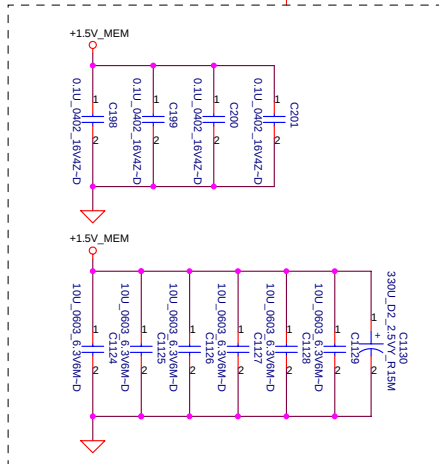

Layout Note:
Place near JDIMMB.203,204

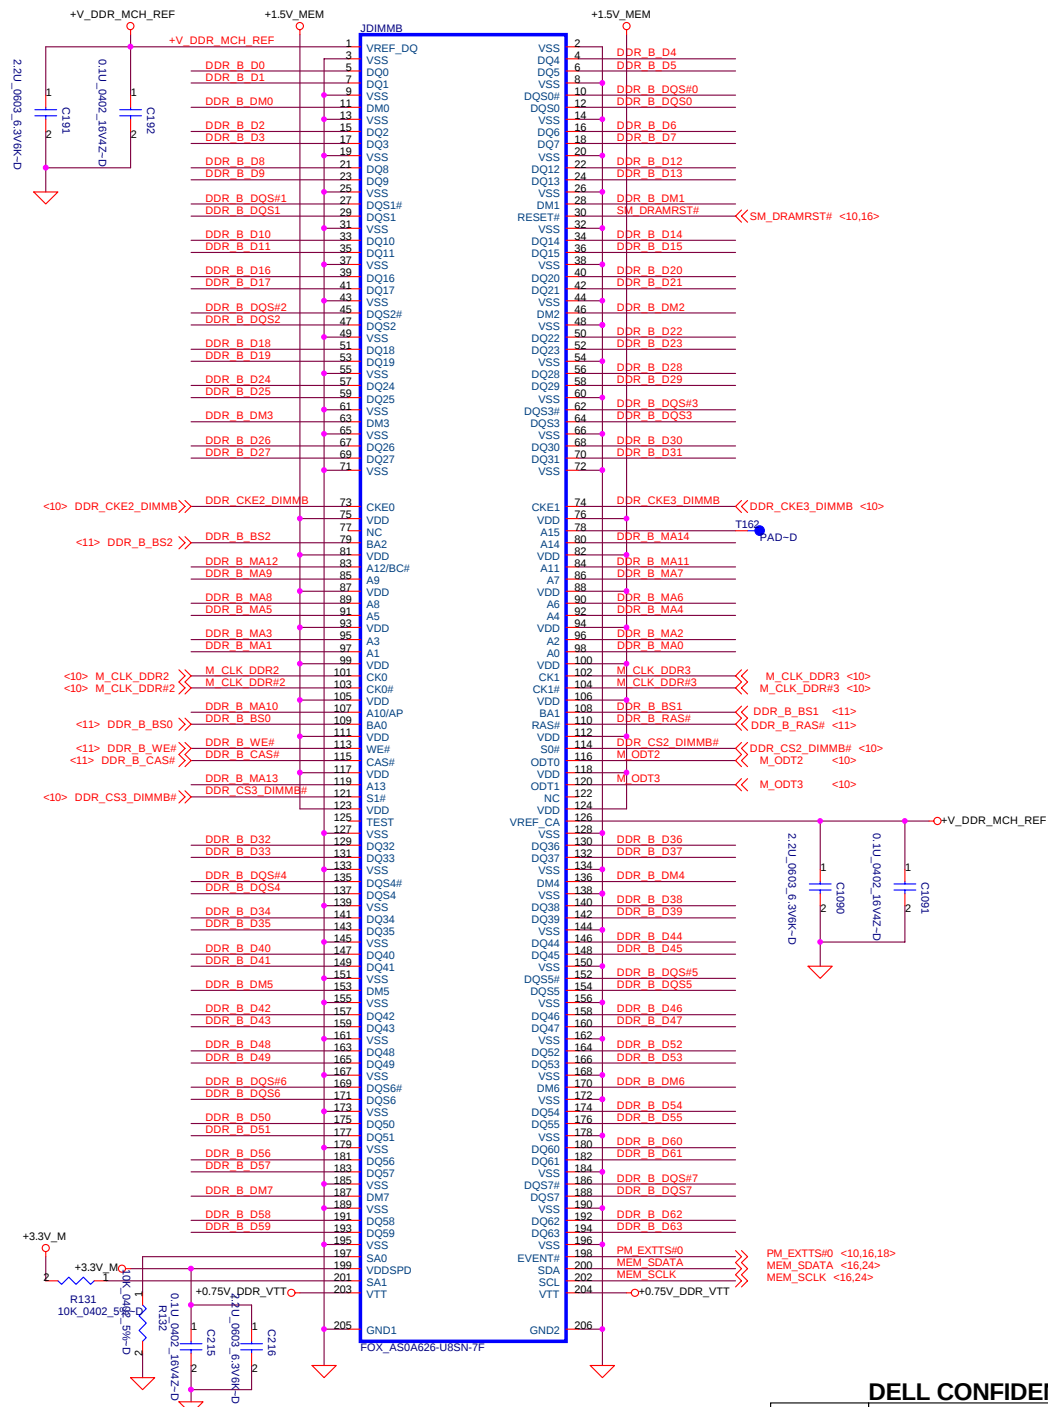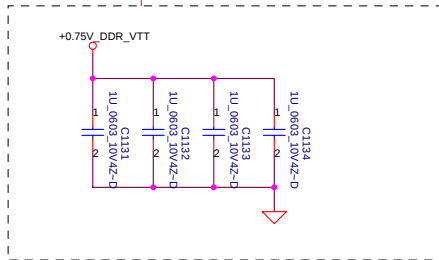

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

DDRIII-SODIMM SLOT2

LA-4151P

Date: Friday, July 04, 2008 Sheet 17 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.










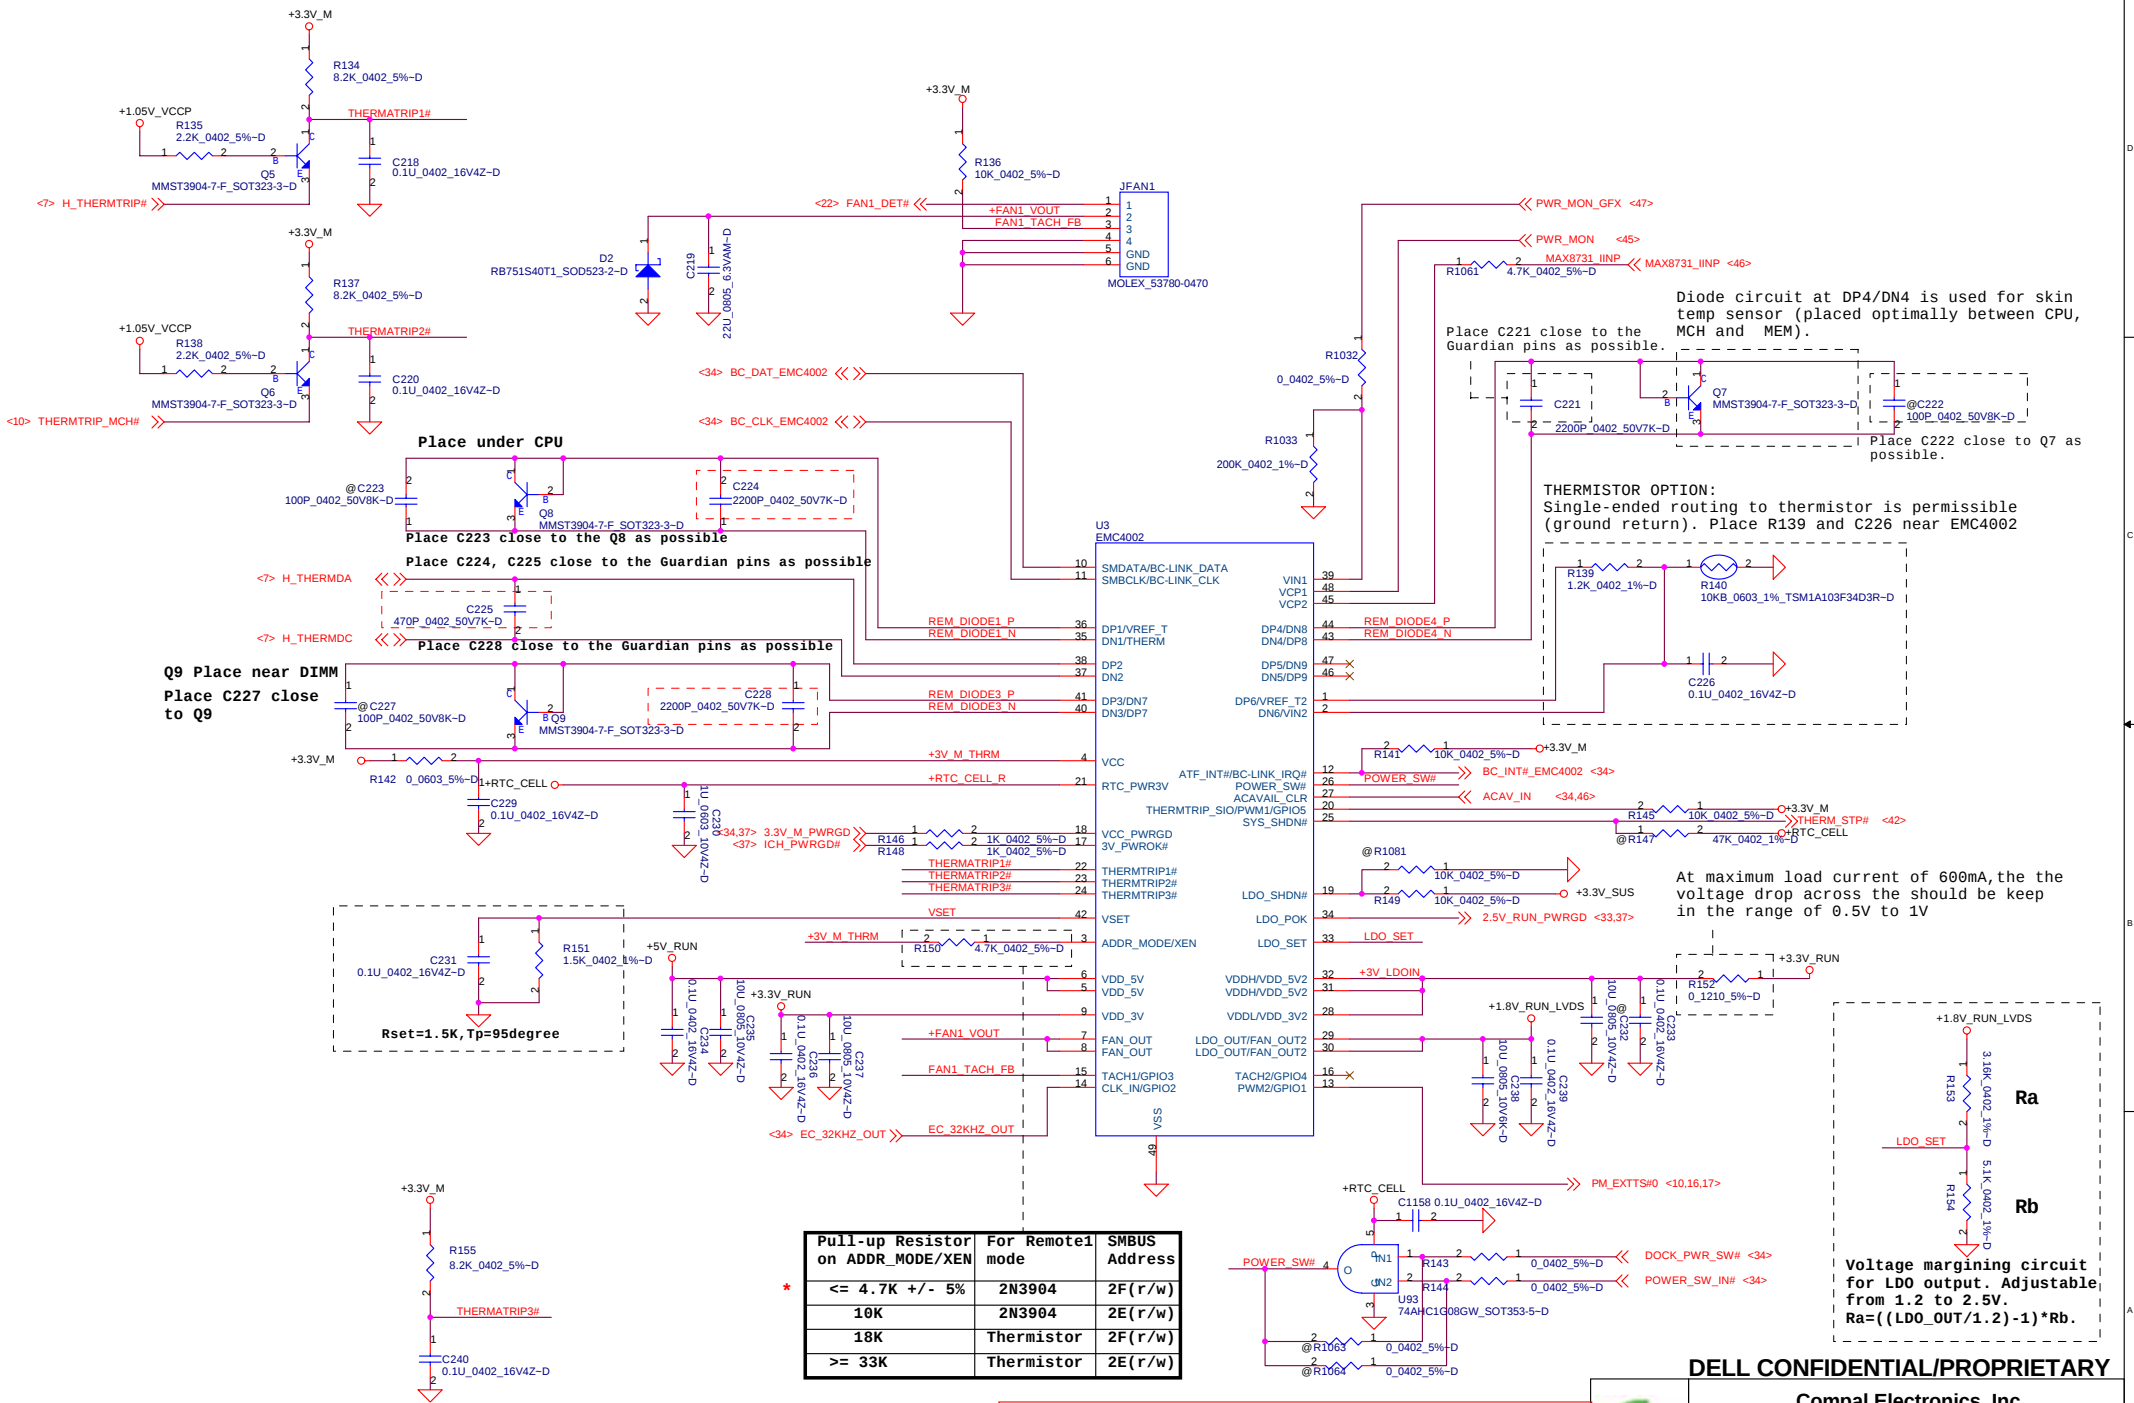


DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.			
FAN & Thermal Sensor			
LA-4151P	Rev 1.0		
Date: Friday, July 04, 2008	Sheet 18 of 57		

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

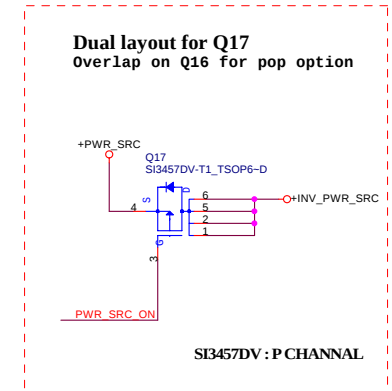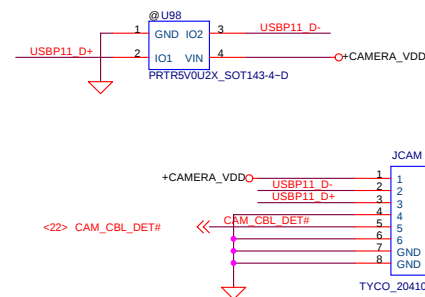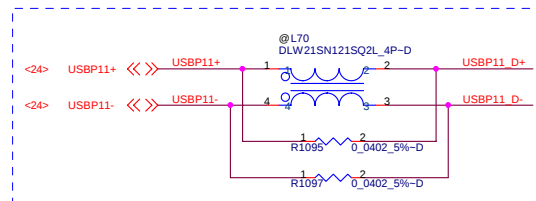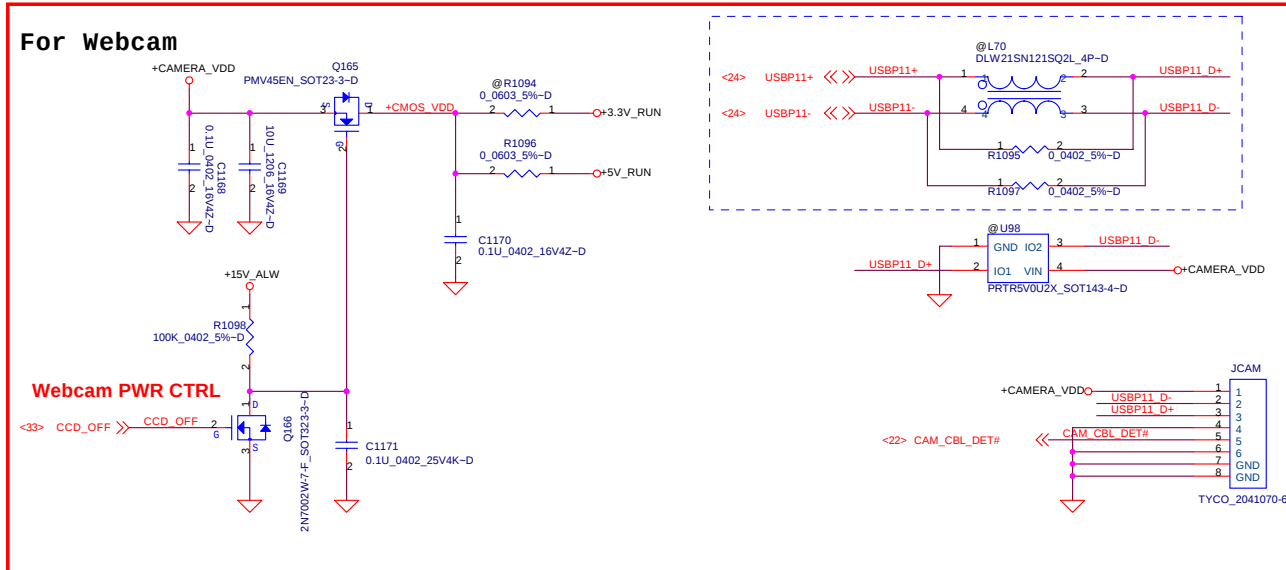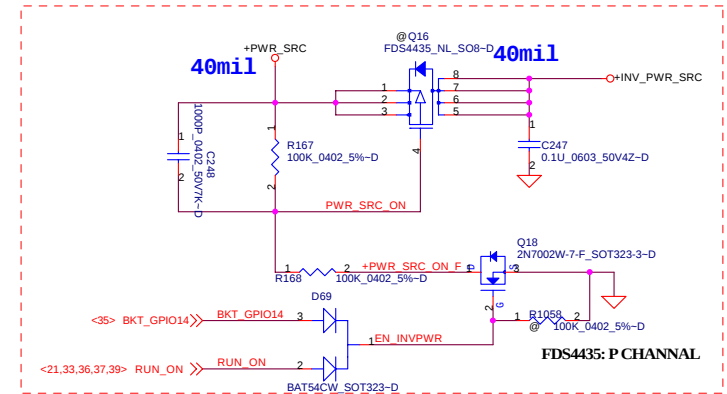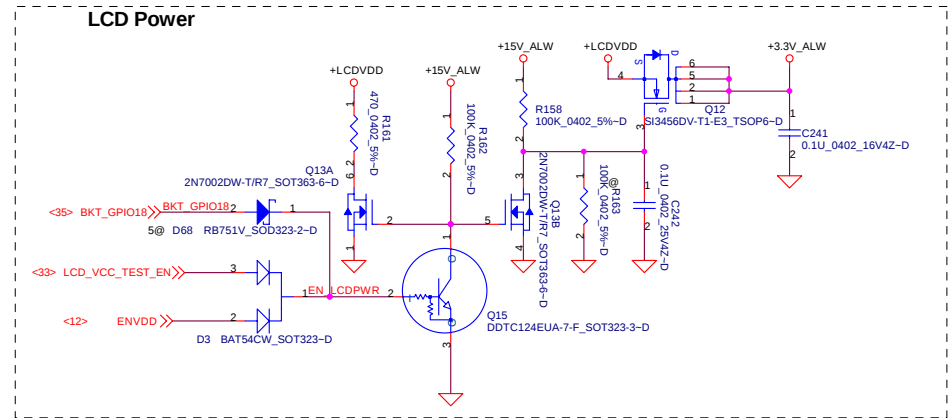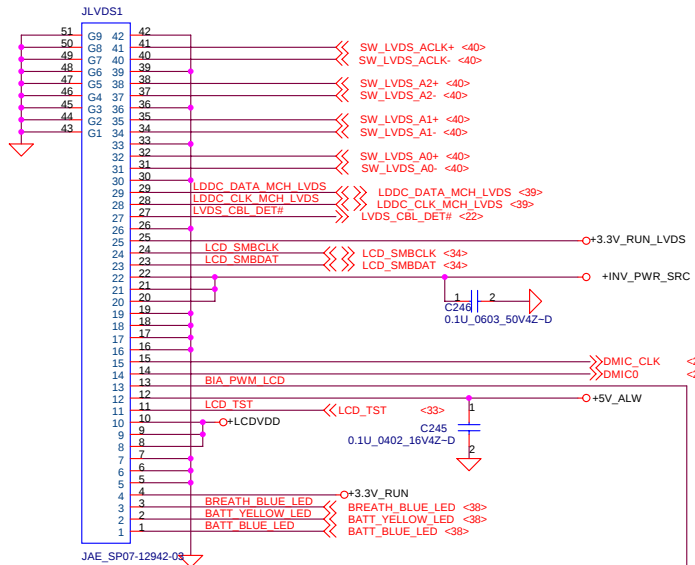

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


LVDS Conn

LA-4151P






Friday, July 04, 2008 Sheet 19 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

SW for eDOCK side

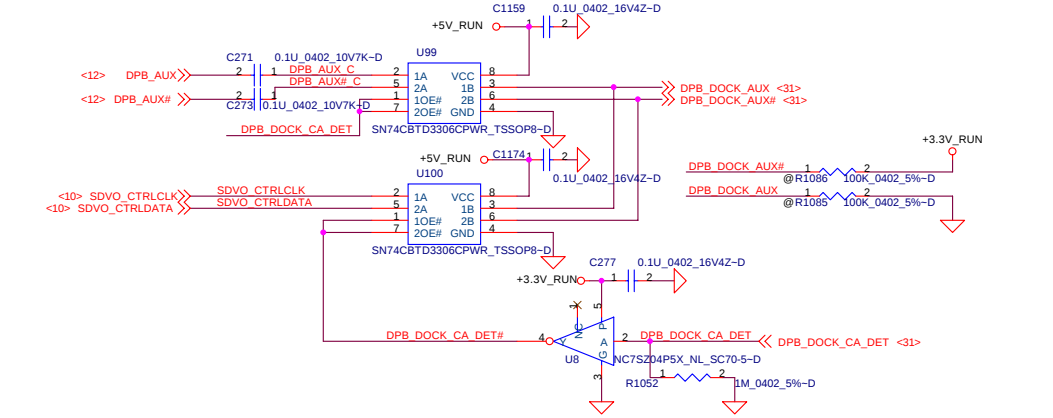

SW for eDOCK side

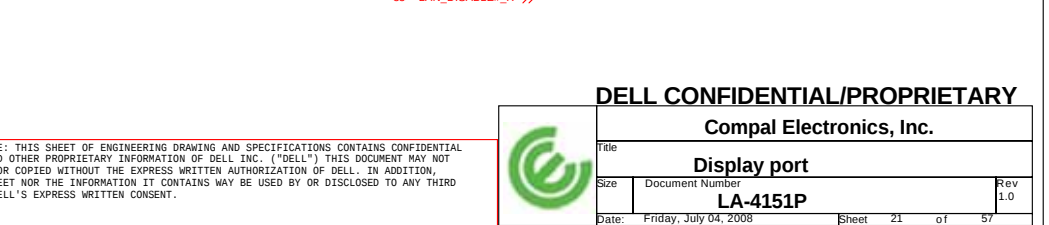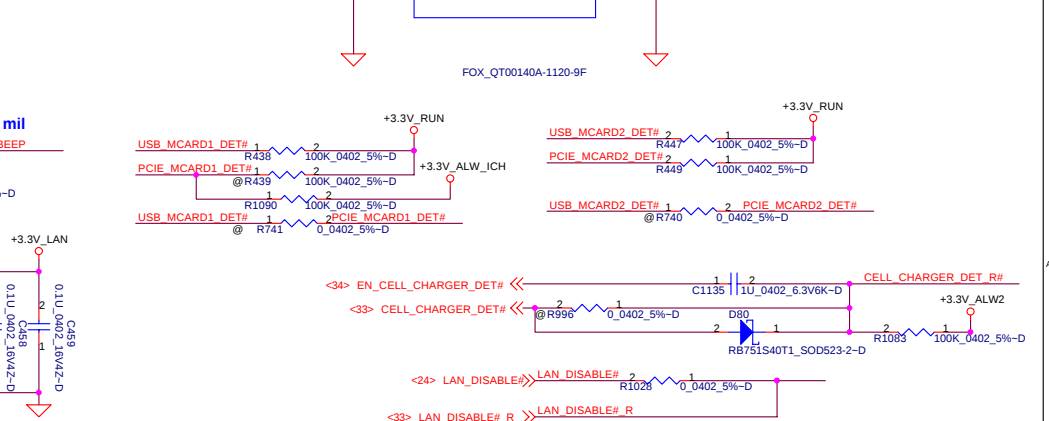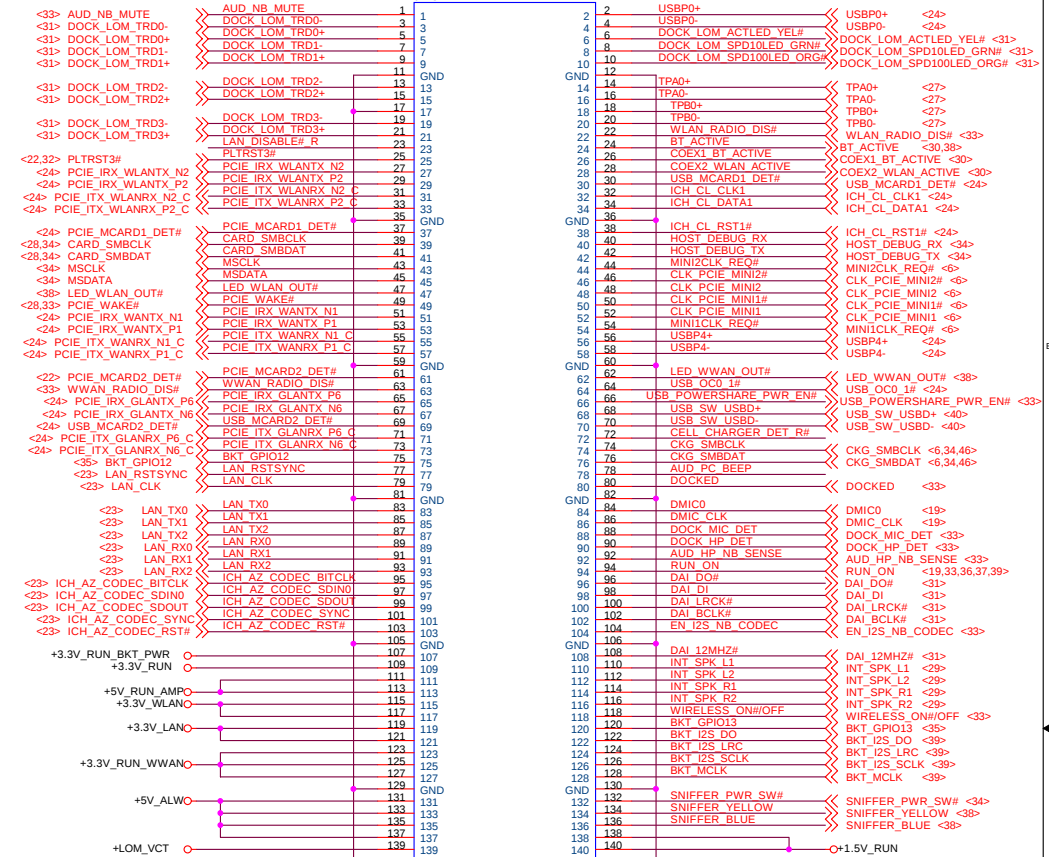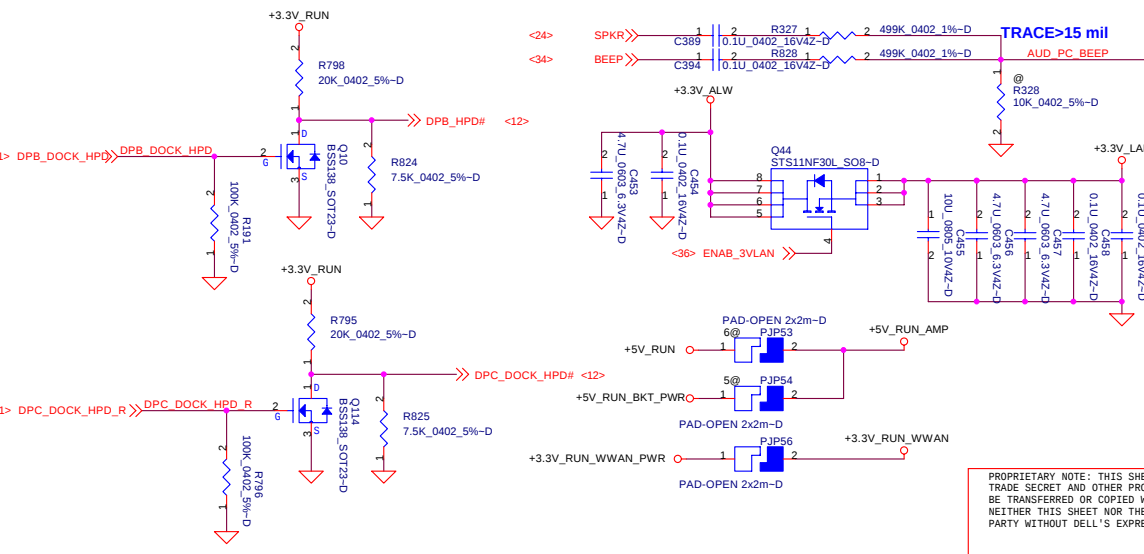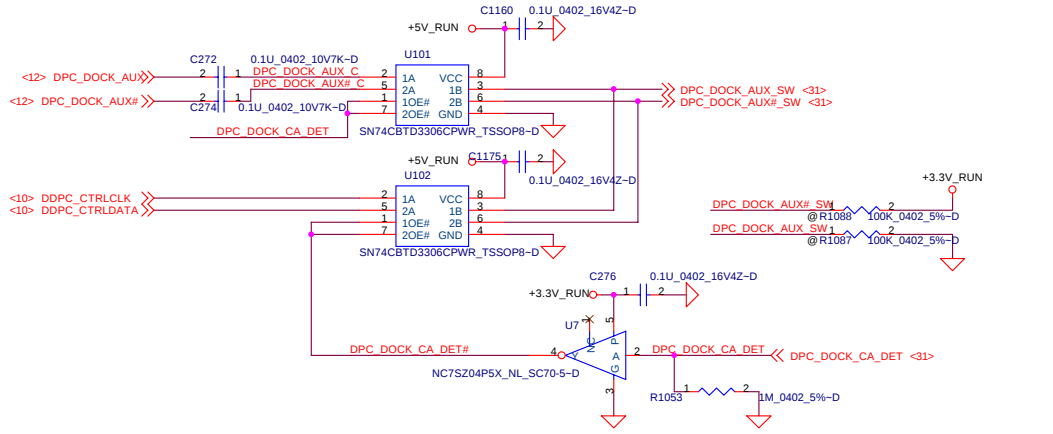

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.







DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Display port

LA-4151P


Date: Friday, July 04, 2008 Sheet 21 of 57

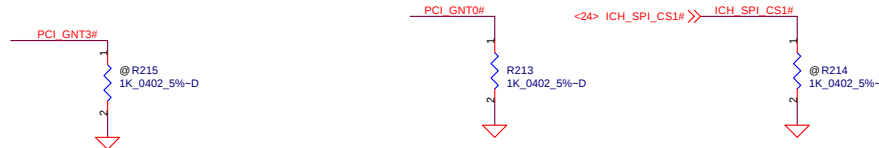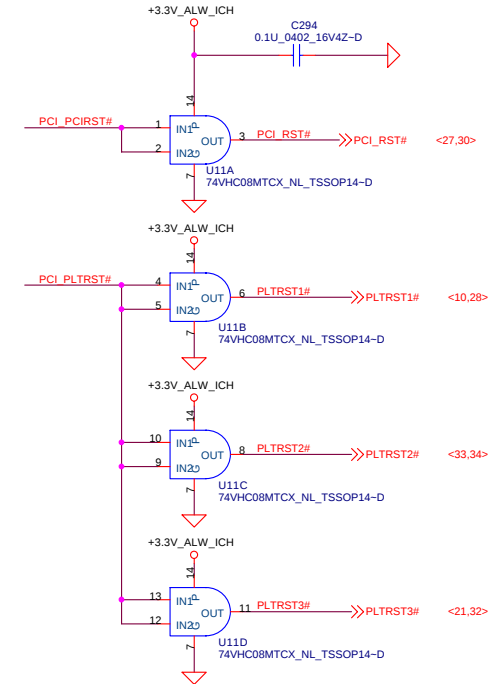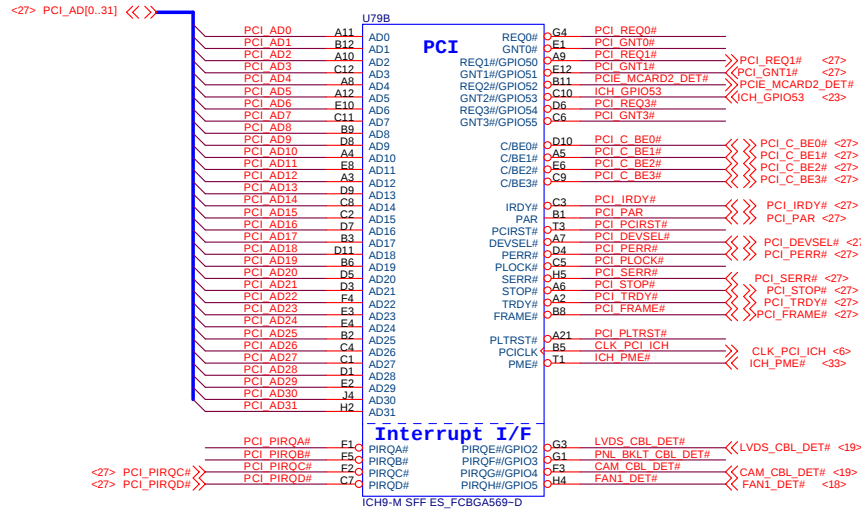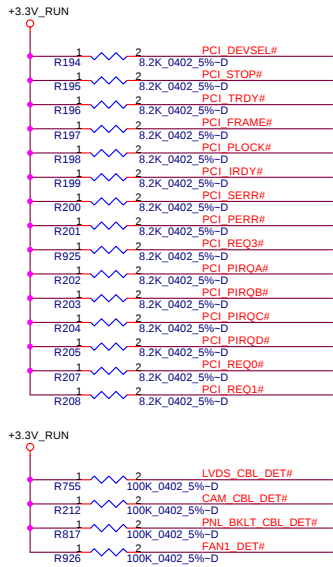

A16 away override strap.	
PCI_GNT3#/(MDC_RST_DIS#)	Low = A16 swap override enabled. High = Default.

*

Boot BIOS Strap		
PCI_GNT0#	SPI_CS1#	Boot BIOS Location
0	1	SPI
1	0	PCI
1	1	LPC



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title ICH9-M(1/4)




Size Document Number LA-4151P

Date: Friday, July 04, 2008 Sheet 22 of 57


PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

CMOS_CLR1	CMOS setting
Shunt	Clear CMOS
Open	Keep CMOS

ME_CLR1	TPM setting
Shunt	Clear ME RTC Registers
Open	Keep ME RTC Registers

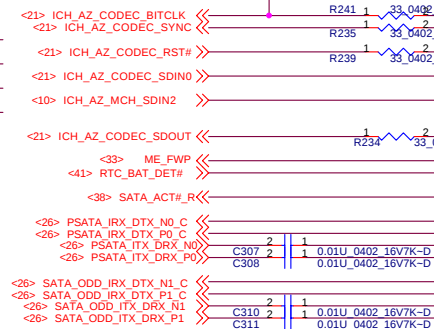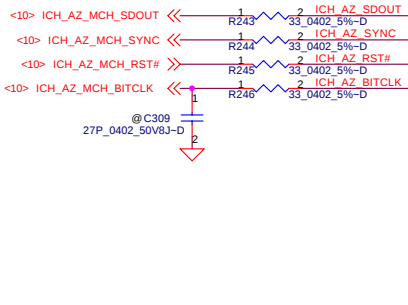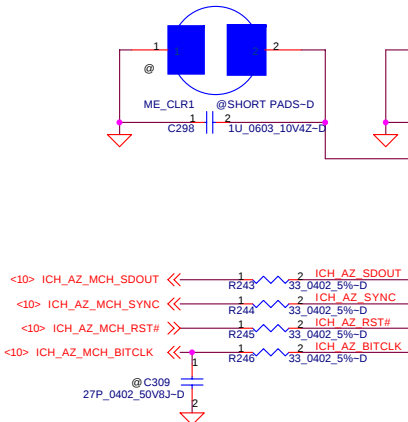


Package
9.6X4.06 mm

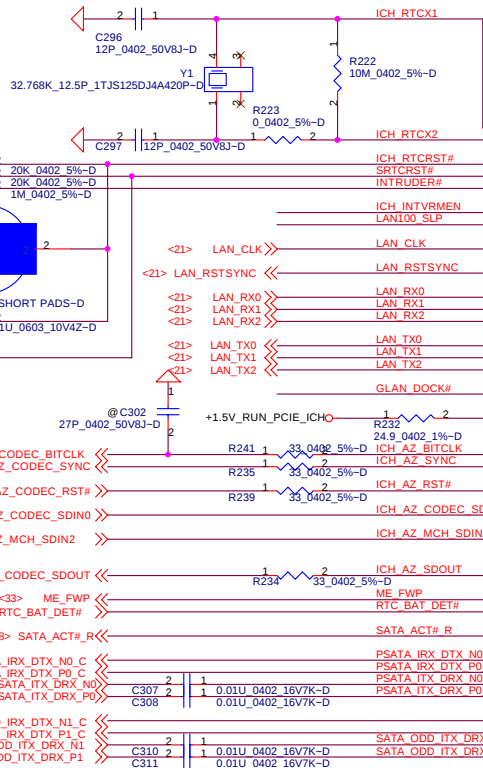



ICH9M Internal VR Enable Strap (Internal VR for VccSus1.05, VccSus1.5, VccCL1.5)	
ICH INTVRMEN	Low = Internal VR Disabled High = Internal VR Enabled(Default)

ICH9M LAN100 SLP Strap (Internal VR for VccLAN1.05 and VccCL1.05)	
ICH LAN100_SLP	Low = Internal VR Disabled High = Internal VR Enabled(Default)

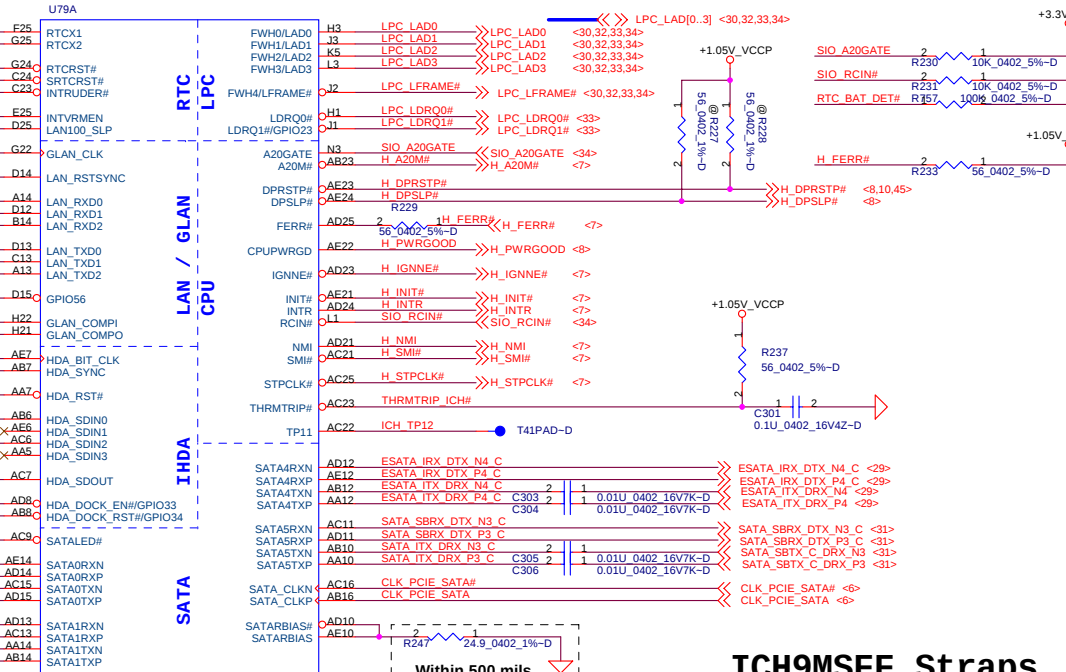

ICH9MSFF Straps

XOR Chain Entrance Strap		
ICH_RSVD_TP3	HDA SDOUT	Description
0	0	RSVD
0	1	Enter XOR Chain
1	0	Normal Operation (Default)
1	1	Set PCIE port config bit 1



PCie Port Configuration 1 (Ports 1-4)		
HDA_SYNC	HDA SDOUT	Ports Routing
0	0	Port 1(X1), Port 2(X1), Port 3(X1), Port 4(X1) default
1	1	Port 1(X4)

PCie Port Configuration 2 (Ports 1-4)	
ICH_GPIO53	Ports Routing
1	Port 5(X1), Port 6(X1) default

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

ICH9-M(2/4)

Title	Document Number	Rev
LA-4151P	LA-4151P	1.0
Date	Friday, July 04, 2008	Sheet 23 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



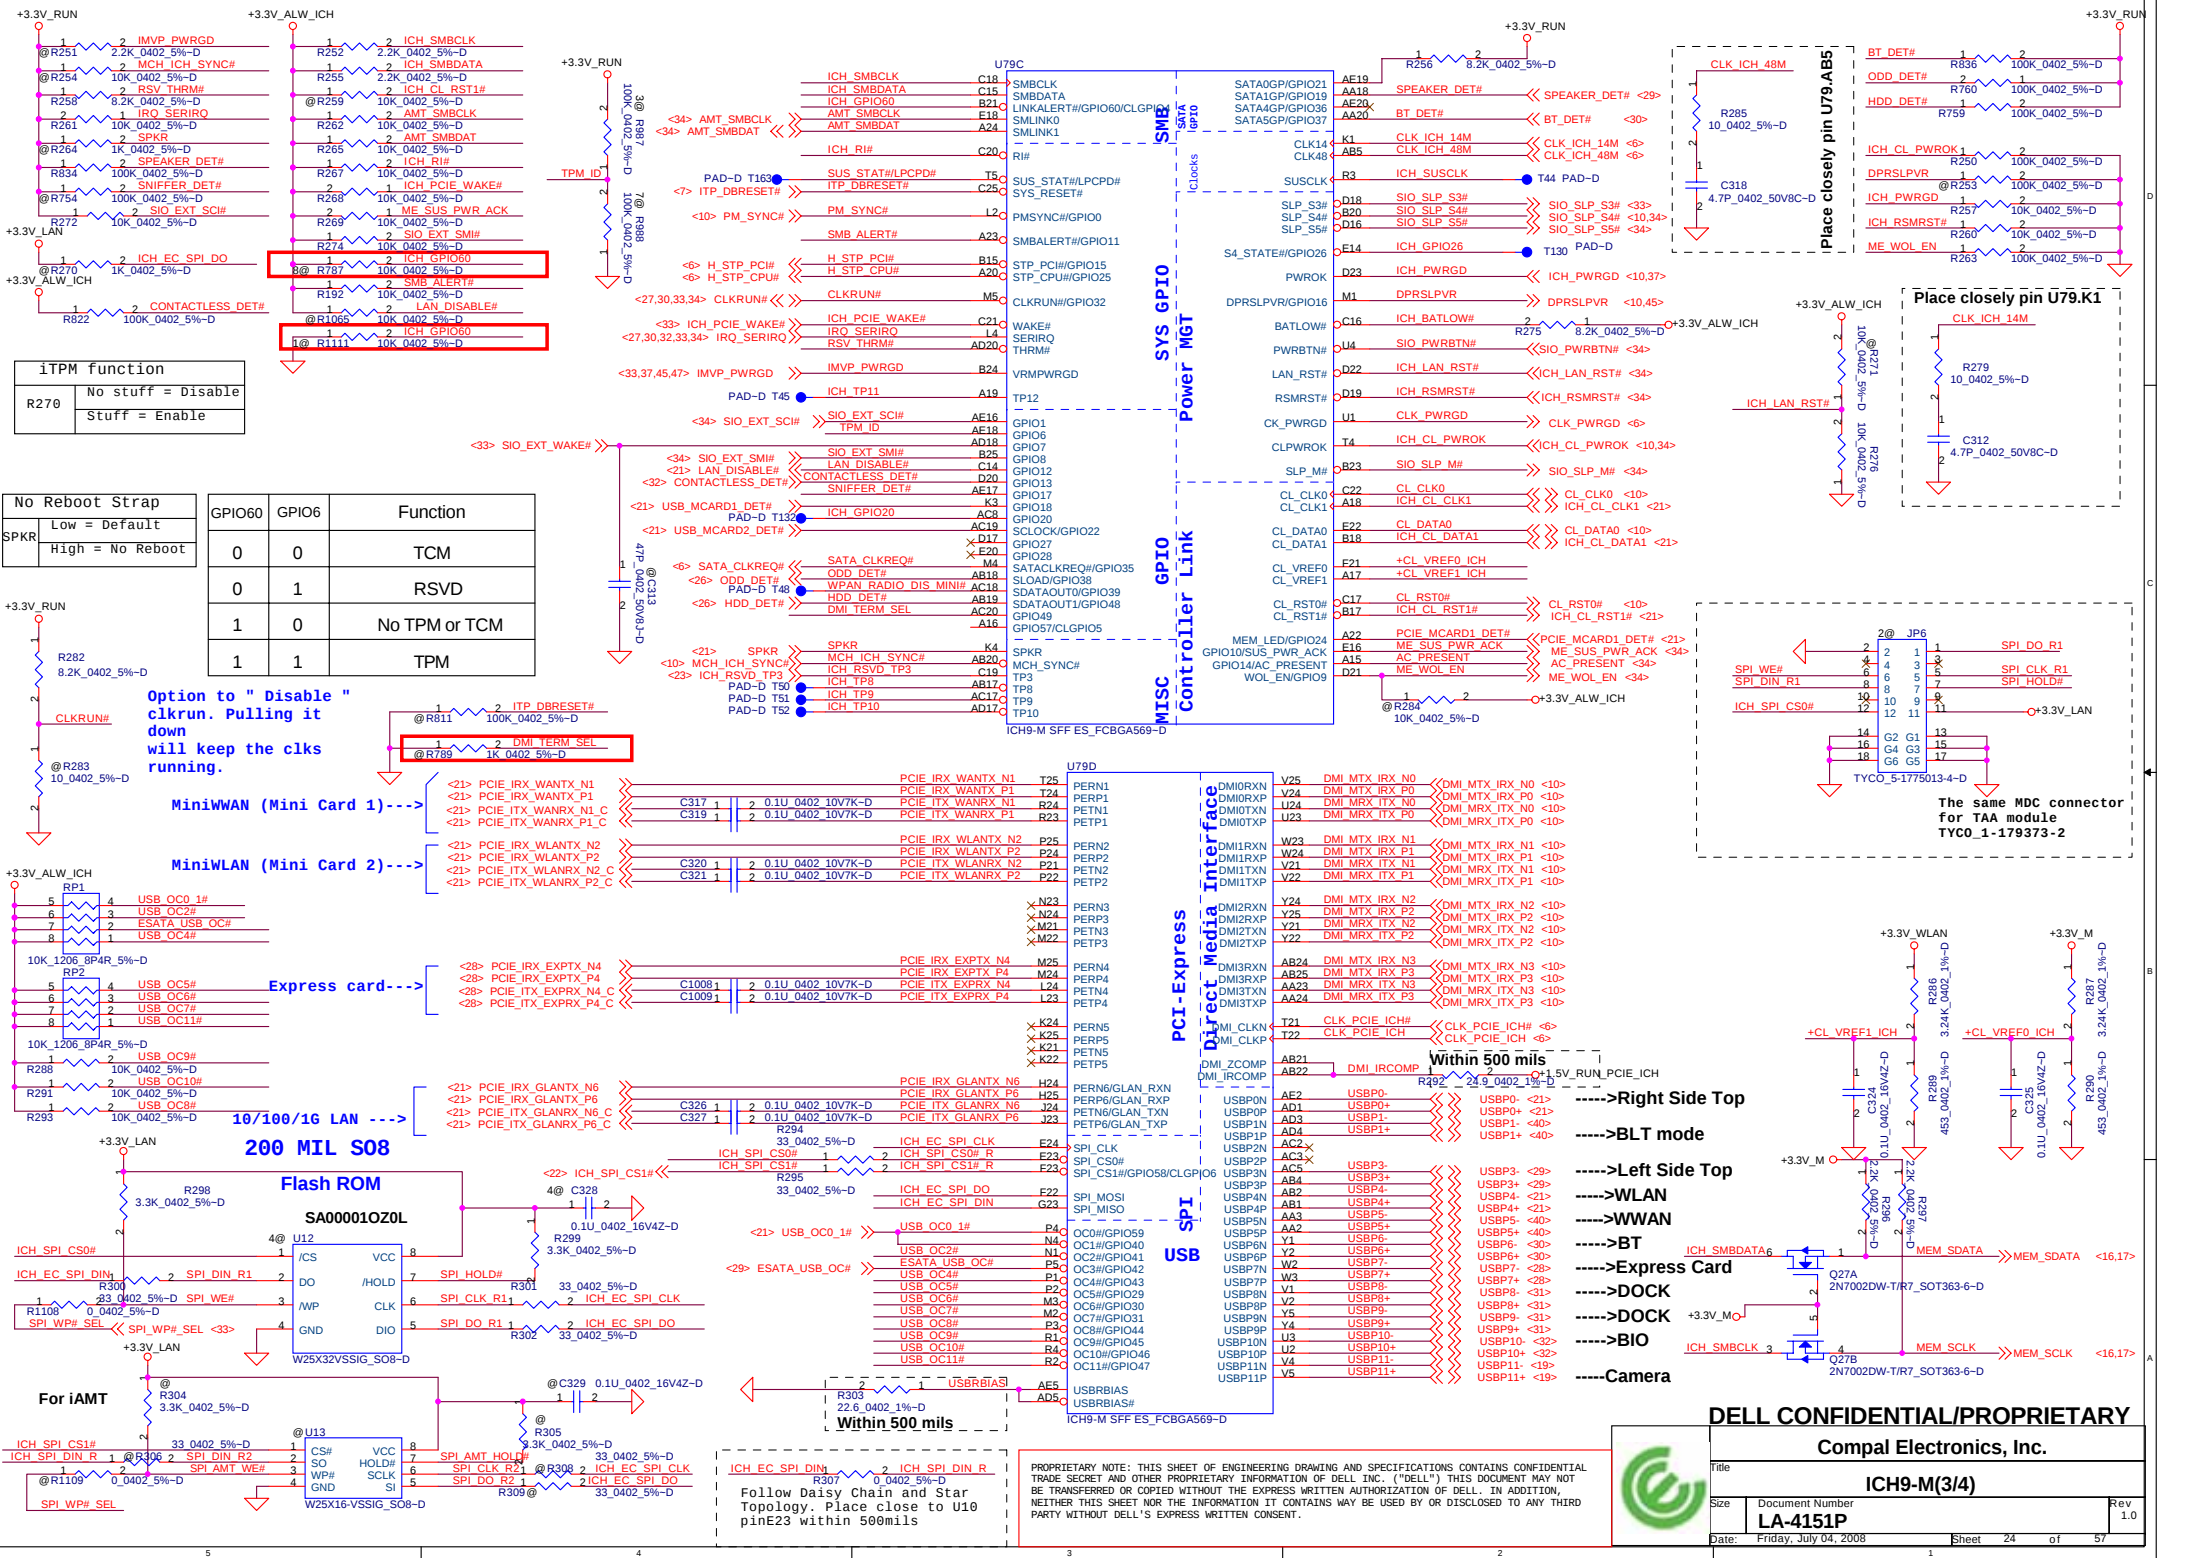

iTPM function	
R270	No stuff = Disable Stuff = Enable

No Reboot Strap		Function	
SPKR	Low = Default High = No Reboot	GPIO06	GPIO6
		0	0
		0	1
		1	0
		1	1
			TCM
			RSVD
			No TPM or TCM
			TPM

Option to "Disable" clkrun. Pulling it down will keep the clks running.	
MiniWWAN (Mini Card 1)----	
MiniWLAN (Mini Card 2)----	

Express card----	
10/100/16 LAN ---->	
200 MIL S08	

Flash ROM	
SA0000LOZOL	
For iAMT	

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.



ICH9-M(3/4)

LA-4151P





Friday, July 04, 2008

Sheet 24 of 57

For ODD

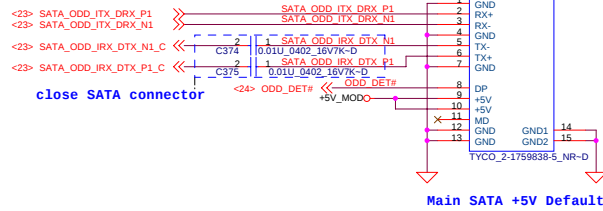

For HDD

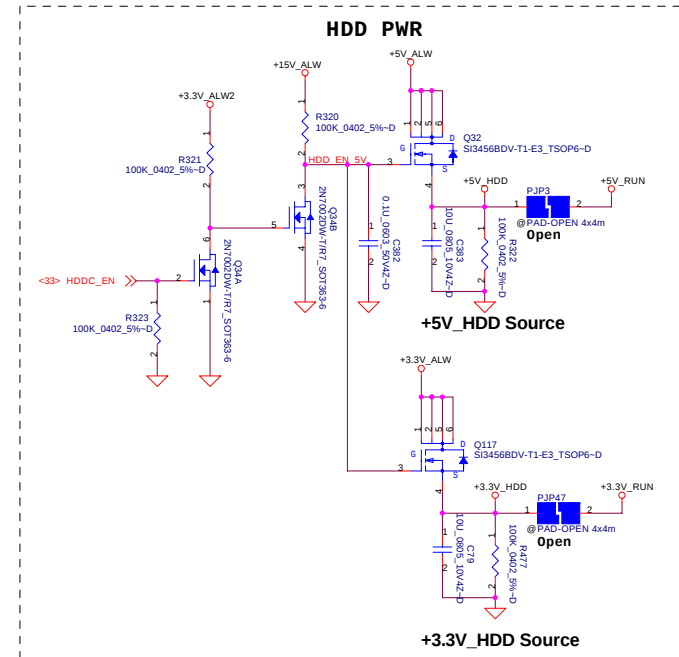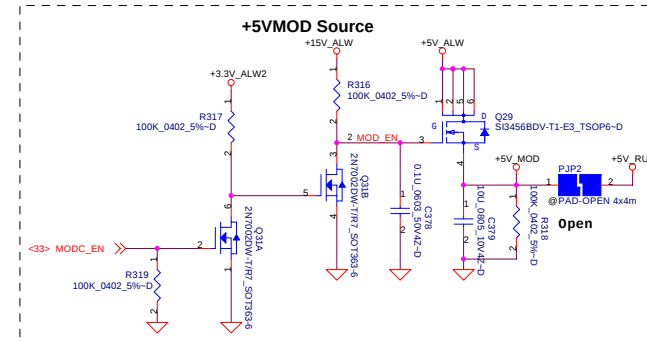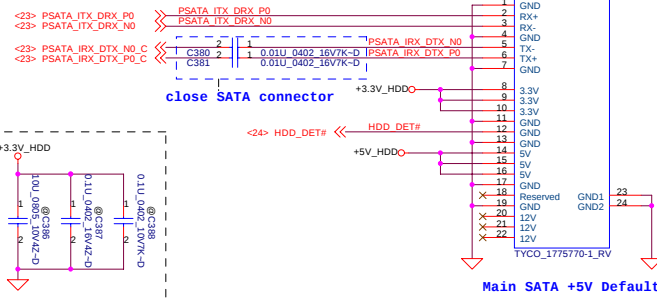


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


File	ODD/HDD CONNECTOR		
Size	Document Number	LA-4151P	Rev 1.0
Date	Friday, July 04, 2008	Sheet 26	of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

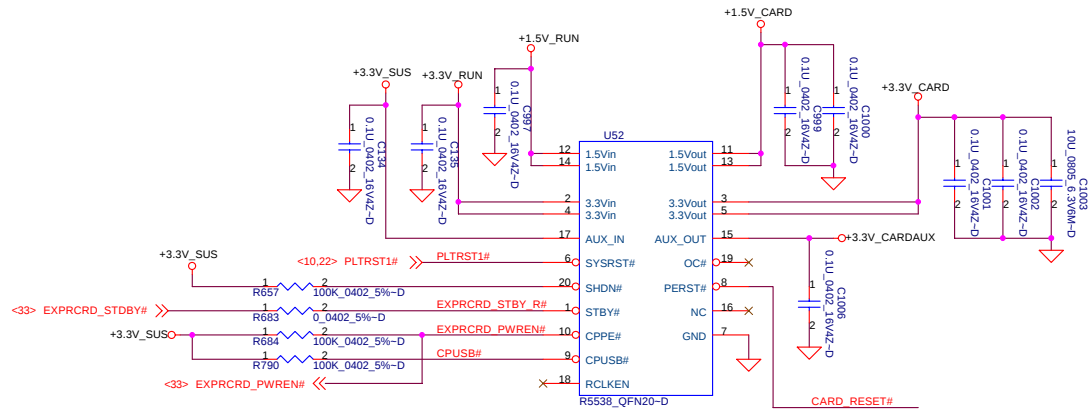

Express Card

+1.5V_CARD: Max. 650mA, Average 500mA
+3.3V_CARD: Max. 1300mA, Average 1000mA

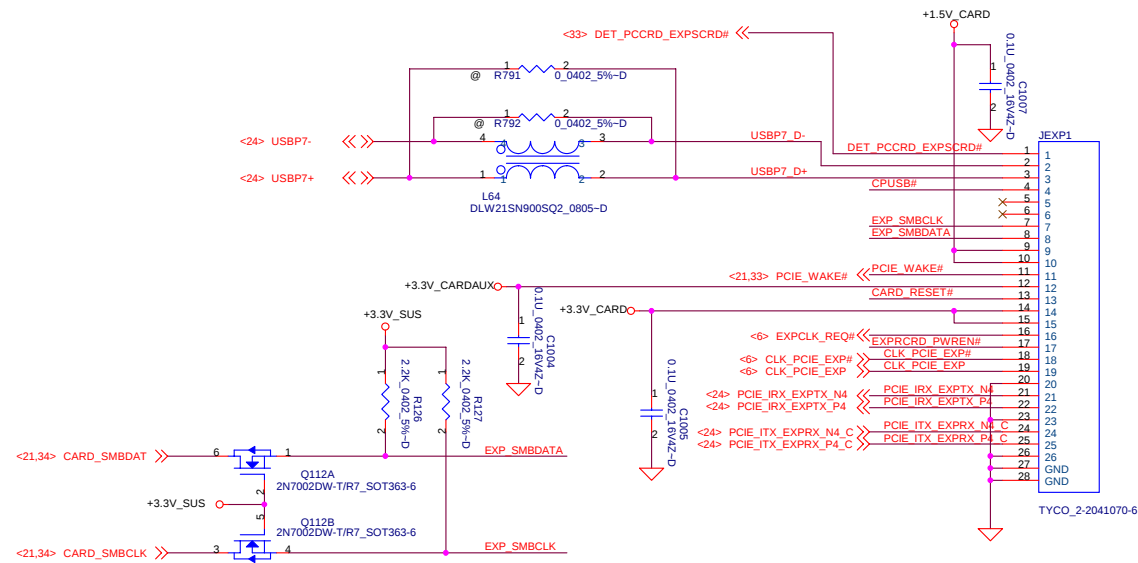

DELL CONFIDENTIAL/PROPRIETARY





Compal Electronics, Inc.

CardBus/SD card Socket

Title	Document Number	Rev
LA-4151P	1.0	
Date: Friday, July 04, 2008	Sheet 28 of 57	

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

IO connector II

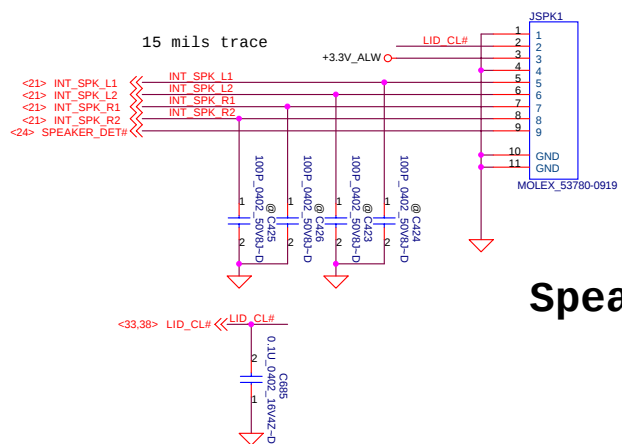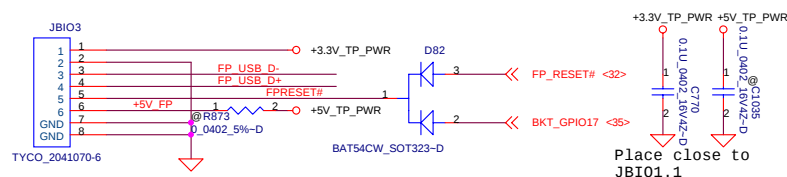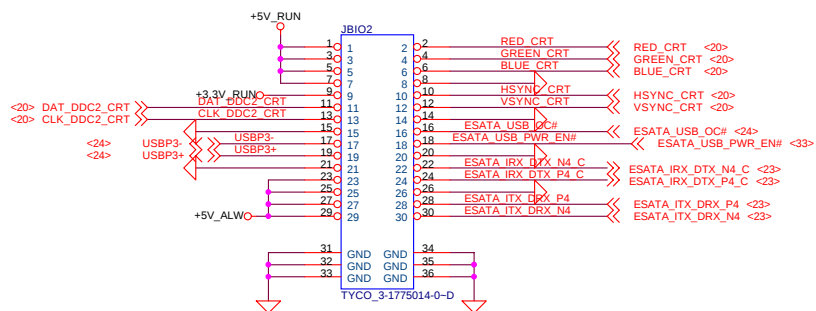

Speaker Connector

USB PORT#	DESTINATION
0	JUSB1 (Ext Right Side Top)
1	BLT mode
2	NC
3	JESATA1 (Ext Left Side Bottom)
4	WLAN
5	WWAN
6	BT
7	Card Bus/Express card
8	DOCKING
9	DOCKING
10	USH->BIO
11	Camera

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

FingerPrint

Title	Document Number	Rev
LA-4151P	1.0	
Date: Friday, July 04, 2008	Sheet 29 of 57	

China TPM

LOW:Power Down Mode
High:Working Mode

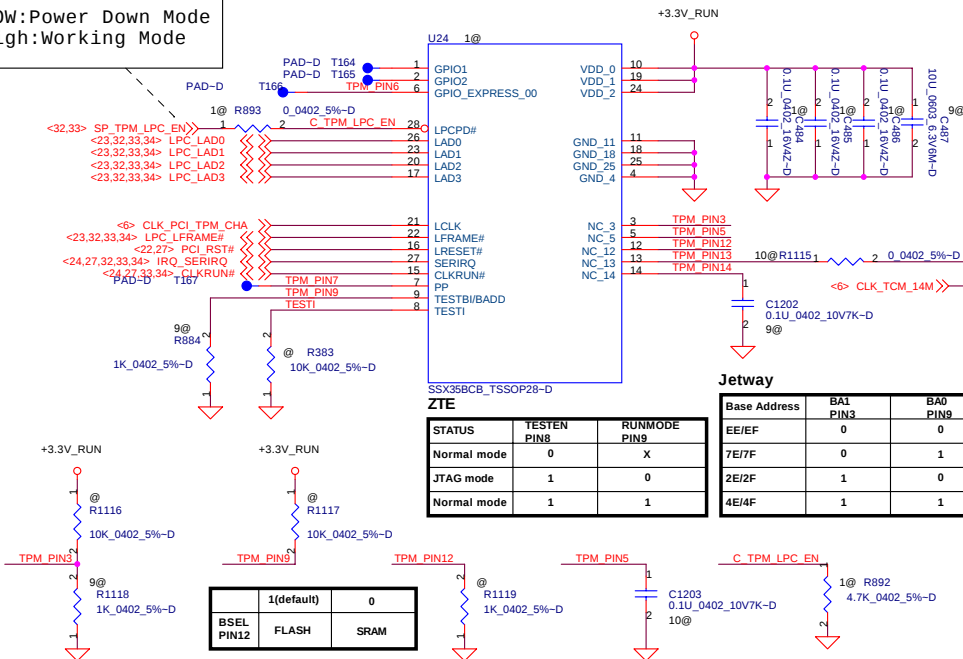

STATUS	TESTEN PIN8	RUNMODE PIN9
Normal mode	0	X
JTAG mode	1	0
Normal mode	1	1

Base Address	BA1 PIN3	BA0 PIN9
EE/EF	0	0
7E/7F	0	1
2E/2F	1	0
4E/4F	1	1


	1(default)	0
BSEL PIN12	FLASH	SRAM

Lola USH and China TPM BOM Option

DESCRIPTION	PART/PIN	Ref Des	A0 USH	B0 USH	A0 w/CHINA	B0 w/CHINA
Pull-up on LPC_EN_R	USH pin R6 LPCEN	R841	POP	@	POP	@
Pull-down on LPC_EN_R	USH pin R6 LPCEN	R483	@	POP	@	POP
Series from EC to LPC_EN_R	EC to USH Pin R6 LPCEN	3@ R464	@	POP	@	@
Series from EC to LPD#	EC to USH Pin P7 LPCPD_N	R466	@	@	@	@
Pull-up on LPD#	USH pin P7 LPCPD_N	R474	POP	POP	POP	POP
Pull-up on EC	SIO pin 105 OUT65	R788	@	@	@	@
Pull-down on China TPM	To China TPM U24 pin 28	1@ R892	@	@	POP	POP
Series from EC to China PD#	SIO to China Pin 28 LPCPD#	1@ R893	@	@	POP	POP
Broadcom USH	U32 USH	U32	POP	POP	POP	POP
China TPM	U24 China TPM	1@ U24	@	@	POP	POP
LPCBus Series Resistors	R705, R723, R724, R732, R733	3@	POP	POP	@	@
TPM_ID(Strap Low)	ICH9M GPIO6 Pin AH21	1@ R988	@	@	POP	POP
TPM_ID (Strap High)	ICH9M GPIO6 Pin AH21	3@ R987	POP	POP	@	@

```
1@ is for TCM
3@ is for Broadcom TPM only
9@ is for ZTE TCM
10@ is for Jetway TCM
```

Blue tooth

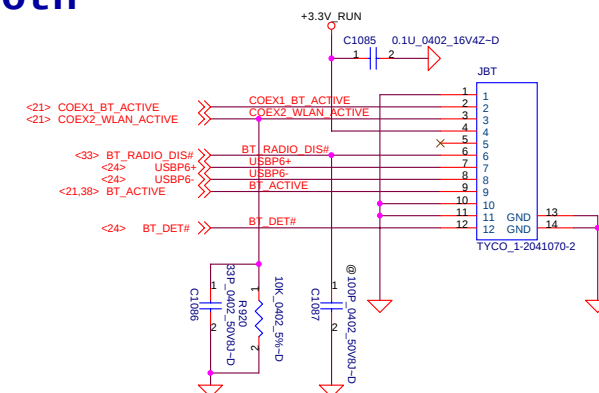


PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.





DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title			
Blue Tooth			
Size	Document Number		Rev
	LA-4151P		1.0
Date:	Friday, July 04, 2008	Sheet	30 of 57

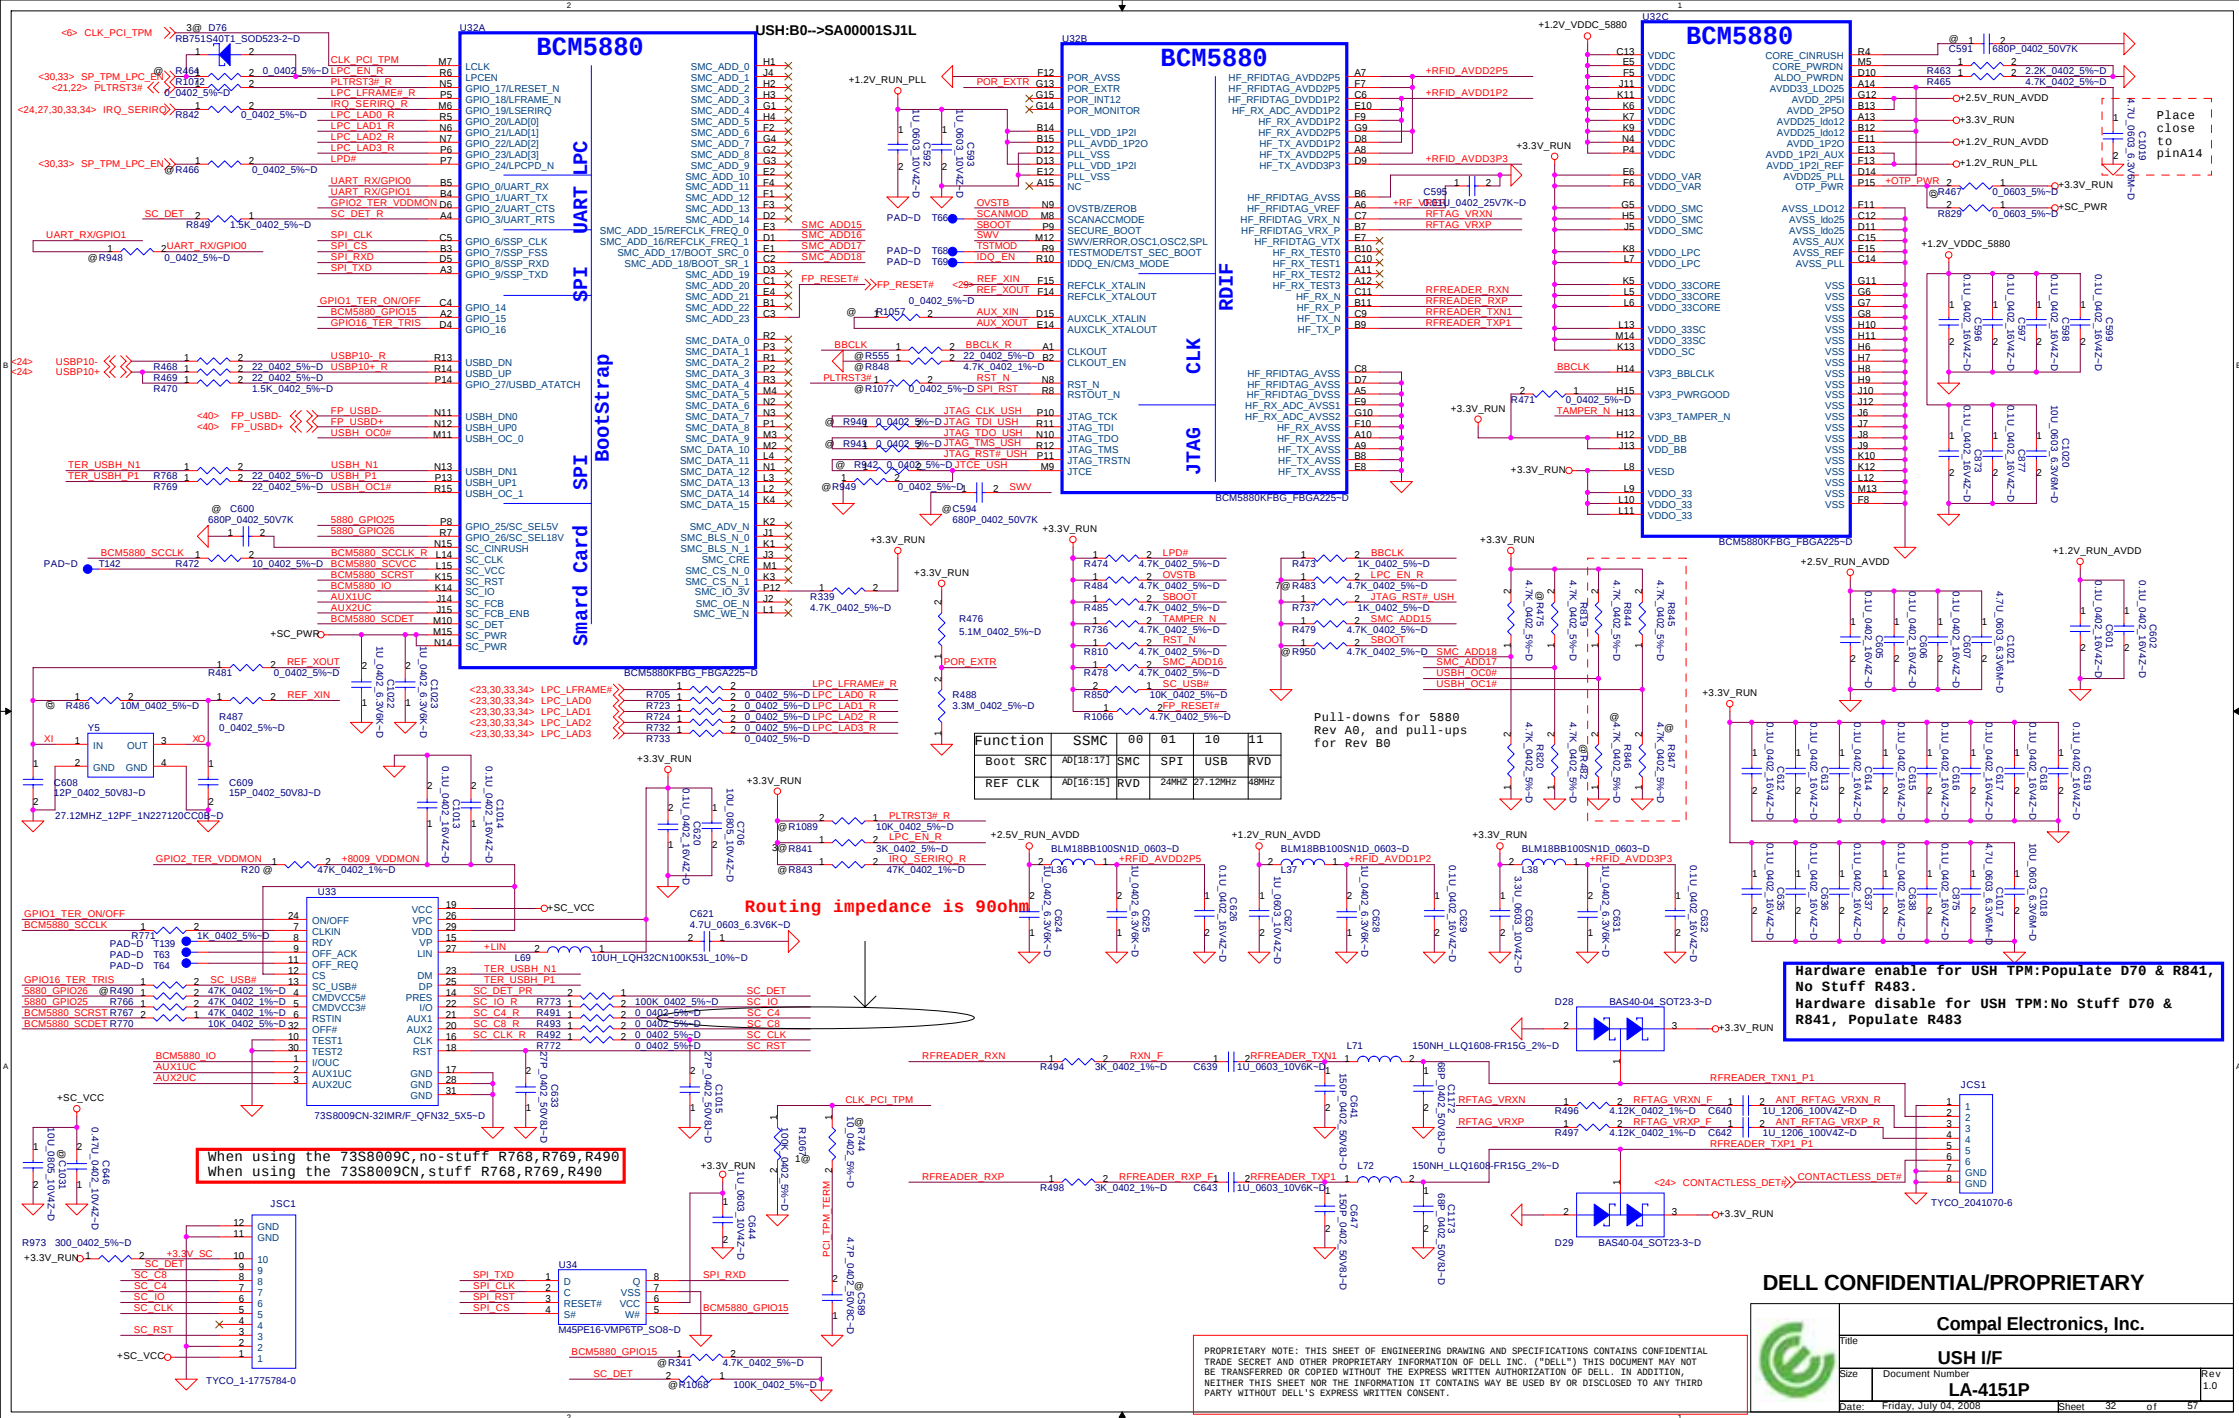

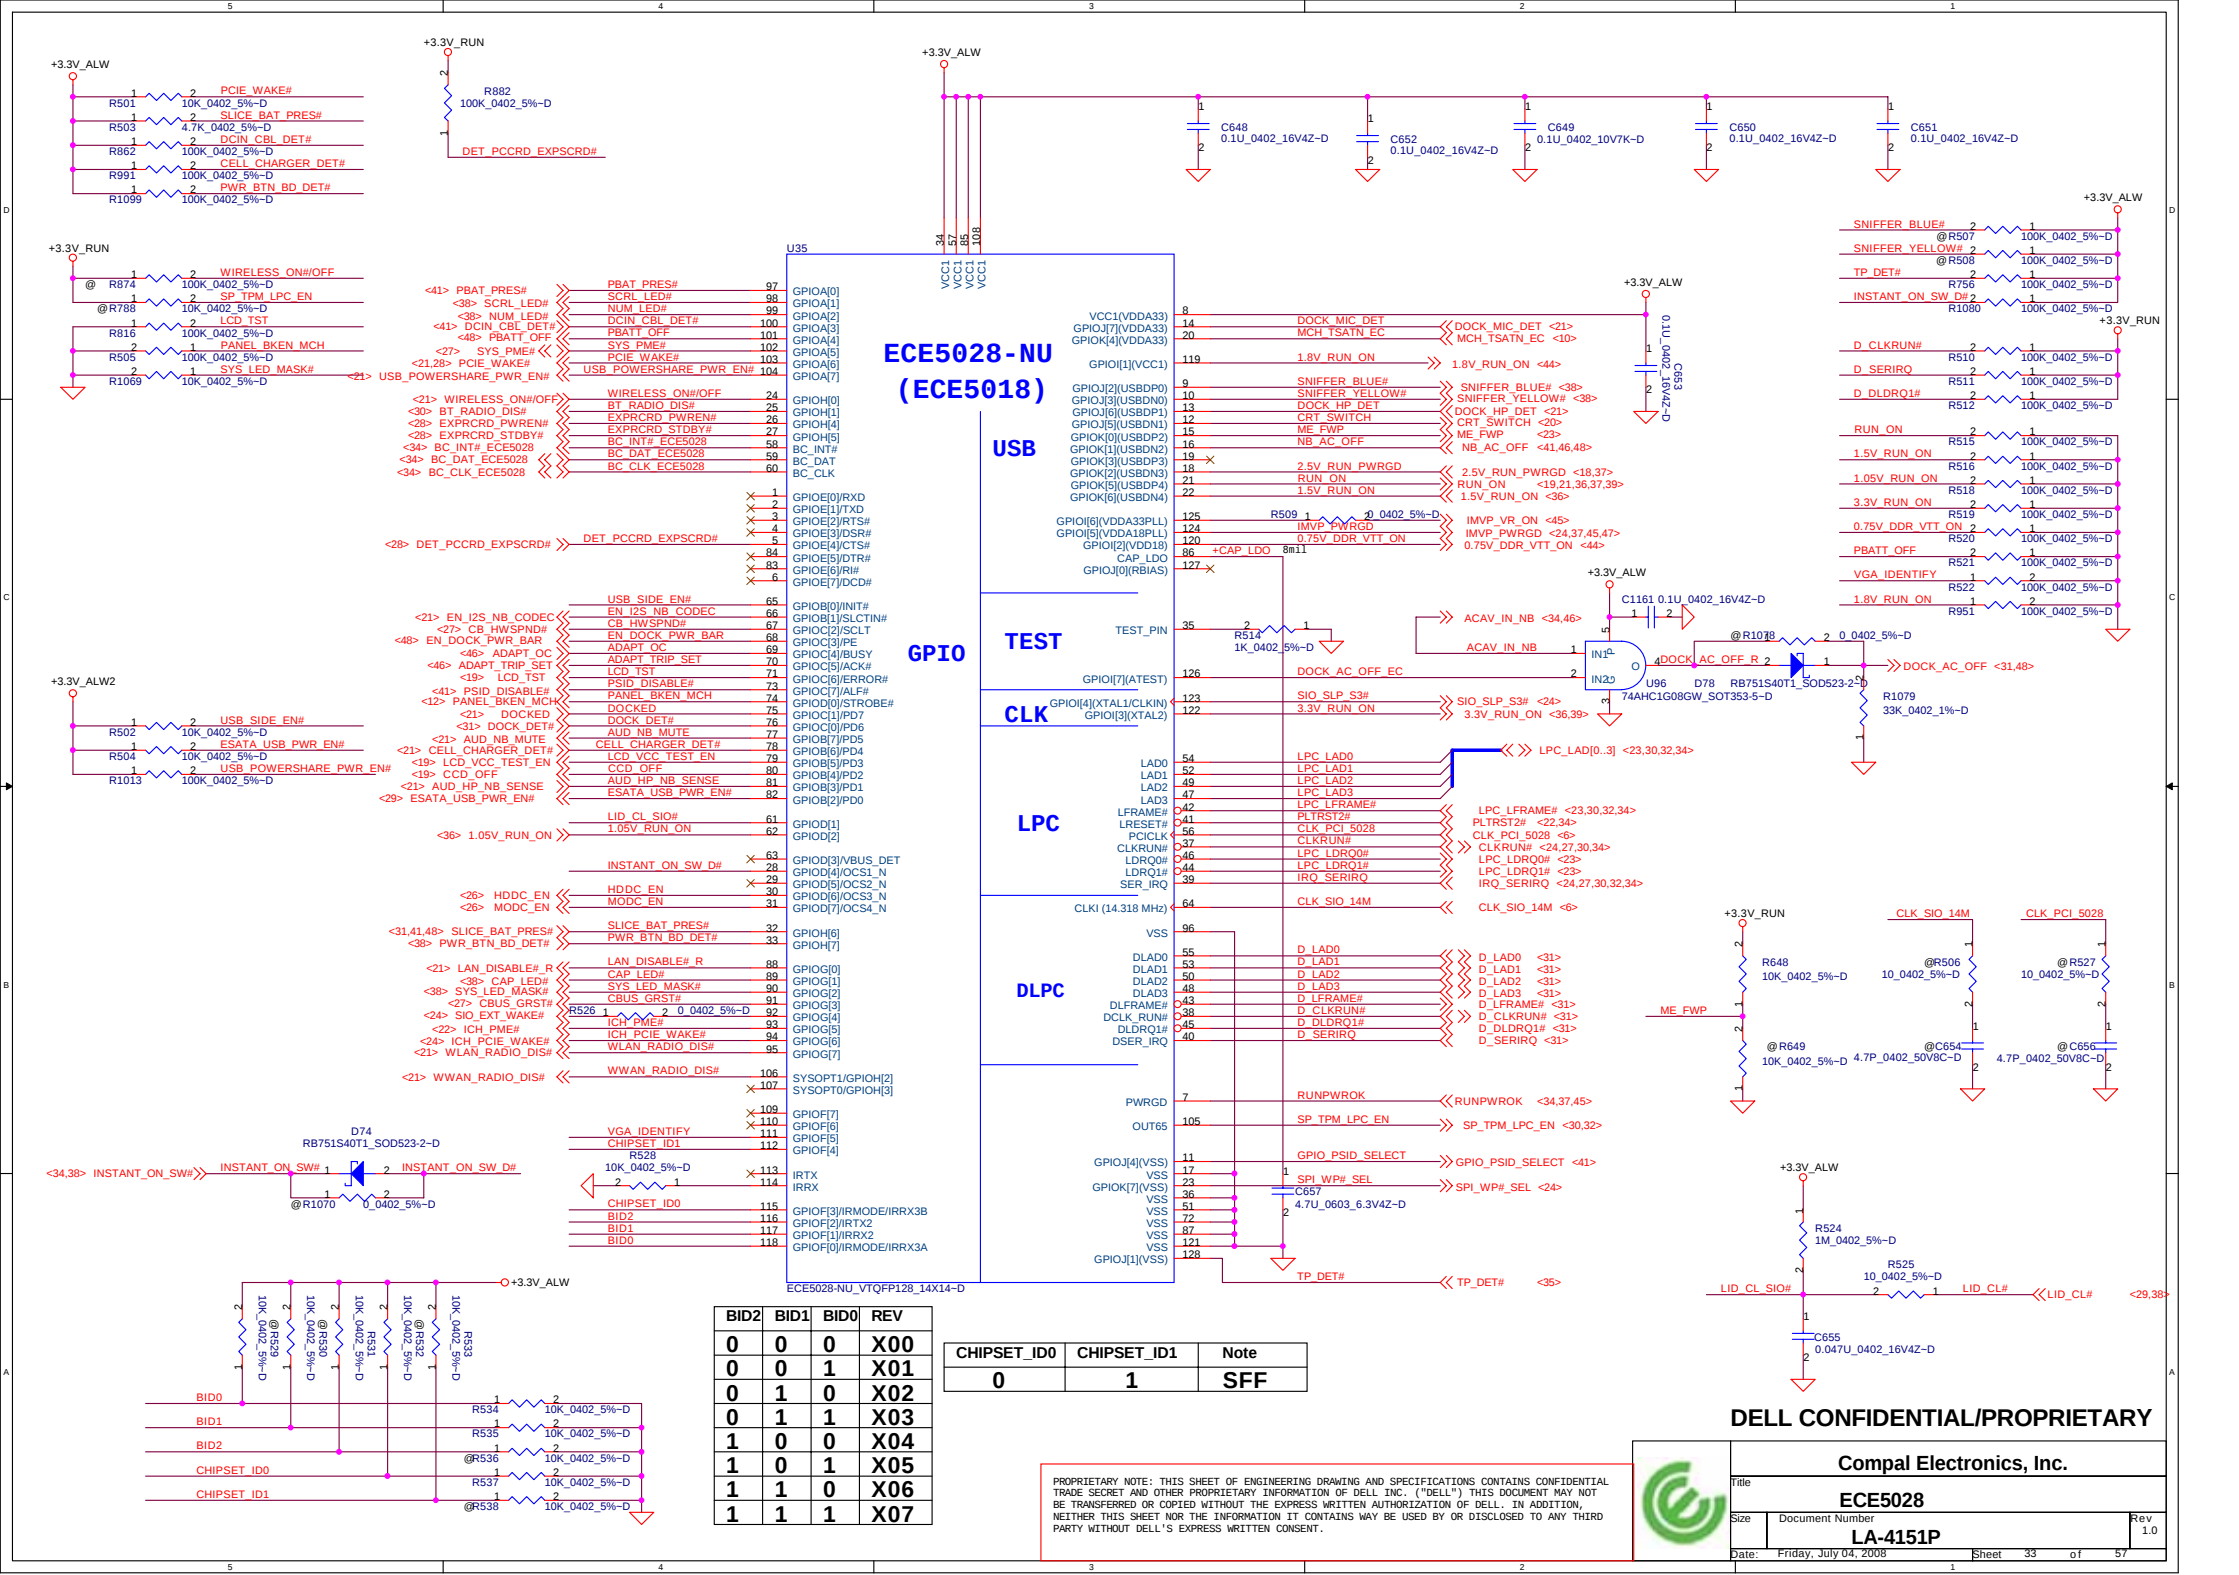


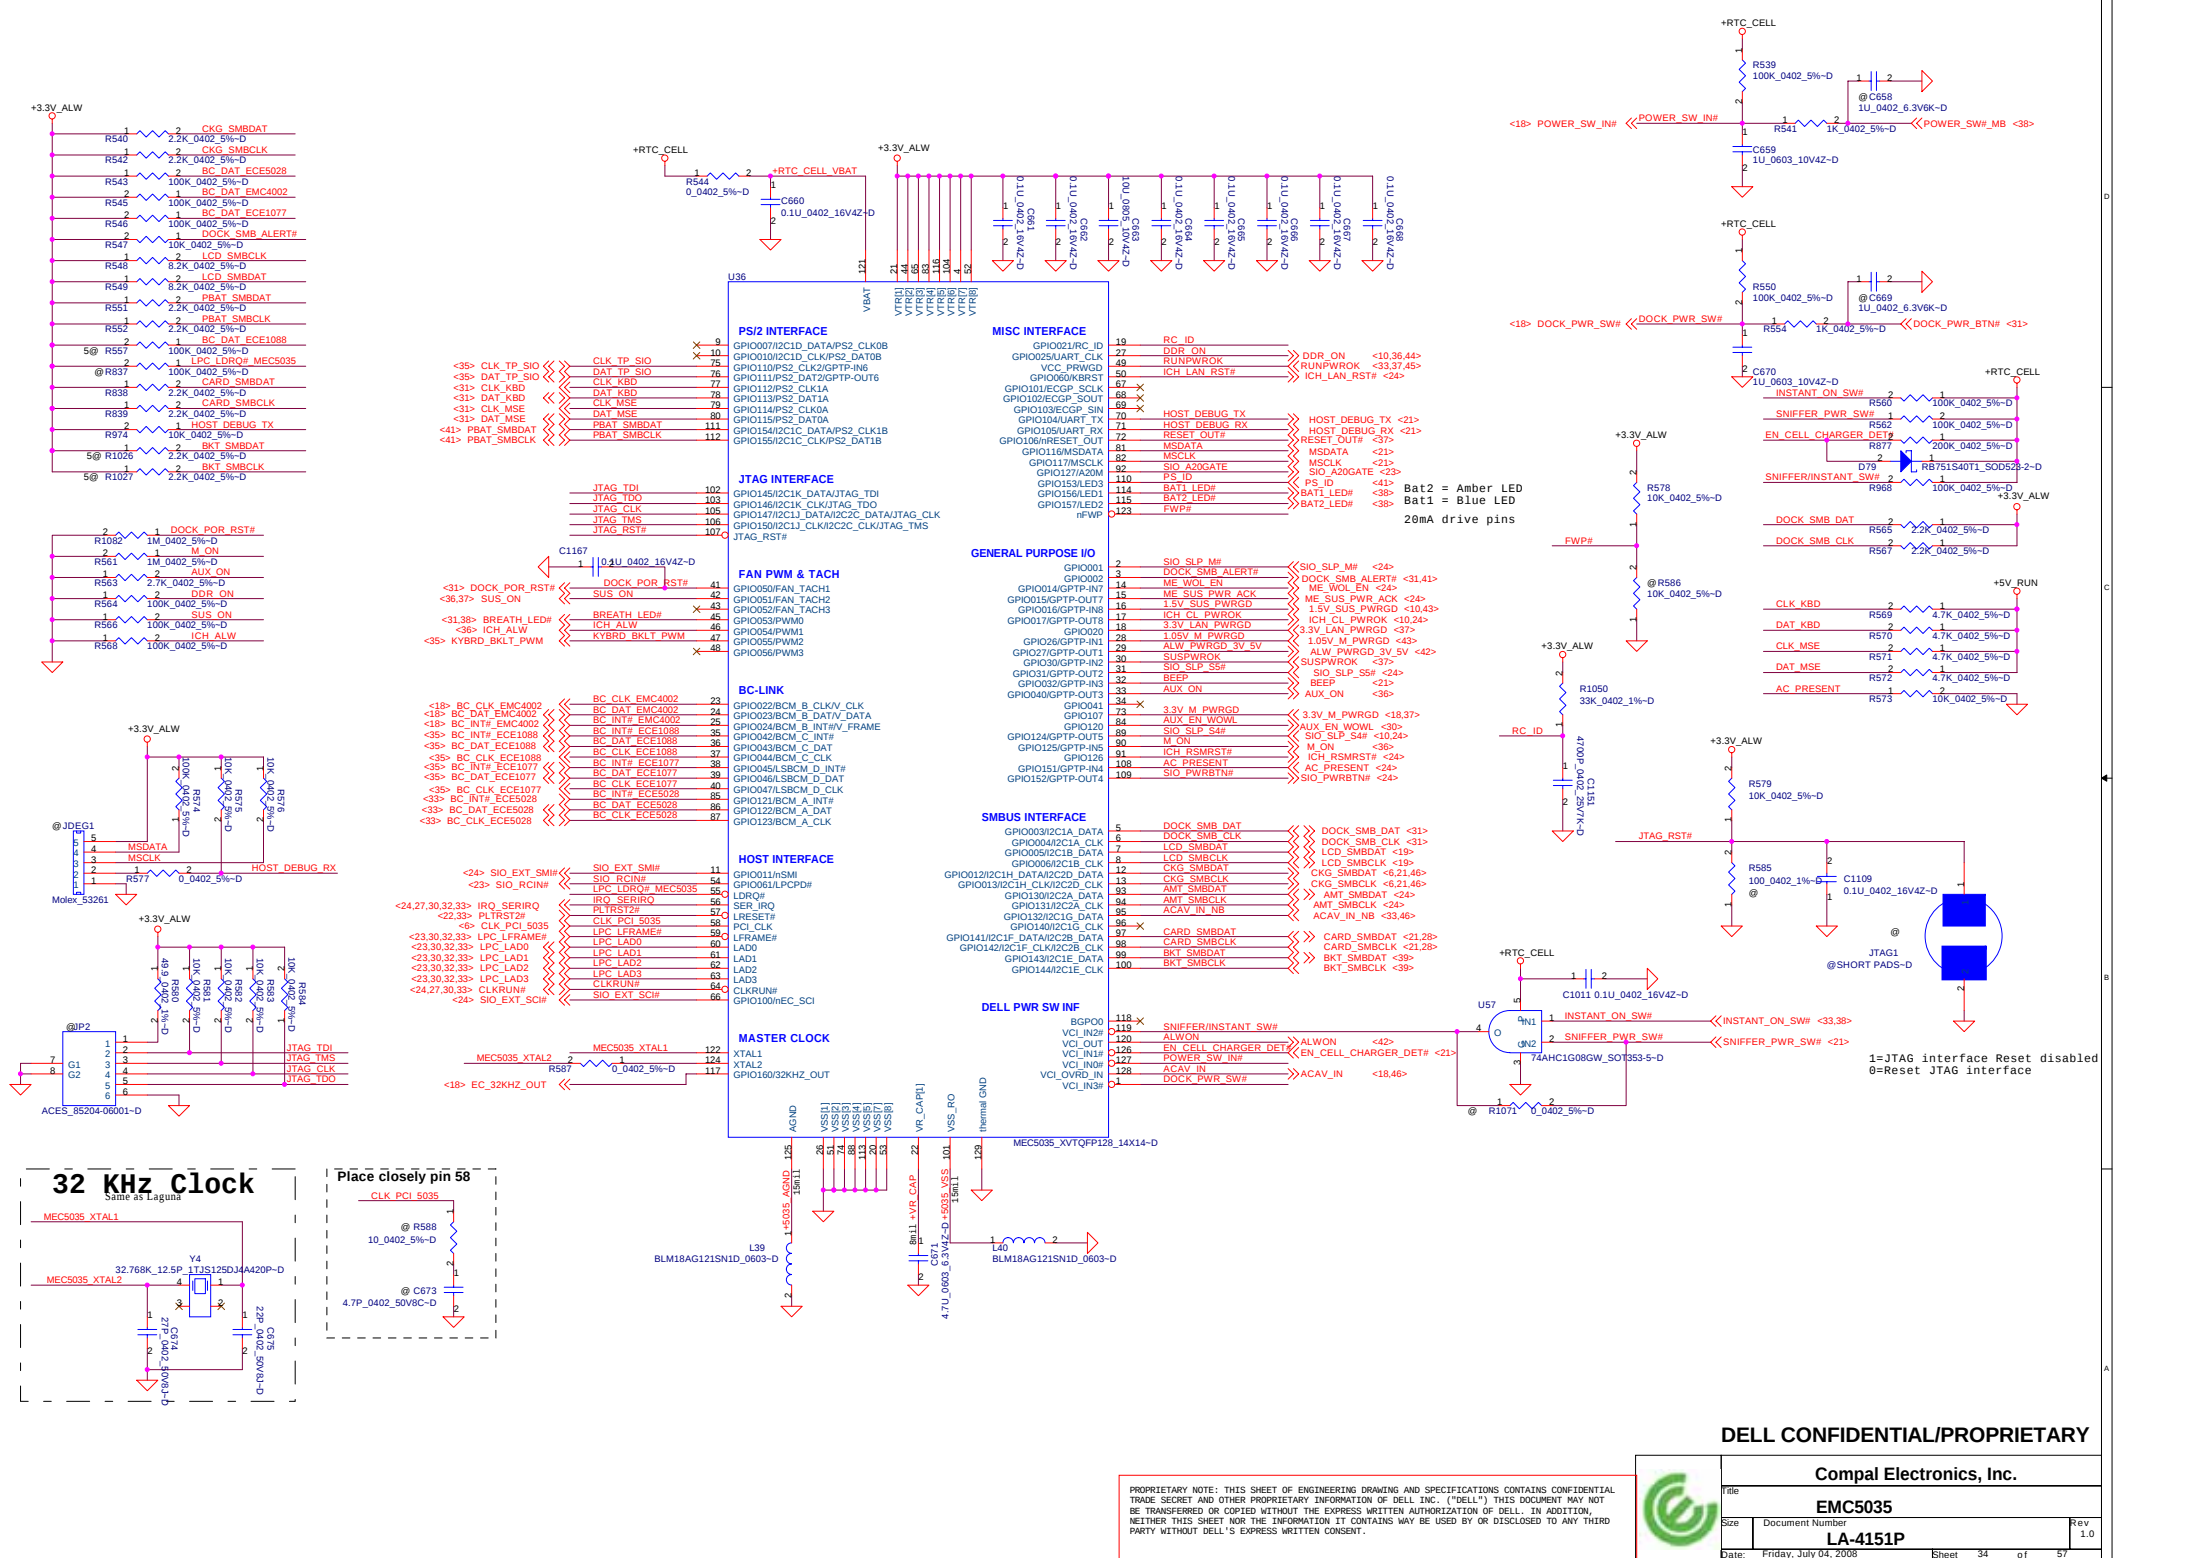


DELL KBDENTIAL/PROPRIETARY

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE REPRODUCED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Compal Electronics, Inc.			
EMC5035			
Size	Document Number	Rev 1.0	
LA-4151P			
Date	Friday, July 04, 2008	Sheet	34 of 57

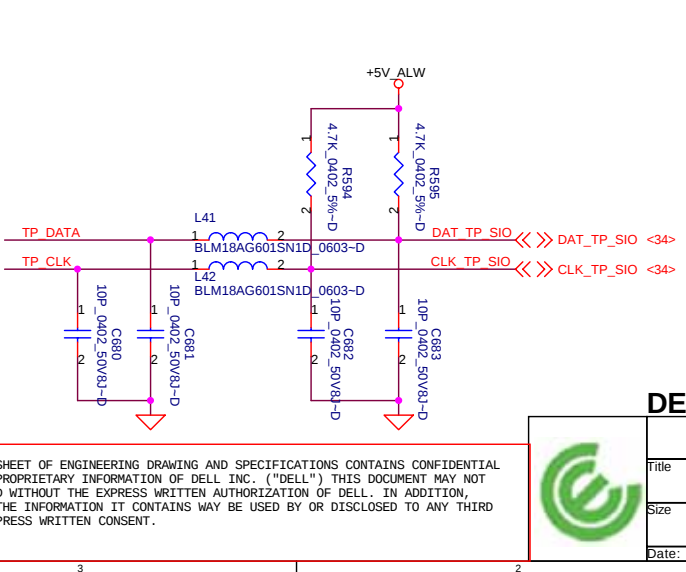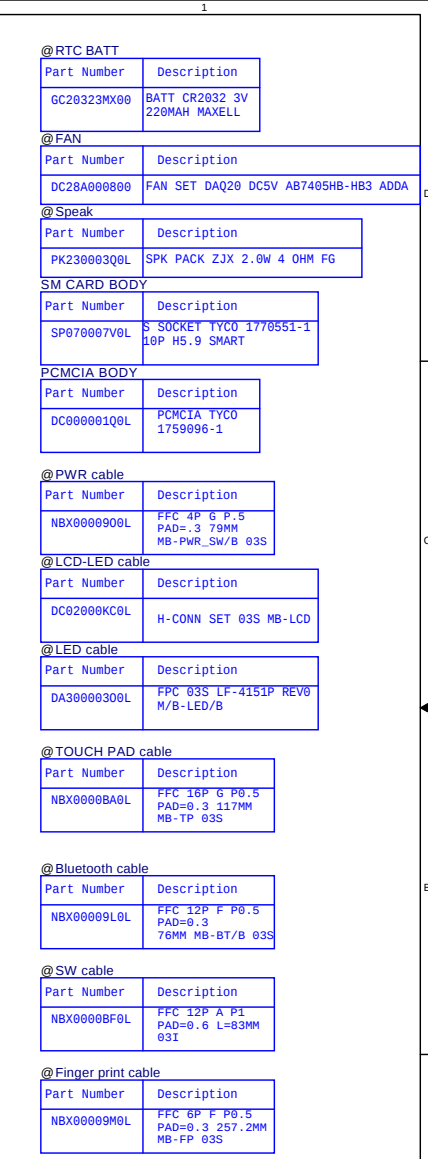


PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.




DELL CONFIDENTIAL/PROPRIETARY			
Compal Electronics, Inc.			
Title			
Touch PAD/Int KB/LID			
Size	Document Number		Rev
	LA-4151P		1.0
Date:	Friday, July 04, 2008	Sheet	35 of 57

DC/DC Interface



+3.3V_ALW_ICH Source

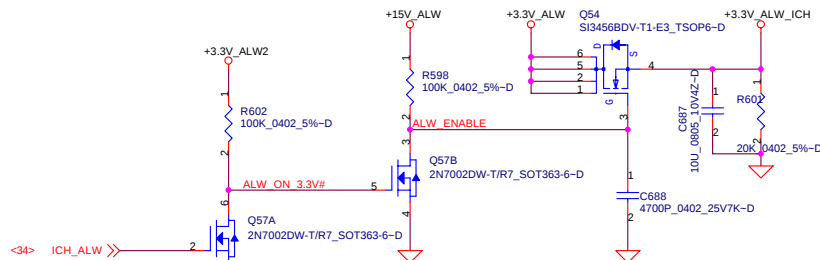


+3.3V_SUS Source

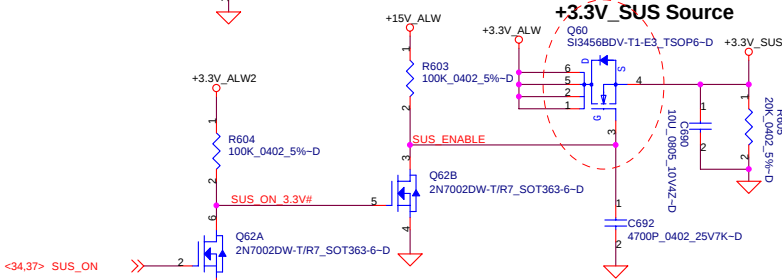

+3.3VM Source

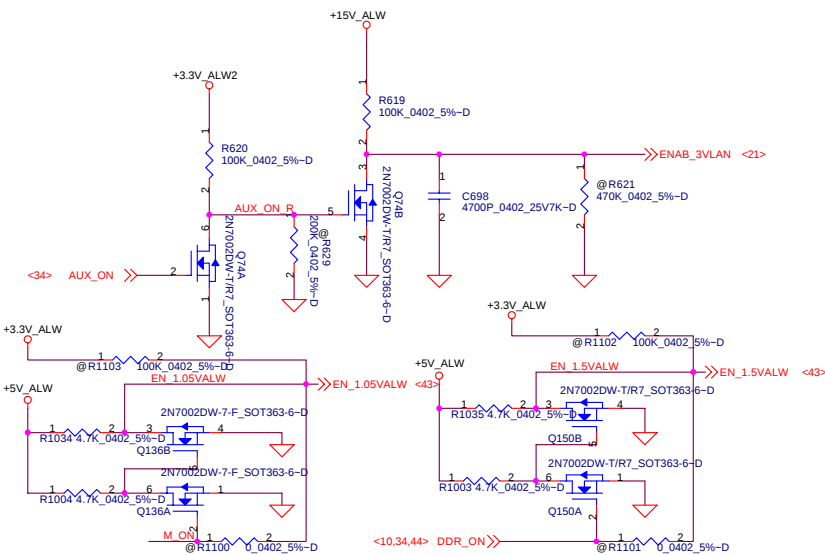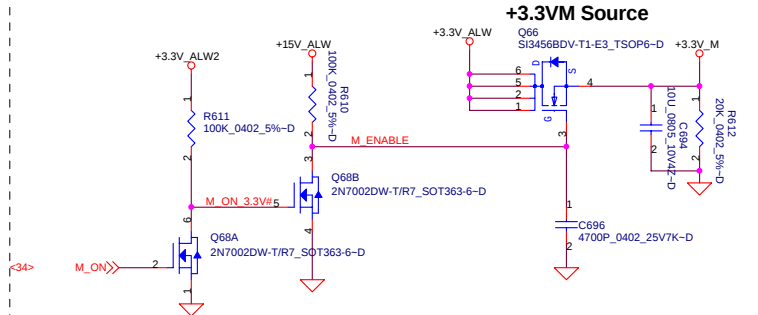


Discharg Circuit

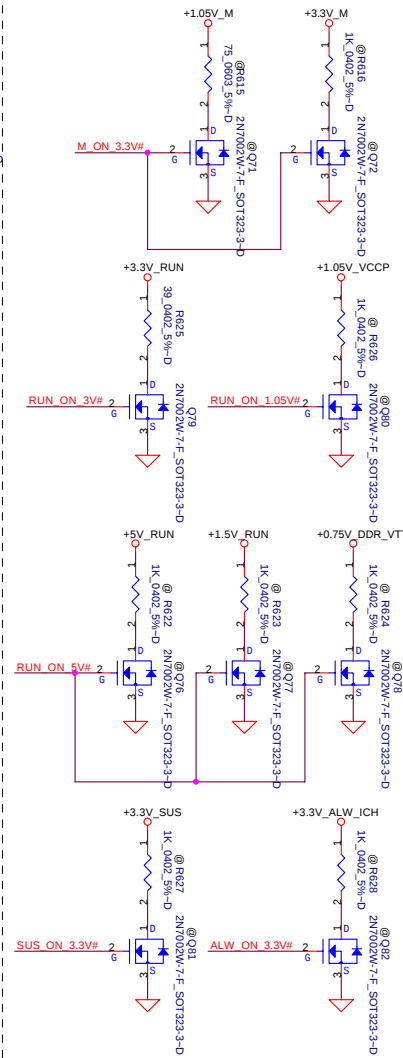


1.5 Volt +/-5%
Design Current: 11mA
Peak current: 11mA

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


+5VRUN Source

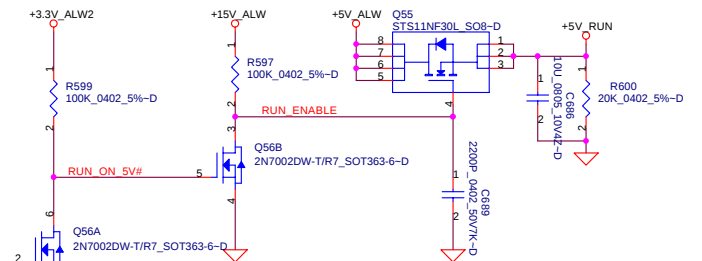


+3.3V_RUN Source

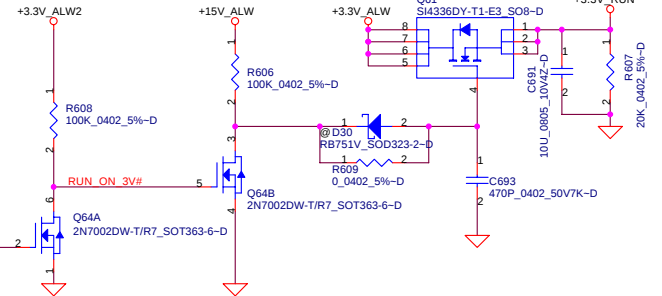

+1.05V_VCCP Source

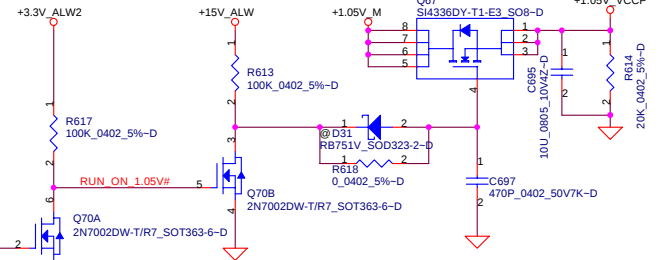

+1.5V_RUN Source

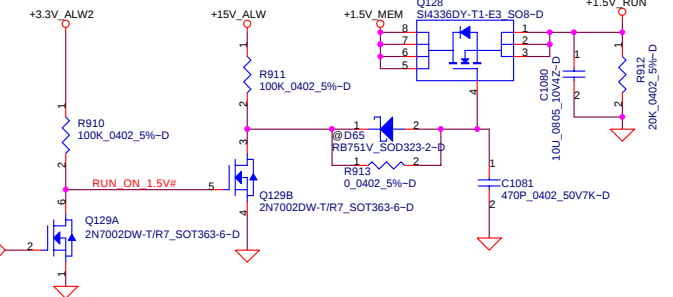


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


POWER CONTROL

LA-4151P


Friday, July 04, 2008 Sheet 36 of 57

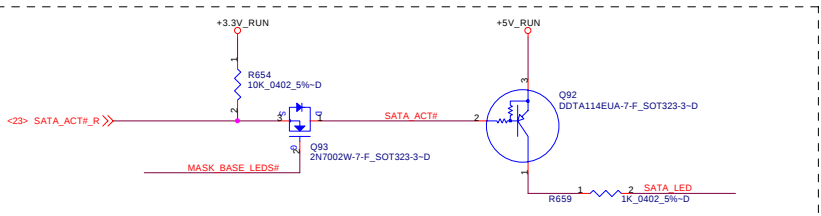


HDD LED solution for Blue LED

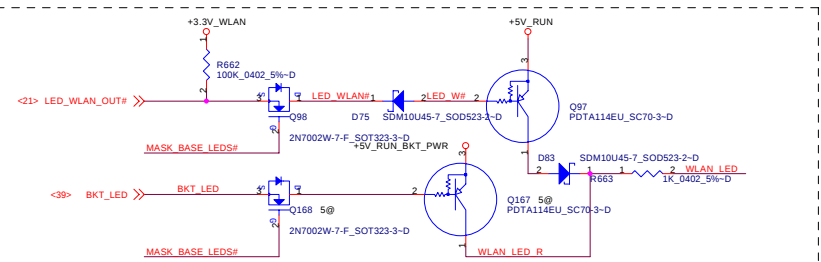

WLAN&BKT LED solution for Blue LED


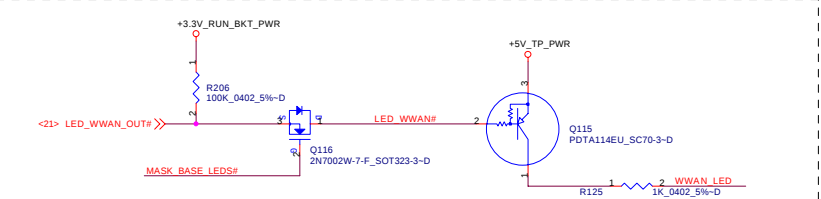


WWAN LED solution for Blue LED

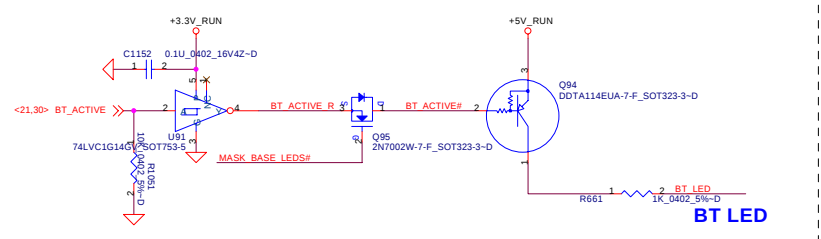


BT LED






LED Circuit Control Table		
	SYS_LED_MASK#	LID_CL#
Mask All LEDs (Sniffer Function)	0	X
Mask Base MB LEDs (Lid Closed)	1	0
Do not Mask LEDs (Lid Opened)	1	1

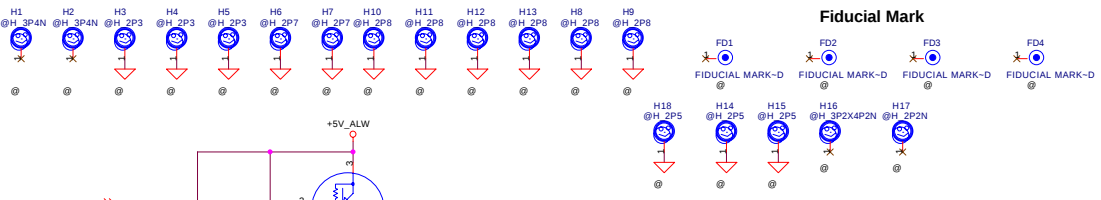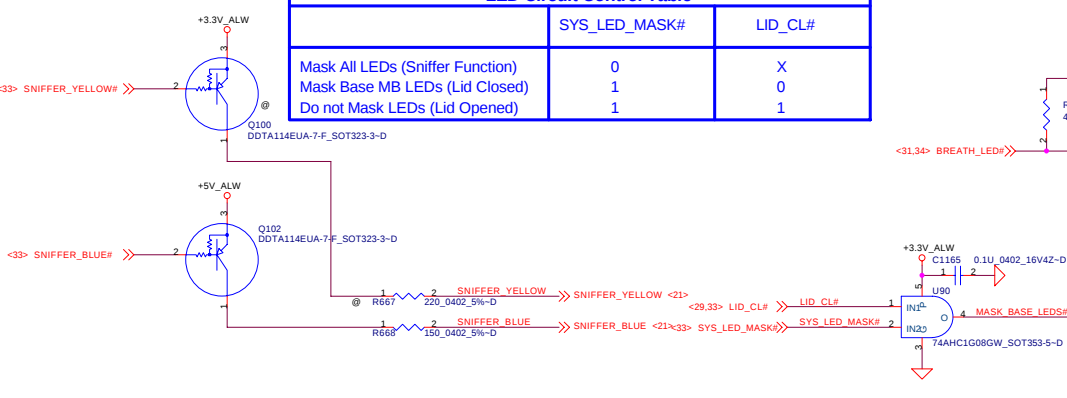

Fiducial Mark

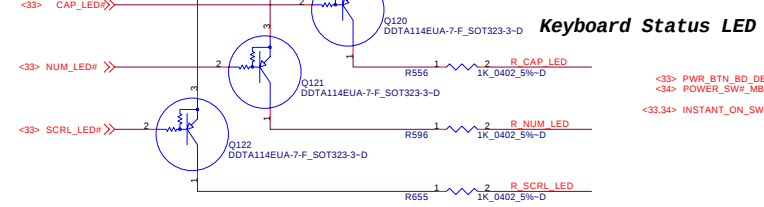

Keyboard Status LED

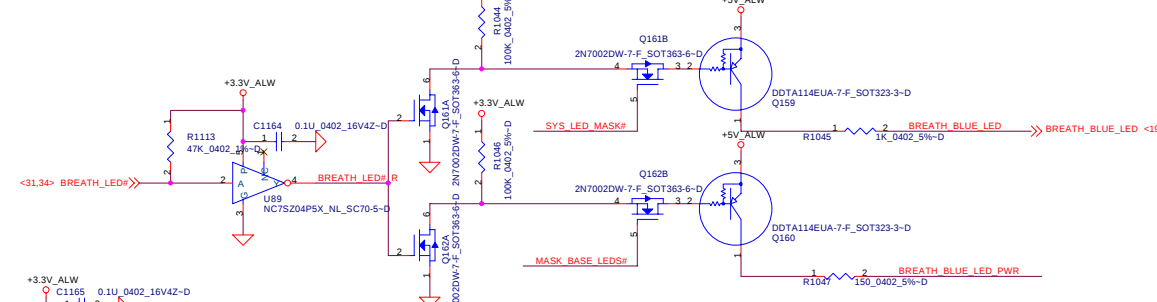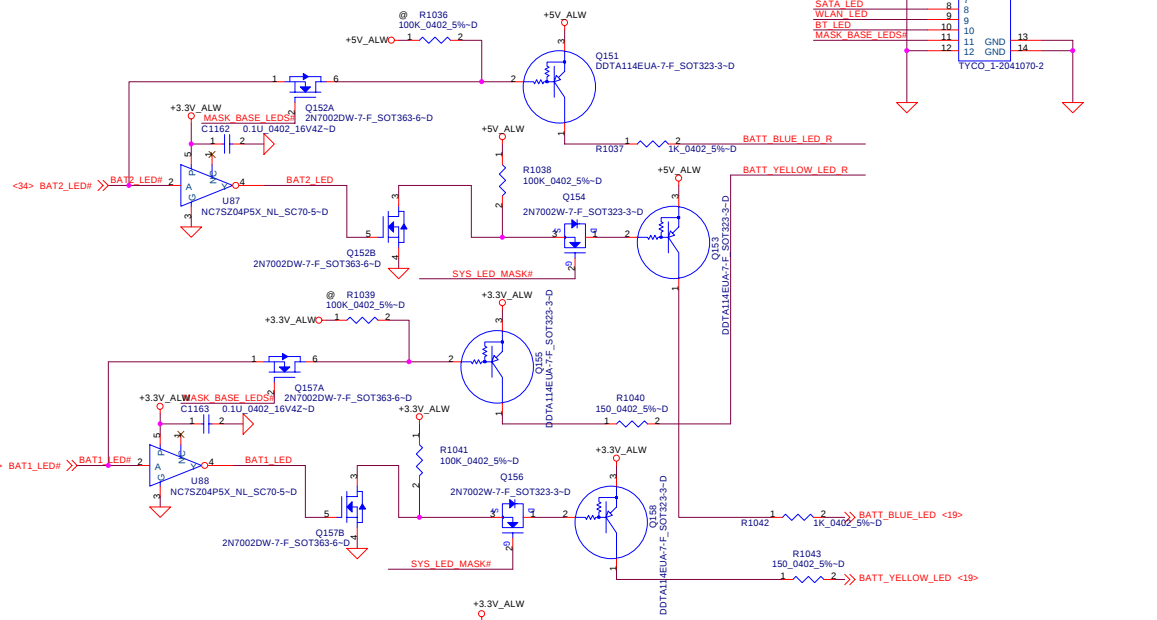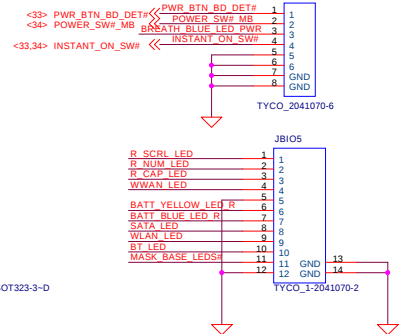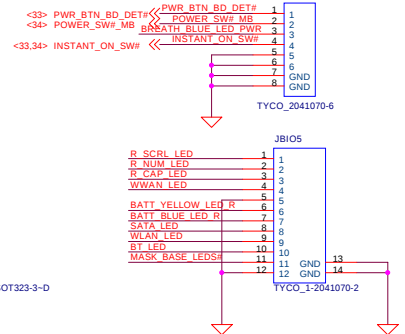

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.		
PAD and Standoff		
Size	Document Number	Rev
LA-4151P		1.0
Date: Friday, July 04, 2008	Sheet 38 of 57	

[illegible][illegible][illegible][illegible]

Q144A
2N7002DW-7-F_SOT363-6-D

<12> LDDC_DATA_MCH <<<>>> LDDC DATA MCH 1 6 LDDC DATA MCH LVDS <<<>>> LDDC_DATA_MCH_LVDS <19>

+3.3V_RUN

LVDS connector side

<12> LDDC_CLK_MCH <<<>>> LDDC CLK MCH 4 3 LDDC CLK MCH LVDS <<<>>> LDDC_CLK_MCH_LVDS <19>


Q144B
2N7002DW-7-F_SOT363-6-D

EDID signals drive low
when BlackTop mode

	Compal Electronics, Inc.			
	Title			
	BlackTopI			
	Size	Document Number		Rev
		LA-4151P		1.0
Date:	Friday, July 04, 2008		Sheet	39 of 57
		1		

	Normal mode	BKT mode
BKT_GPIO1	0	1
BKT_GPIO4	0	1
BKT_GPIO11	0	1


	Normal mode	BKT mode	Diag mode
BKT_GPIO3	1	1	0

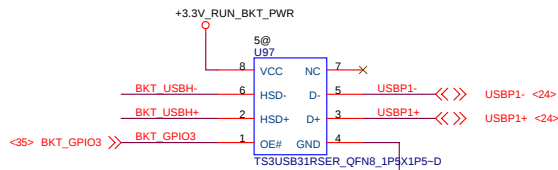

BKT_GPIO3 Logic "0" on Diag mode

Add SB<-->BKT by USB interface when diagnostic mode

For WWAN

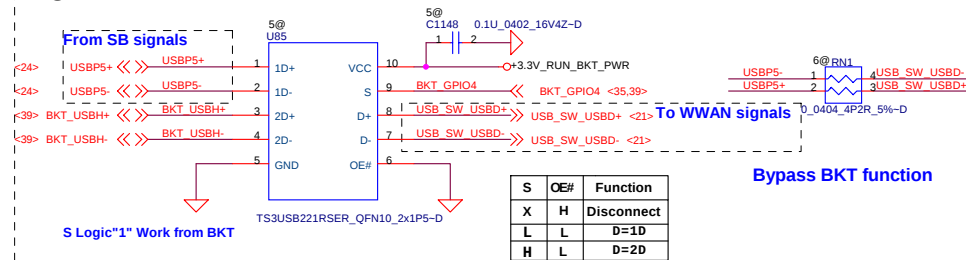


S Logic "1" Work from BKT

Bypass BKT function

S	OE#	Function
X	H	Disconnect
L	L	D=1D
H	L	D=2D


For Biometric

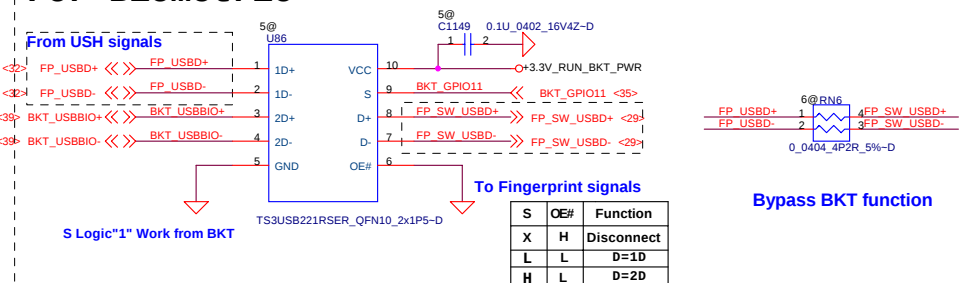

S Logic "1" Work from BKT

Bypass BKT function


S	OE#	Function
X	H	Disconnect
L	L	D=1D
H	L	D=2D

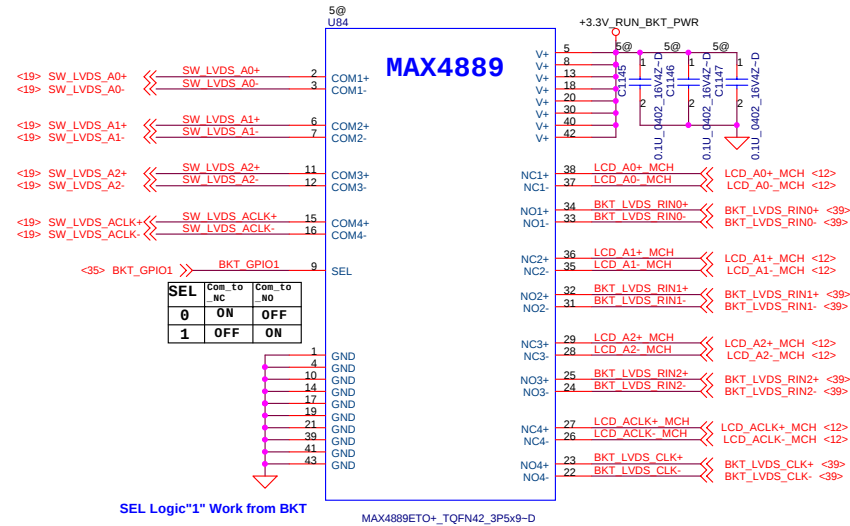

SEL Logic "1" Work from BKT

MAX4889ETO+_TQFN42_3P5x9-D

LVDS switch when system on power mode or BKT mode

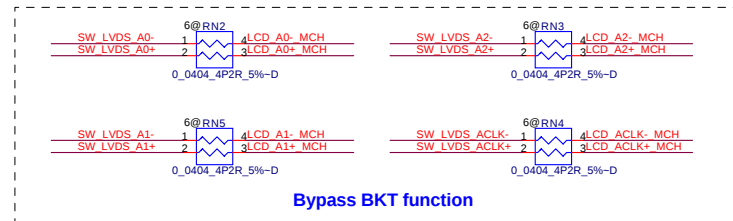

Bypass BKT function

		Compal Electronics, Inc.	
		BlackTopII	
Size	Document Number	Rev 1.0	
Date:	Friday, July 04, 2008	Sheet	40 of 57

+3.3V_ALWP/ +5V_ALWP/ +5V_ALW2 / +15V_ALWP/ +3.3V_RTC_LDO

5 Volt +/-5%
Thermal Design Current:8.33A
Peck current: 11.97A
OCP_min:13A


3.3 Volt +/-5%
Thermal Design Current: 8.4A
Peak current: 12A
OCP_min:12.4A

VOUT2=5V
L=3.3uF
Fsw=200KHz
D=0.263
Input Ripple Current= $TDC \cdot (D \cdot (1-D)) / \Delta 0.5 = 4.63A$
Output Ripple Current= $(19-5) \cdot 0.263 / 2.8u / 200K = 6.57A$
Output Ripple Voltage= $6.57 \cdot 18m = 118mV$

Component select
Input CAP 10uF_1206_25V *2
Output Cap 330uF_D3L_6.3VM_R18(Sanyo_6TPE330ML)*1
H_MOSFET FDMC8878
L_MOSFET FDS6676AS(5.9/7.25mOhm@4.5V, 14.5A)
Inductor 2.8U_SSC-1350F3-2R8-R_16A(TNP)

VOUT2=3.3V
L=3.3uF
Fsw=300KHz
D=0.173
Input Ripple Current= $TDC \cdot (D \cdot (1-D)) / \Delta 0.5 = 2.98A$
Output ripple current= $(19-3.3) \cdot 0.173 / 2.8u / 300K = 3.23A$
Output ripple Voltage= $3.23 \cdot 25 = 80.75mV$

Component select
Input CAP 10uF_1206_25V *2
Output Cap 330uF_D3L_6.3VM_R18
Sanyo_6TPE330ML)*1
H_MOSFET FDMC8878
L_MOSFET FDS6676AS(5.9/7.25mOhm@4.5V, 14.5A)
Inductor 2.8U_SSC-1350F3-2R8-R_16A(TNP)

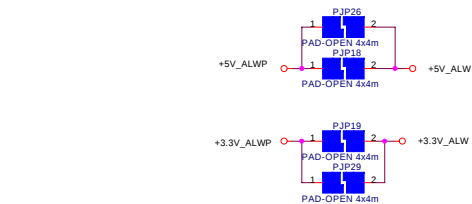

(100mA, 20mils, Via NO.=1)

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

DC/DC +3V/ +5V


LA-4151P

Date: Friday, July 04, 2008 Sheet 42 of 57

+1.5V_SUS_P / +1.05V_M

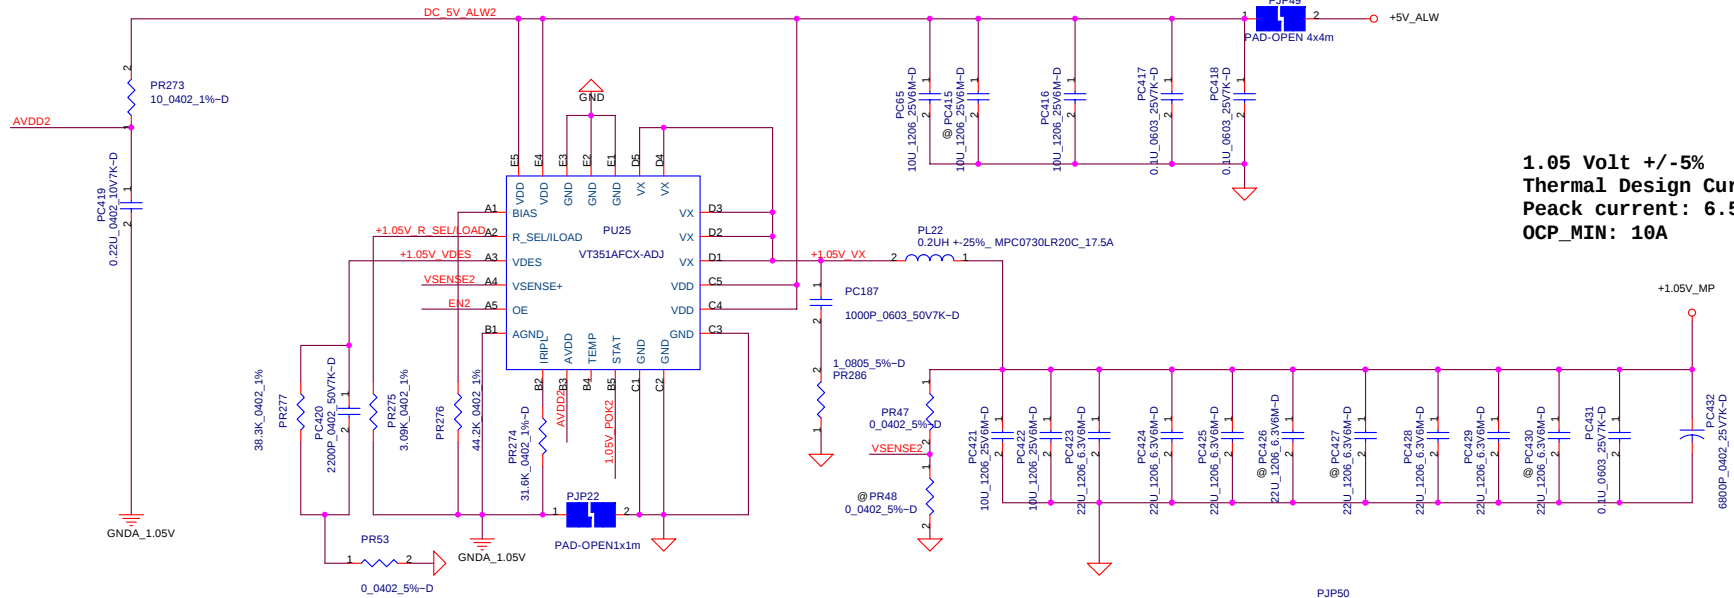

1.05 Volt +/-5%
Thermal Design Current: 4.6A
Peak current: 6.5A
OCP_MIN: 10A

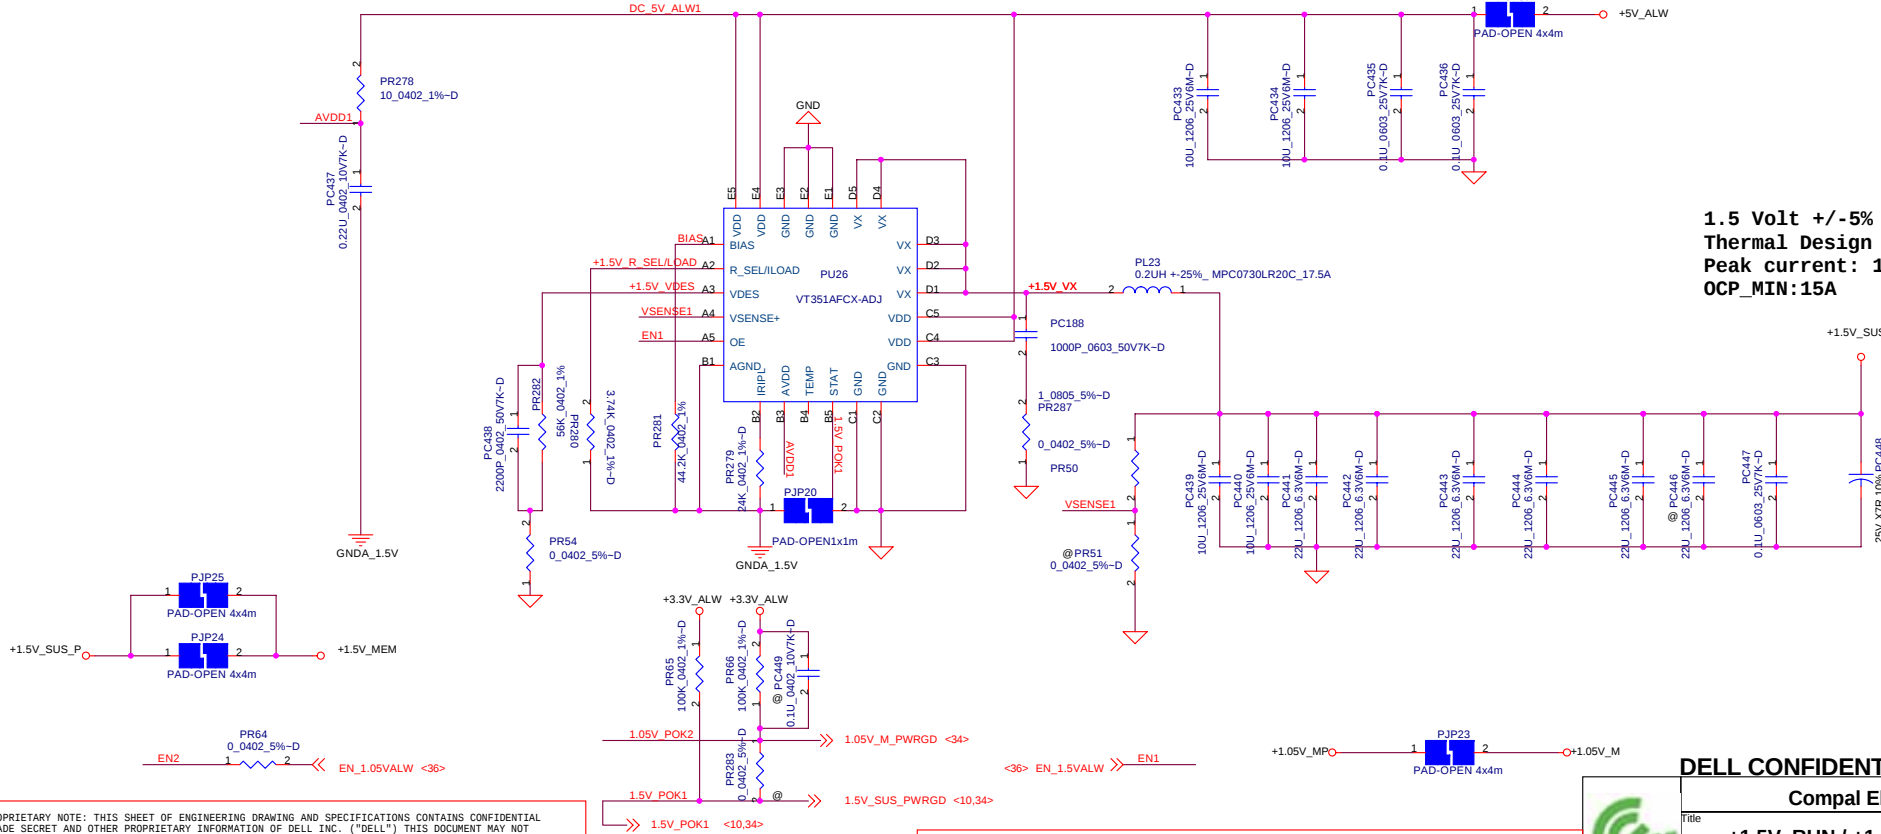

1.5 Volt +/-5%
Thermal Design Current: 7.56A
Peak current: 10.7A
OCP_MIN:15A

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS



DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

+1.5V_RUN / +1.05V_VCCP



Size	Document Number LA-4151P
------	------------------------------------

Rev
0.2

+1.8V_{RUN}/ +0.75V_{DDR_VTT} **DDR3 Termination**

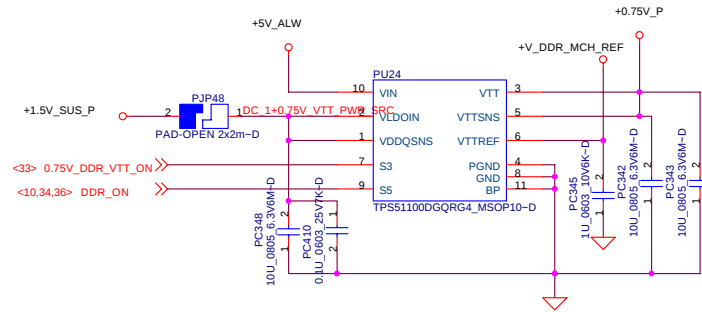

0.75Volt +/-5%
Thermal Design Current: 1.4A
Peak current: 2A

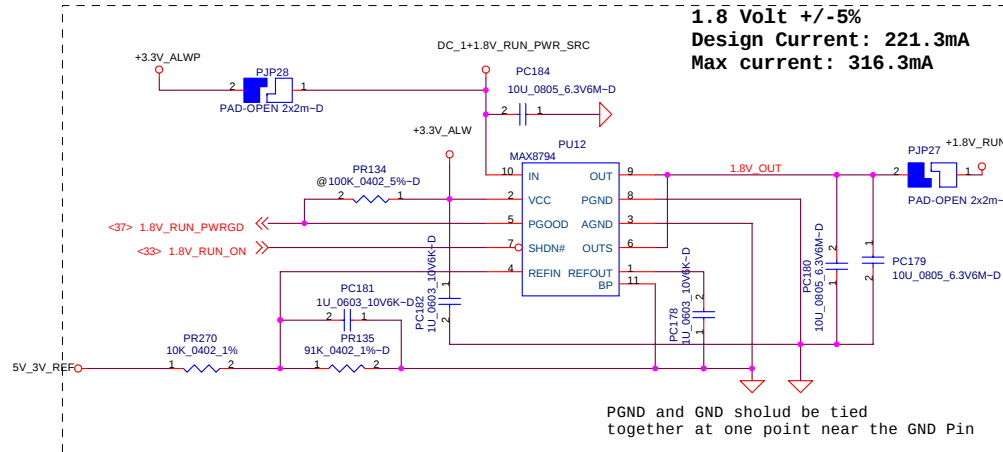


1.8 Volt +/-5%
Design Current: 221.3mA
Max current: 316.3mA


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title	+1.8VSUSP/ +0.75V_DDR_VT		
Size	Document Number	Rev	0.2
LA-4151P		Date:	Friday, July 04, 2008
Sheet		44	of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

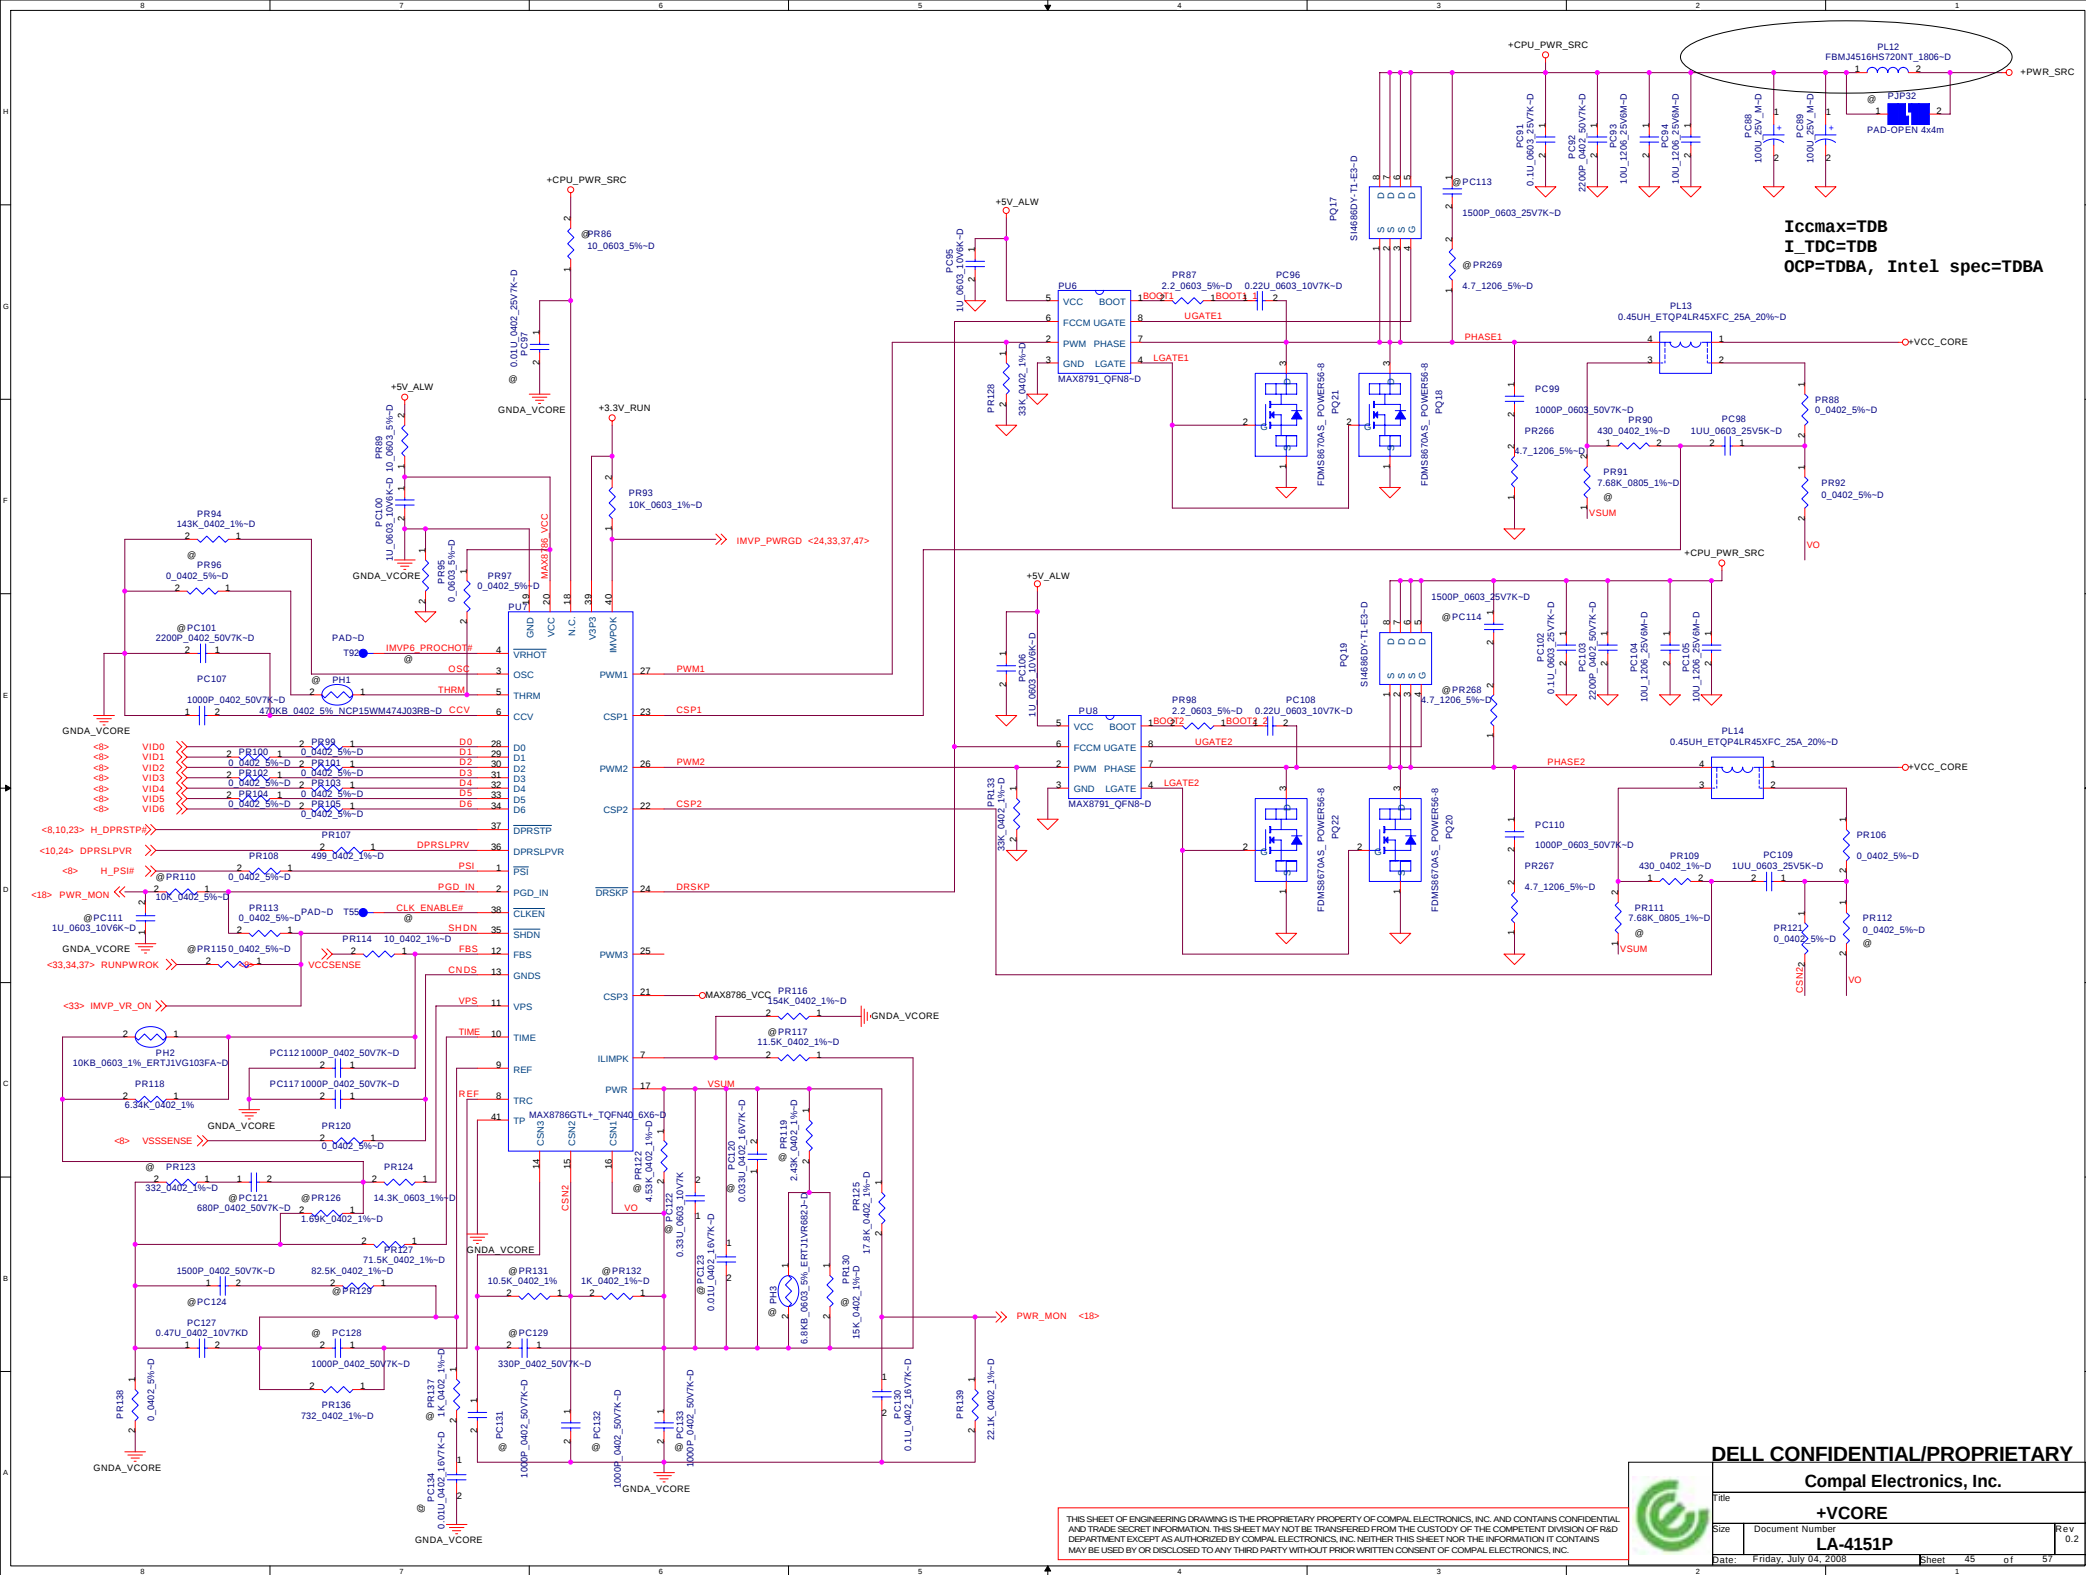

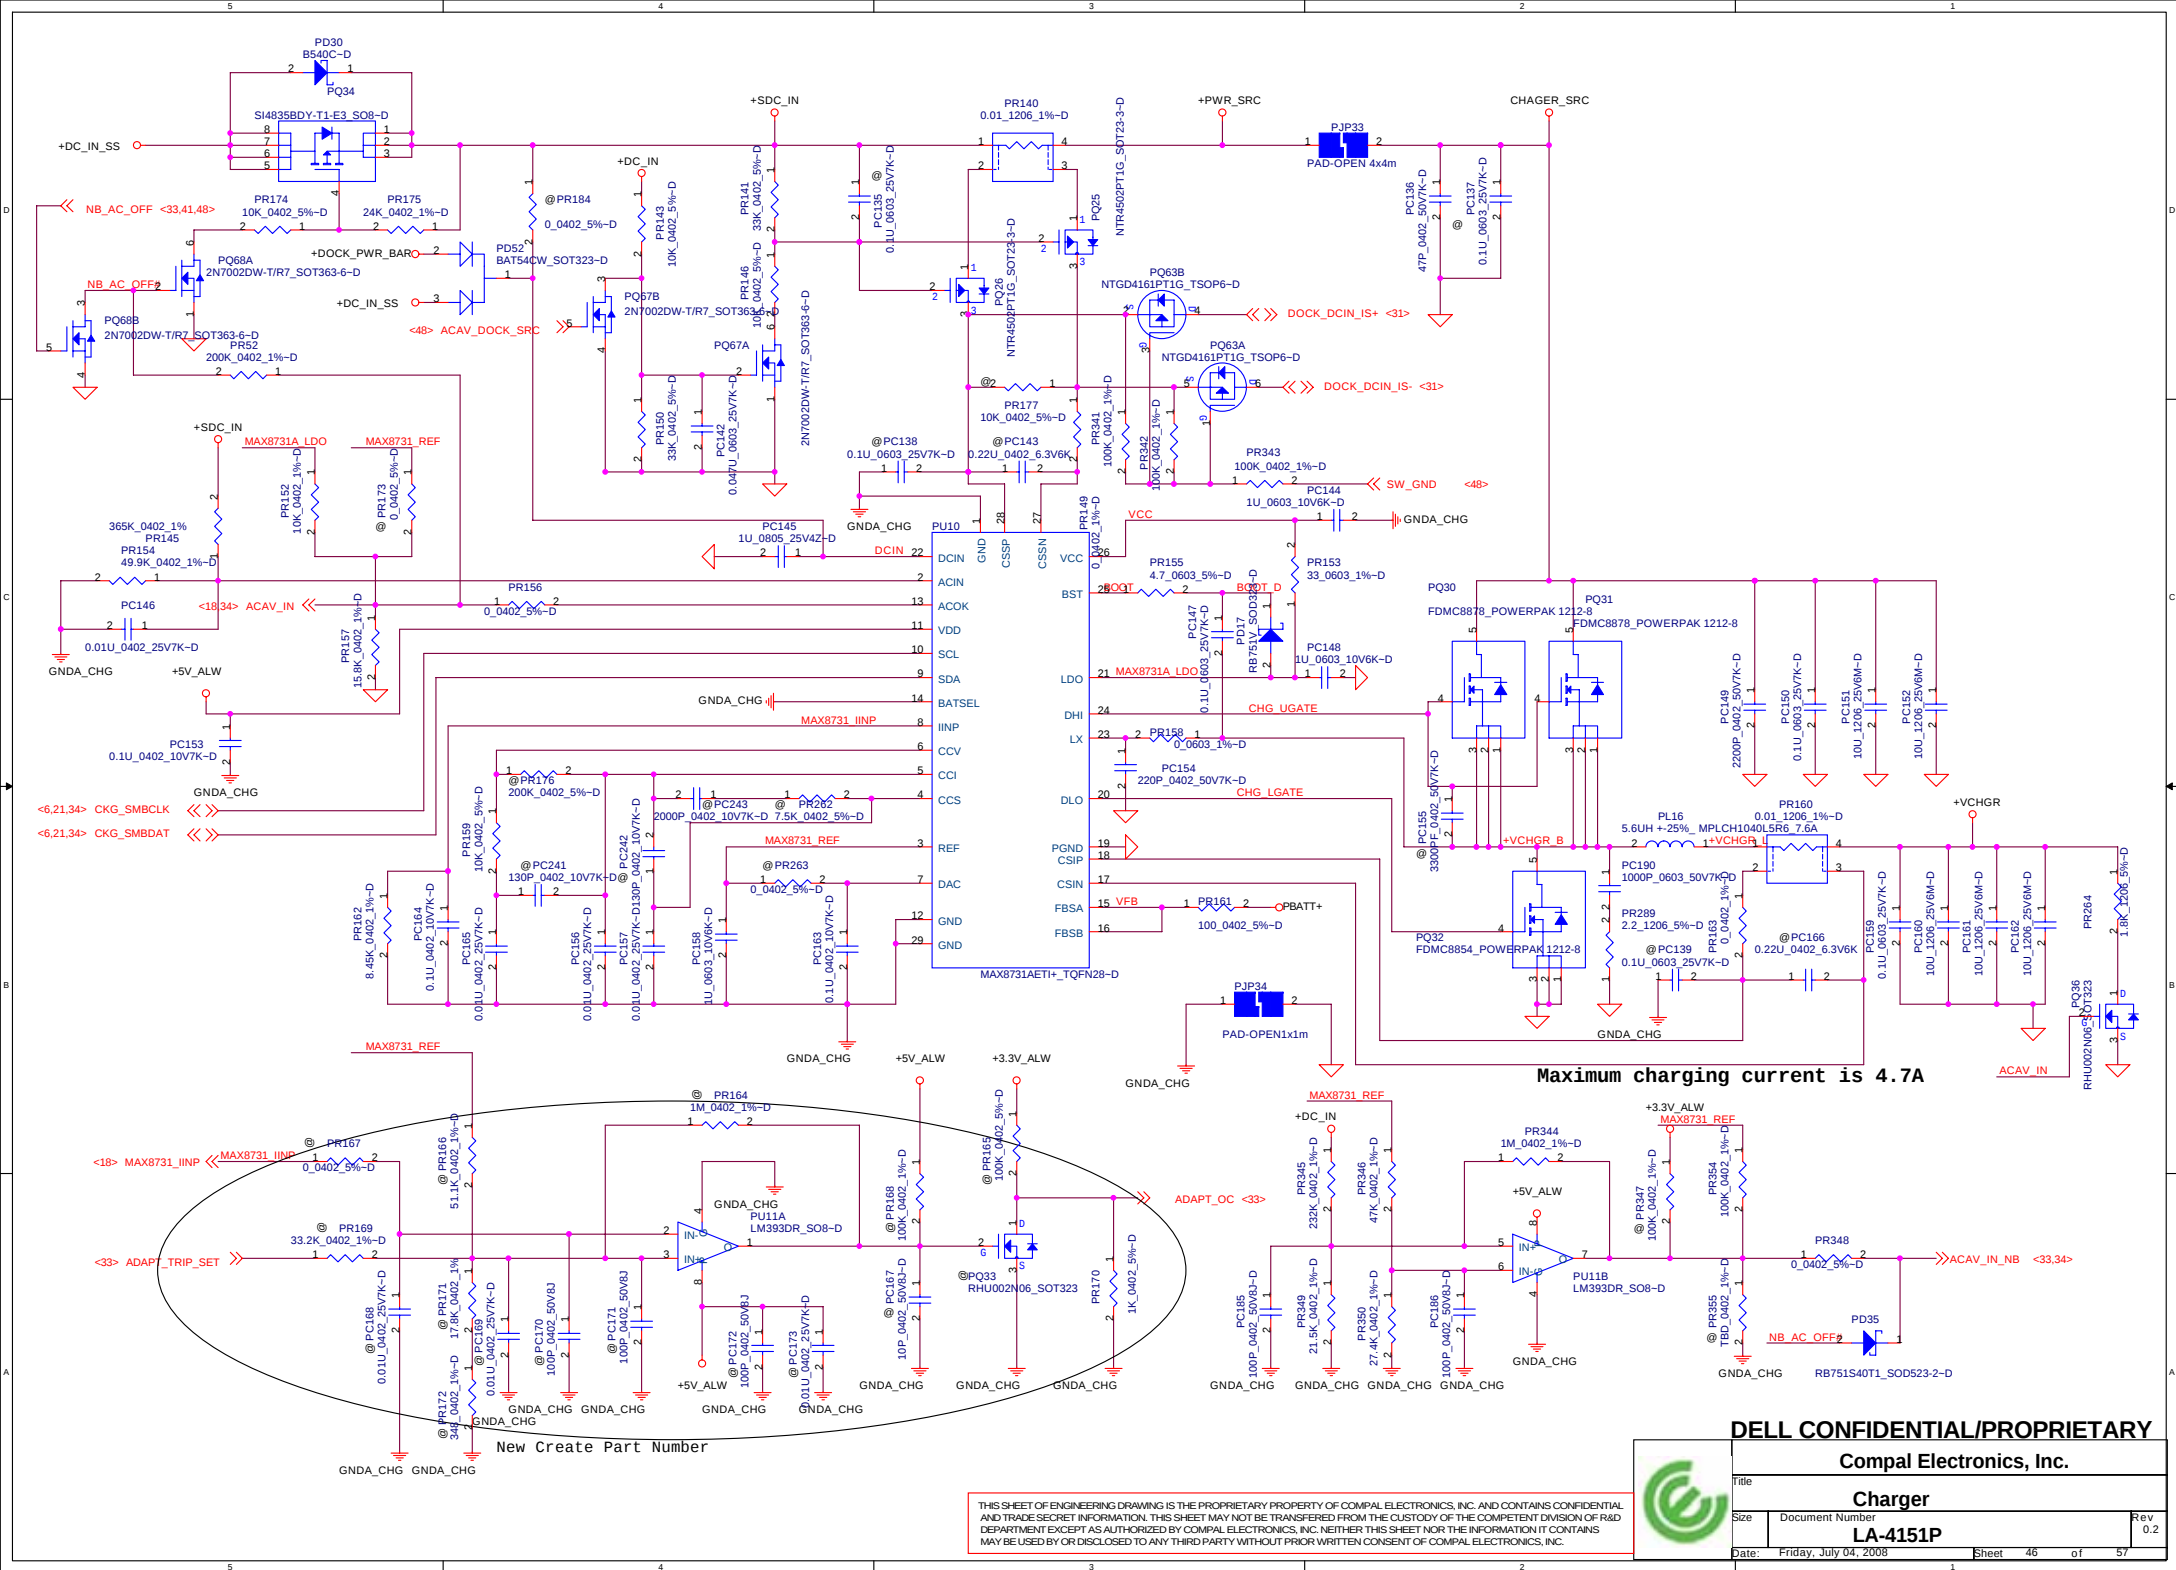

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	7	CPU	12/14/2007	HW	Add R1059 H_RESET# pull up +1.05V_VCCP and Depop R1059	Depop R1059	X01
2	9	CPU	12/14/2007	HW	For Intel CPU power transient	Change C56,C57and C58 to 470UF	X01
3	10	MCH	12/14/2007	HW	For Intel request for DP function	Change R180,R181,R182 and R183 to 4.02K	X01
4	10, 34	MCH	12/14/2007	HW	For design issue	Change U80 and U57 to 74AHC1G08GW	X01
5	13	MCH	12/14/2007	HW	For Intel request power seq	Depop D1 and R122	X01
6	13	MCH	12/14/2007	HW	For disable TV-OUT function	Modify U78.K30 to GND plane	X01
7	18	EMC4002	12/14/2007	Dell	For Dell request	-Disconnect PWR_MON GFX from U3.45 -Connect U3.45 to MAX8731_IINP with a 4.7k series resistor -Identify the values of R1033 and R1061	X01
8	18	EMC4002	12/14/2007	Dell	For U3 POWER_SW# Input-Add AND Gate	-Add U93,C1158,R1063,and R1064 -Change R142 to 0ohm	X01
9	21	DP	12/14/2007	Intel	Follow Intel proposal for DP interoperability	Add U94,U95,Q163,Q164,C1159,R1073,R1074 and C1160	X01
10	31	Docking	12/14/2007	Compal	For Docking ESD concern	Add D73	X01
11	32	USH	12/14/2007	Broadcom	Follow Broadcom request to modify schematics for USH	-Add R1066,R1067,R1068 and del R495,R499 and change R771 to 1K -Depop R1067,R490,C594,C591,R467 and pop R829,add R1072	X01
12	33	SIO	12/14/2007	Dell	GPIO Map update	-Changed pin 82 from USB_CHARGER_PWR_EN# to ESATA_USB_PWR_EN# -Change pin 104 from ESATA_USB_PWR_EN# to USB_POWERSHARE_PWR_EN#	X01
13	33	SIO	12/14/2007	Dell	The LCD/LED will keep had power with USB device when unplug AC & Battery	-Add 100k no pop pull-ups to +3.3V_ALW2 on: USB_SIDE_EN#, ESATA_USB_PWR_EN#,USB_POWERSHARE_PWR_EN#	X01
14	33	SIO	12/14/2007	Dell	On Battery Mode U35 have +3.3V backdrive	-No stuff R502, R504, R1013. -Add diode on signal INSTANT_ON_SW# to 5028 pin 28 -Add D74 and R1070	X01
15	33	SIO	12/14/2007	Dell	Add PD on SYS_LED_MASK#	Add R1069	X01
16	33	SIO	12/14/2007	Compal	Change BID to X01(001)	Pop R529 and depop R534	X01
17	33	SIO	12/14/2007	Dell	GPIO Map update	Add U96 and C1161	X01
18	34	EC	12/14/2007	Dell	GPIO Map update	-Del U59,C1012,R553,R558 and add R1071,Change R1050 from 1K to 33K -Change ACAV_IN_DOCK# to ACAC_DOCK_SRC# ACAV_IN_MB/DOCK to ACAV_IN	X01
19	35	EC	12/14/2007	Dell	GPIO Map update	-For BKT add U38.15 to BKT_GPIO17 connect to D71.2	X01
20	38	LED	12/14/2007	Compal	Backdrive from +3.3V_WLAN to +5V_RUN on S3 mode	Add D75 between Q97 and Q98	X01
21	38	LED	12/31/2007	Compal	Add Bypass Capacitor for TTL Gate	Add C1162-C1165	X01
22	32	USH	12/31/2007	Broadcom	Follow Broadcom request to modify schematics for USH	-Change R476 to 5.1M ohms and R488 to 3.3M ohms to lower -Pop D70, C641, C647,add R1077 and Depop R464,R1077	X01
23	31	Docking	12/31/2007	Dell	Roush + Docking AC protect issue(crowbar)	Add D77, R1075,R1076,and Depop R124.	X01
24	33	SIO	12/31/2007	Dell	For Power change Media Slice issue	Add D78, R1079 and Depop R1078.	X01
25	21, 40	USB	01/03/2008	Compal	For power leakage for USB switch	Change U97,P/N from FSUSB31K8X_US8 to TS3USB31RSER_QFN8	X01

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History1

LA-4151P
Date: Friday, July 04, 2008 Sheet 49 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
26	16, 17	DIMM	01/03/2008	ME	For ME team change foxconn to main source	-Change DIMMA P/N from TYCO_2013022-1 to FOX_AS0A620_U4SN-7F -Change DIMMB P/N from TYCO_2013297-1 to FOX_AS0A620_U8SN-7F	X01
27	34	SIO	01/03/2008	HW	Update Cell charger detect circuit	Add D79	X01
28	29	Fingerprint	01/03/2008	HW	Follow Broadcom request to modify schematics for USH	Modify JBI03.5 from U19.A16 to U32.C3(FP_RESET#)	X01
29	24	SB	01/03/2008	HW	For LOM Disable concern	Add R1065 and Depop R1065 and del R935	X01
30	40	BKT	01/03/2008	HW	For BKT function concern and bypass BKT function	-Del U81 and U86.6 connect to GND -Add RN1-RN6 and depop	X01
31	34	SIO	01/04/2008	HW	For GPIO update	-Modify U36.41 to DOCK_POR_RST# connect to JD0CK1.140 -Add C1167,R1082	X01
32	19	LVDS	01/07/2008	HW/ME	For ME team change LVDS connector and cost down action for BKT function	-Modify LVDS connector to SP02081020 -Modify LVDS1.4 from PNL_BKLT_CBL_DET# to +3.3V_RUN -Swap netname LCD_VCC_TEST_EN and BKT_GPIO2	X01
33	21	BTB	01/08/2008	HW	For HW concern	Modify pin-name from JBI01.109,111,113-123 to JBI01.107,109,111-121 and change JBI01.139 from +1.8V_LAN_M to +LOM_VCT	X01
34	21, 33	BTB	01/08/2008	HW	For HW concern	-Add D80 and R1083 to pull up +3V_ALW2 -Add R1084 pull up to +3V_ALW and depop	X01
35	35	ECE1088	01/08/2008	HW	For GPIO update	Modify U38.15 from BKT_GPIO17 to BKT_GPIO19	X01
36	21, 33	BTB	01/08/2008	HW	For GPIO update	-Modify from WIRELESS_ON/OFF# to WIRELESS_ON#/OFF -Del R489,R830 and netname SC_DET from U35.84	X01
37	21	DP	01/09/2008	HW	For Intel DP solution update	Add R1085,R1086,R1087,R1088	X01
38	23, 27, 32, 34	Crystal	01/09/2008	HW	For EA test result for crystal	-Change Y3 to SJ100005X0L,C674 to 27PF -Change C608,C296,C297 to 12PF,C609,C1032,C1058 to 15PF	X01
39	35	TouchPAD	01/09/2008	ME	For ME team change connector	Change JTP1 to SP070801070	X01
40	38	LED	01/09/2008	ME	For ME team change LED board to FPC	Change JBI05 pin-define	X01
41	21, 35	WLAN	01/10/2008	HW	For GPIO update for WLAN switch	Add BKT_GPIO12(U38.8) and BKT_GPIO13(U38.9) connect to JBI01.75 and JBI01.120	X01
42	07	ITP	01/10/2008	HW	For Intel ITP solution update	Change R62,R64,R65,R66,R67 from 51ohm to 56ohm and R977 depop	X01
43	32	USH	01/11/2008	HW	Follow Broadcom request to modify schematics for USH	Add R1089	X01
44	10	MCH	01/14/2008	HW	UMA display TV solution implement	Remove TV_CVBS/TV_Y/TV_C signals with pull down resistors (R674,R677 and R678). Connect pin J27,E27 and G27 to GND	X01
45	10	MCH	01/14/2008	HW	Follow Roush UMA implement (CRT/LVDS)	Remove R1048,R1049(CRT_H/VSYNC)pull up. Change R688 from 2.37K 1% to 2.4K 1%; Change R672 from 1.02K 1% to 976 1%	X01
46	11	MCH	01/14/2008	HW	UMA display TV solution implement	Change pin N32 of U78(VCCD_TVDAC) from +1.5V_RUN to GND. Remove C138 and C139	X01
47	23	ICH9M	01/14/2008	HW	Follow Roush UMA implement	Remove R952, connect pin AC23 of U79 to pin2 of R237	X01
48	21	DP/Card1 IO	01/14/2008	HW	Follow Roush UMA implement	Remove BIO_DET# net(Del. R823,R932; pin A16 of U79), depop R754 Add R1090(100K)pull up to +3.3V_ALW_ICH on PCIE_MCARD1_DET# net, make R439 depop; change C1135 from .1uf to 1uf	X01
49	24, 35	ICH9M	01/14/2008	HW	CIS Symbol update	Link JP3(Change to JP6) and JTP1	X01
50	19	LVDS	01/15/2008	HW	BIA_PWM signal seems to be floating in " BKT mode ".	Add D81 between LVDS and MCH, ADD 1091 pullup.	X01

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.			
Title			
Changed-List History2			
Size	Document Number	Rev	
	LA-4151P	0.5	
Date:	Friday, July 04, 2008	Sheet	50 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
51	6	CLKGEN	03/04/2008	HW	For component derating	L1 change to SM01002480L	X02
52	7	CPU	03/04/2008	HW	For ITP modify solution	R57 change to 124ohm, R64 change to 39ohm, R65 change to 150ohm, R66 change to 649ohm, R67 change to 27ohm	X02
53	9	CPU	03/04/2008	HW	For CPU power loadline solution	C52 change to pop and C56,C57,C58 change to 270UF(SGA00003H0L)	X02
54	10	MCH	03/04/2008	HW	For DP modify solution	R180,R181,R182,R183 change to 2.2K ohm	X02
55	19	PFG	03/04/2008	HW	Add Camera solution for PFG	Add Q165,Q166,R1094(unpop),R1095,R1096,R1097,R1098,C1168,C1169 C1170,C1171,U98(unpop),L70(unpop),JCAM and net CAM_MIC_CBL_DET#	X02
56	19	LVDS, JBI01	03/04/2008	HW	For BKT table updated	Modify D68.2 to BKT_GPIO18 for +LCDVDD power and	X02
57	21	Audio	03/04/2008	HW	For audio vendor solution	R327,R828 change to 499K ohm and R328 unpop	X02
58	27	R5C833	03/04/2008	HW	For R5C833 crystal solution by test result	Modify X2(SJ124P5M53L)-->Y2(SJ10000690L)	X02
59	29	FP	03/04/2008	ME	For FP connector change	Modify JBI03(Tyco_1734820-6)-->(TYCO_1734242-6)	X02
60	32	BCM5880	03/04/2008	HW	For EMI solution by BCM5880	Add L71,L72,C1172,C1173 R841 change to 3K and R473 change to 1K,R849 pop	X02
61	33	ECE5028	03/04/2008	HW	For ECE5028 and board ID updated	Del R1084, add PWR_BTN_BD_DET# R529(unpop),R534(pop),R530(pop),R535(unpop) for X02	X02
62	34	ECE5035	03/04/2008	HW	For ECE5035 updated	Modify R560 to pop,R877 change to 200K and R565,R567 change to 2.2K ohm	X02
63	38	LED	03/04/2008	HW	Add WLAN LED share to BKT LED	Add Q167,Q168	X02
64	38	PWR board	03/04/2008	ME	For PWR board connector change	JBI04 change from Tyco_1734242-4 to Tyco_1734242-6 add PWR_BTN_BD_DET# for PWR board	X02
65	39	BKT function	03/04/2008	HW	For BKT function updated	Modify +3.3V_RUN_BKT_PWR source to alway pop Add net BKT_LED to control LED	X02
66	40	BKT function	03/04/2008	HW	For BKT table updated	Modify U86.9 to BKT_GPIO11(U38.14)	X02
67	24	SPI	03/04/2008	HW	For del recovery bios function	Del U13,R295,R303,R304,R305,R306,R308,R309,C329	X02
68	31	Dock	03/04/2008	HW	For Docking ESD concern	Modify D73 from SC10T24C010 and SC600000N0L	X02
69	36	Power	03/04/2008	HW	For power control concern	Reserve R1100,R1101 to bypass level shift	X02
70	29,35	BKT function	03/05/2008	HW	For BKT table updated	Add net BKT_GPIO17 and R1104(unpop),D82 for Biometric reset signal	X02
71	35	TP	03/06/2008	HW	For backdrive from Touch PAD	Modify R594,R595 pull-up to +5V_ALW	X02
72	32	USH	03/06/2008	HW	For smart card concern	Modify R849 to 1.5K and R973 to 300ohm	X02
73	38	LED	03/07/2008	HW	For keyboard LED modify	-Modify JBI05 to TYCO_1-1734242-2 and add net MASK_BASE_LEDS# -Q120.3,Q121.3,Q122.3 modify to +5V_ALW	X02
74	19,22	Camera	03/10/2008	HW	For Camera function	Modify net name from CAM_MIC_CBL_DET# to CAM_CBL_DET#	X02

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Chaged-List History3

LA-4151P

Friday, July 04, 2008

Sheet 51 of 57

Rev 0.5

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
75	31	Docking	04/07/2008	HW	Slice battery issue	change R1076 from 1K to 910K	X03
76	33	EC5028	04/07/2008	HW	Support wireless on#/off switch on BLT mode	change R874 to depop	X03
77	38	LED	04/07/2008	HW	Blue LED brightness concern	R659, R663, R125, R661, R556, R596, R655, R1037, R1042, R1045 change from 150 ohm to 1K ohm	X03
78	33	EC5028	04/07/2008	HW	Roush MB side have backdrive when plug some USB device which have extra-power source	R504 change to 10K and made pop.R502 and R1013 change to pop	X03
79	18	EMC4002	04/07/2008	HW	Vendor recommend value	R1033 change to 200K	X03
80	34	EC5035	04/07/2008	HW	Remove reserved SPI ROM at EC side.	Remove U37,C672,R589,R590,R591,R592,R593 and R558	X03
81	24	SPI ROM	04/07/2008	HW	Reserved 2nd SPI ROM for code size over 4M byte.	Add U13,C329,R295,R304,R305,R306,R308,,R307 and R309	X03
82	32	USH	04/07/2008	HW	Vendor recommend schematics for EMI	D28 and D29 change connect to RFREADER_TXN1_P1 and RFREADER_TXP1_P1 R494 and C639 change connect to RFREADER_TXN1 R498 and C643 change connect to RFREADER_TXP1	X03
83	21	DP	04/07/2008	HW	Vendor recommend schematics for DP switch	Add U99~U101(SN74CBTD3306) and C1174~C1175(0.1UF) R1053 change from 100K ohm to 1M ohm Del Q19,Q20,Q163,Q164,R958,R960,R964,R966,R1073,R1074	X03
84	12	TV	04/07/2008	HW	Vendor recommend schematics for TV disable	Add R1105~R1107 to 75 ohm	X03
85	24,33	EC5028, SPI ROM	04/07/2008	HW	GPIO table update	Add net name SPI_WP#_SEL and R1108~R1109(0 ohm)	X03
86	35	TouchPAD	04/07/2008	ME	ME concern need to shorten TouchPAD FFC length	Swap JTP1 Pin1~Pin16 net name	X03
87	06	Clock	04/07/2008	HW	Isolate CLK_PCI_DOCK signal that has risk for docking scenarios.	change CLK_PCI_PCM to U1.33	X03
88	40	BlackTop	04/07/2008	HW	USB interface change for BKT to ICH	Del U83 and C1144,Modify U97.5 to USB1-,U97.3 to USB1+ and U85.6 from BKT GPIO3 to GND and change U97.1to BKT GPIO3	X03
89	19	Camera	04/07/2008	HW	Camera pinout modify for vendor	USBP11_D- change to JCAM.2,USBP11_D+ change to JCAM.3 CAM_CBL_DET# change to JCAM.5	X03
90	38	LED	04/09/2008	HW	Add WWAN LED control on BLT mode	Modify R206.1 to +3.3V_RUN_BKT_PWR and Q115.3 to +5V_TP_PWR	X03
91	27	R5C833	04/09/2008	HW	Add SC CLK impedance control between chip(20~30 ohm) and connector	Add R1110	X03
92	29	PWR SW	04/09/2008	HW	Remove PWR SW for debug	Remove PWRSW1,PWRSW2 and C684	X03
93	21	I/O	04/10/2008	HW	Vendor I/O connector update	Remove JBI01.141~144	X03
94	06	Clock	04/14/2008	HW	Vendor recommend schematics modify to damping resistor for share CLK signals	Modify R27 to 33ohm	X03
95	29,32	Hall sensor	04/16/2008	ME	Modify Hall sensor from smart card connector to SPK connector	Modify JSC1 to 10pin and JSPK1 to 9pin connector	X03
96	24,27	RF issue	04/21/2008	HW	Add 14M/33M/48MHZ terminator for RF issue	POP R279,C312,R285,C318,R803 and C1057	X03
97	10	S3	04/21/2008	HW	Fixed S3 resume	Modify U80 power to +3.3V_ALW_ICH	X03

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History4

LA-4151P

Date: Friday, July 04, 2008

Sheet 52 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
98	9	CPU	04/21/2008	HW	Reserve 24 pcs high frequency for ULV CPU	Add C1176~C1199	X03
99	18	Thermal	04/22/2008	HW	Modidy thermal protect on 95 degree	change R151 to 1.5K	X03
100	21	DP	04/23/2008	HW	Update new DP swith schematics	Depop R1085~R1088	X03
101	36	backdrive	04/24/2008	HW	Fix +3.3V_RUN backdrive from North bridge	Modify R625 to 33ohm 0603 and pop Q79	X03
102	39	BLT	04/25/2008	HW	Update BLT GPIO table	Add BKT_GPIO5 connect to JBKT1.63	X03
103	10,36	Audio	05/22/2008	HW	Fix WLAN card intermittent can't detect	Add U103,C1200,C1201 and del U92,C1156,C1157,R1060 ,U79.V10 change to +1.5V_ALW_HDA R153 change to 3.16K R154 change to 5.1K, del R314,R315 and U79.AD7 change to +1.5V_RUN	X04
104	38	LED	05/22/2008	HW	Fix +5V_RUN backdrive on BLT mode	Add D83	X04
105	33	Slice Battery	06/10/2008	HW	Fix slice battery concern on power	Change R503 from 100K to 4.7K	X05
106	27	1394	06/10/2008	HW	Fix 1394 reset timing	Modify R801 to 47K	X05
107	24	ICH	06/10/2008	HW	Update GPIO table for TPM and TCM	Add R1111	X05
108	36	backdrive	06/10/2008	HW	Fix +3.3V_RUN backdrive from North bridge	Modify R625 to 39ohm 0402	X05
109	30,38	connector	06/11/2008	ME	Fix ME concern for factory build	Modify JBT and JBI05 to SP070805091(TYCO_1-2041070-2)	X05
110	29,38	connector	06/11/2008	ME	Fix ME concern for factory build	Modify JBI03,JCAM,JCS1 and JBI04 to SP070805092(TYCO_2041070-6)	X05
111	28	connector	06/11/2008	ME	Fix ME concern for factory build	Modify JEXP1 to SP070805271(TYCO_2-2041070-6)	X05
112	35	connector	06/11/2008	ME	Fix ME concern for factory build	Modify JEXP1 to SP070805270(TYCO_1-2041070-6) JSATA1 to SP01000SE0L(TYCO_2-1759838-5)	X05
113	32	USH	06/13/2008	HW	Modify USH component tolerance	Modify L71,L72 change to SHI00005Y0L and C639,C643 change to +-10%	X05
114	12	NB	06/13/2008	HW	Update NB reference schematics	Add C1202	X05
115	29	SPK	06/16/2008	ME	Modify SPK connector pin define to improve cable routing for ME concern	Re-define SPK connector pin-out	X05
116	6	CLKGEN	06/20/2008	HW	Fix setup ME power package5 issue when power on	Add R1112	X05
117	38	LED	06/20/2008	HW	Fix LED flash bright when unplug AC	Add R1113	X05
118	21	USB Charge	06/20/2008	HW	Follow Roush reduce USB charge schematics	Delete R995	X05
119	30	BT	06/20/2008	HW	Fix BT cable for factory assemble	Modify BT_DET# from JBT.1 to JBT.12	X05
120	30	TCM	06/20/2008	HW	Update TCM reference schematics	Add R1115~R1119,C1202,C1203 and R383 change to 10K,R884 change to 1K and delete R381,R382	X05

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History5

LA-4151P

Date: Friday, July 04, 2008 Sheet 53 of 57

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	41	Battery slice application	12/13	Dell	For Slice battery to detect NB battery is insert or not.	Add PQ47(FDN338P_NL), PD22(RB751V) and PR234 (0 ohm)	X01
2	46/48	Charger	12/13	Dell	To block +PWR_SRC (19.5V) from Docking connector DOCK_DCIN_S +/- pins when NB is not docked	Add PQ63 A/B(NTGD4161PT1G),P341(100K),PR342(100K), PR343(100K). Add PQ46 RHU002N06 to control PQ62 on/off	X01
3	46	Charger	12/13	Dell	Charger of ISL88731 will turn off when ACIN is no power	Add LM393 to replace ISL88731 ACOK function(PU11B) Add PR345(232K), PR346(47K), PR349(21.5K), PR350(27.4K) Add PR344(1M), PR347(100K), PR348(0) Add PC185(0.1U), PC186(100P)	X01
4	46	Charger	12/13	Dell	This change to allow charging when AC adapter only in Dock. Note TI and Intersil version of charger will disable charging when AC OK goes low. Maxim charger function was fine. The added comparator circuit is used to give BIOS indication when AC adapter is inserted or removed from notebook. Replaces charger AC OK function.	Remove PR188 and PR187, Change PR145 from +DC_IN to +SDC_IN. change PR157 net name from ACAV_IN_NB to ACAV_IN.	X01
5	46/48	Charger	12/13	Dell	Change all notebook signal name's "ACAV_IN_DOCK" and "ACAV_IN_DOCK#" to "ACAV_DOCK_SRC" and "ACAV_DOCK_SRC#" respectfully.	Change PQ40_Pin1 from "ACAV_IN_DOCK#" to "ACAV_DOCK_SRC#" Change PQ40_Pin2 from "ACAV_IN_DOCK" to "ACAV_DOCK_SRC" Change PQ43_Pin2 from "ACAV_IN_DOCK" to "ACAV_DOCK_SRC"	X01
6	46	Charger	12/13	Dell	Change PQ36.2 connection from ACAV_IN_NB to "ACAV_IN"	Change PQ36.2 connection from ACAV_IN_NB to "ACAV_IN"	X01
7	48	Selector	12/13	Dell	PBATT back drive to Battery Slice vias charger high side MOSFET	Add PQ45 between PBATT+ and +VCHGR Use PBATT_OFF control PQ62 to switch PQ45 Add PR351(240K), PR352(47K) and PR353(100K)	X01
8	48	Selector	12/13	Compal	PBATT_OFF connect to DOCK_AC_OFF	Add PD34 RB751V-40	X01
9	41	DC_IN	12/13	Dell	Add PC183 and non-stuff	Add PC183 and non-stuff	X01
10	42	+3.3V/+5V	12/13	Dell	EE work item	Change PL6 and PL7 from HMP1350-3R3LD-R to SSC-1350F3-2R8 Change PQ6 and PQ7 from FDMC8878 to FDMS8692	X01
11	48	Selector	12/14	Compal	For save the placement space, use one dule MOS chip to replace 2pcs MOS chip	Add PQ64 A/B (2N7002DW-T/R7) to replace PQ29 and PQ40 (RHU002N06) Add PQ65 A/B (2N7002DW-T/R7) to replace PQ37 and PQ46 (RHU002N06) Add PQ66A/B (2N7002DW-T/R7) to replace PQ 38and PQ39 (RHU002N06)	X01
12	46	Charger	12/14	Compal	For save the placement space, use one dule MOS chip to replace 2pcs MOS chip	Add PQ67 A/B (2N7002DW-T/R7) to replace PQ27 and PQ43 (RHU002N06) Add PQ68 A/B (2N7002DW-T/R7) to replace PQ35 and PQ44 (RHU002N06)	X01
13	42	+3.3V/+5V	12/14	Compal	ME highet limit issue	Change PL16 from HMU1356-5R6 to MPLCH1040L5R6	X01
14	45	CPU_VCORE	12/14	Compal	Connect MAX8786_VCC to PU7_Pin3 to disable third phase	Connect MAX8786_VCC to PU7_Pin3	X01

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History

Size	Document Number	Rev
	LA-4151P	1.0
Date:	Friday, July 04, 2008	Sheet 54 of 57

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	48	Selector	1/7	AJ Compal	Charger for Battery Slice	Change PQ63 to 2N7002DW Add PR360 0_0402_5% between PQ63 and SLICE_BAT_PRES	X01
2	46	Charger	1/7	Merle DELL	Charger Isense MOSFET timing change	PC142 change to 0.047u_0603_25V	X01
3	48	Selector	1/7	Merle DELL	Hot dock issue, adapter crowber	Add PR357 330K_0402 form +DOCK_PWR_BAR to GND. Add PQ70 RHU002N06 parallel PQ61, series PR358 0_0402 to EN_DOCK_PWR_BAR#, serial PR359 0_0402 to ACAV_DOCK_SRC	X01
4	41	+DC_IN	1/7	Doug DELL	PJPDC1 change to 7pin connector	PJPDC1 change to MOLEX_87438-0743_7P-T Change PR20 to 0_0402_5% and populate	X01
5	PWR	Snubber	1/9	Guangyong DELL	DELL request add a snubber circuit on every regulator	Add below location of regulator switching node +3.3V_ALW: PR290, PC191 +5V_ALW: PR288, PC189 +1.5V_RUN:PR287, PC188 +1.05V_M:PR286, PC187 +VCHGR:PR289, PC190	X01
6	41	+DC_IN	1/9	Battery Team DELL	Change Battery Pin from 9 to 7pin	Change Battery Pin from 9 to 7pin	X01
7	47	ADP3209 NB_CORE	1/10	Guangyong DELL	Modify ADP3209 schematic Follow ADI suggestion	Populate PR224 Change PR239 from220K_0603_1% to 49.9K_0603_1% Change PR238 from 140K_0402_1% to 169K_0402_1% Change PC219 from 2200p_0402_50V to 1200p_0402_50V	X01
8	45	CPU_CORE	1/10	Compal	The load line SPEC is 4 mohm for SFF SV CPU	Change PR124 from 6.49K_0603_1% to 14.3K_0603_1% Change PR118 from 4.99K_0402_1% to 6.34K_0402_1% Change PR136 from 1.43K_0402_1% to 732_0402_1% Change PR90 and PR109 fro, 2K_0402_1% to 430_0402_1% Change P98 and PC109 from 0.22U_0603_10V to 1U_0603_25V No stuff PC131, PC132 and PC133	X01
9	46	Charger	2/19	BO DELL	Maxim Charger from powering on while in S5 and battery only	1. Un-pop PR184, PR347. 2.Add PD52 BAT54CW_S0T323, +DOCK_PWR_BAR/+DC_IN_SS Reserve PR184 0_0402_5% form +SDC_IN to PU10 PIN22 3. Add PR354 (10K), MAX8731A_REF/PR348_Pin1 ADD PR355 (41.2K) PR348_Pin1/GND	X02
10	46	Charger	3/4	Merle DELL	Fix BITS CR196131 and CR196130	Add PR363 1K_1206 and PC192 1U_0603_25V from +NBDOCK_DC_IN_SS to ground. Add PD35 RB751S40T1_S0D523-2 from NB_AC_OFF# to ACAV_IN_NB.	X02
11	48	Selector	3/4	AJ Compal	for reducing leakage current.	Change PD31 from SCSB540C08L(S SCH D10 B540C-13-F SMC) to SCS00002M0L(S SCH D10 PDS5100H-13 POWERDI5).	X02
12	47	+VGFX_CORE	3/4	Kenny Compal	for VGFX-CORE test	Add PR364 SD02800008L(S RES 1/16W 0 + -5% 0402 between VCC_AXG_SENSE and PR227.2 Add PR362:SD02800008L(S RES 1/16W 0 + -5% 0402) between IMVP_PWRGD and pin31 of PU15.	X02
13	PWR	Snubber	3/5	Compal EMI	In order to meet the derating requirement, change the resistor component size	Change component size from 0805 to 1206 below location of regulator switching node +3.3V_ALW: PR290 +5V_ALW: PR288, +VCHGR:PR289, Vcore: PR266,PR267,PR268 and PR269	X02

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Changed-List History

Size	Document Number	Rev
	LA-4151P	1.0
Date:	Friday, July 04, 2008	Sheet 55 of 57

Version Change List (P. I. R. List)

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	48	Selector	3/6	MERLE DELL	Application for Battery Slice	Delete PR260 and PR261 Change PQ55 from IMD2AT to 2N7002DW Add PR291, PR292, PR293, PR294, PC193 and PD36	X02
2	46	Charger	3/6	Compal	Material smooth control	Change PQ30 and PQ31 from SI7326DN-T1-E3 to FDMC8878 Change PQ32 from SI7230DN-T1-E3 to FDMC8854	X02
3	41	DC_IN	4/8	AJ Compal	SPACE limitation	Change PC5 to SE00000GG8L(22U_0603) from SE002223K8L(22U_0806)	X03
4	45	VCORE	4/8	James Compal	PWM circuitry DH/DL still switch a few cycles in all 3 phase after power off resulted in a voltage pulse observed at output Vcore with a negative voltage (-0.24V approximately).	Add PR128 (10K_0402) between PWM1 to GND Add PR133 (10K_0402) Between PWM2 to GND	X03
5	43	+1.5V/1.05V	4/8	Compal	Change logic high level voltage for OE pin from 5V to 3.3V	Change PU25 and PU26 from SA000022Y0L(S IC VT351FCX-ADJ CSP 25P) to SA00002GE0L (S IC VT351AFCX-ADJ CSP 25P)	X03
	42, 43, 45, 46, 47	EMC&Noise	4/8	EMI and Key Part DELL	To solve the EMI and system noise issue	1.Boost resister. a.CPU Vocre Change PR87 and PR98 from 0ohm_0603 to 2.2ohm_0603 2 Snubber a.CPU Vcore Change PC99 and PC110 from 1500PF_0603 to 1000PF_0603 Stuff PR266 (4.7ohm_1206), PR267(4.7ohm_1206), PC99 and PC110. b.5V/3.3V/Charger/GPU_Core Change PC191, PC140, PC190 and PC189 from 1500PF_0603 to 1000PF_0603. Change PR288, PR265, PR289 and PR290 from 4.7ohm_1206 to 2.2ohm_1206. Stuff PC189, PC191, PC190, PC140, PR265, PR289, PR288 and PR290. c.1.5V/1.05V Change PC187 and PC188 from 1500PF_0603 to 1000PF_0603. Change PR286 and PR287 from 4.7ohm_1206 to 1ohm_1206. Stuff PC187, PC188, PR286 and PR287.	X03
6	48	Selector	4/8	Kenny Compal	Current Derating issue	Change PQ41 and PQ42 from SI4835 to FDS6679Z	X03
7	42	+3.3V/+5V	4/22	Kenny Compal	Material PSL issue	Change PL6 and PL7 from SSC-1350F3-2R8 (TMP) to HMP1350-2R8 (Delta)	X03
8	45	VCORE	4/22	LES DELL	PWM circuitry DH/DL still switch a few cycles in all 3 phase after power off resulted in a voltage pulse observed at output Vcore with a negative voltage (-0.24V approximately).	Change PR128 and PR138 from 10K_0402 to 33K_0402	X03
9	46	Charger	6/2	AJ Compal	M09 NB_AC_IN design change for sequence issue	Change PC185 from 1000p to 100p. Change PR175 from 100K to 24K	X05
10	46	Charger	6/2	AJ Compal	Change UL setting from 65W to 90W	Change PR166 from 57.6K to 51.1K Change PR171 from 13K to 17.8K Change PR172 from 105 to 348 Pop Pr169	X05
11	41	DC_IN	6/3	AJ Compal	SLICE_BAT_PRES# glitch issue	Add PC38 (1500n) between PQ47 to GND	X05
12	46	Charger	6/20	AJ Compal	Follow the common design	Change PR354 from 10K to 100K De-POP PR355	X05

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.			
Title			
Chaged-List History			
Size	Document Number	Rev	
	LA-4151P	1.0	
Date:	Friday, July 04, 2008	Sheet	56 of 57

Version Change List (P. I. R. List)

[illegible]

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title	Changed-List History
-------	----------------------

Size	Document Number	Rev
	LA-4151P	1.0
Date:	Friday, July 04, 2008	Sheet 57 of 57