




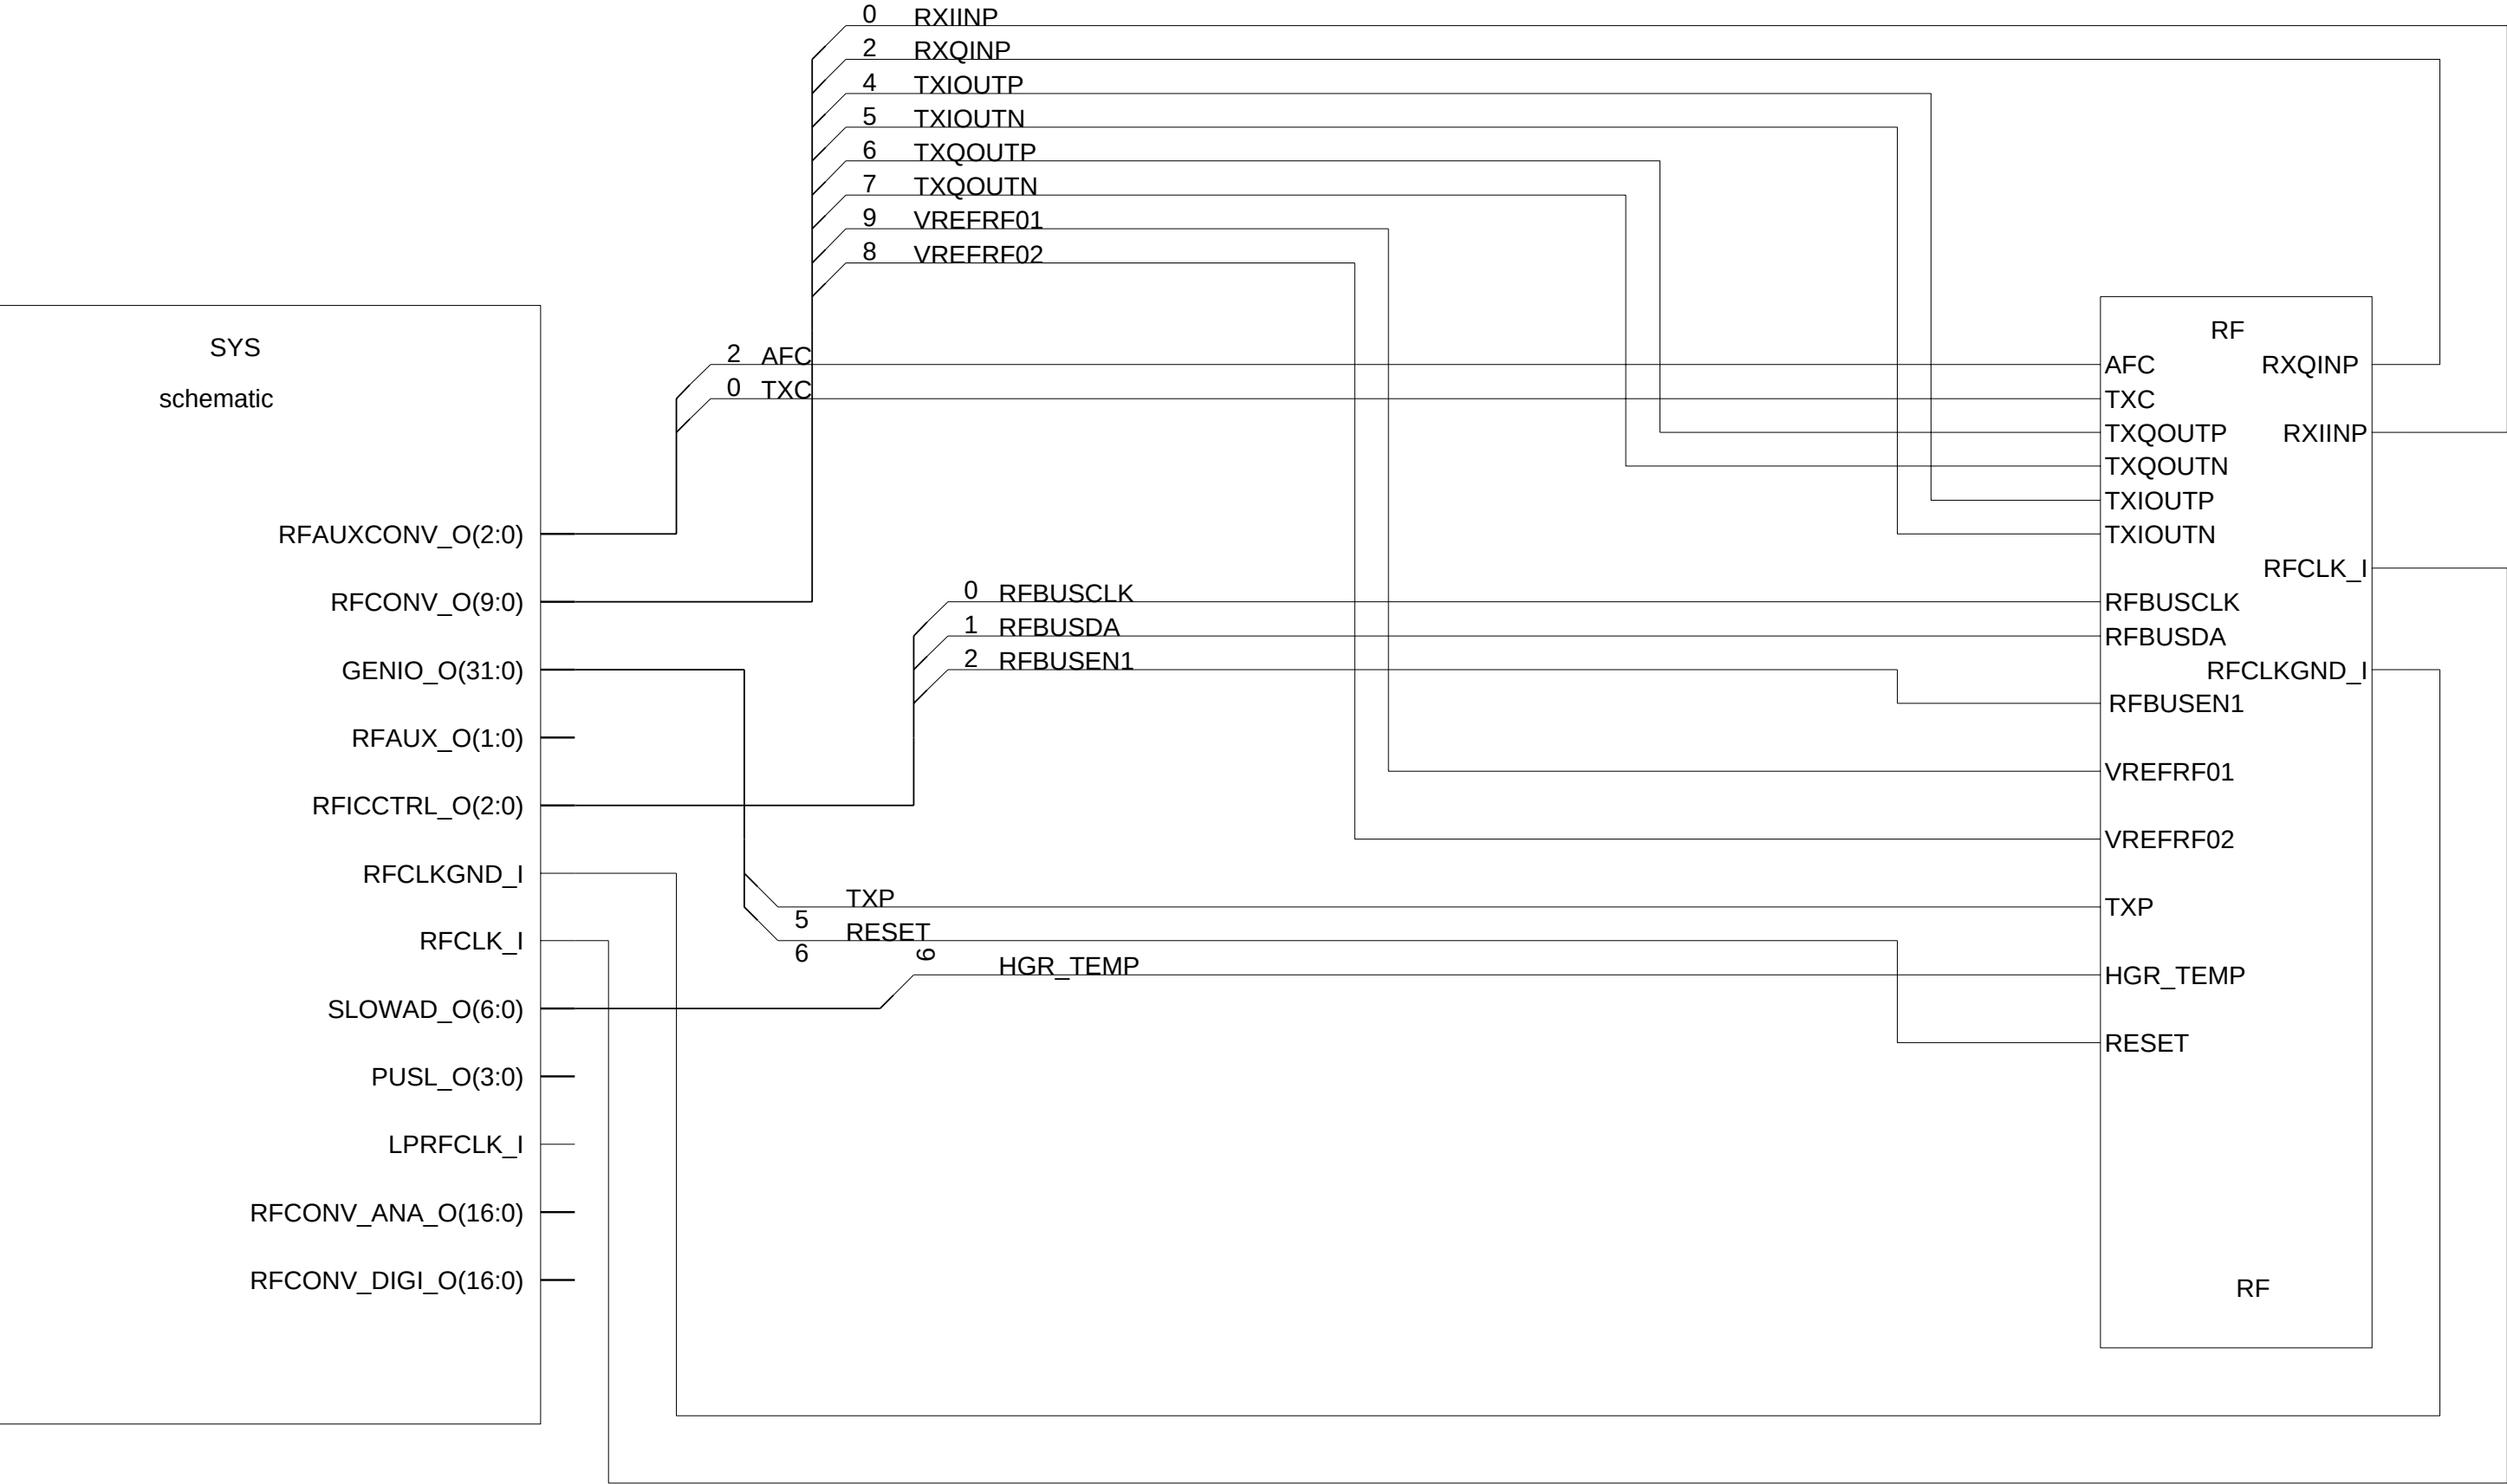


System

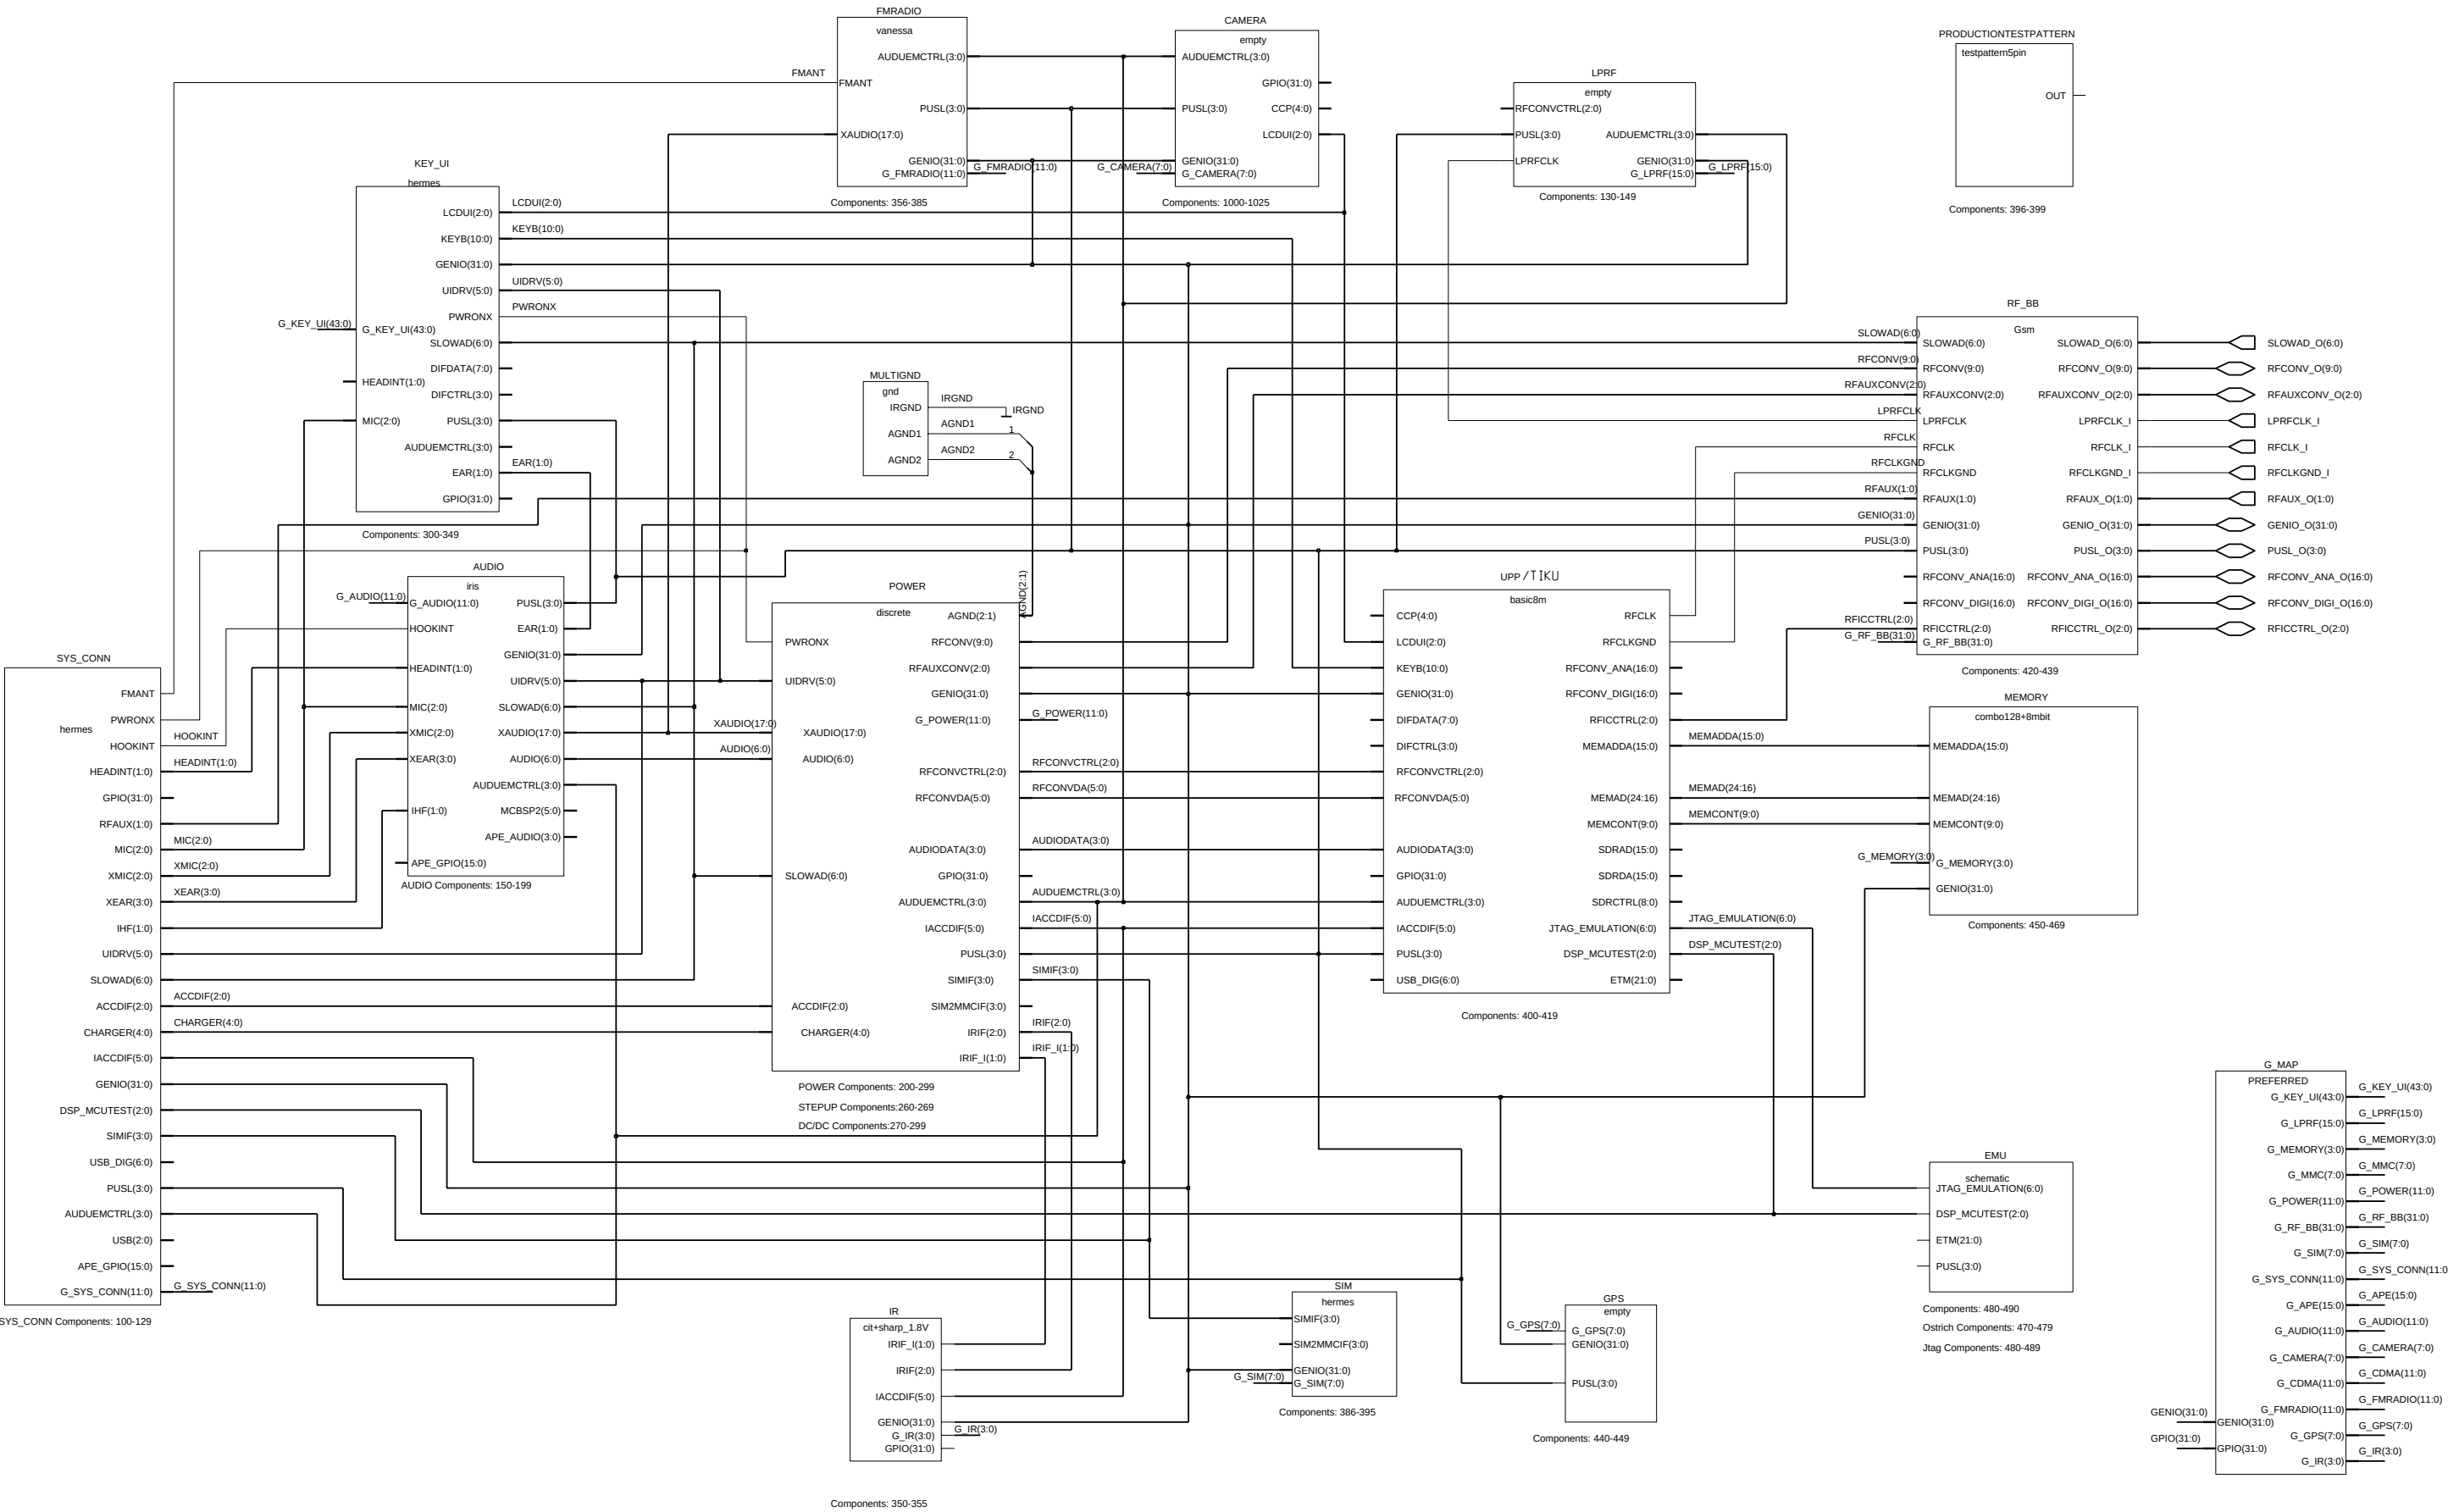


System Connector

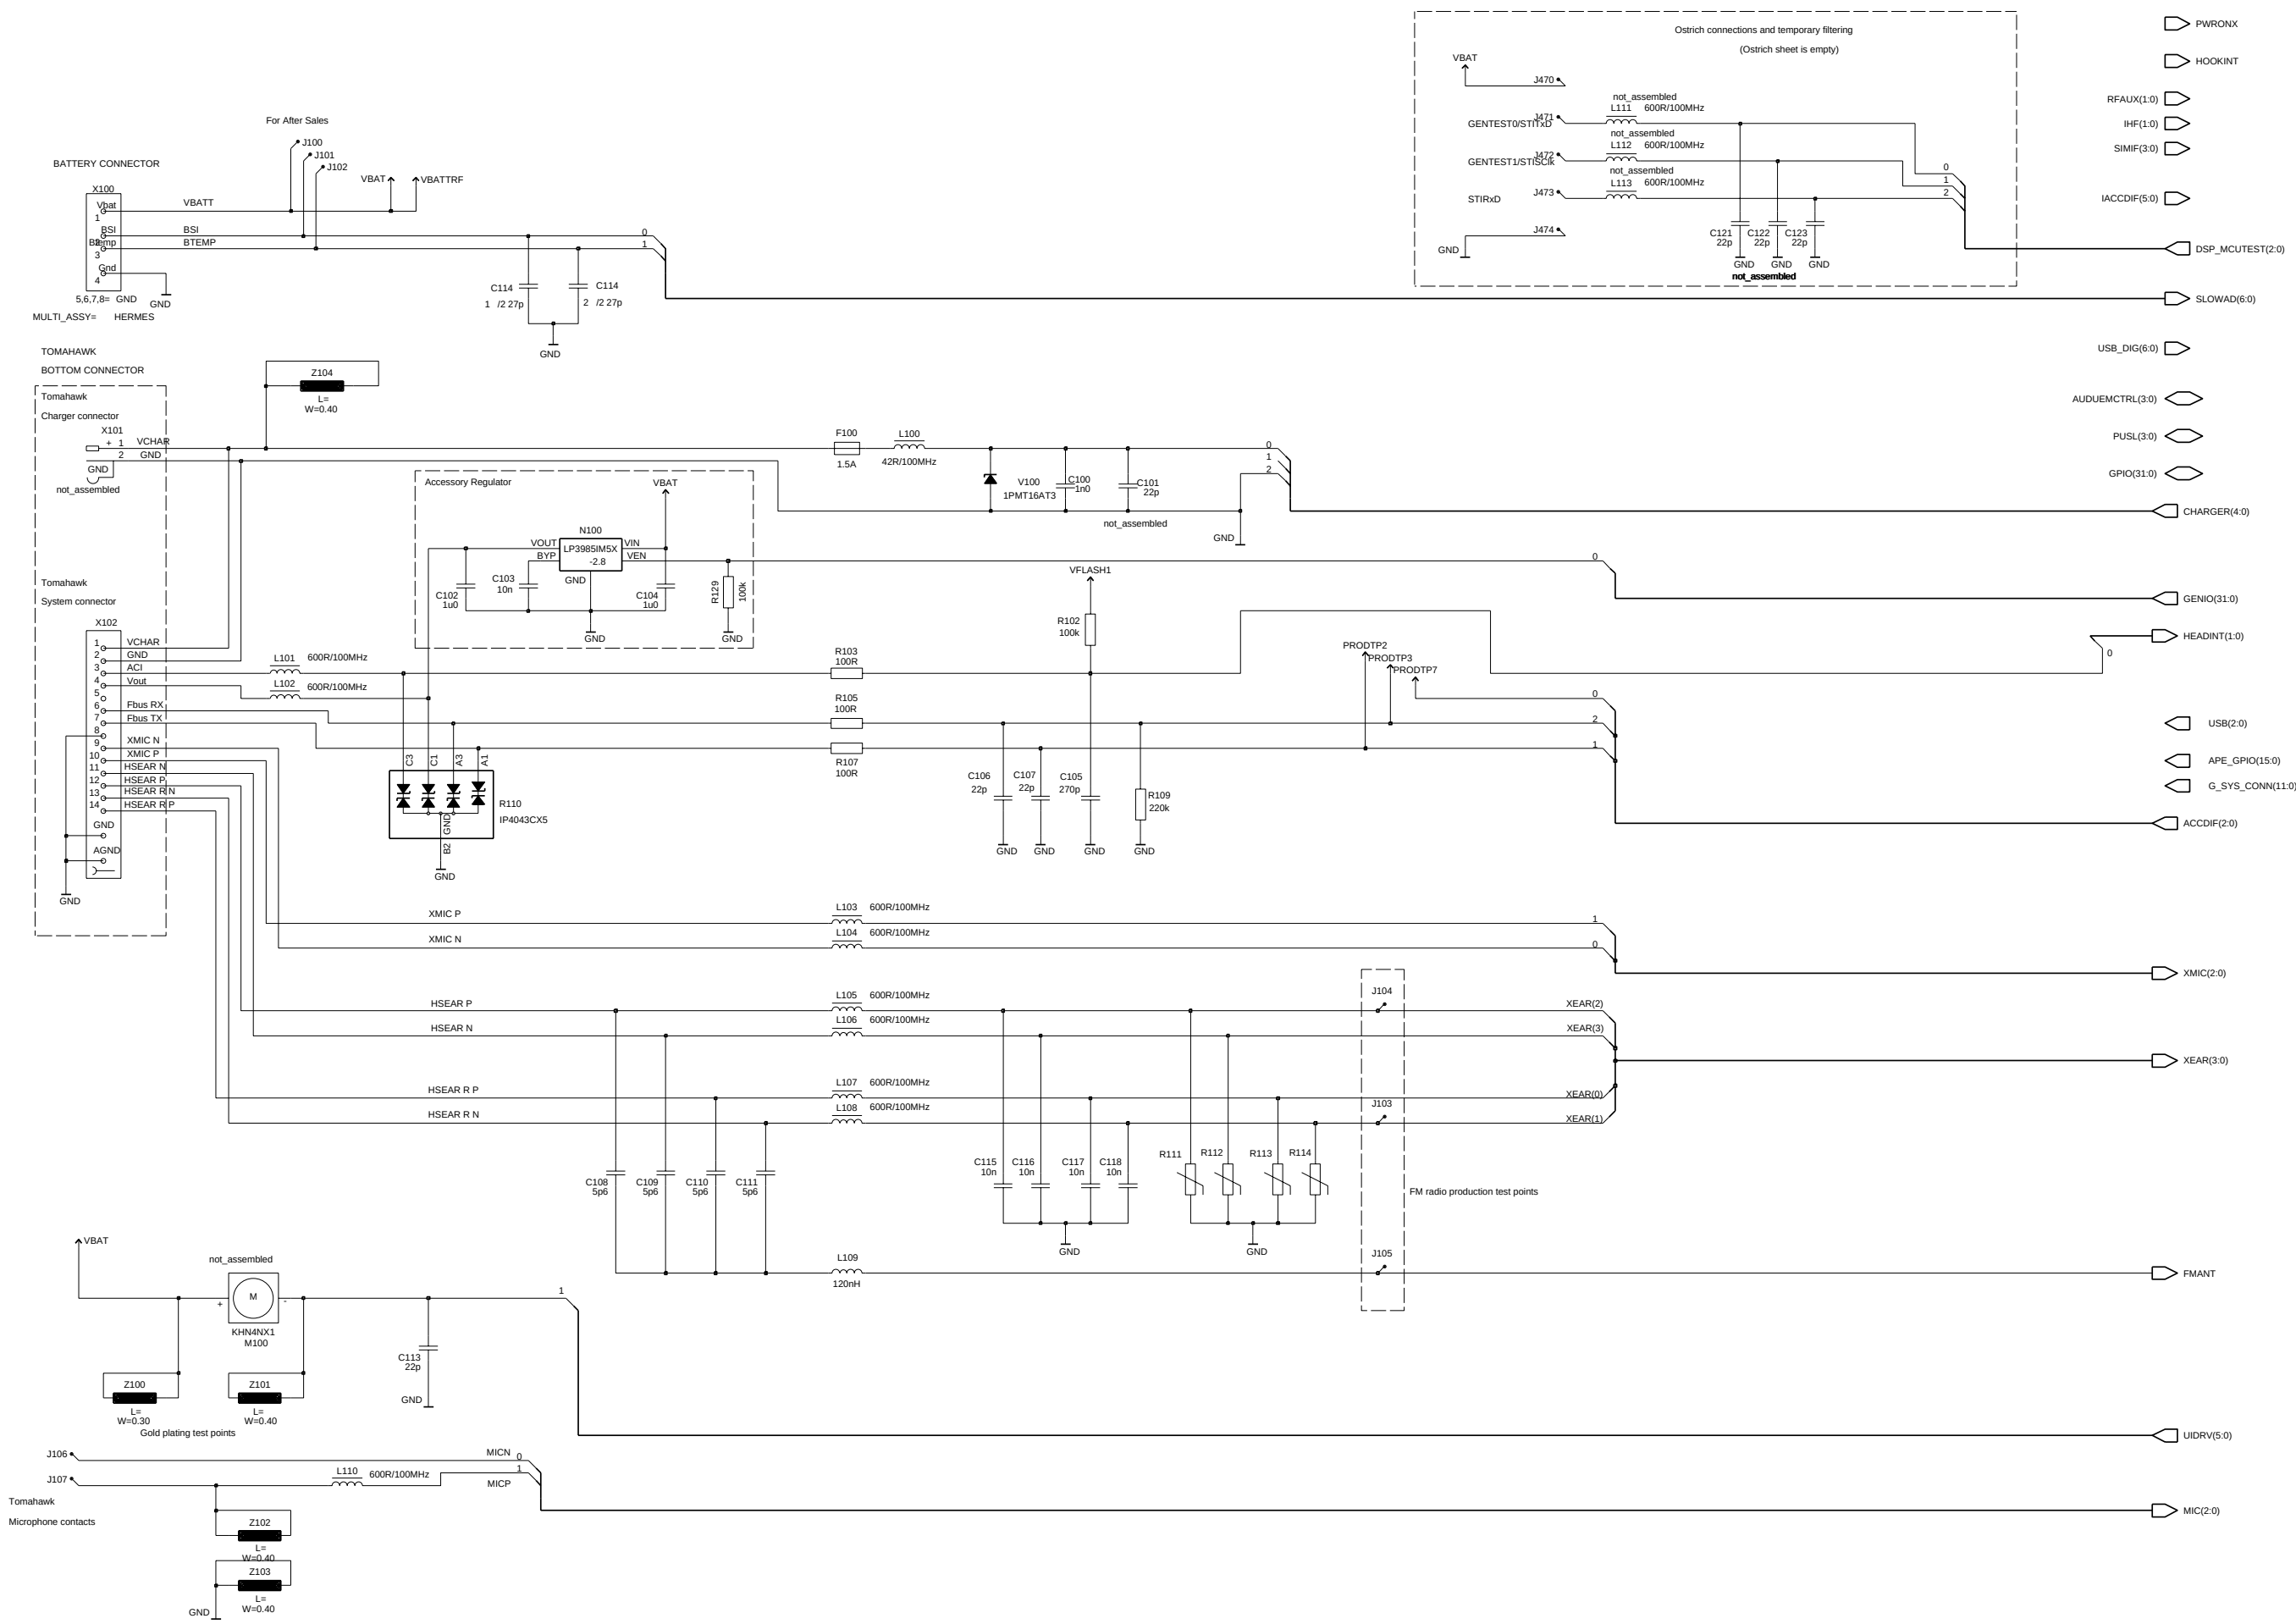


Key UI

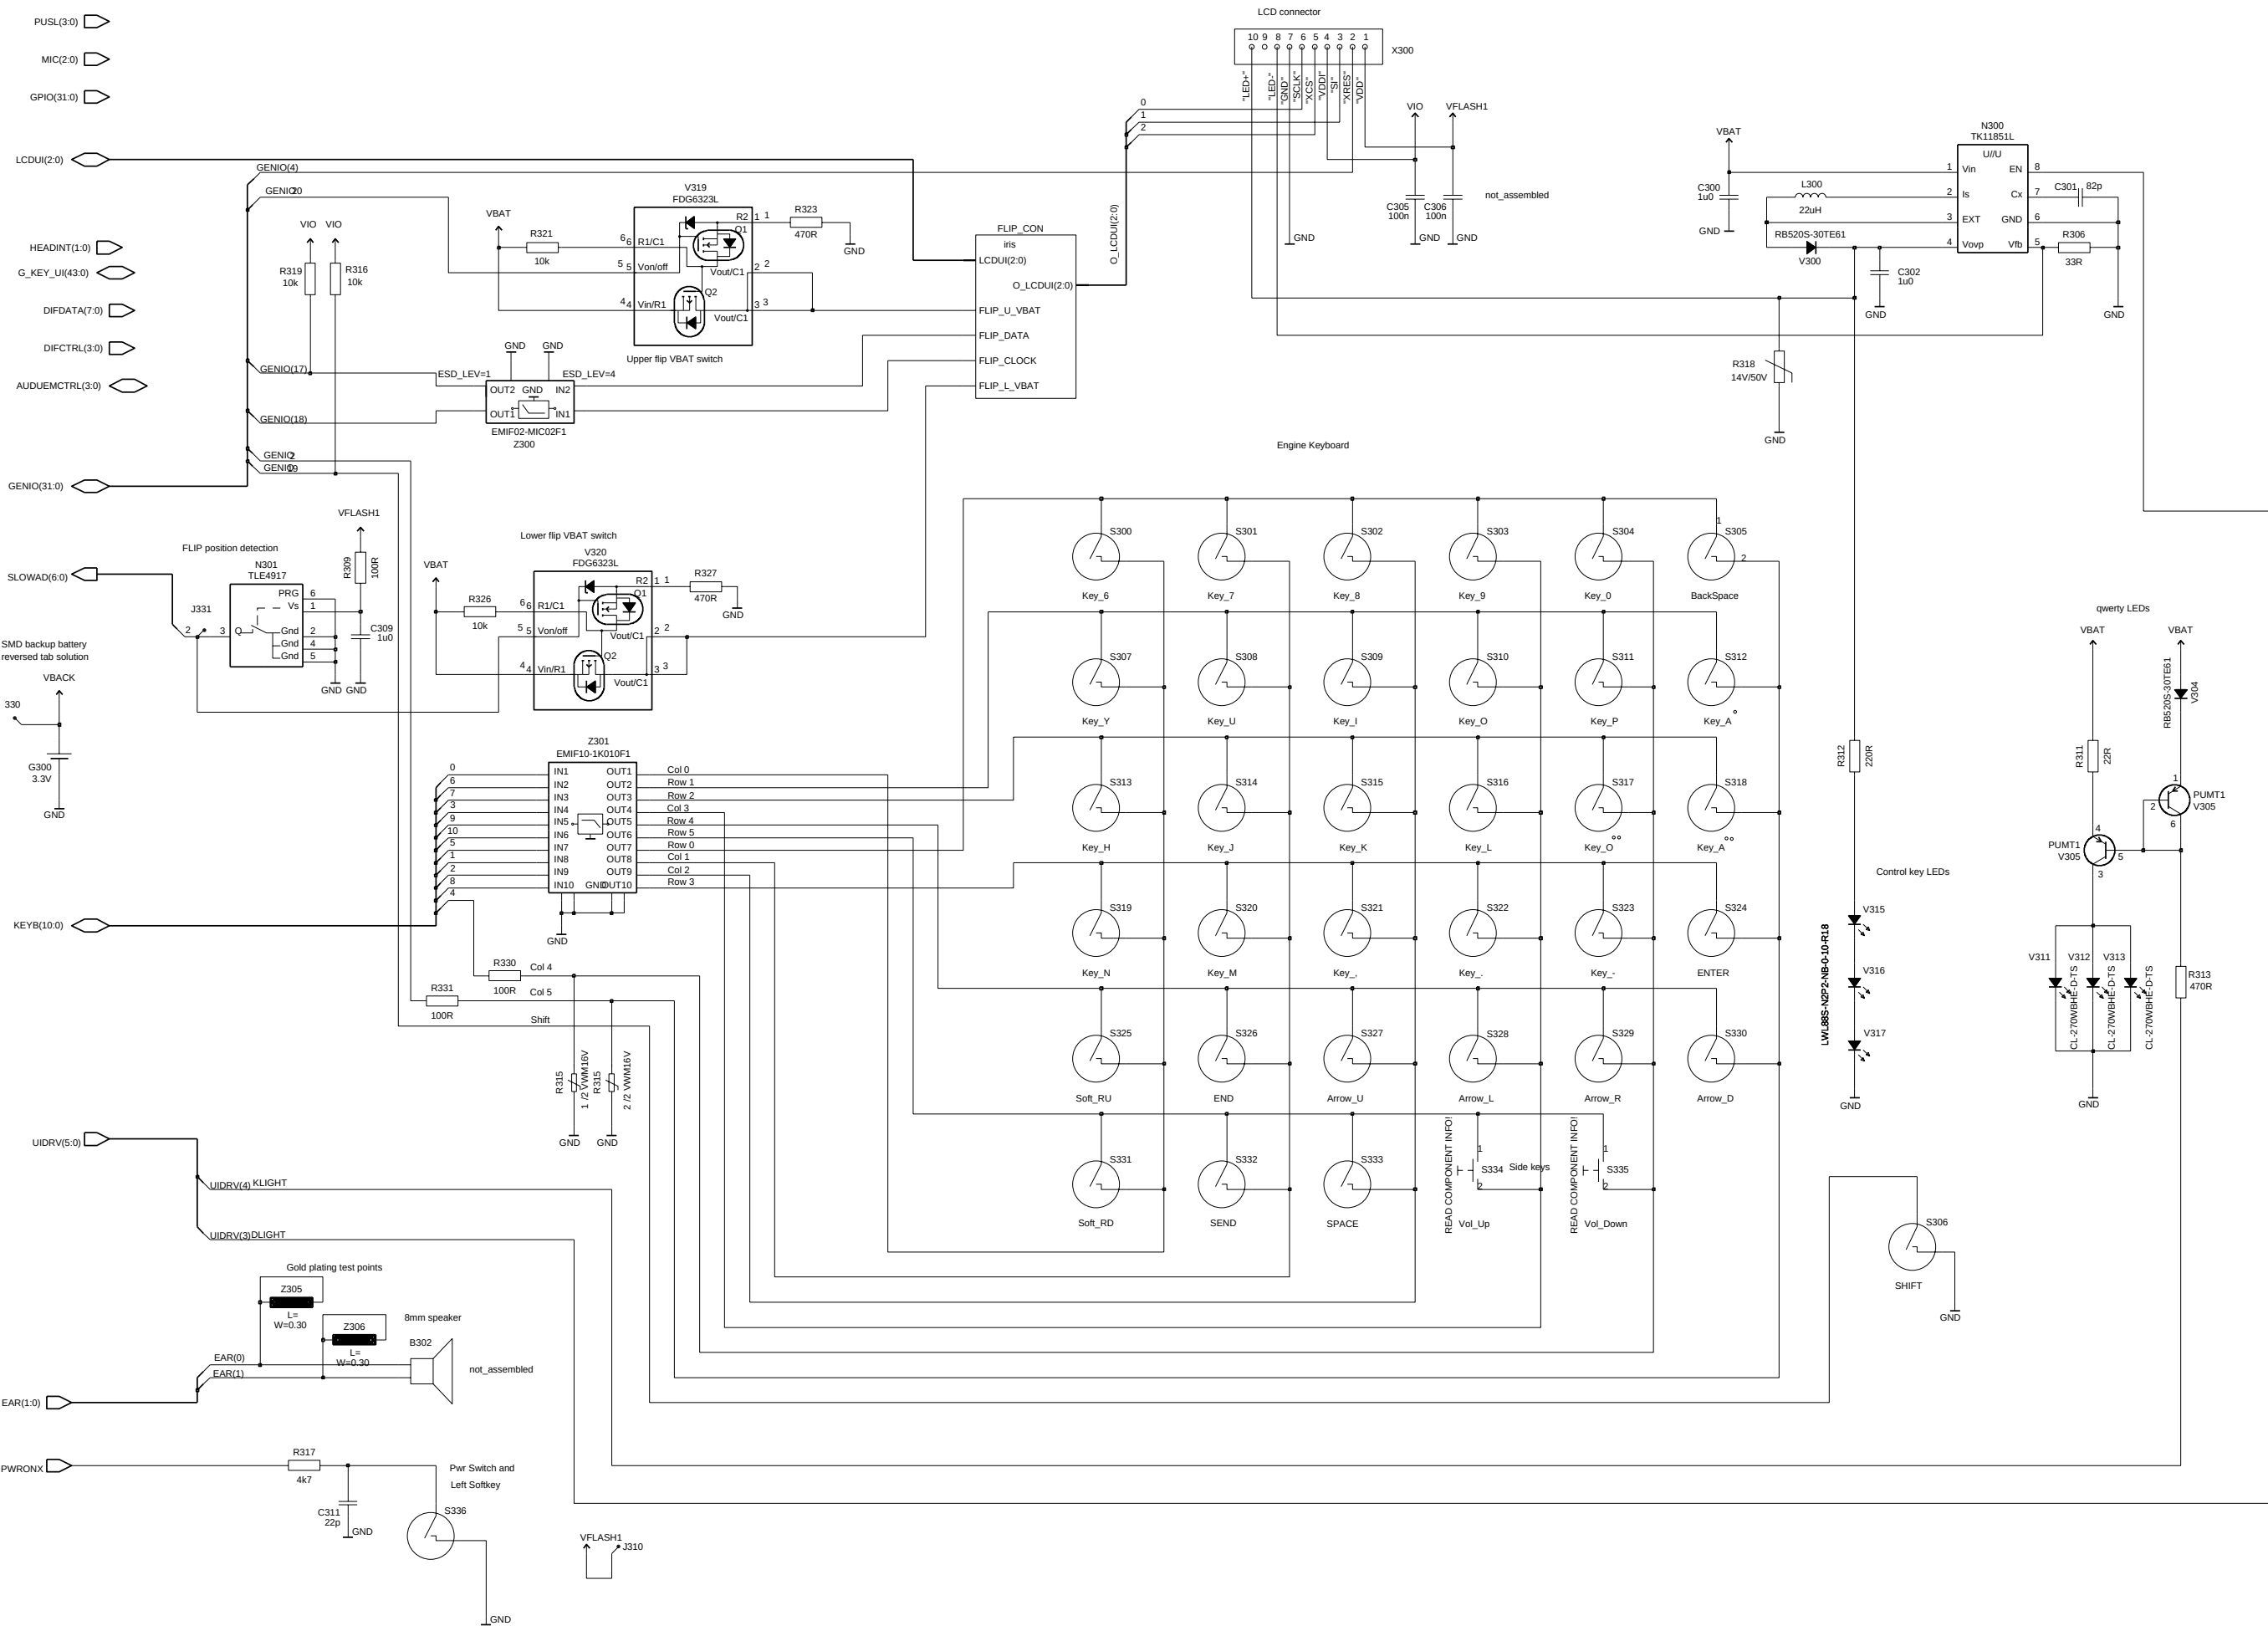


Flip Connector

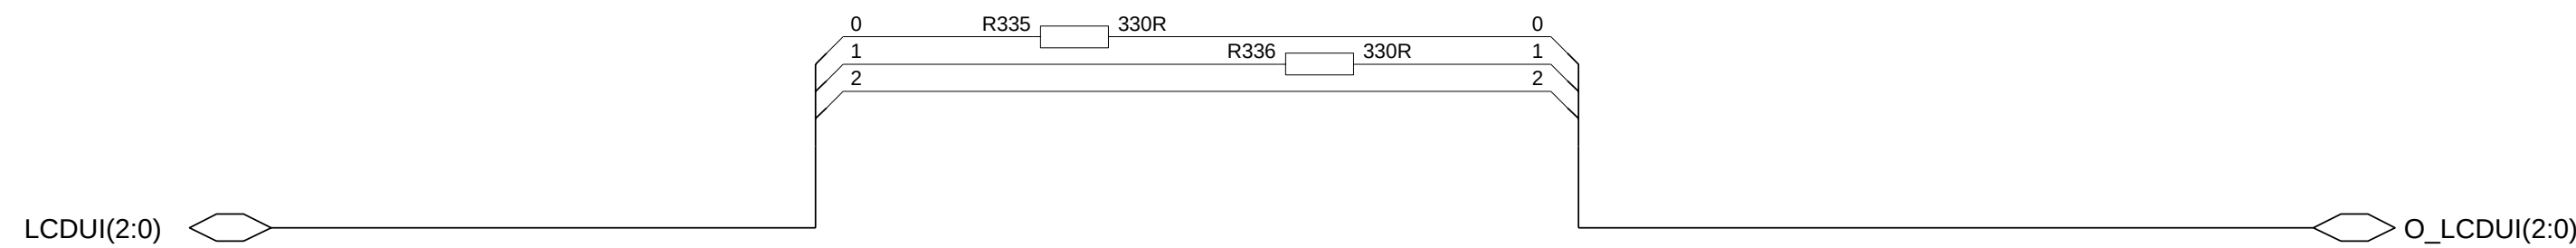


Flip connections

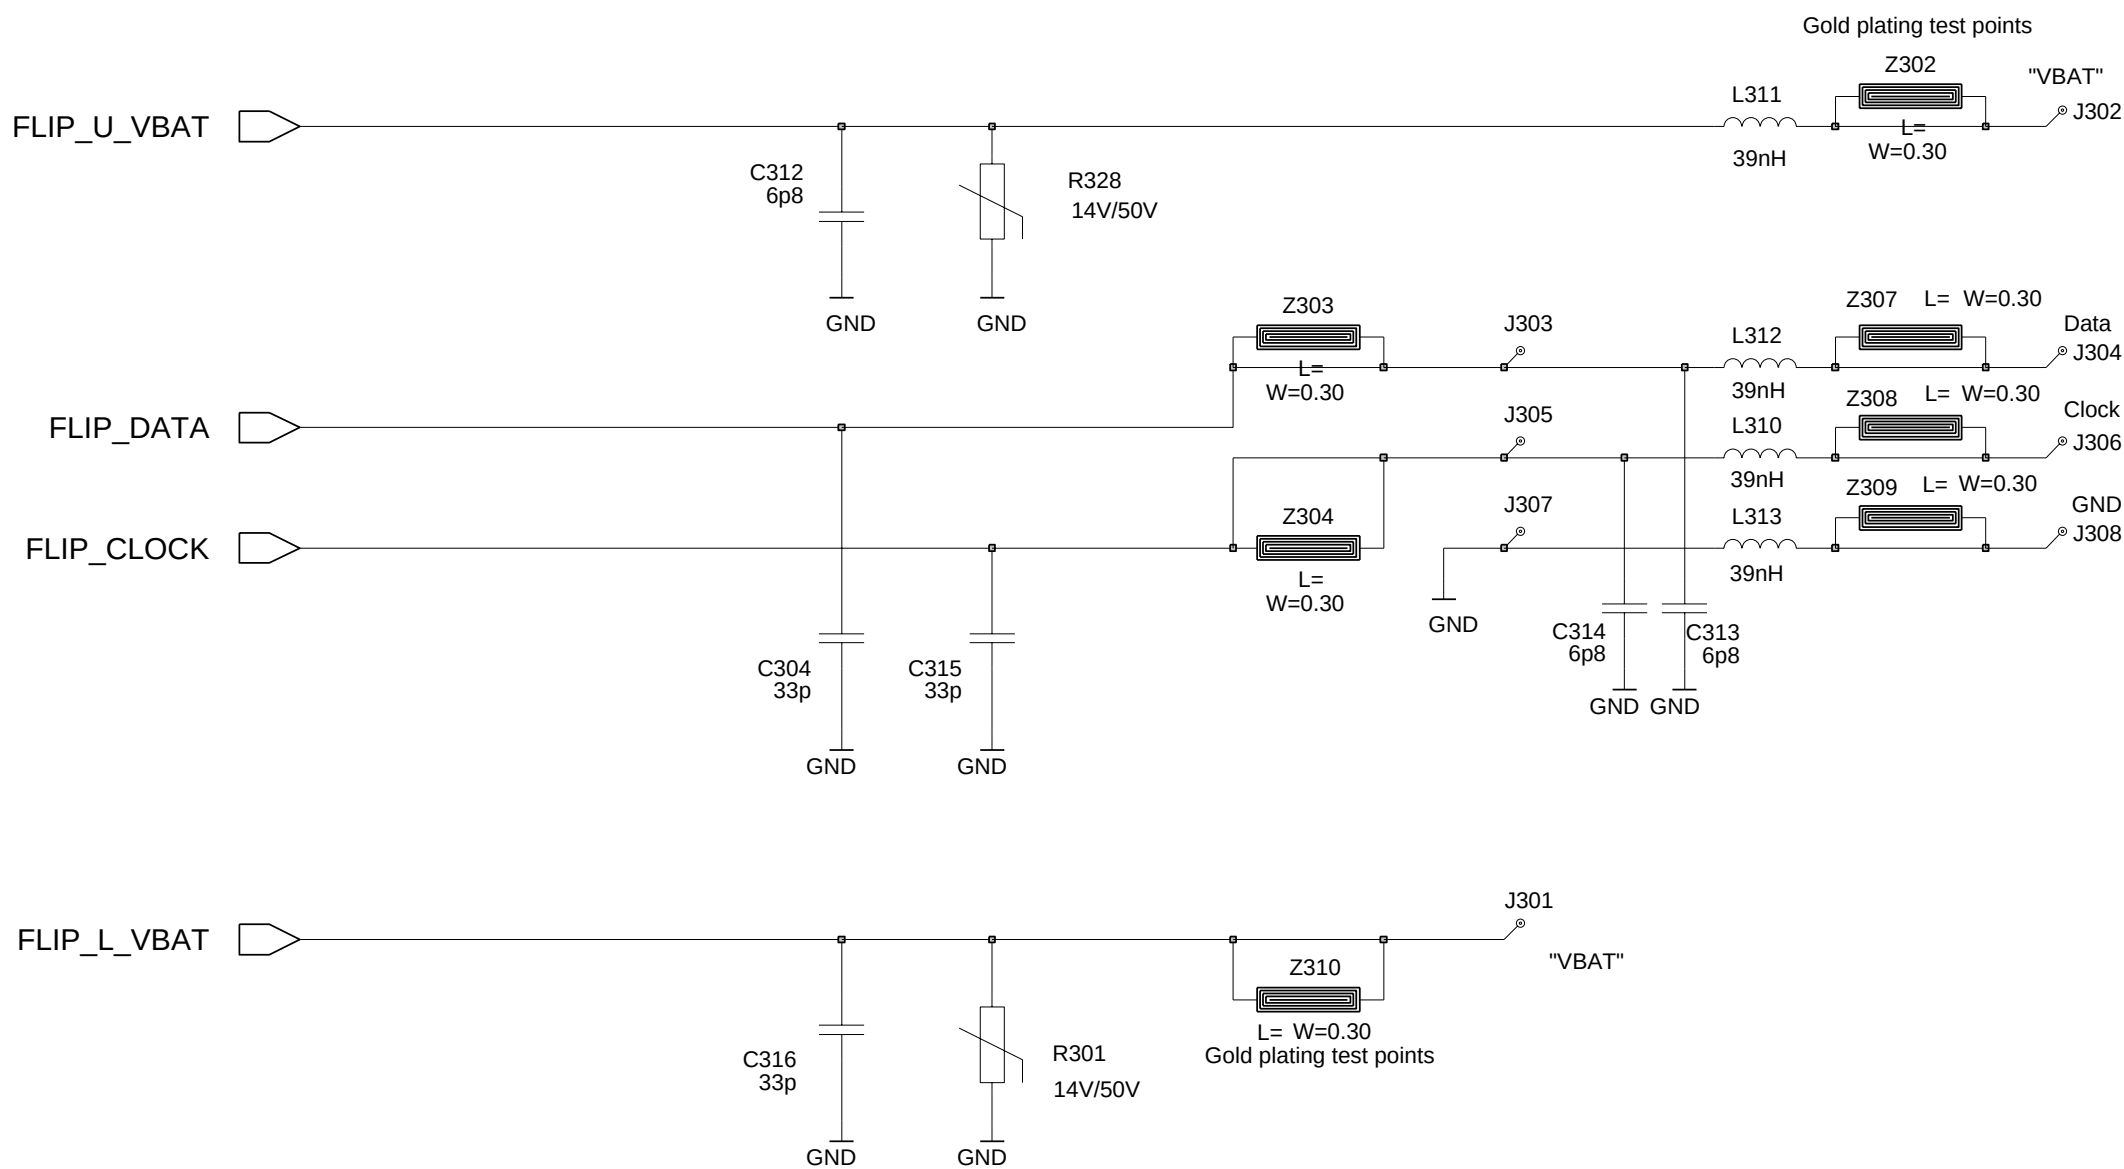

SIM


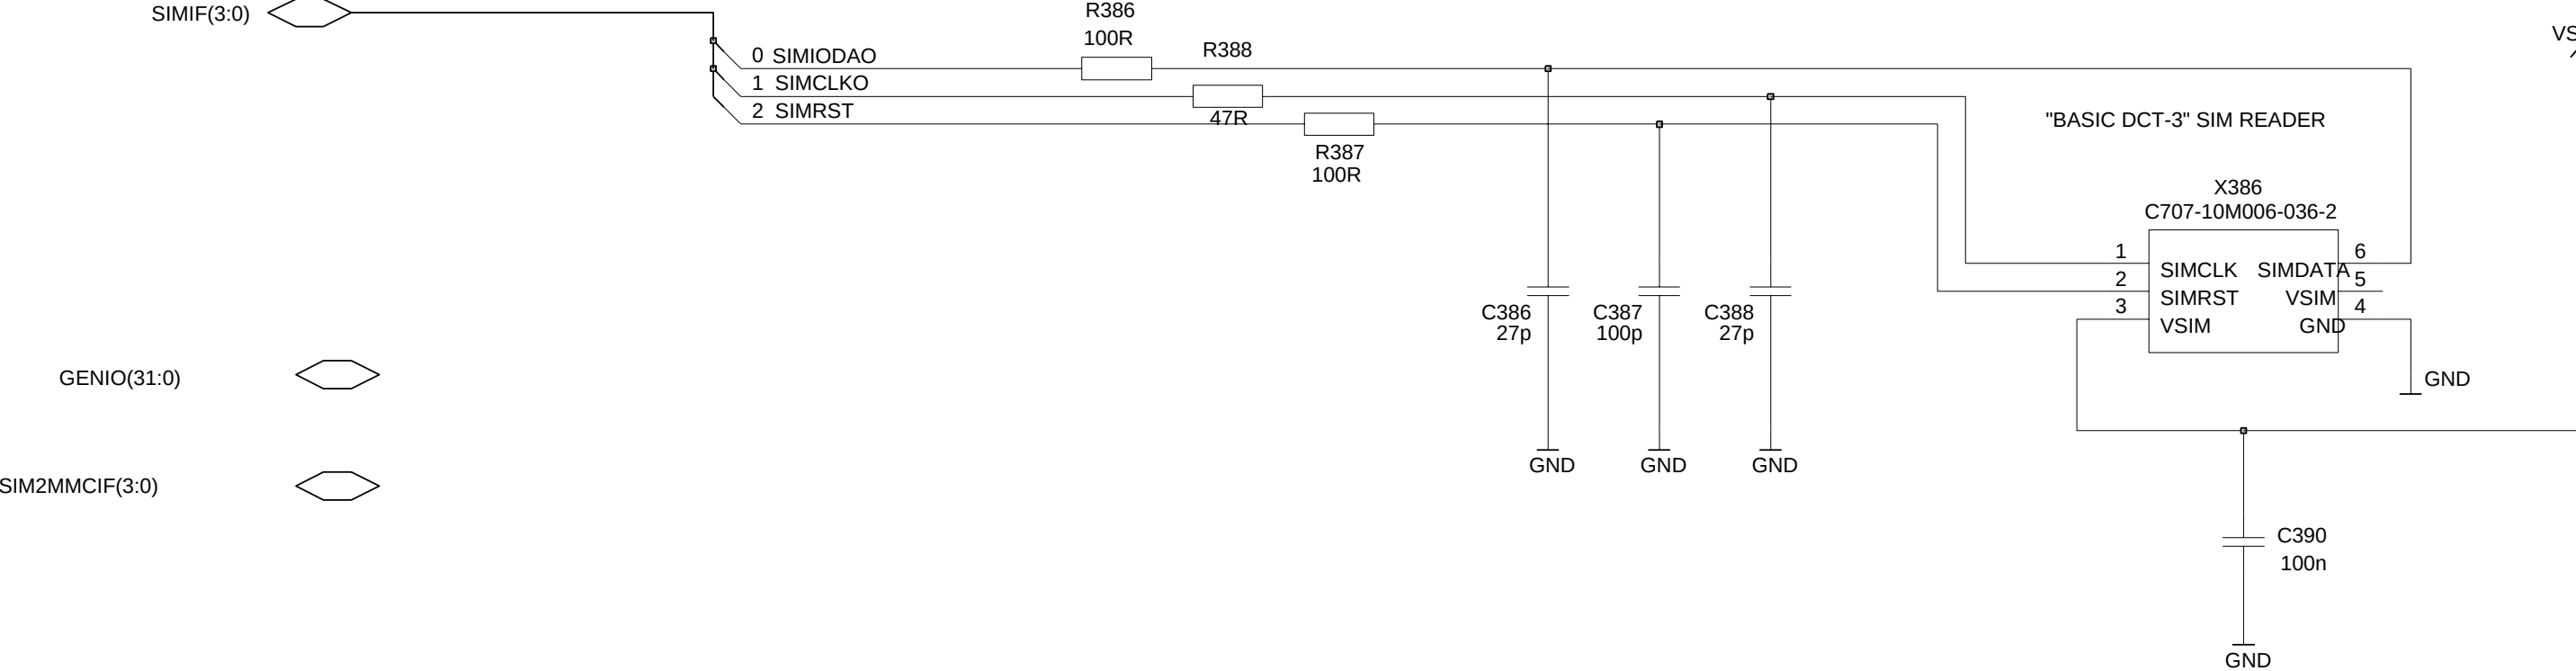


Power

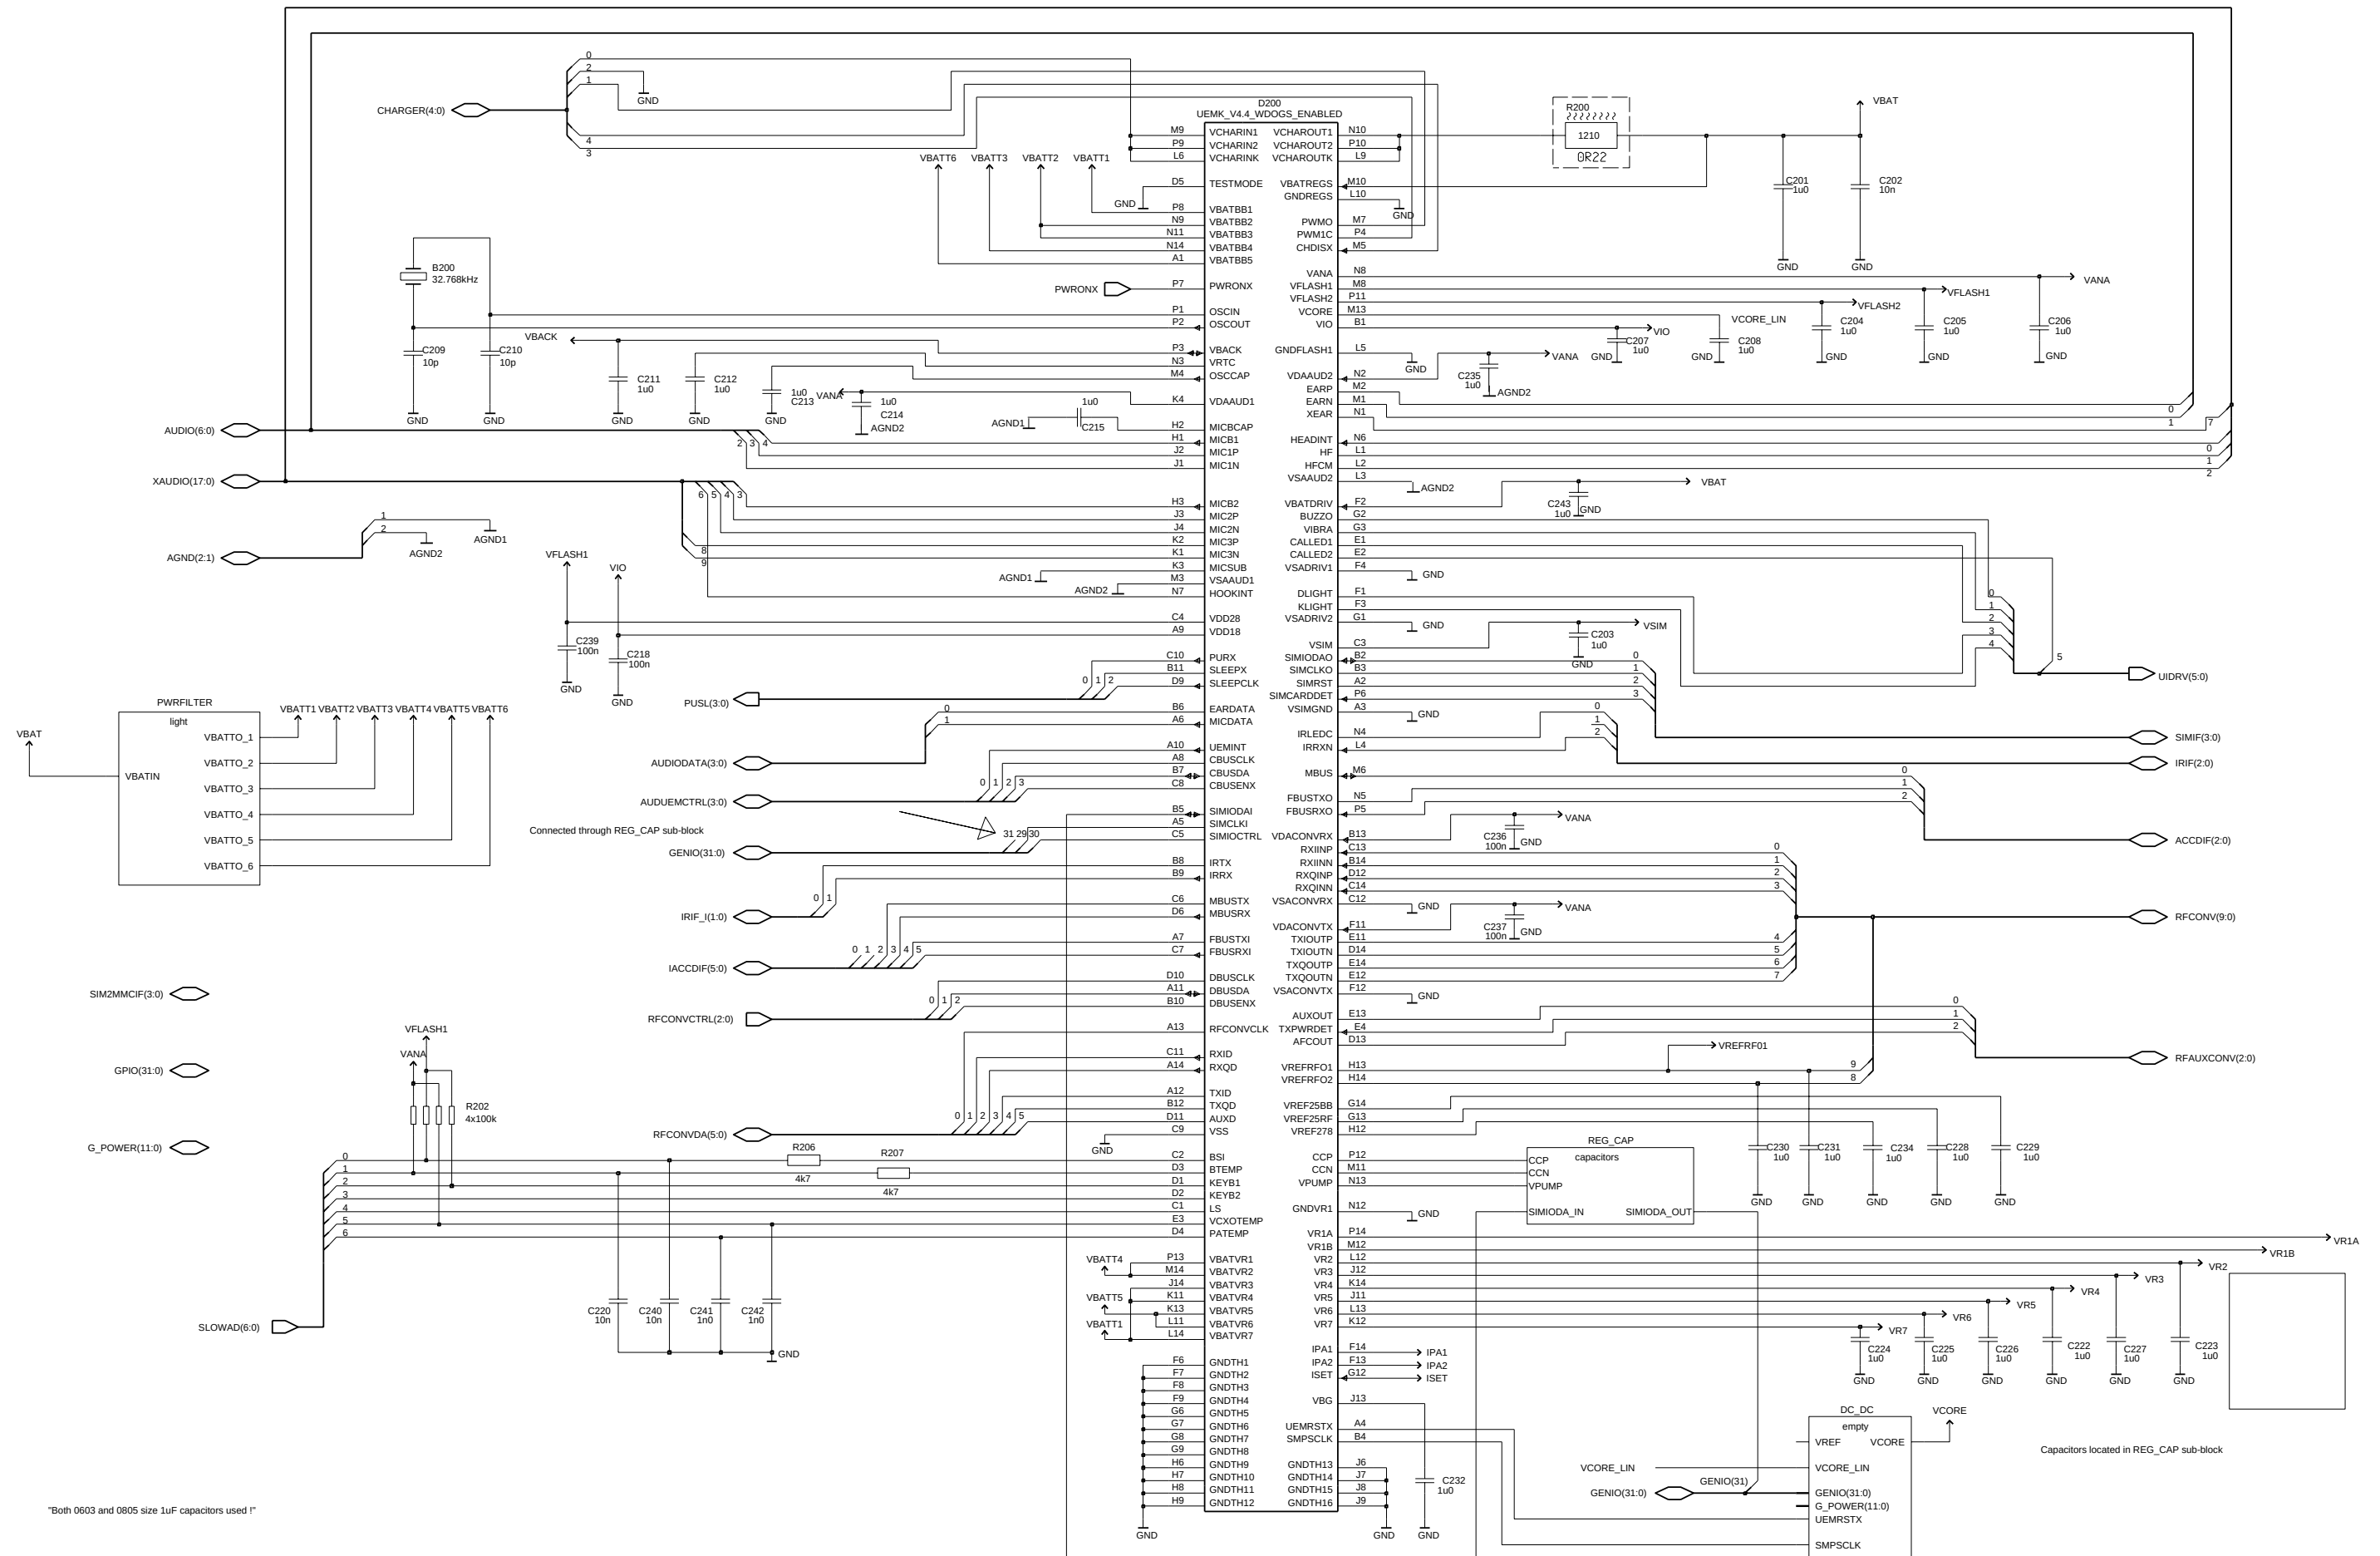


Used refs in REG_CAP: C238, C200, C219, C233, C221 and R205

Reg Cap

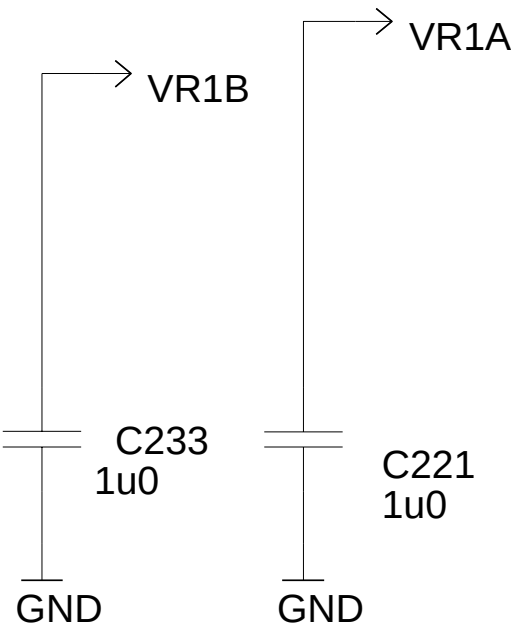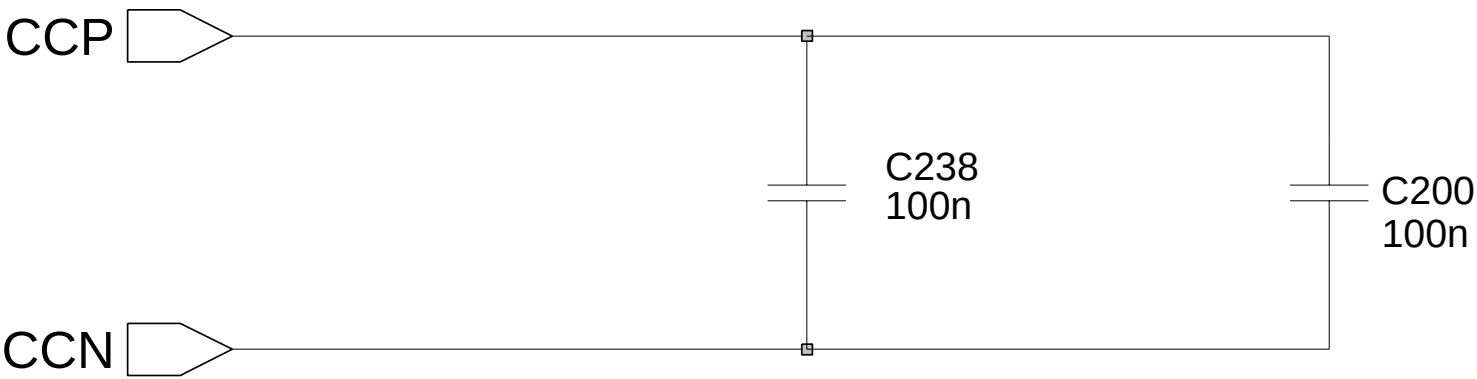


Powerfilter

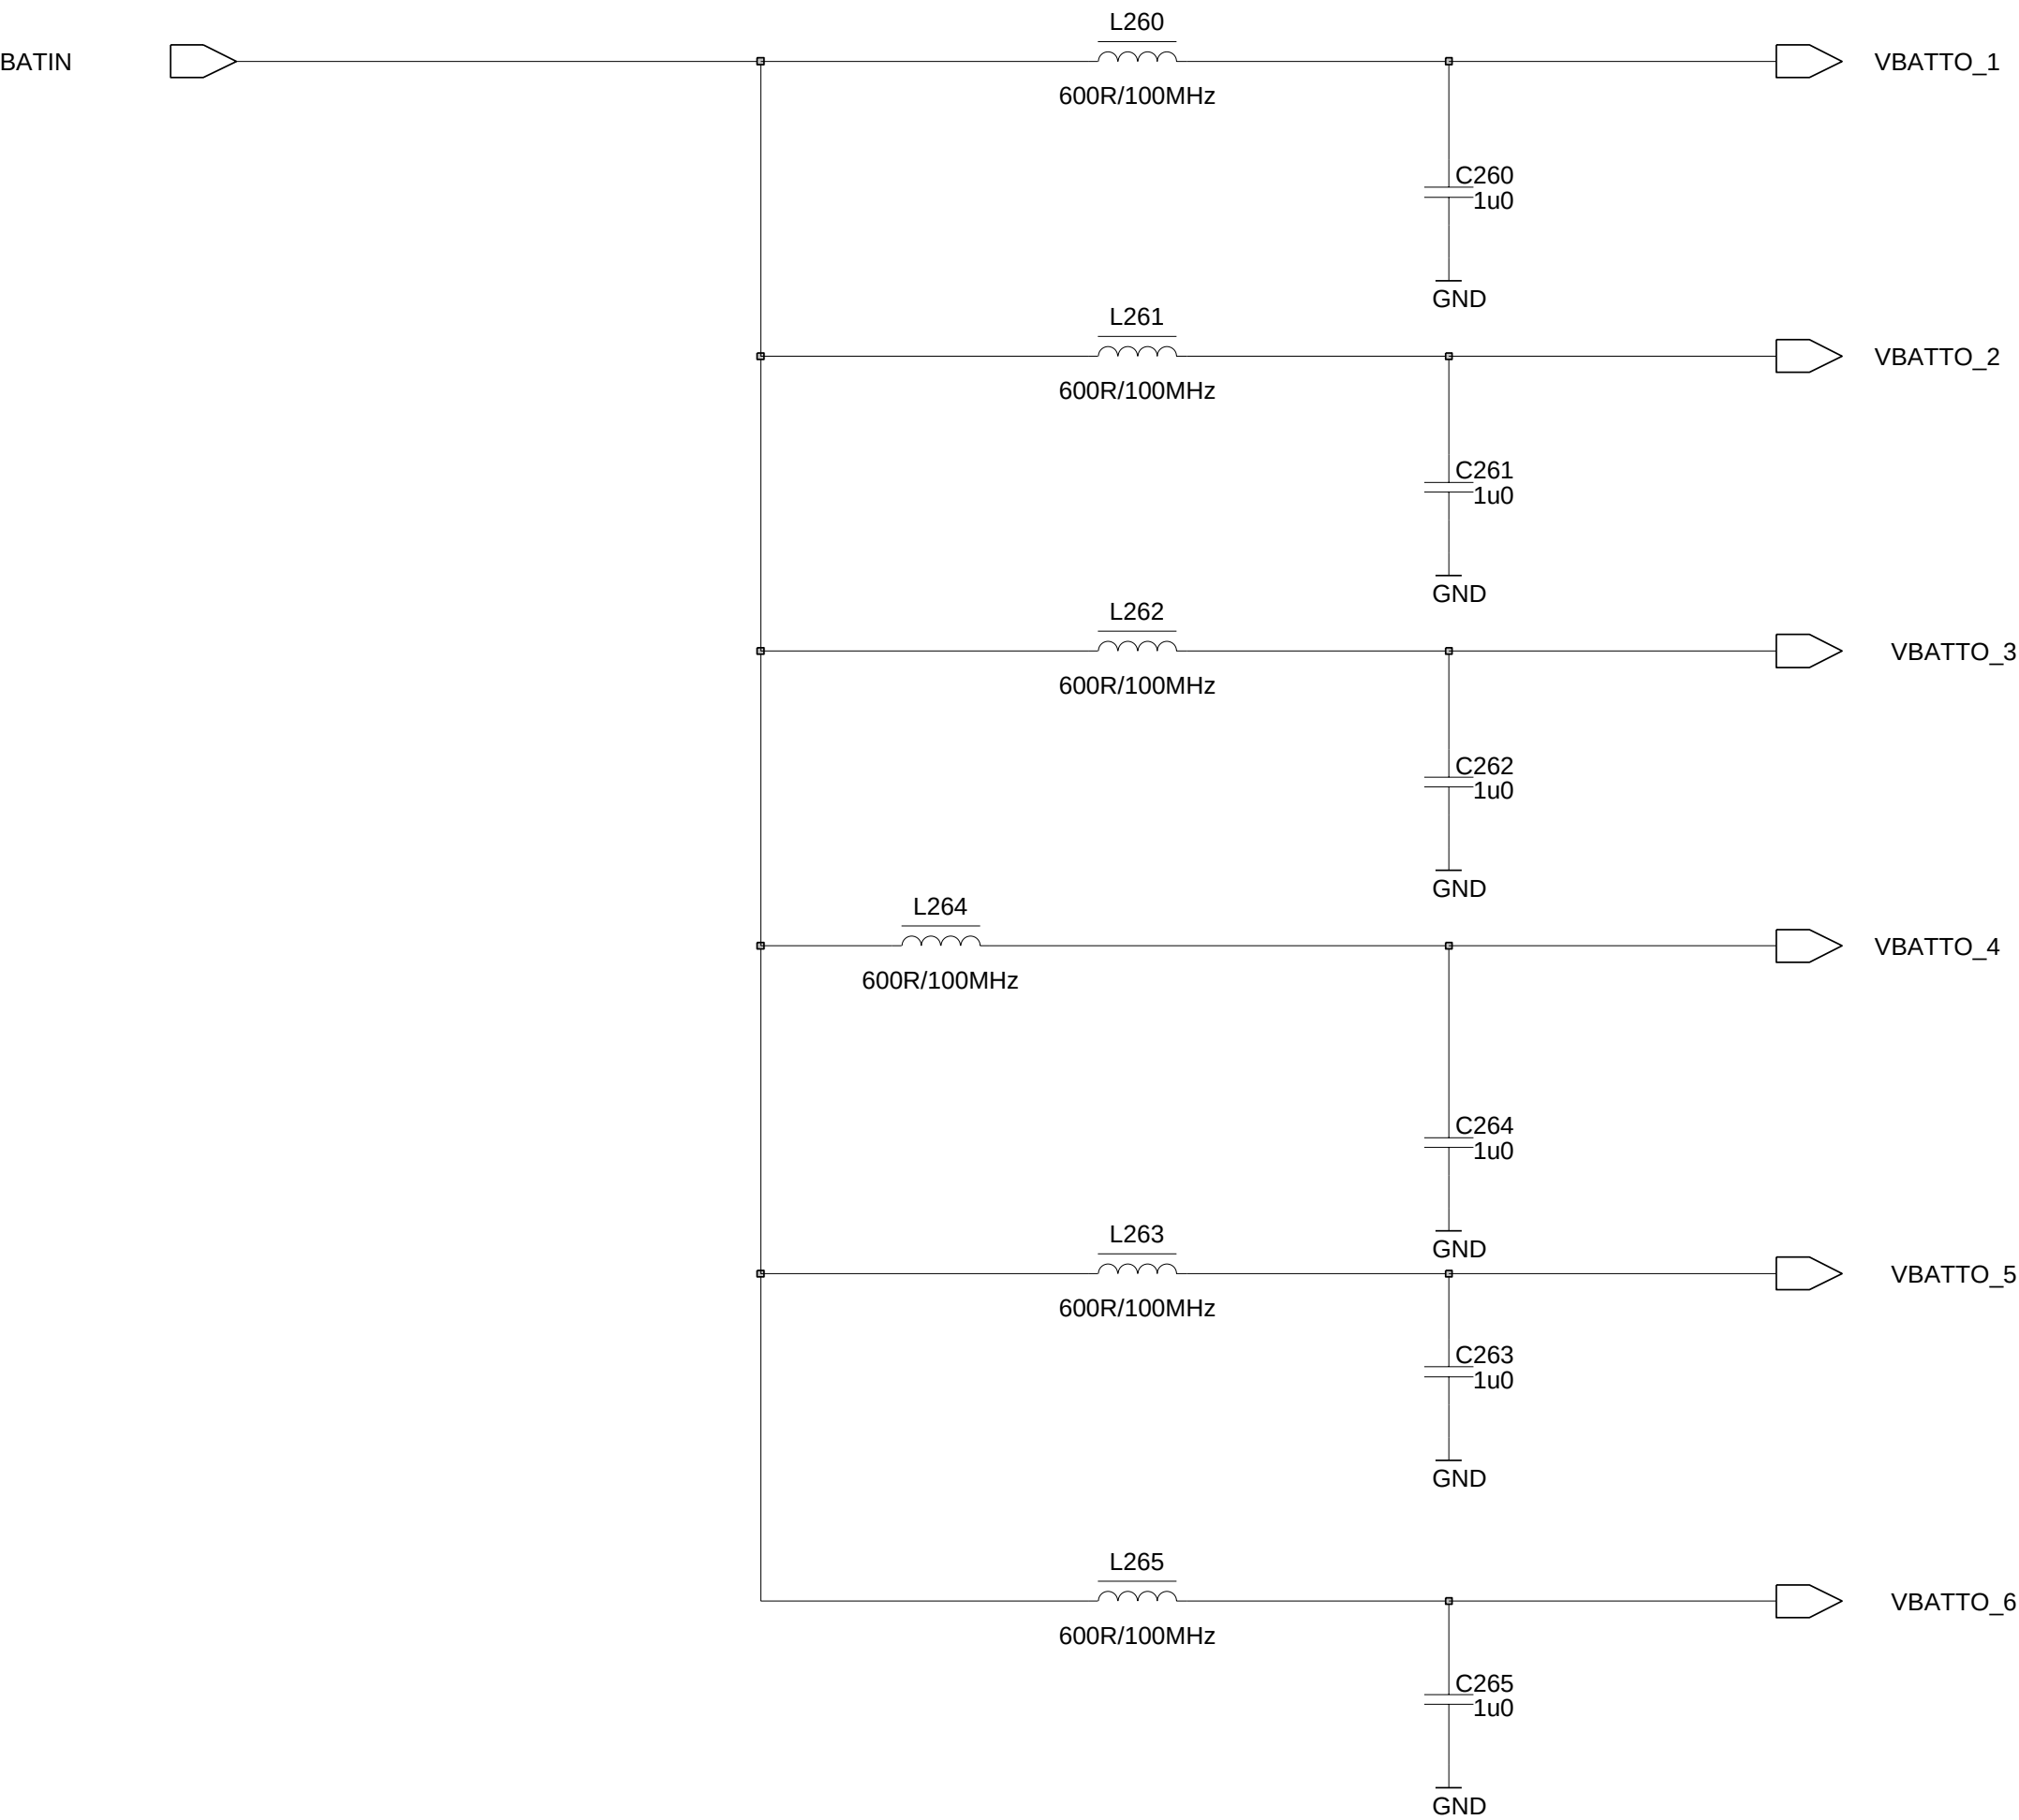


R200

Will be changed to reference number in viewpoint

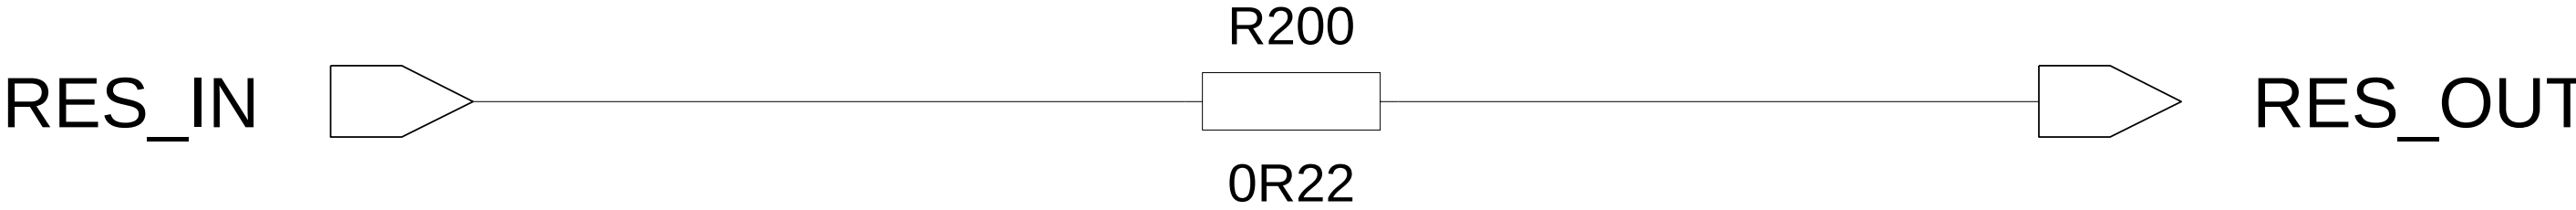




UPP Filter

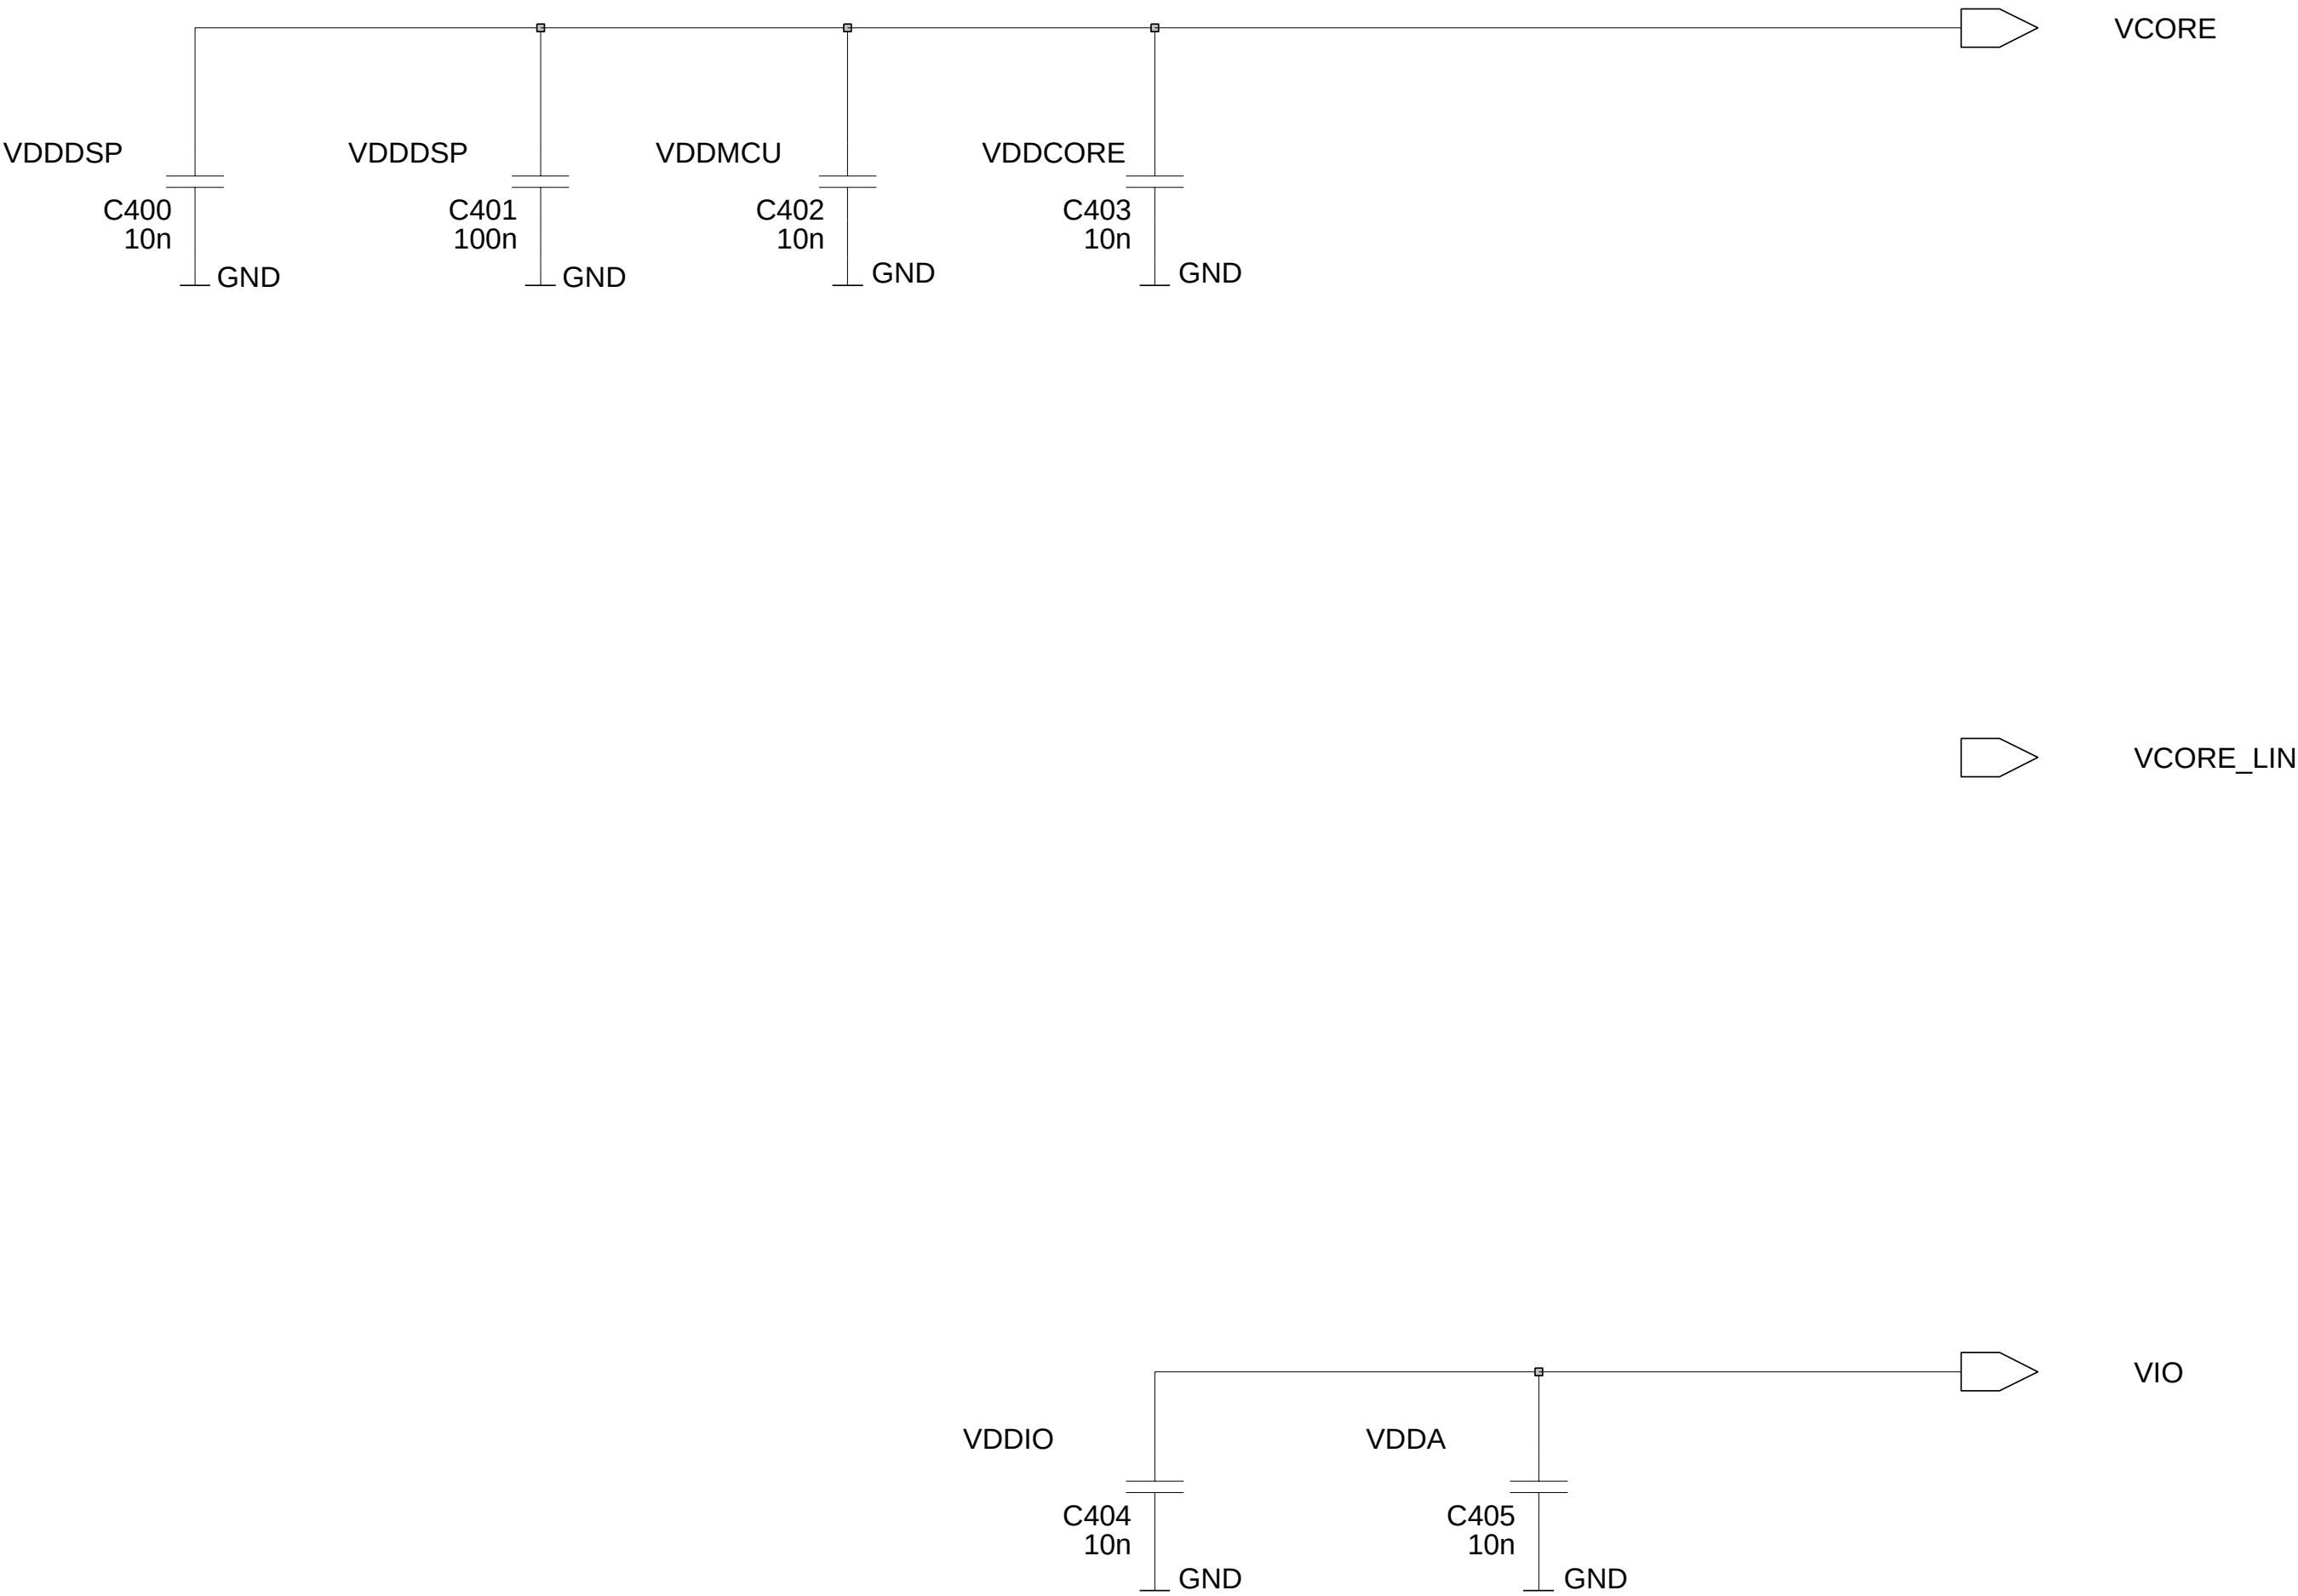

Memory

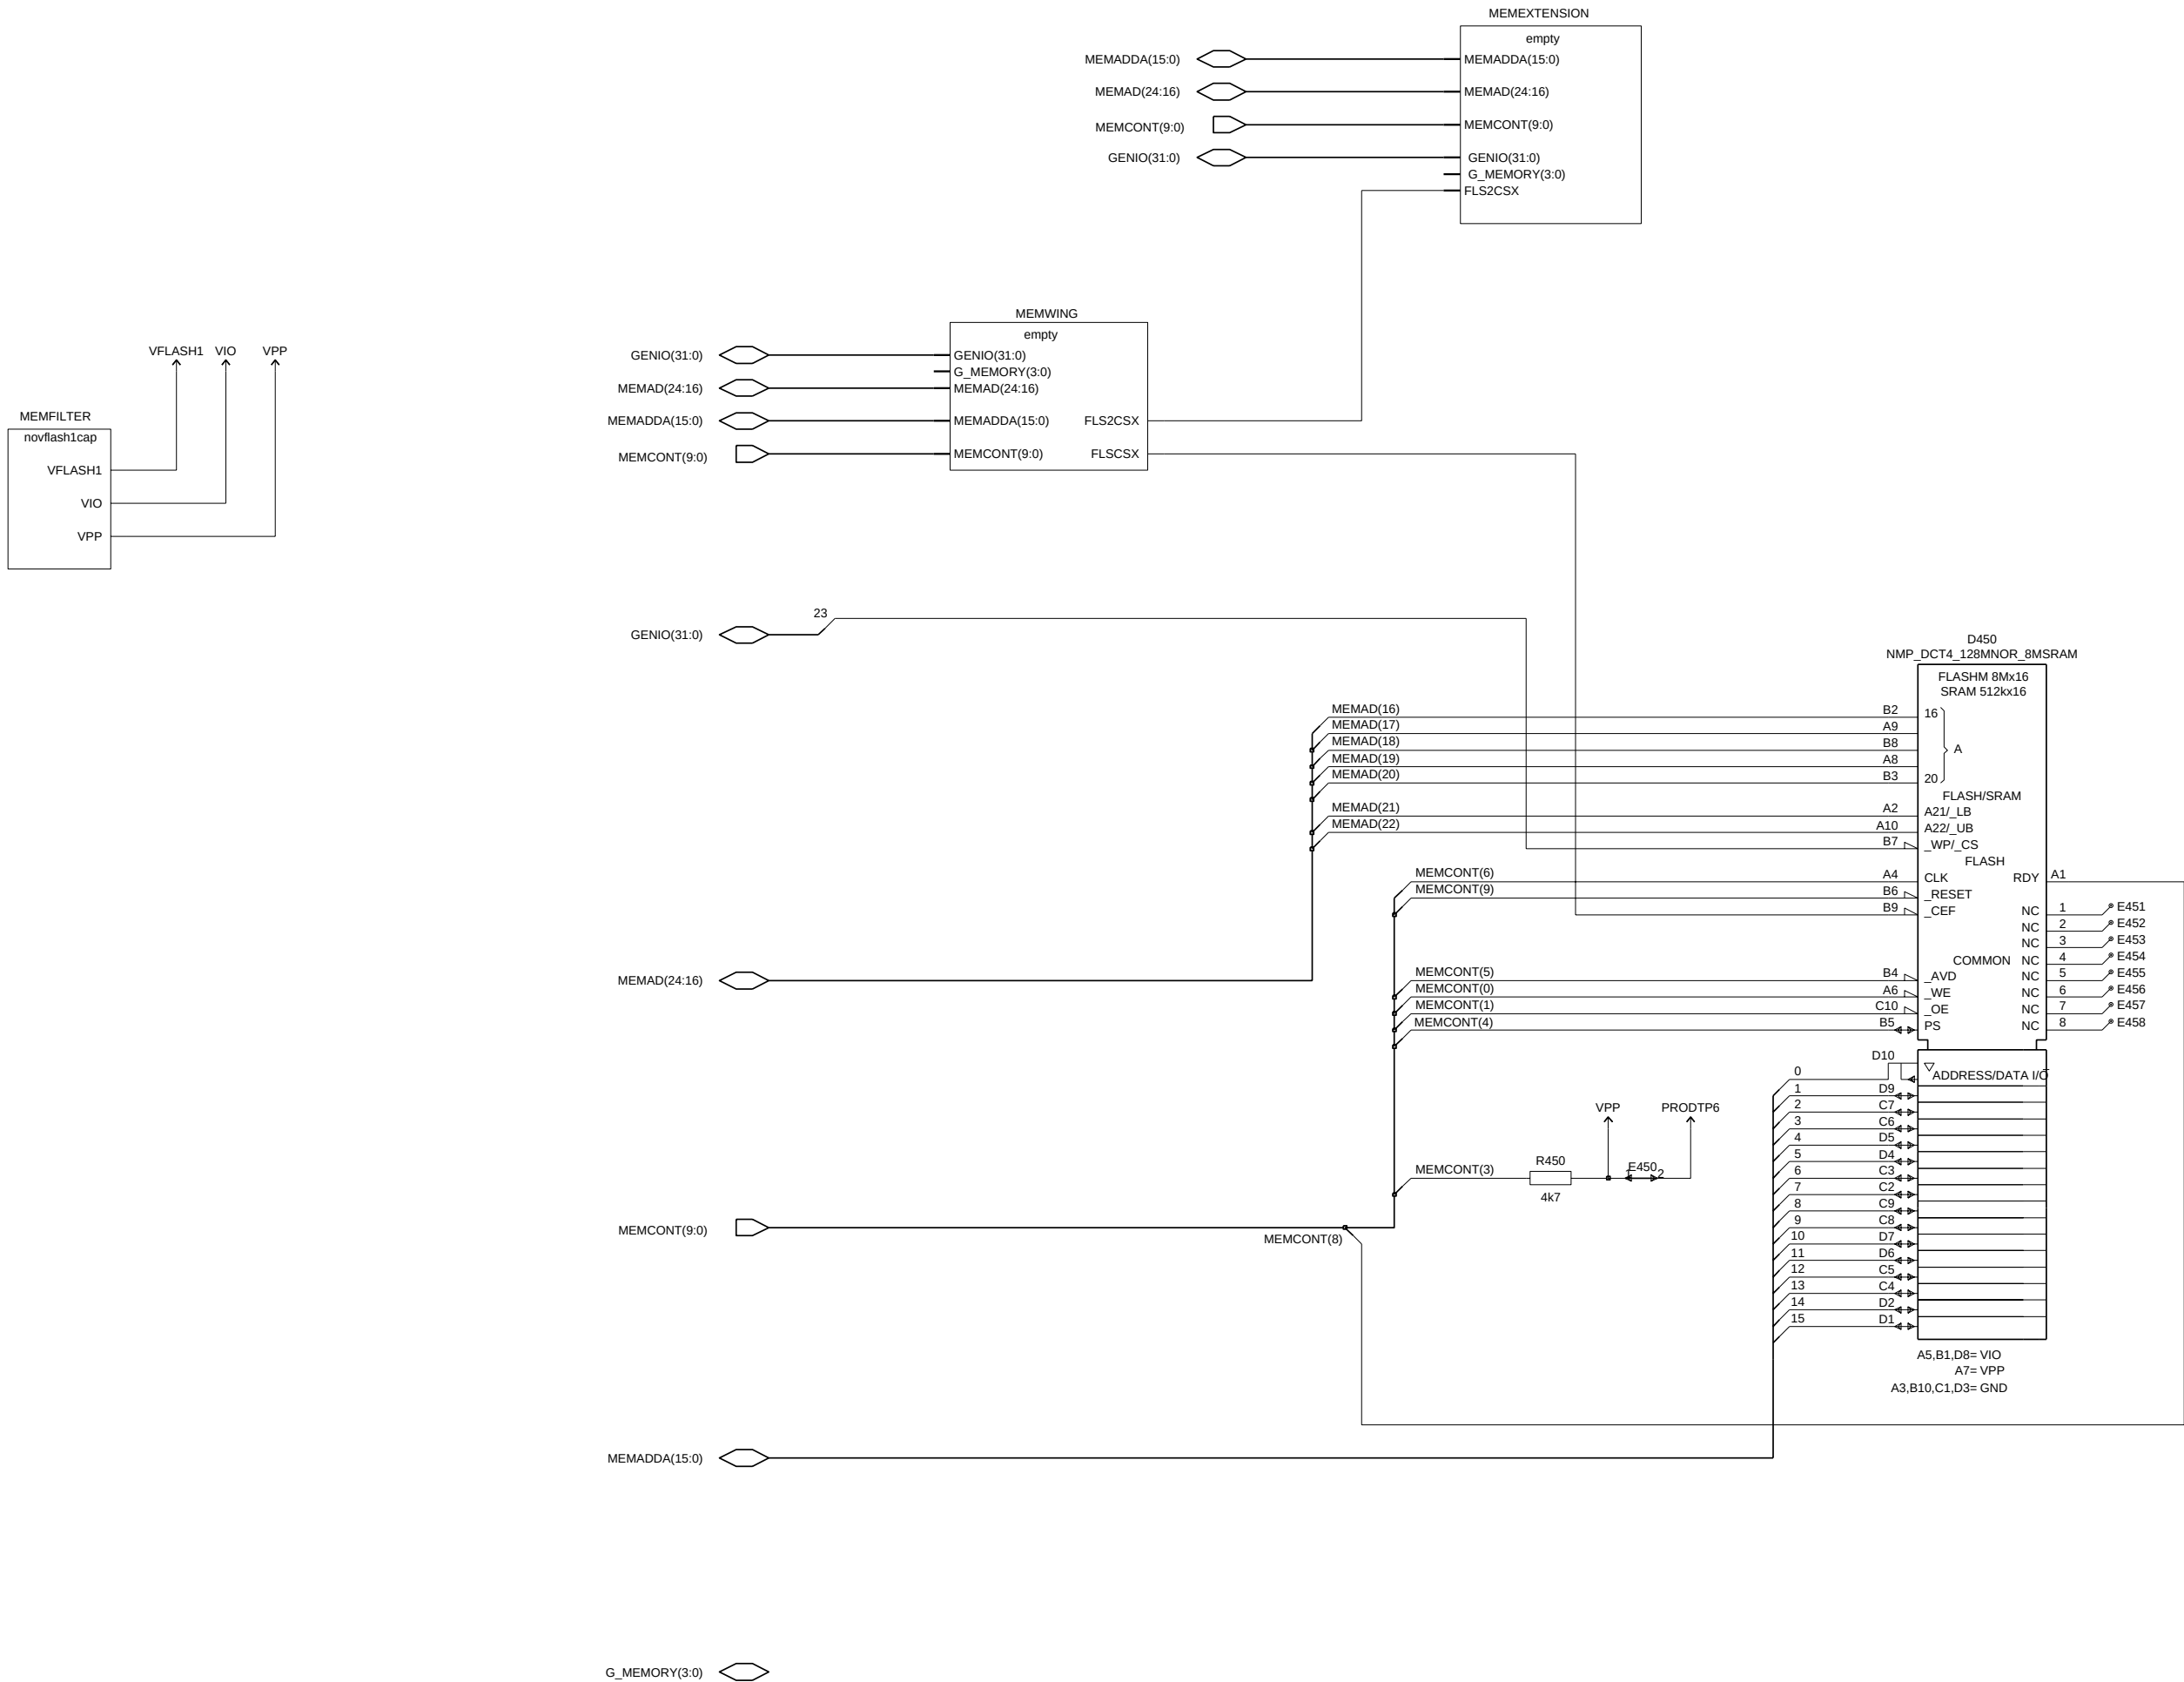

Memory Wing

MEMADDA(15:0)



MEMAD(24:16)



GENIO(31:0)



G_MEMORY(3:0)



MEMCONT(9:0)





2


7

FLS2CSX


FLSCSX

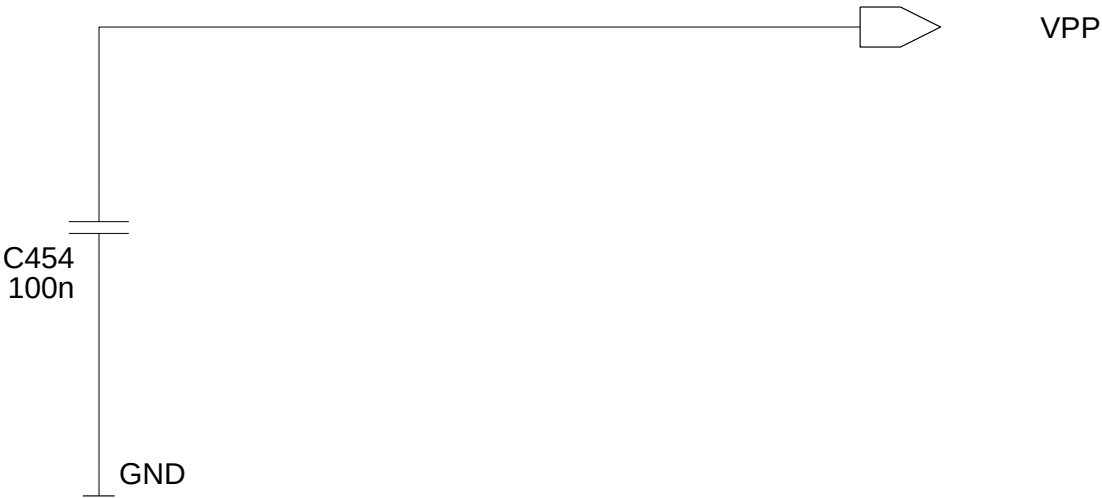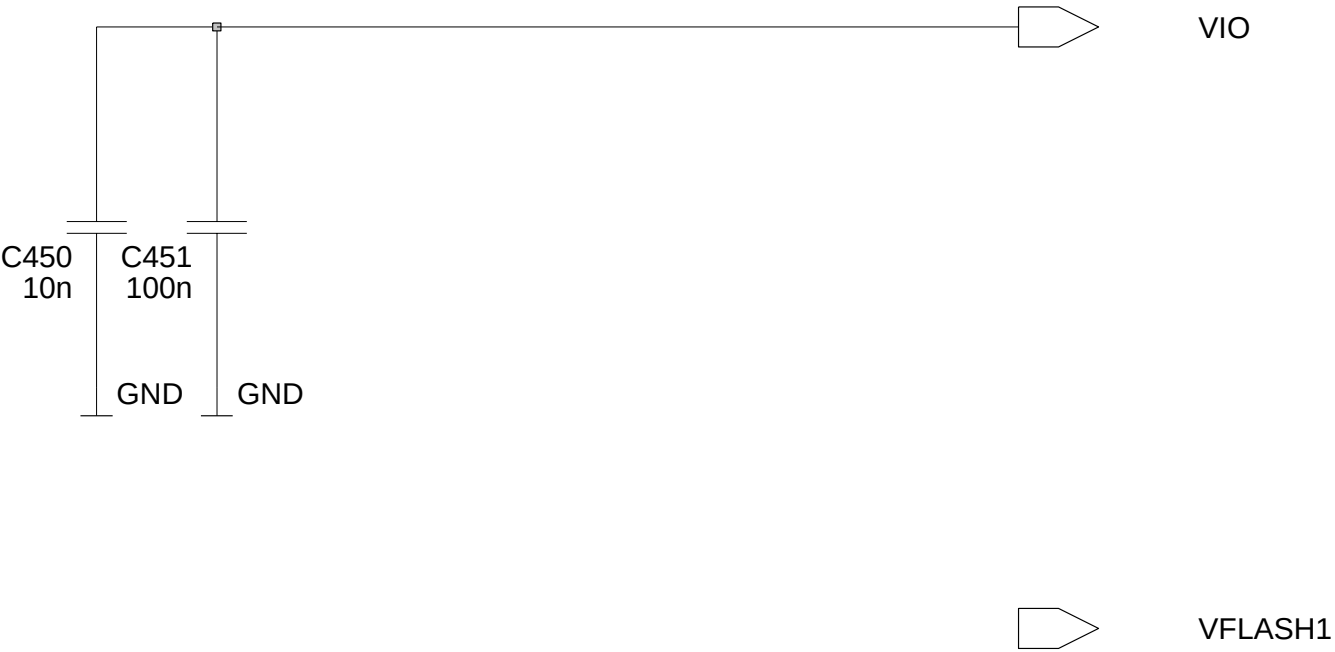

FM Radio

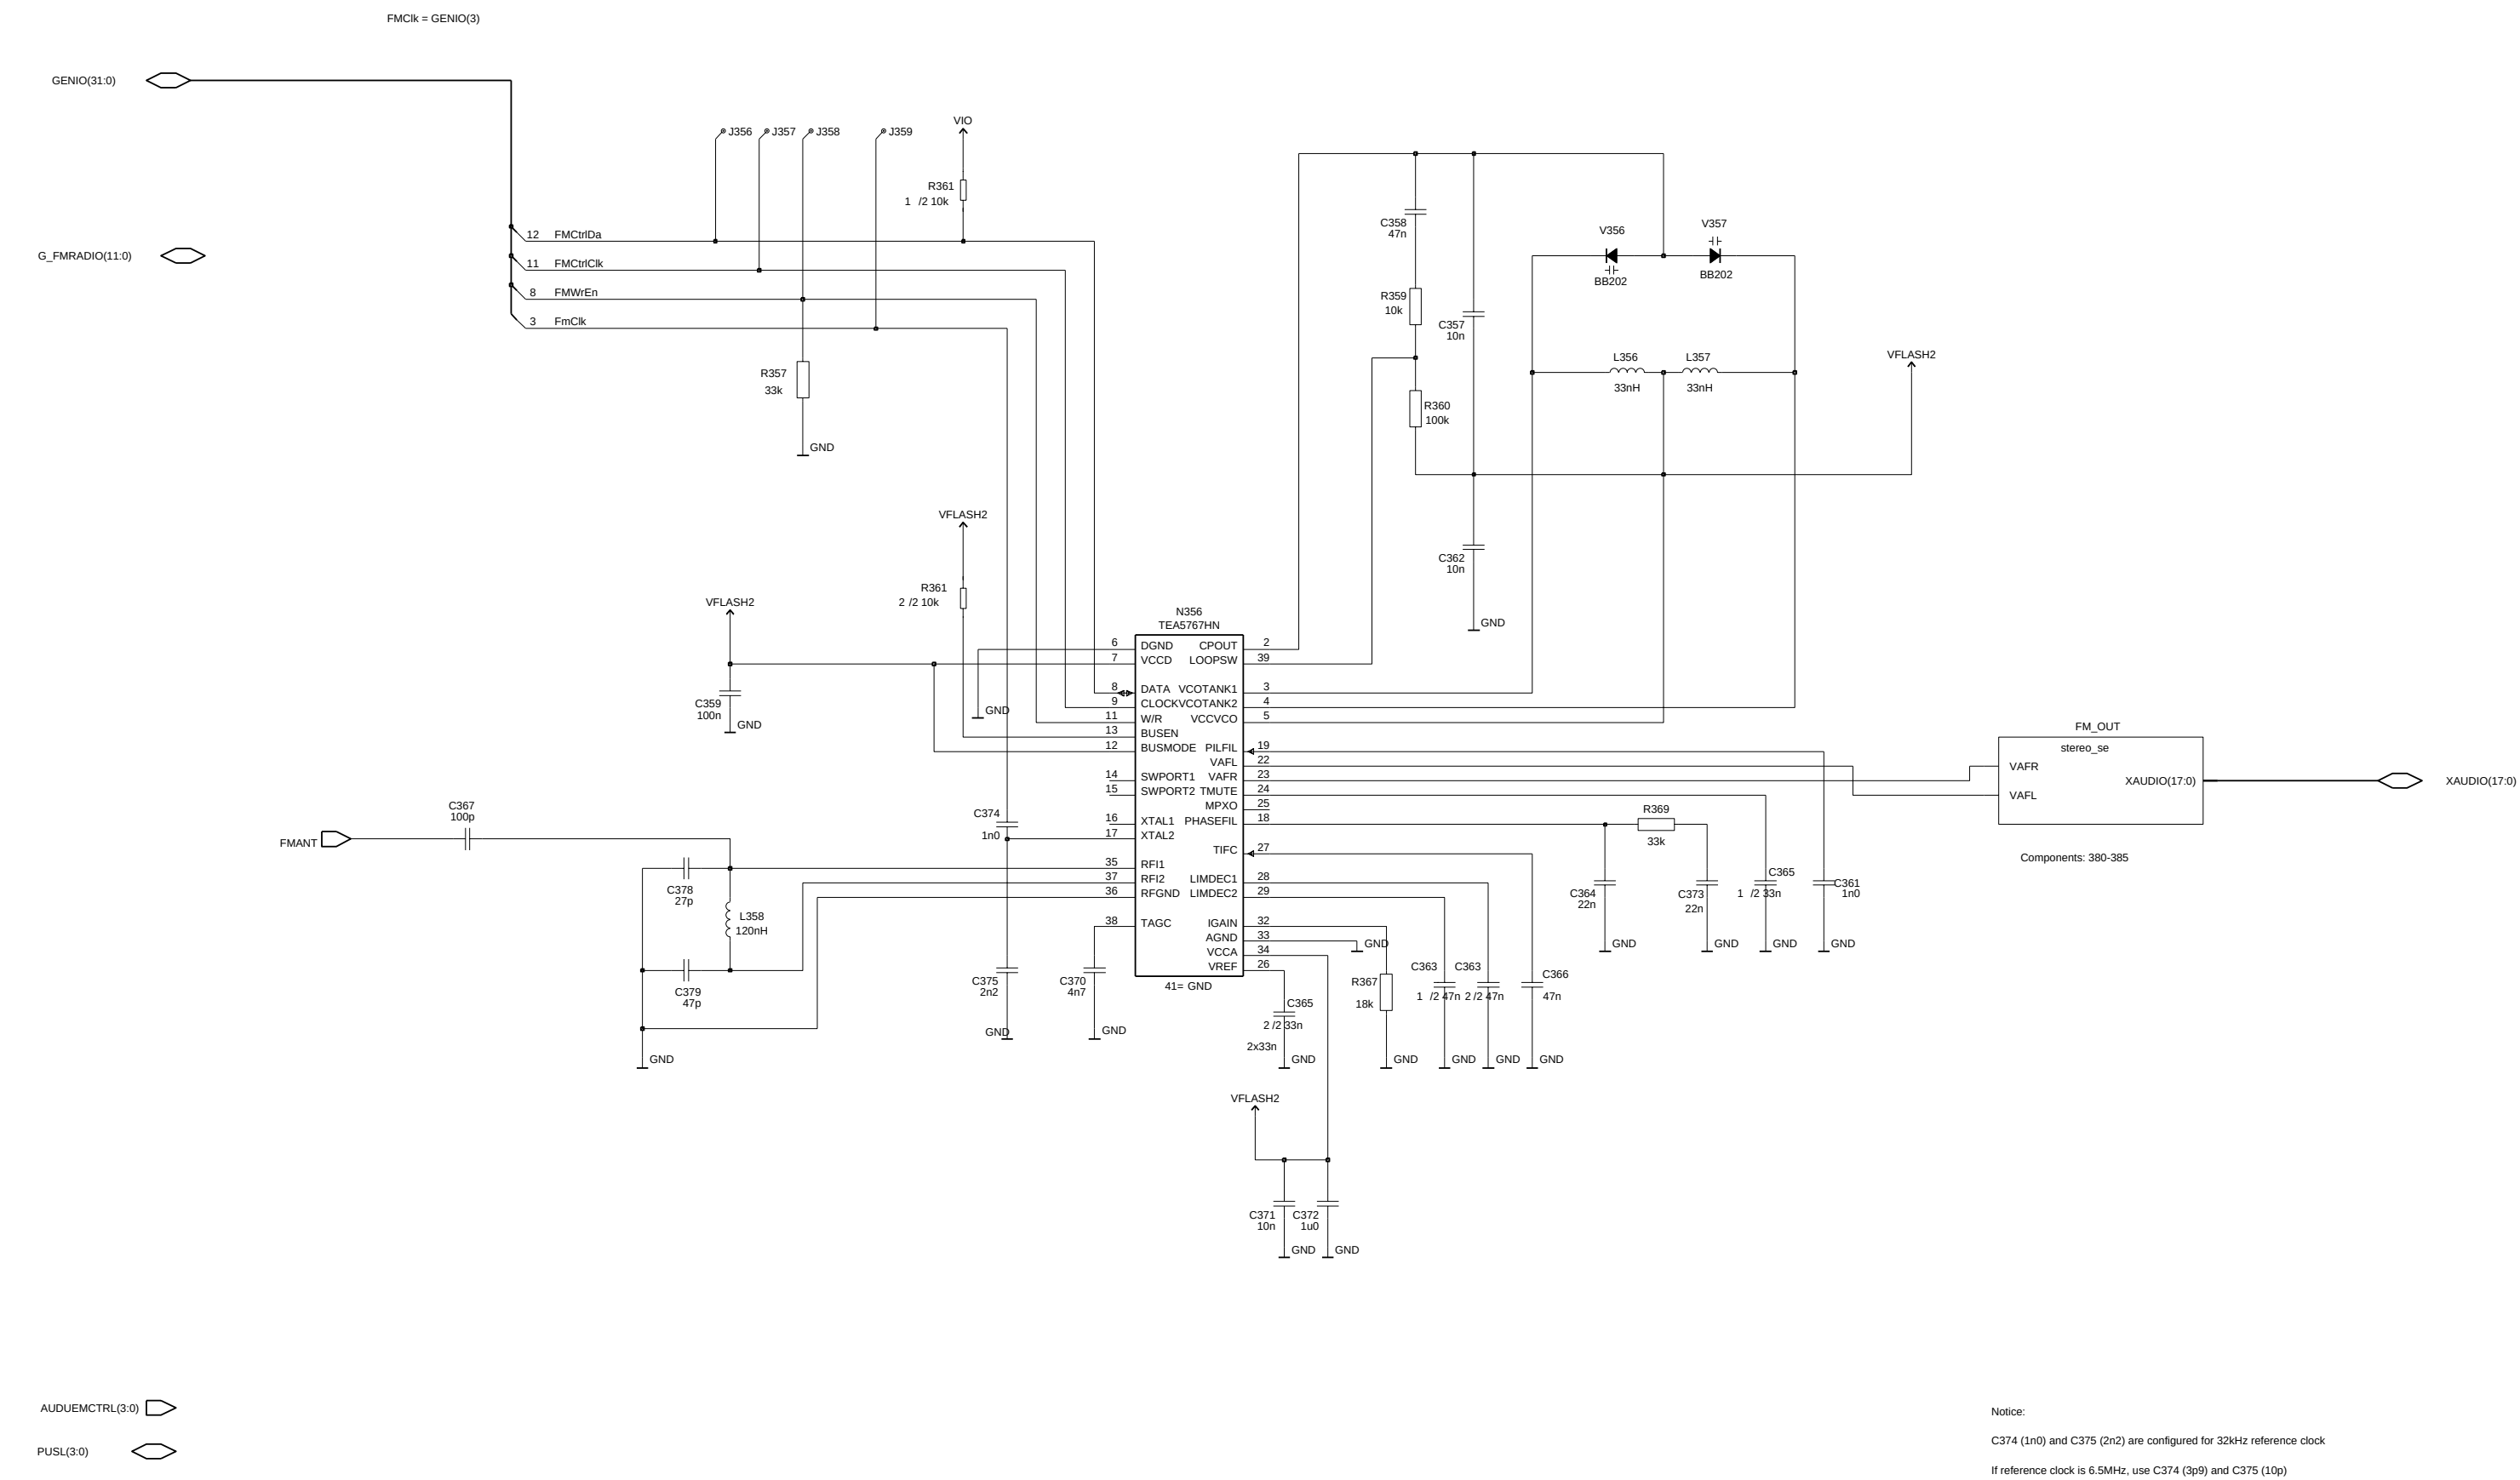

FM Out

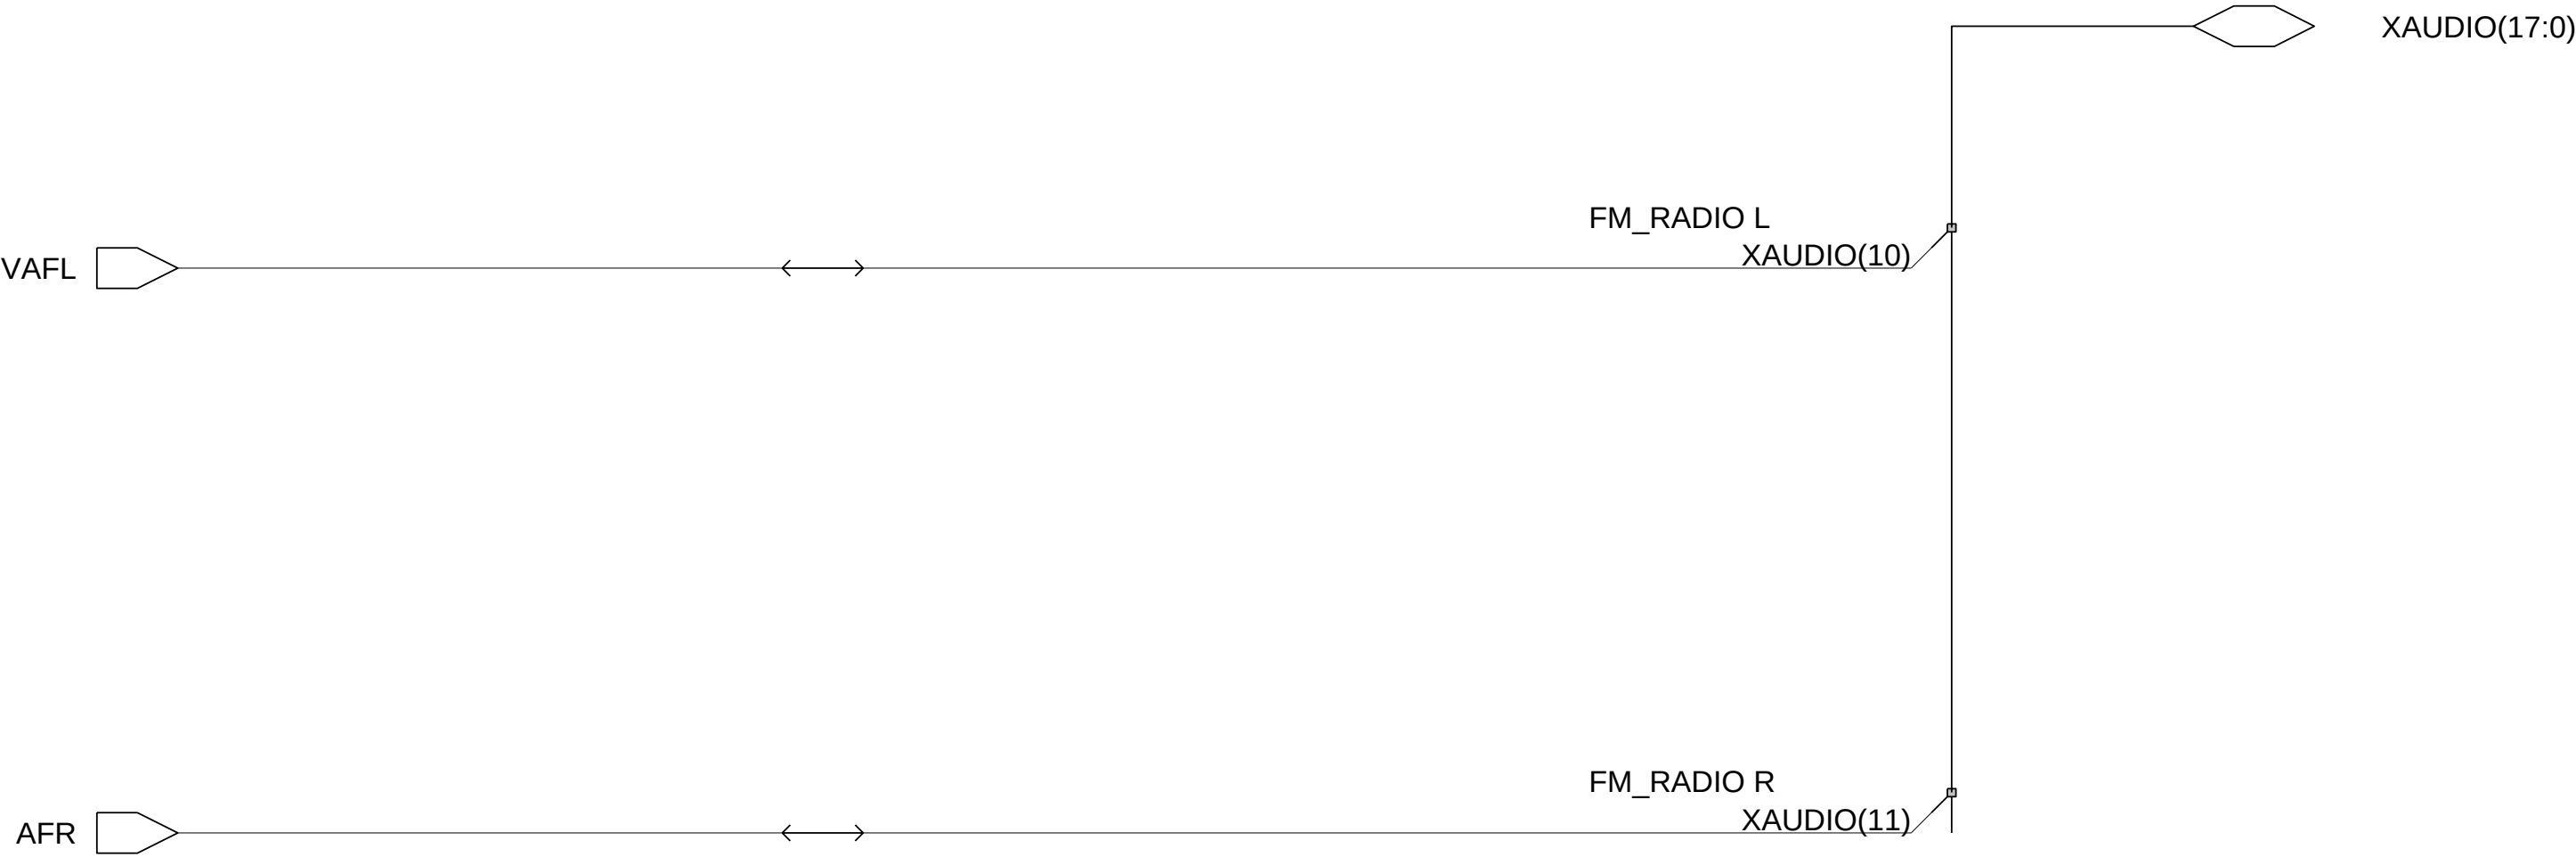

G_CAMERA(7:0)



AUDUEMCTRL(3:0)



LCDUI(2:0)



GENIO(31:0)






CCP(4:0)




GPIO(31:0)

PUSL(3:0)



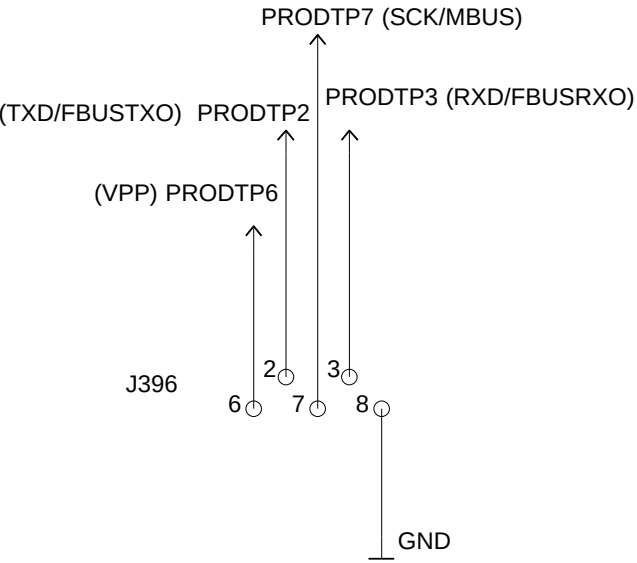





RF and BB

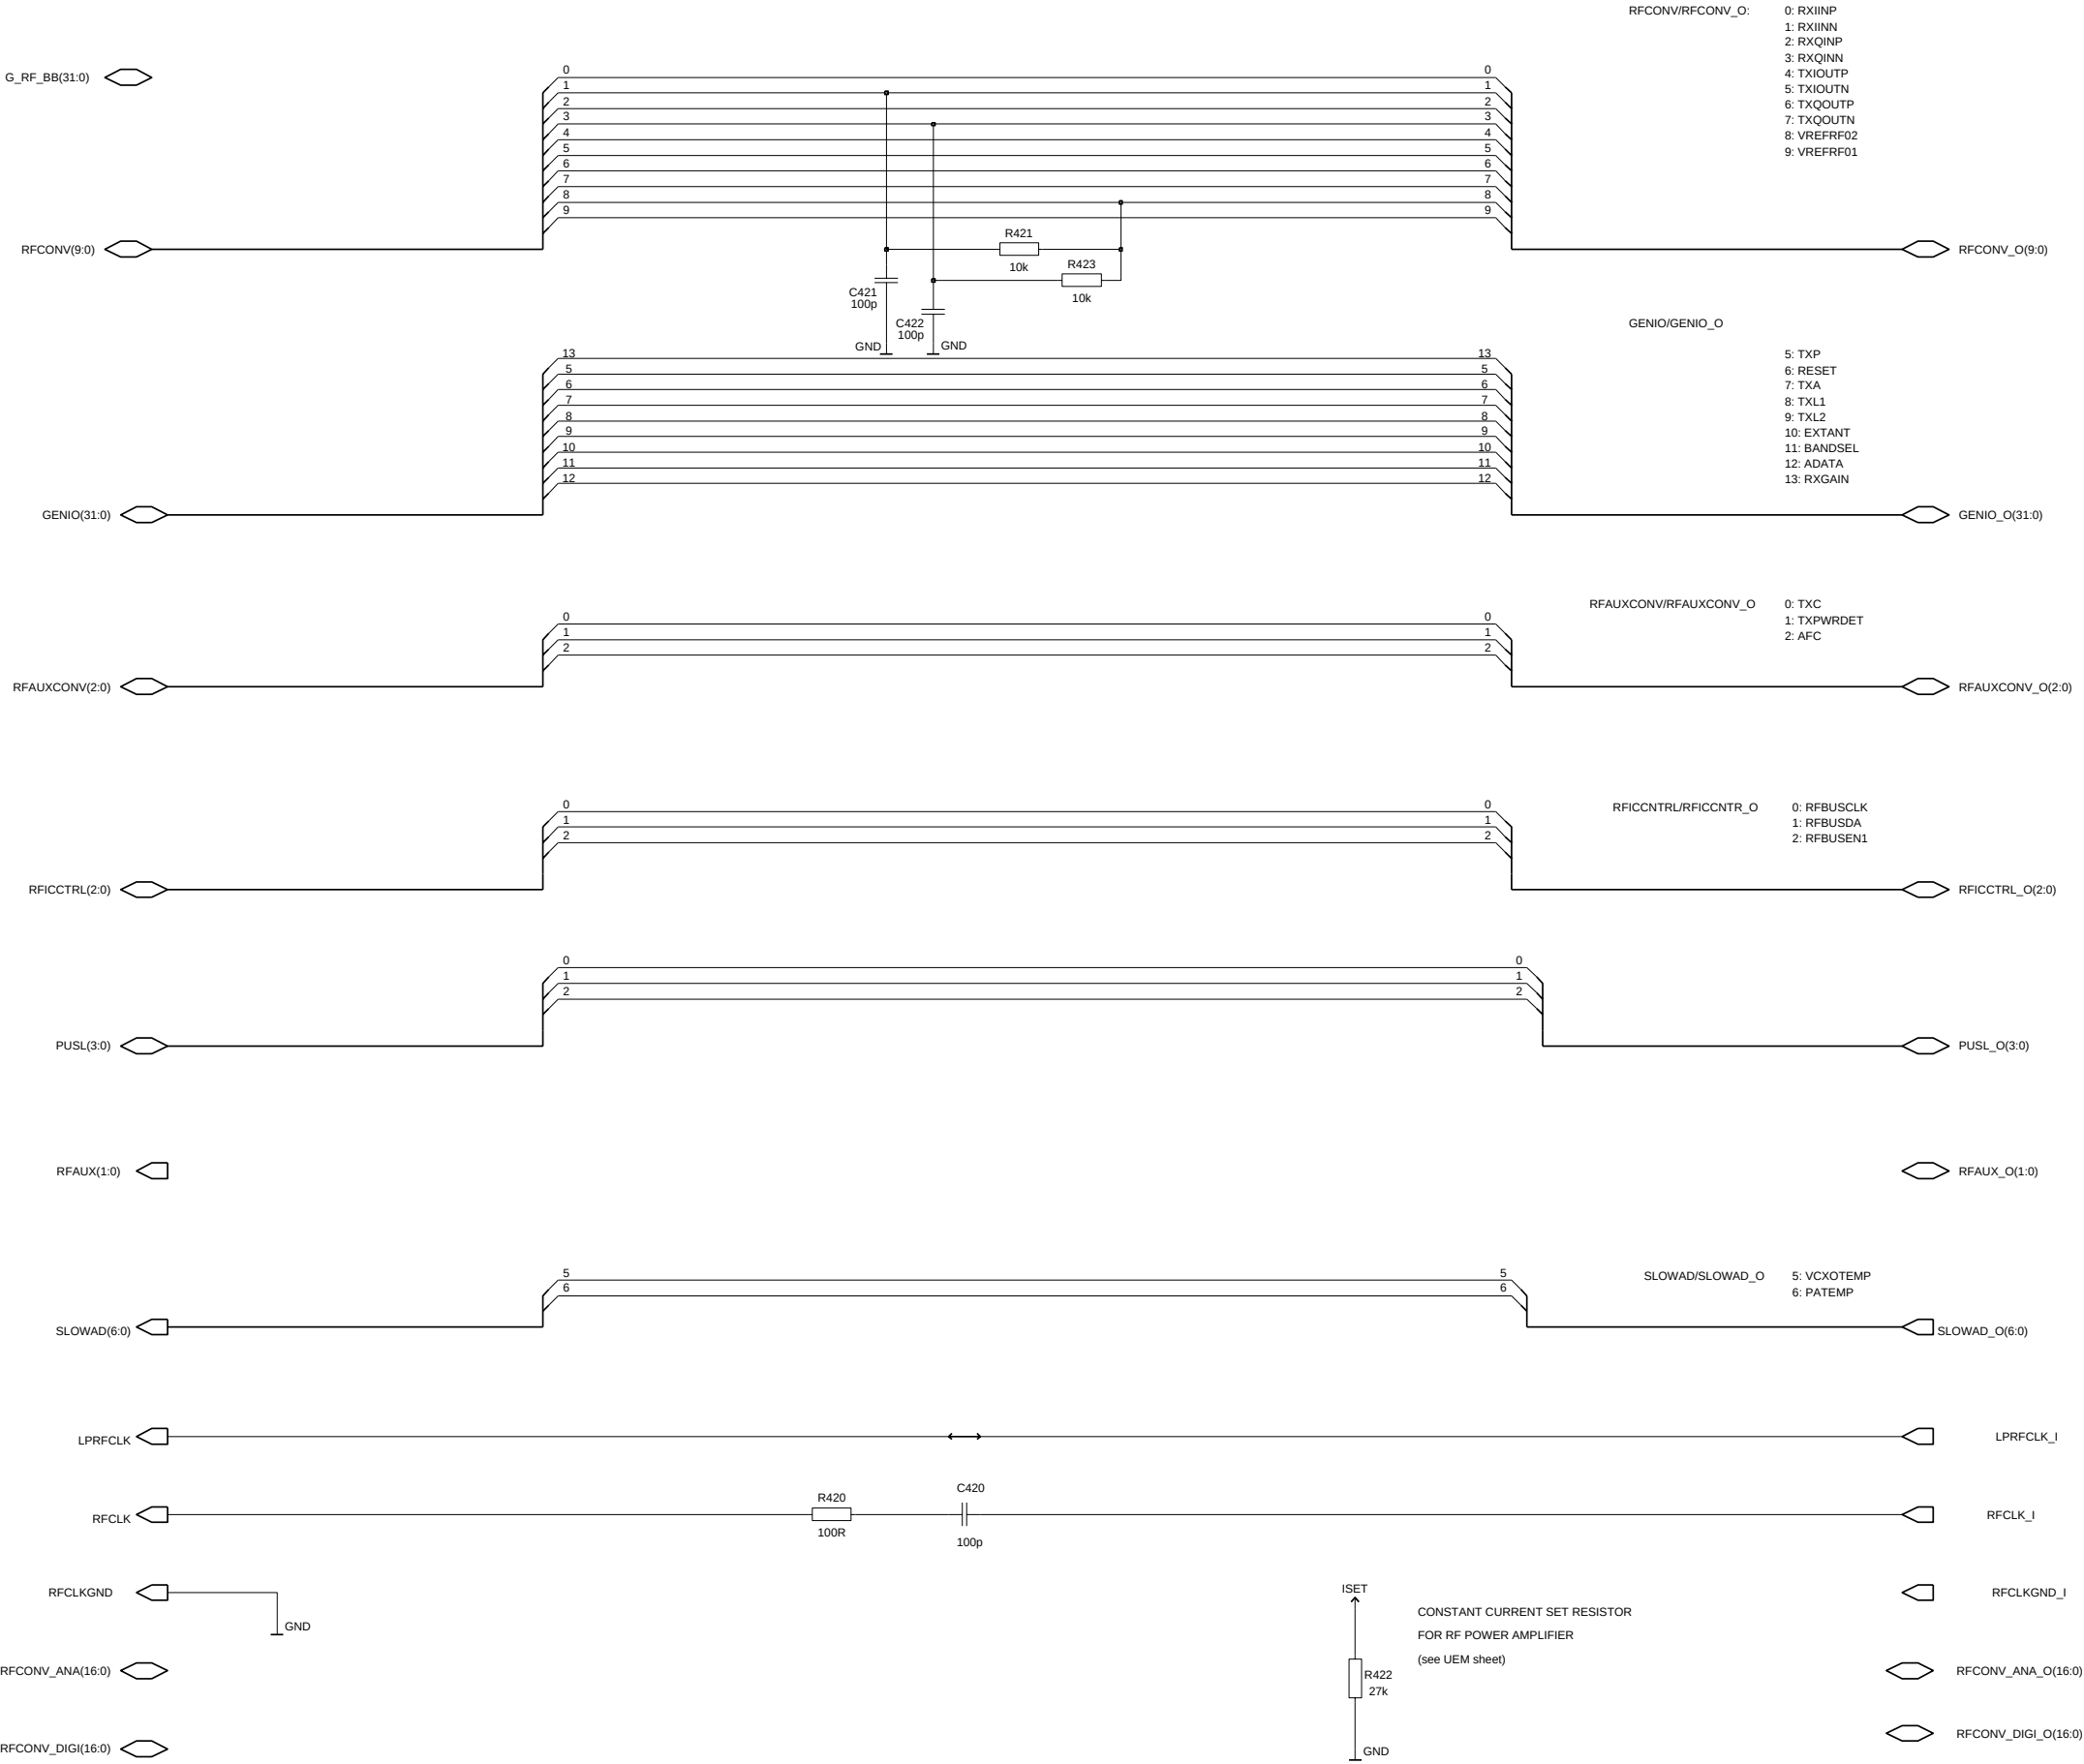



IF IPA1 AND IPA2 ARE USED BY RF THE TOLERANCE HAS TO BE 1% (0402, 1430873)

Audio

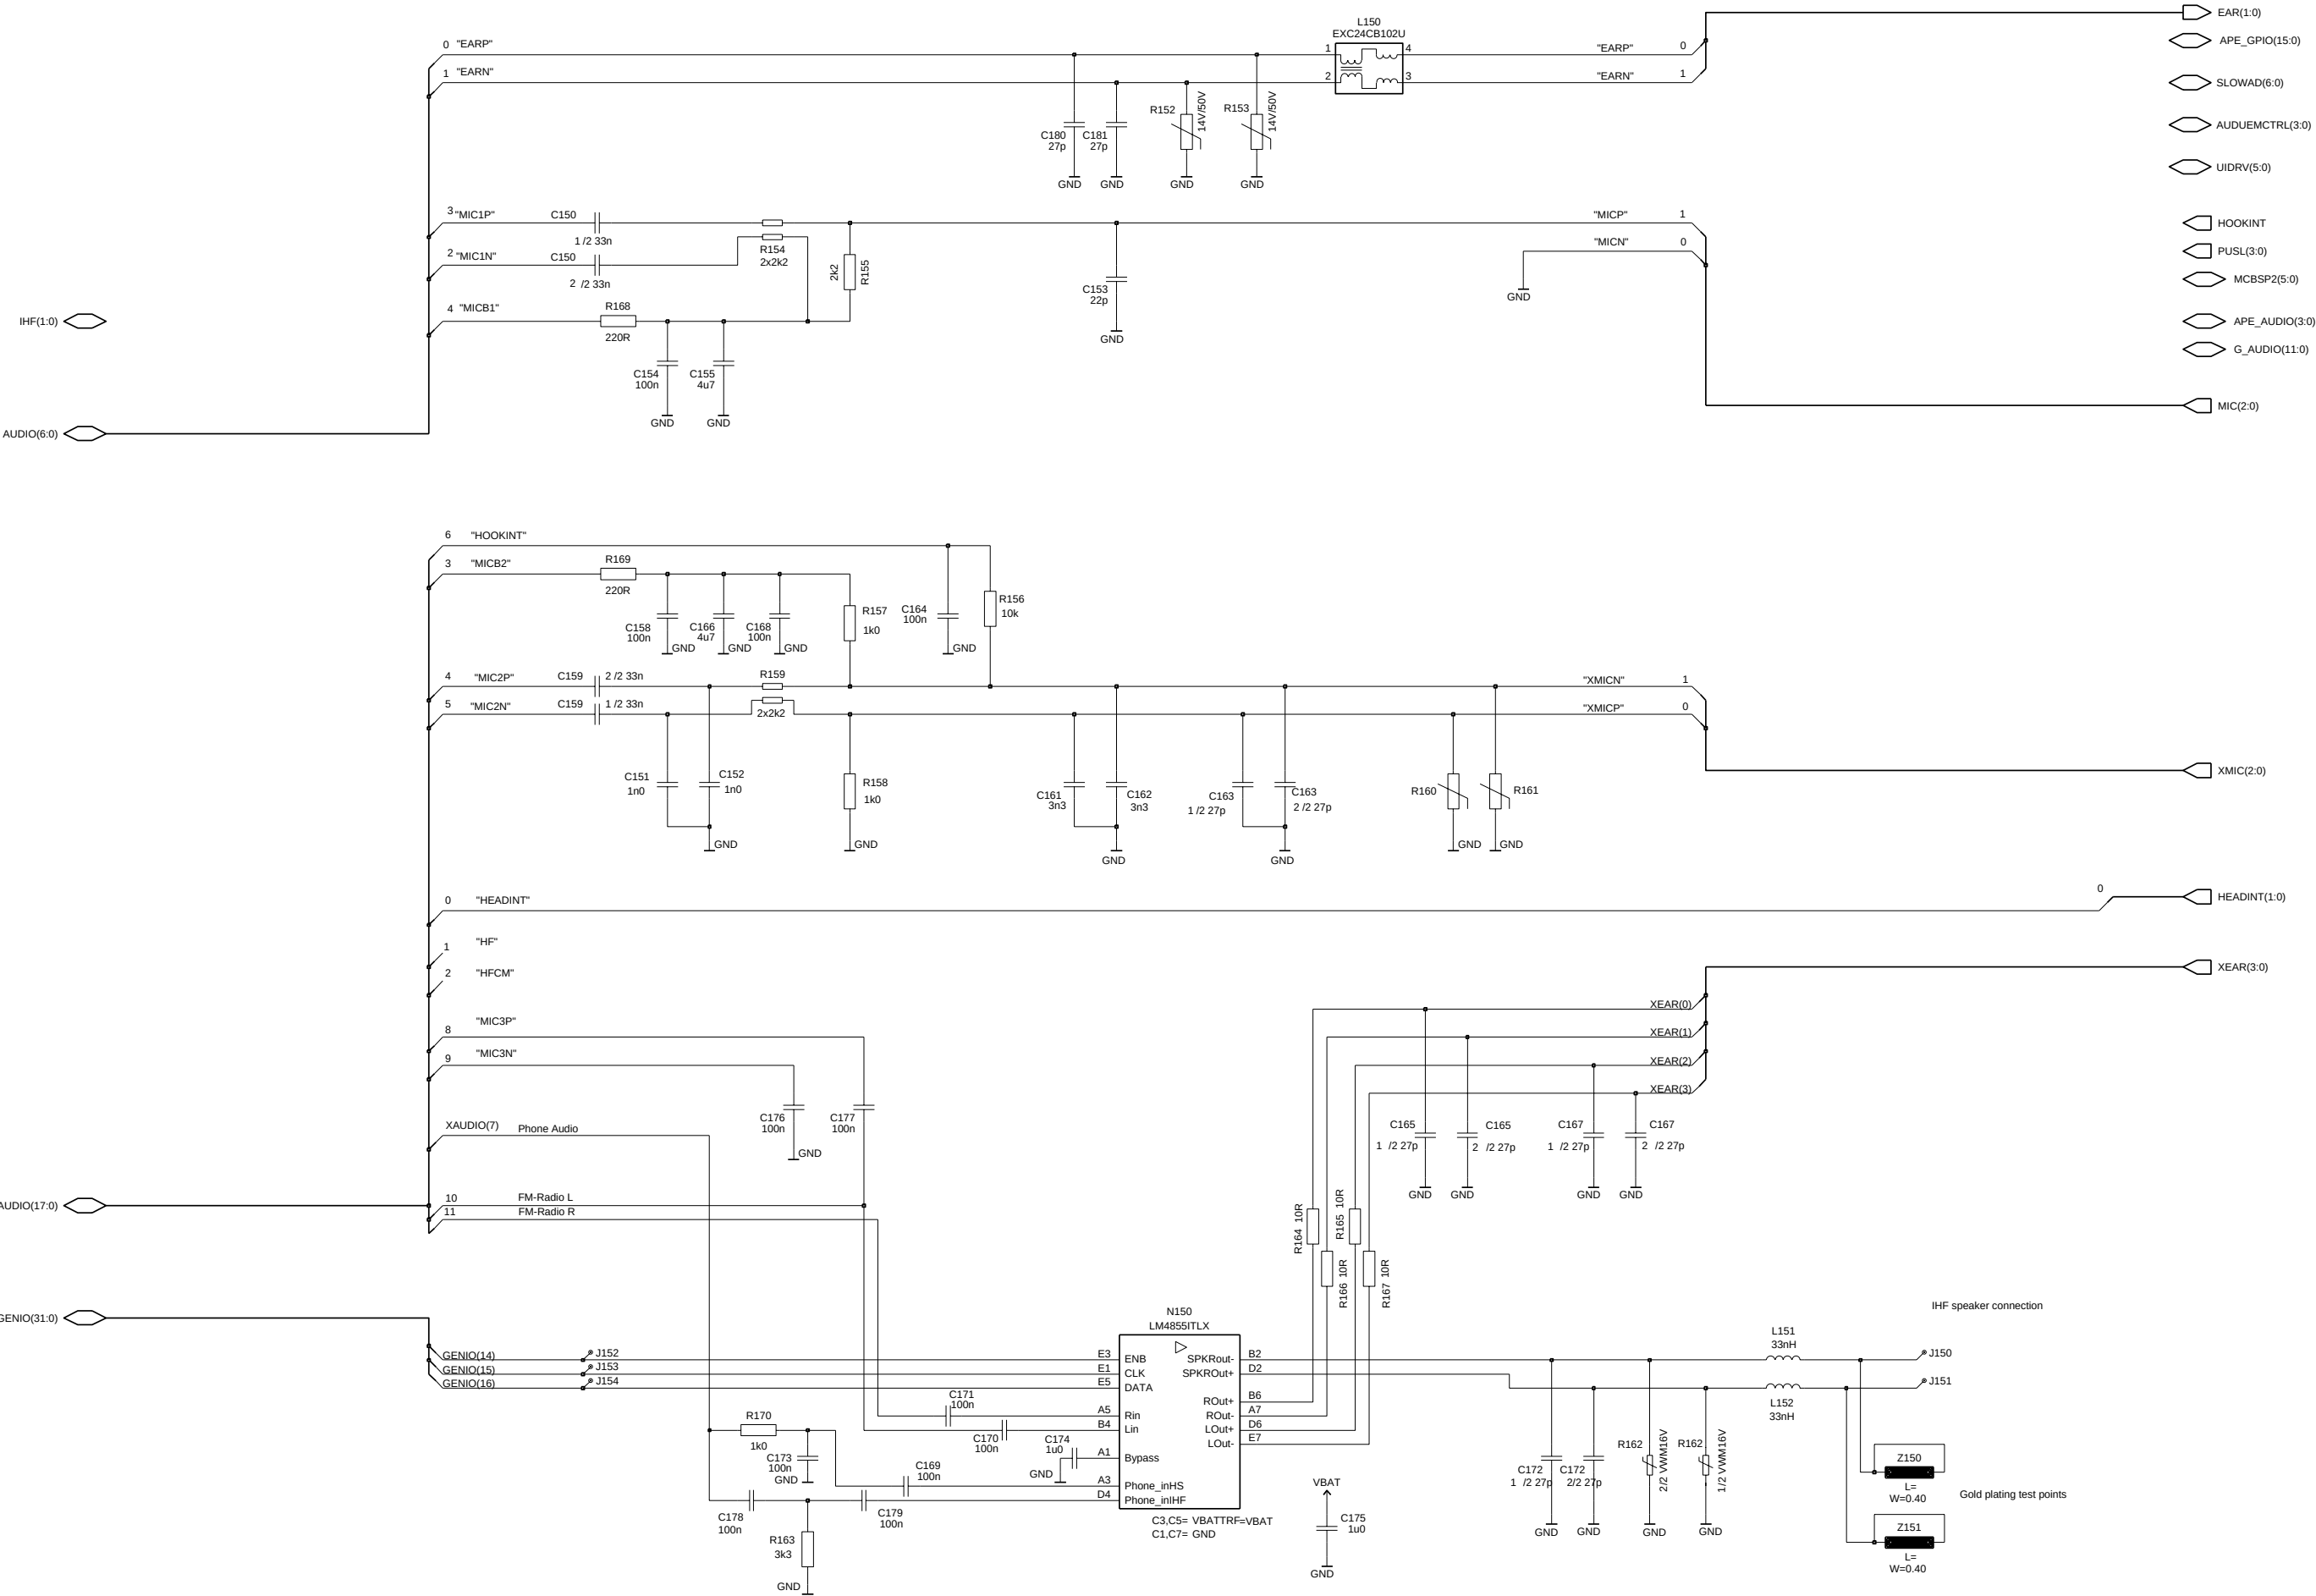

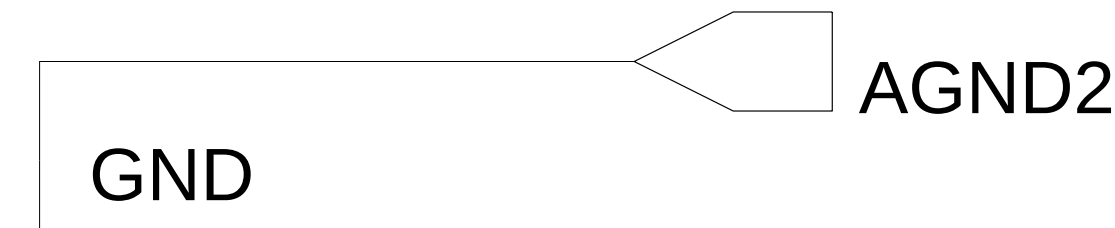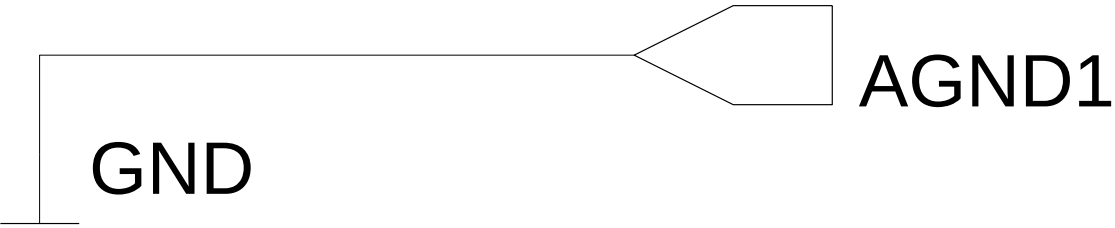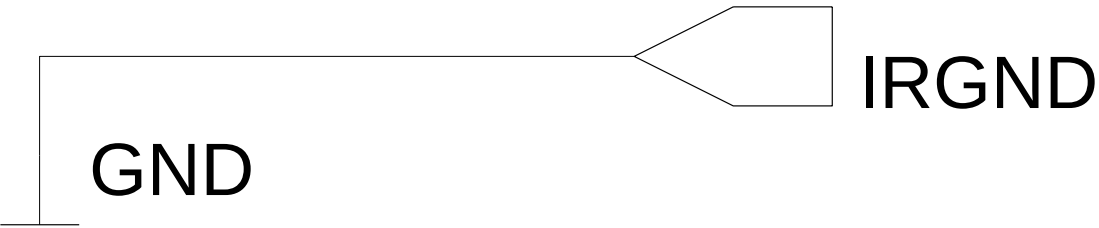

IR

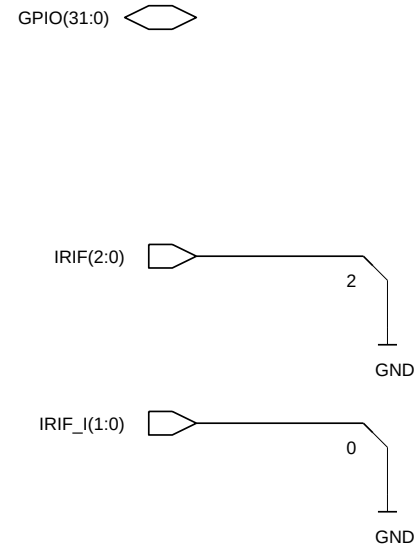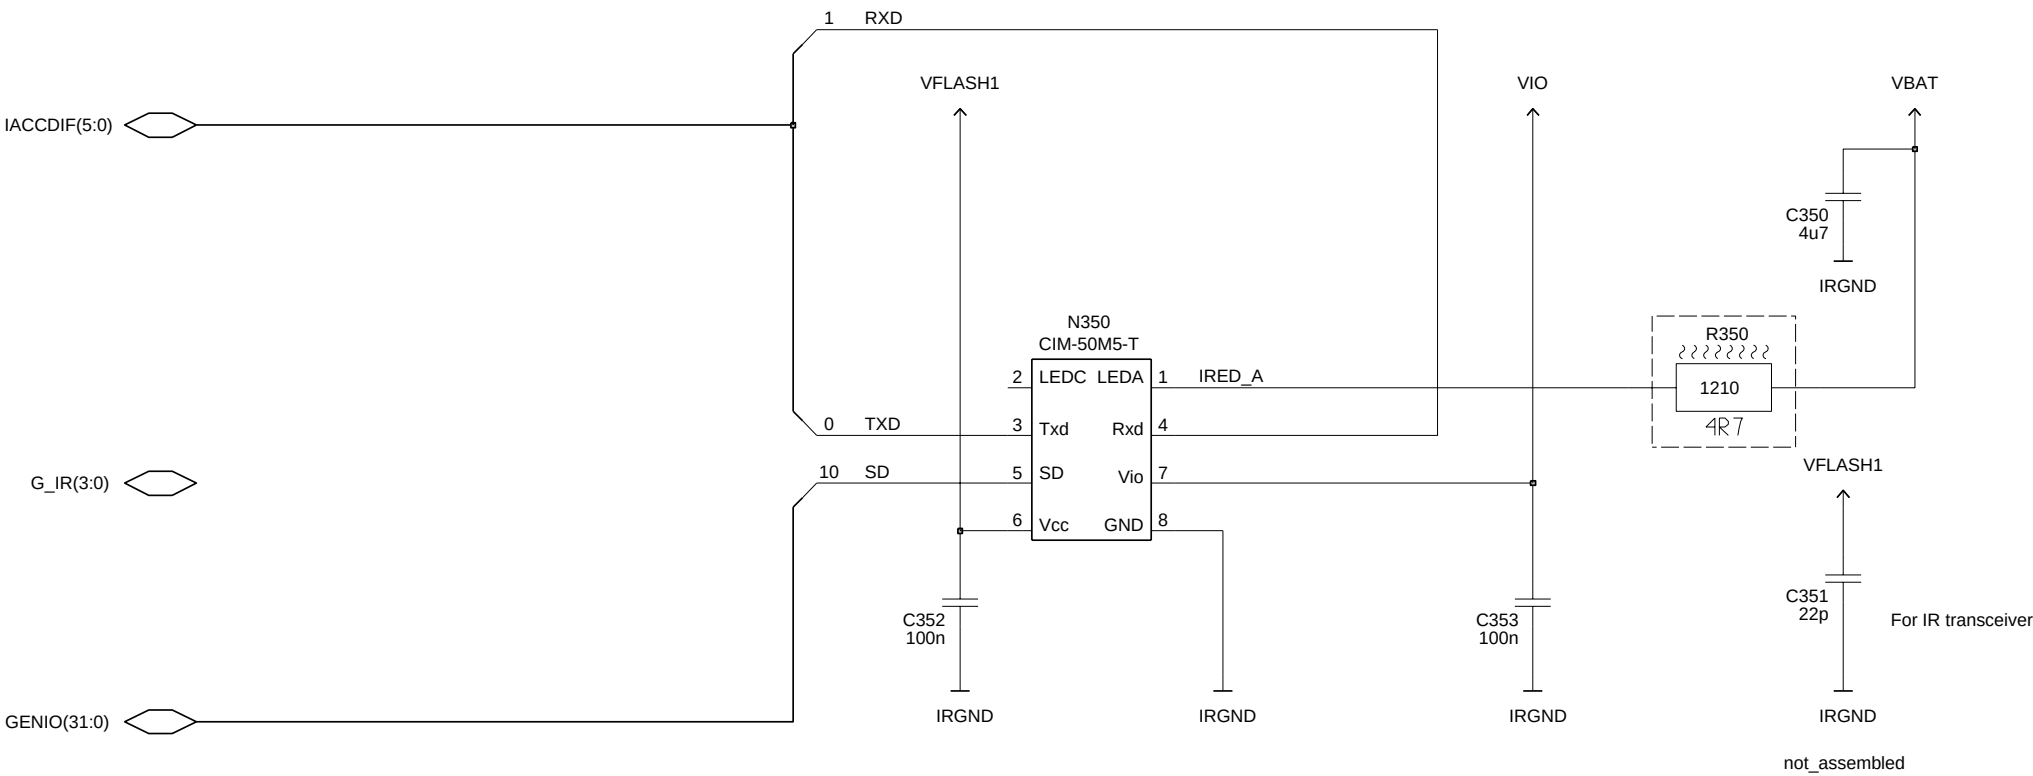


UEM IR level shifters
are ground, when 1.8V
IR is used!


Used referenses

C	350 - 353
N	350
R	350





R350

Will be changed to reference number in viewpoint

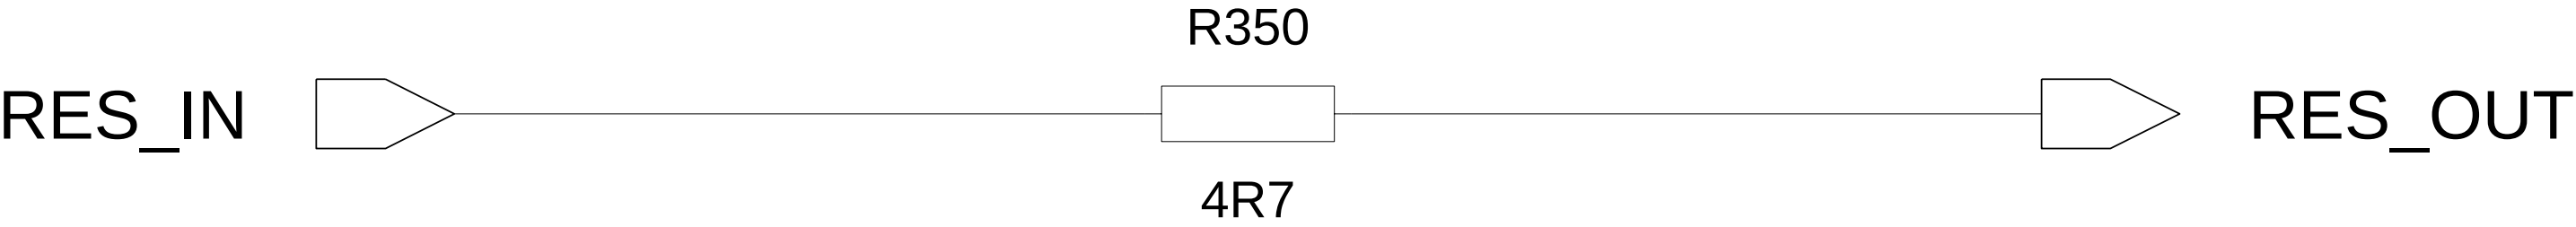


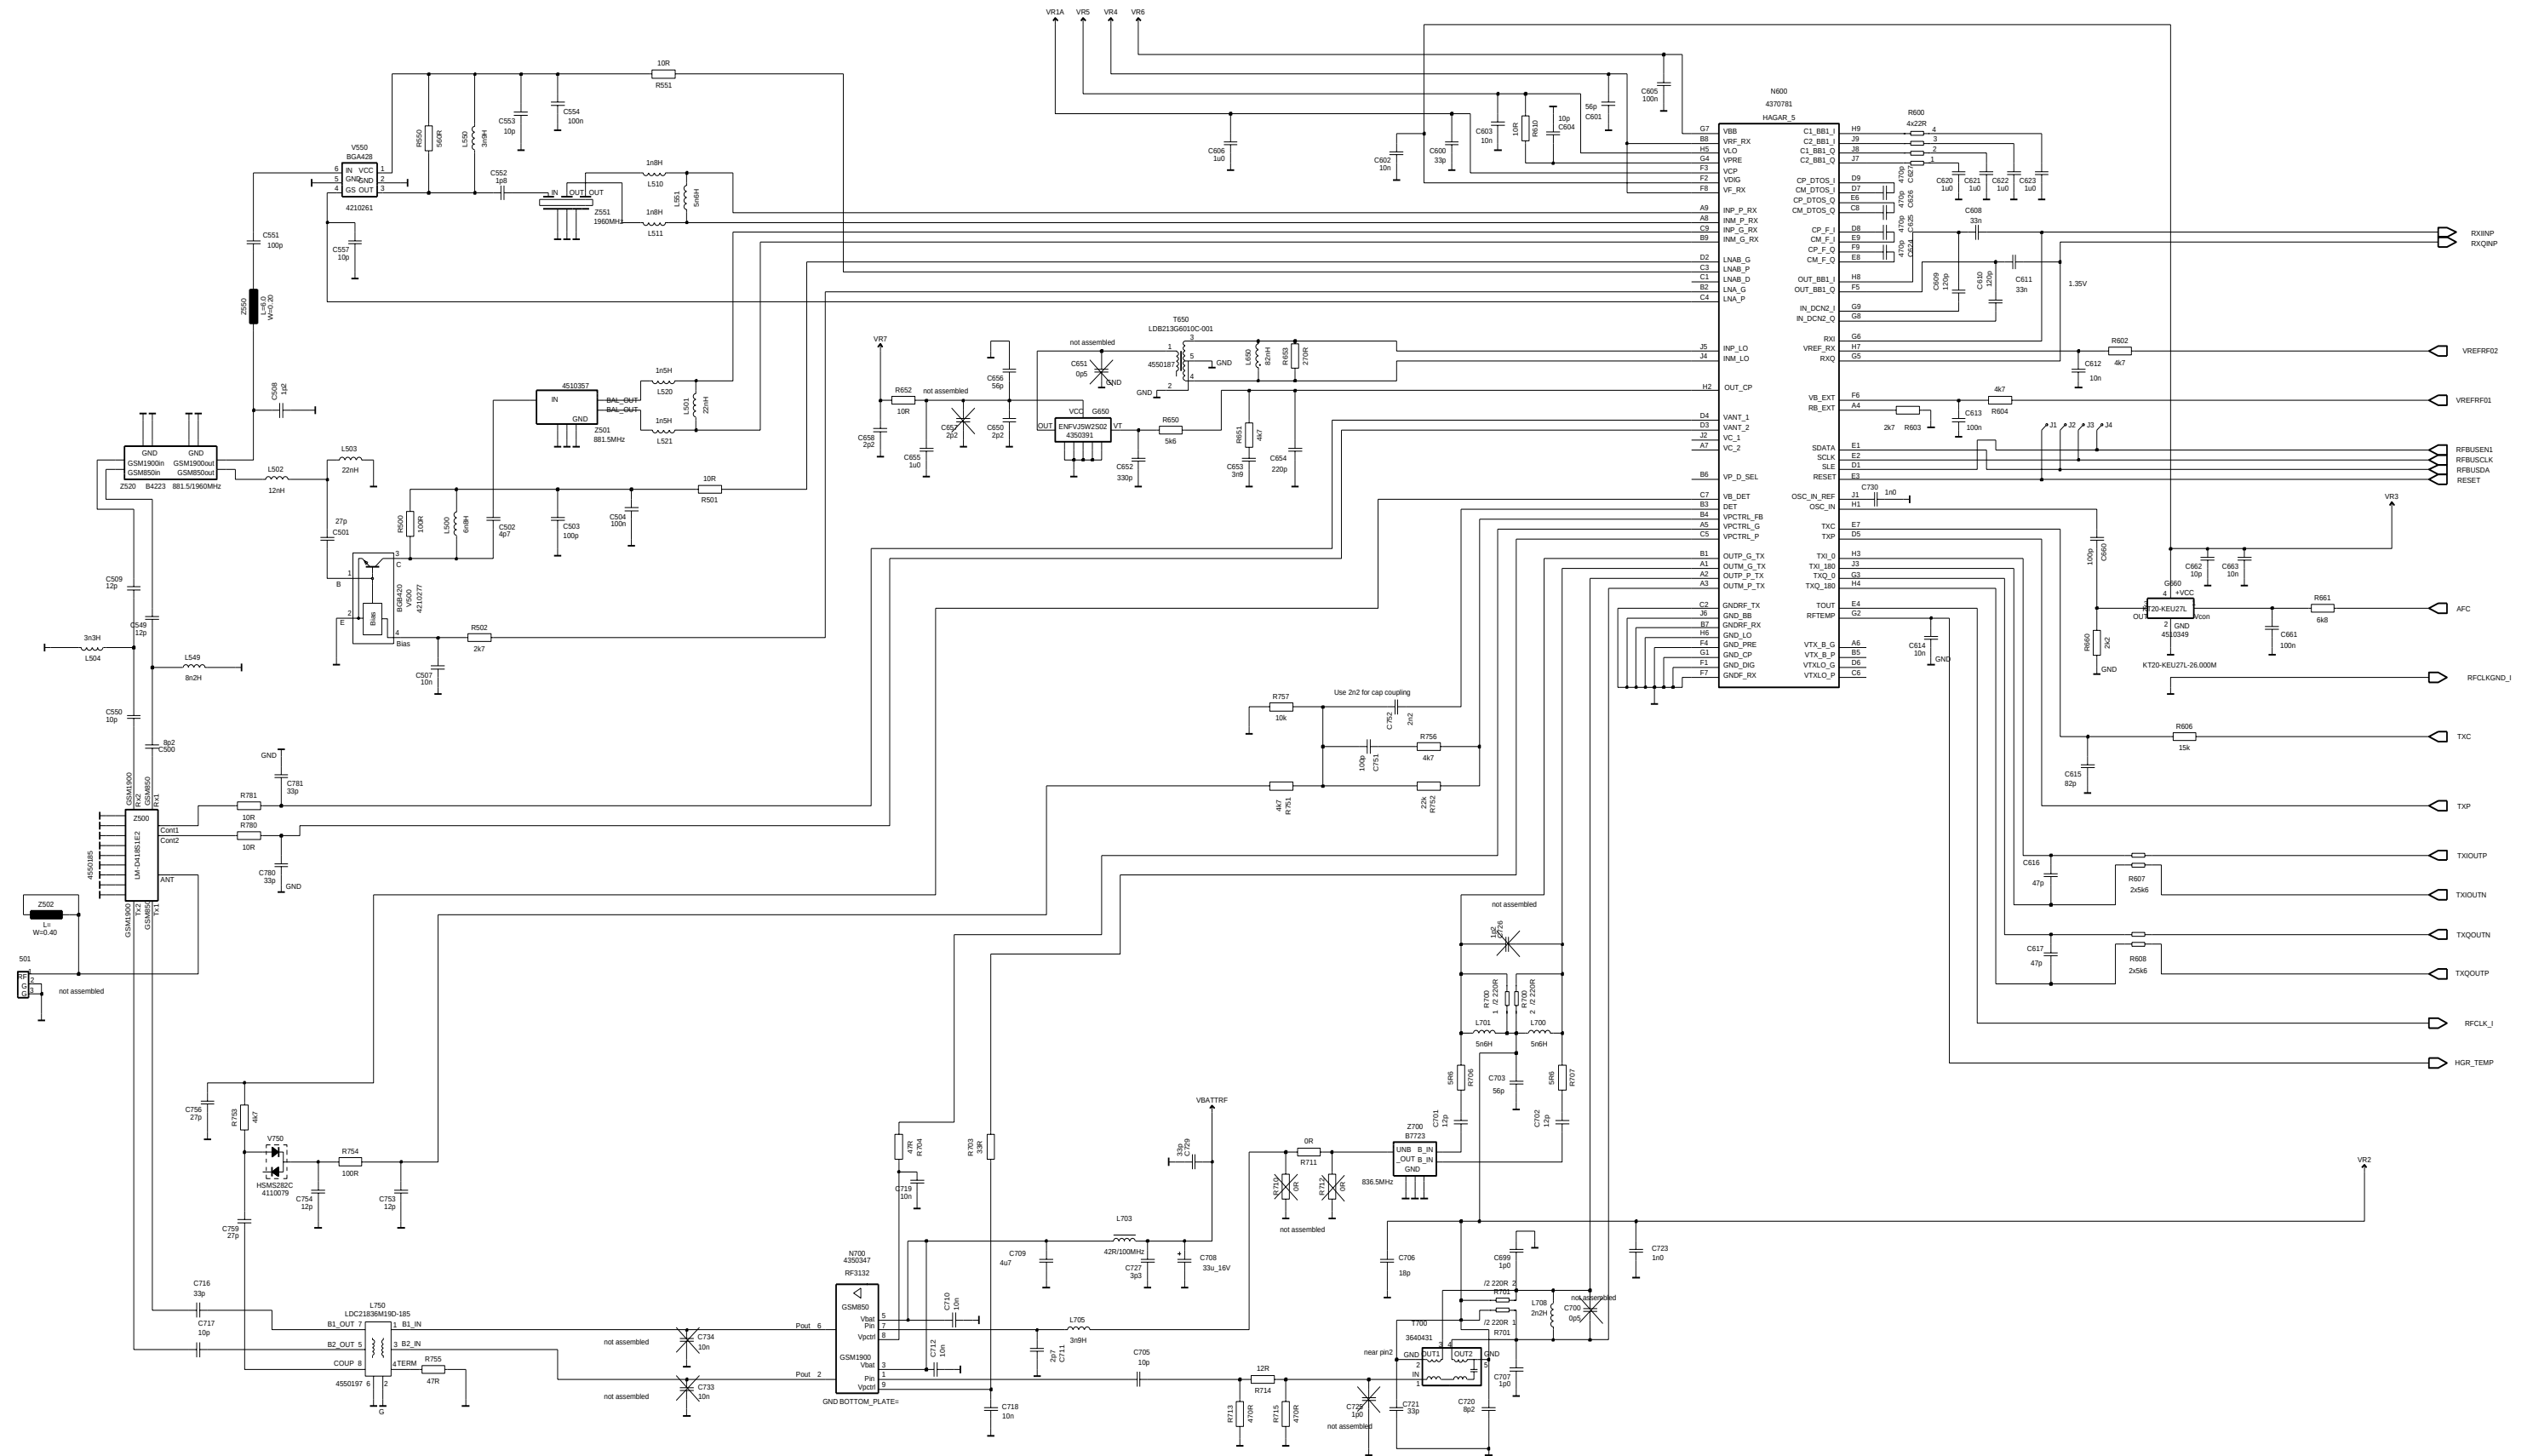


Shields

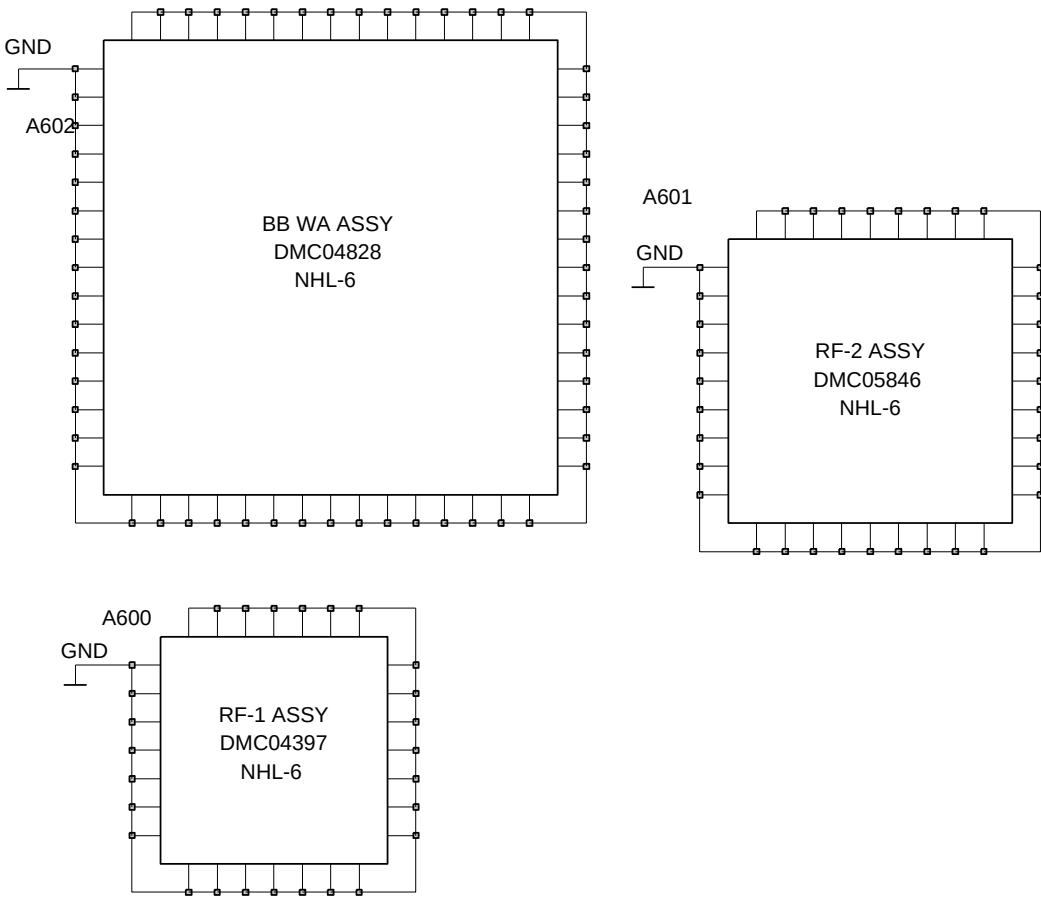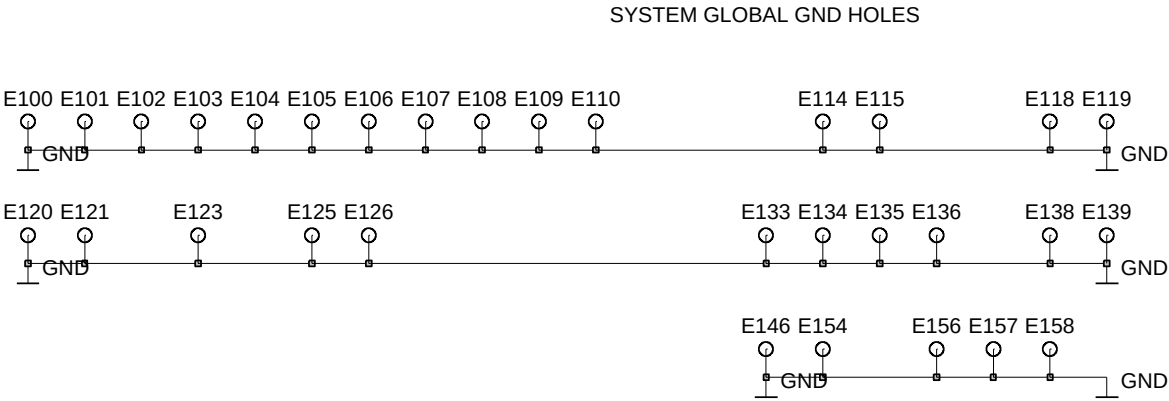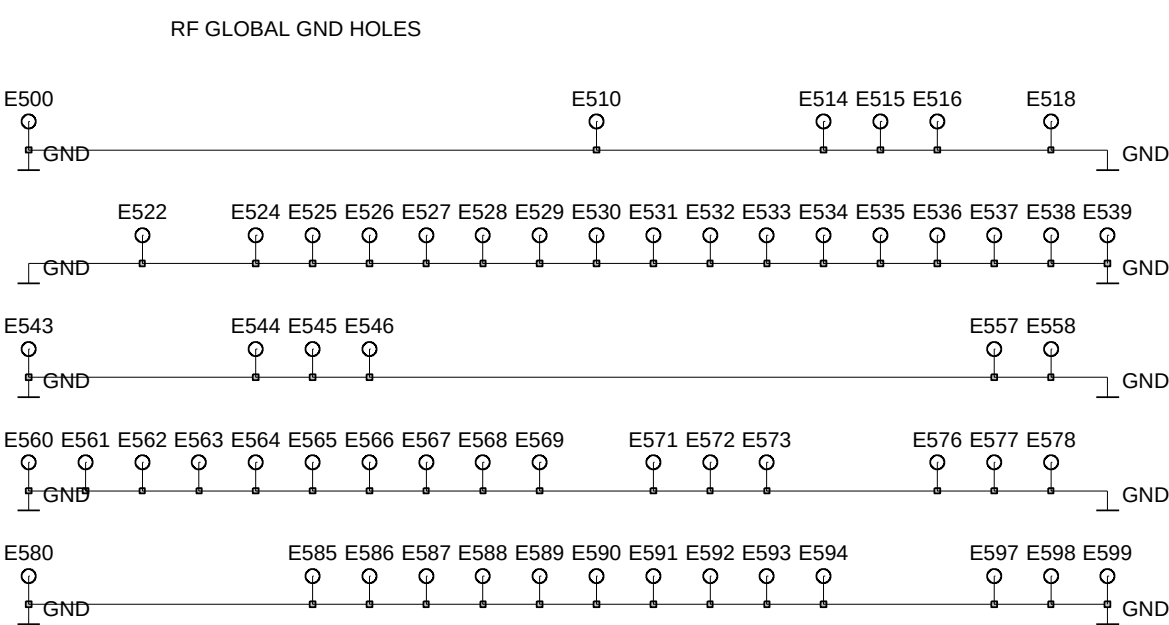

Assembly Values Diagram Top

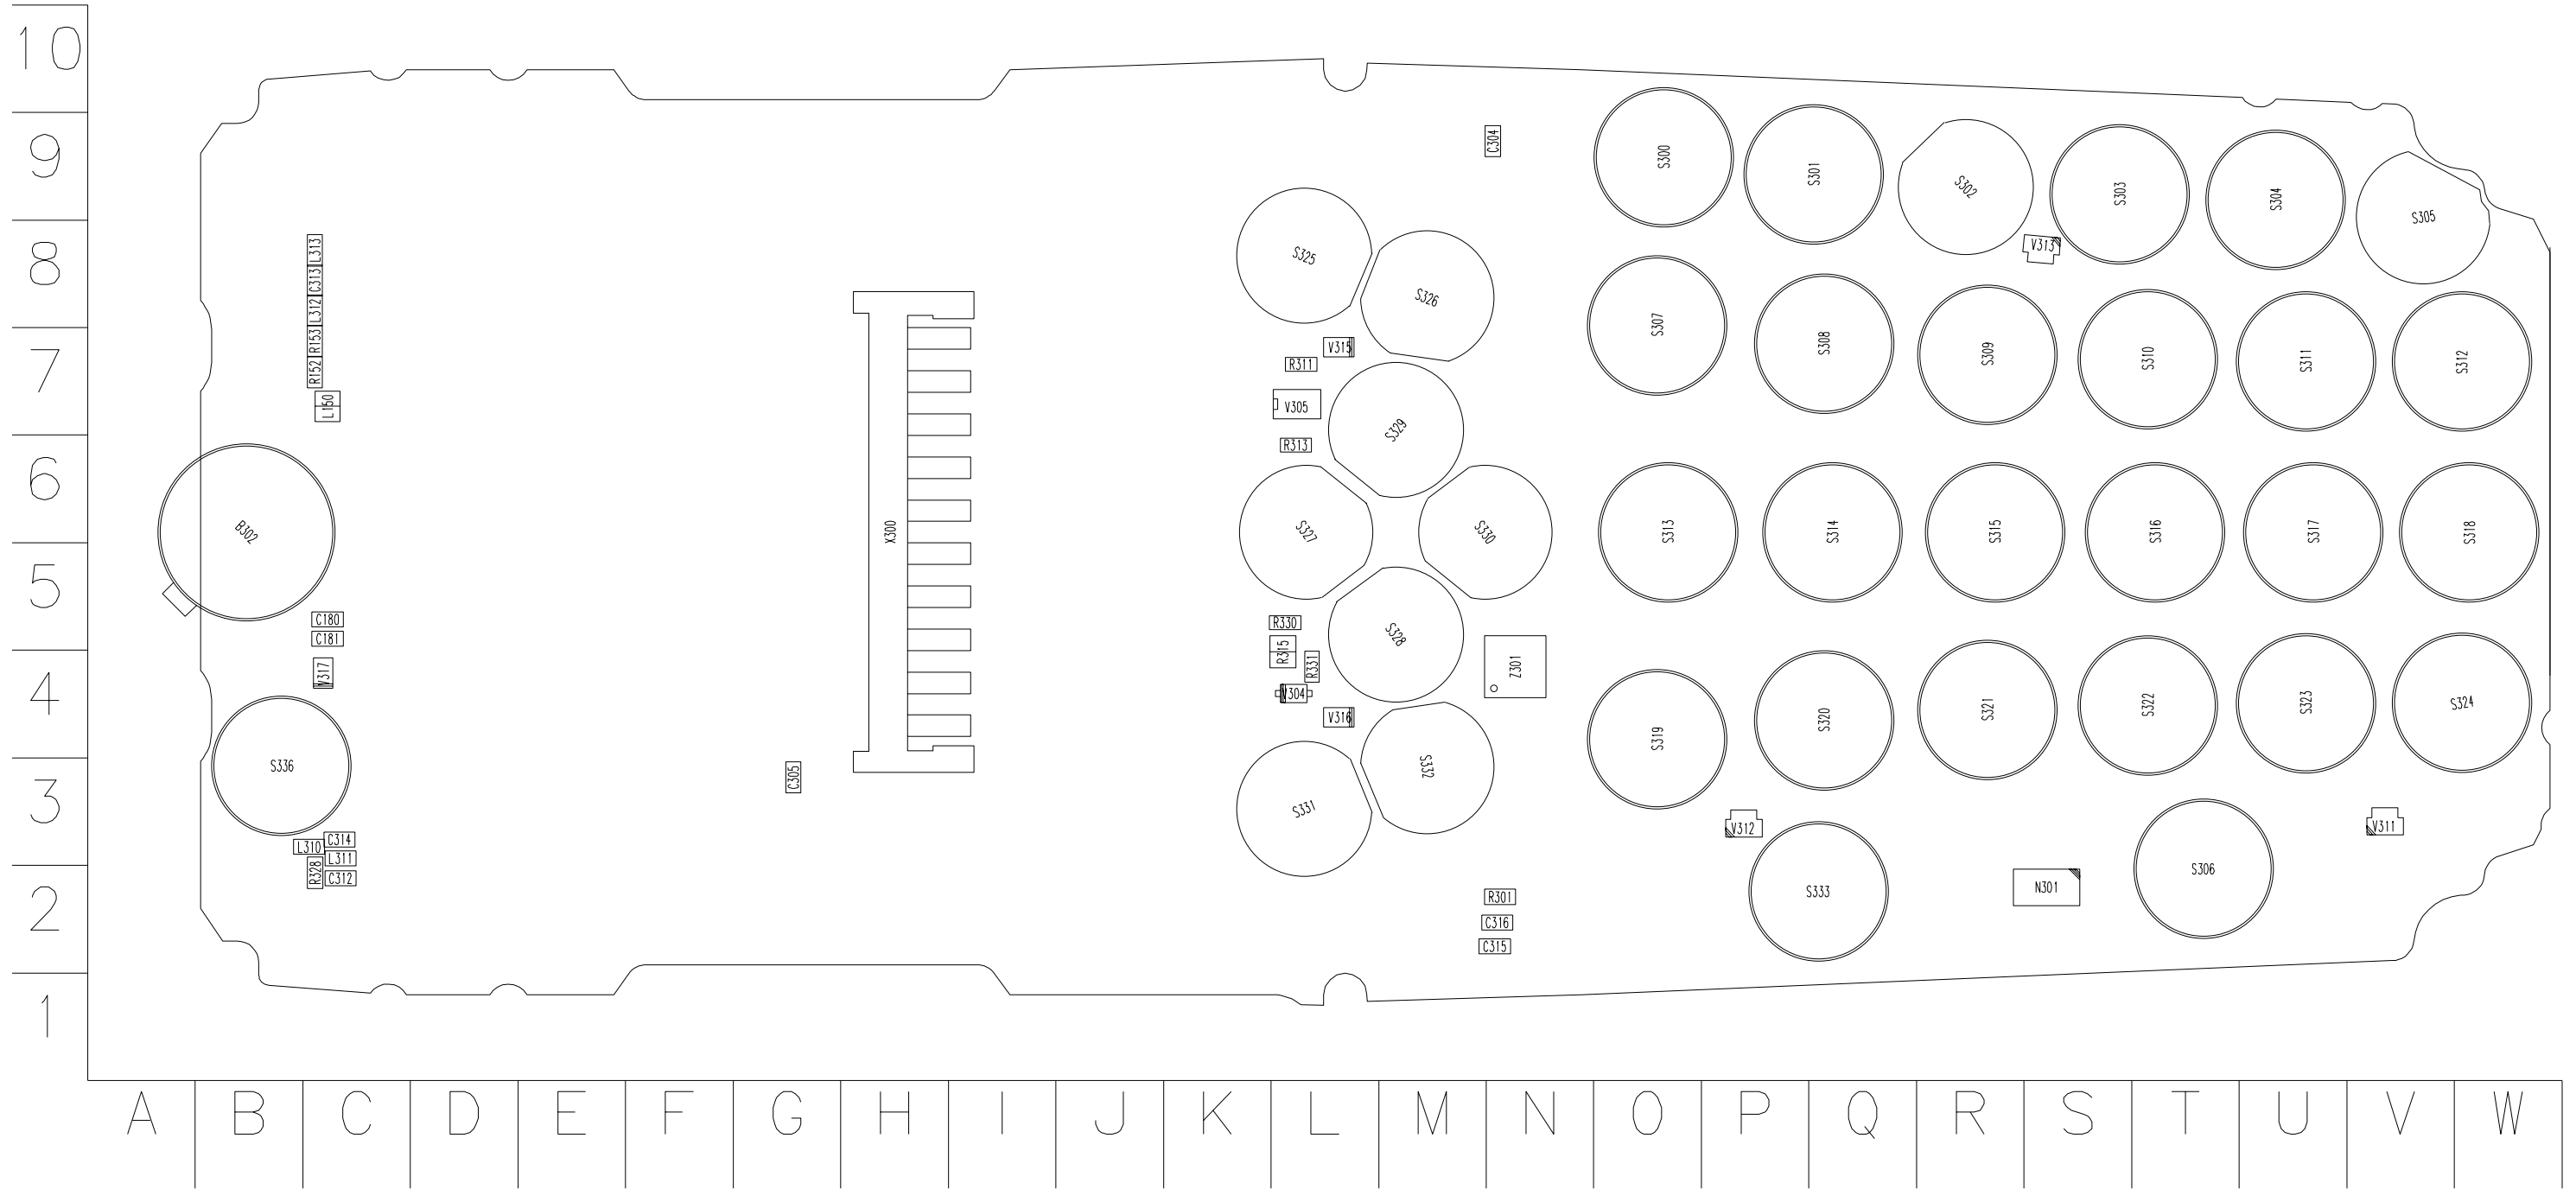

Assembly Values Diagram Bottom

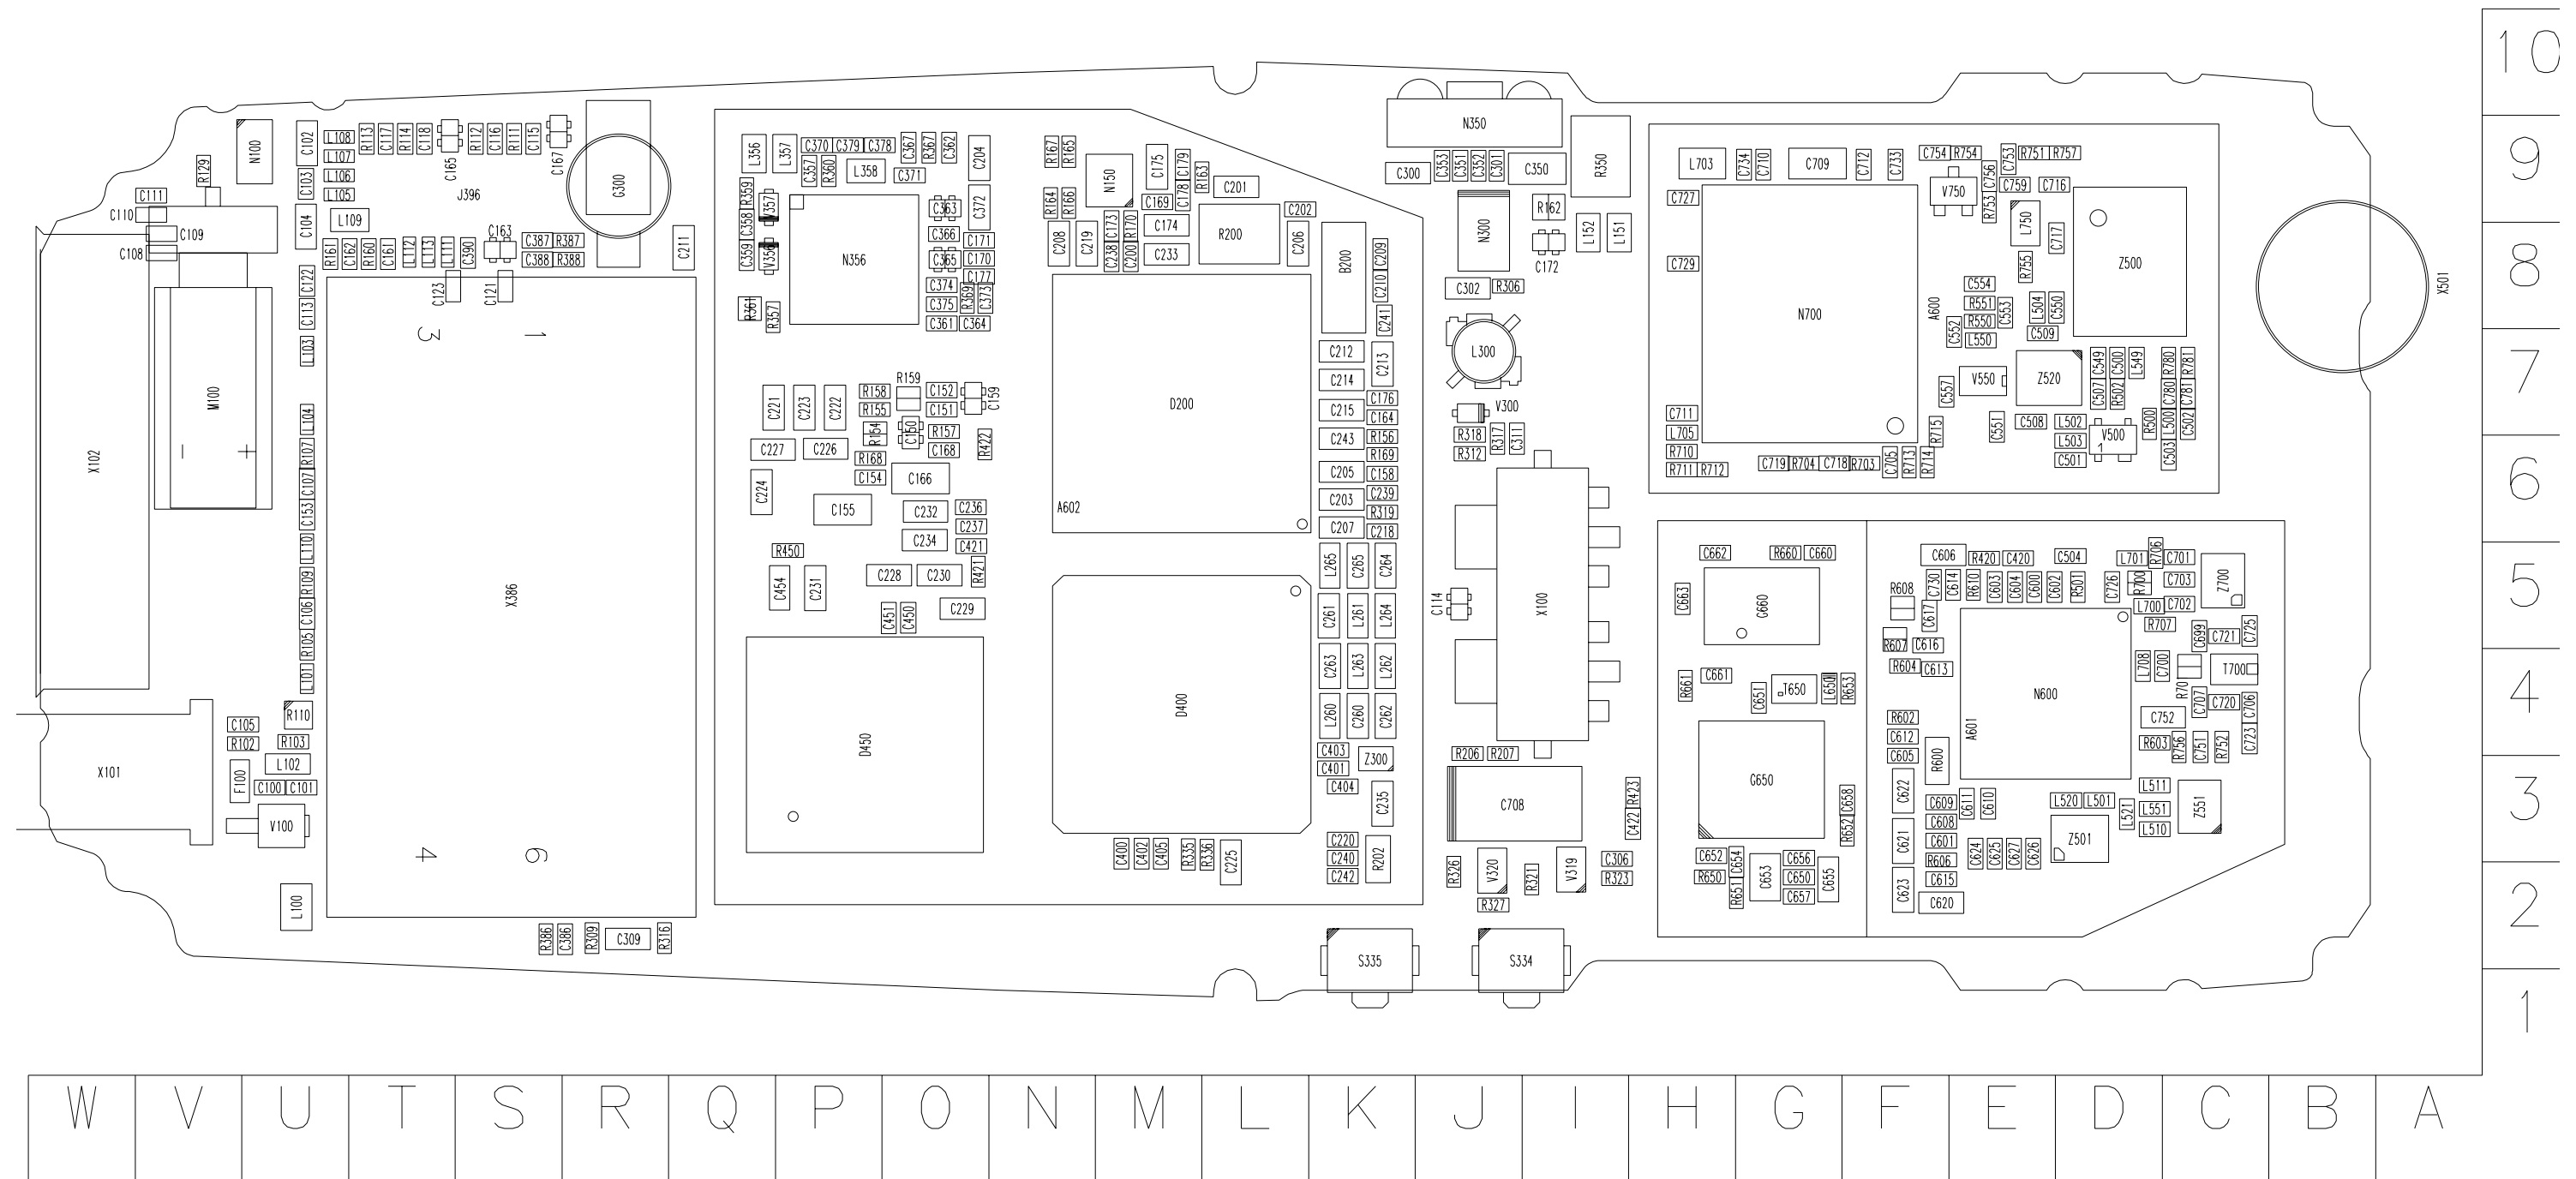

Assembly Values Diagram Bottom

