






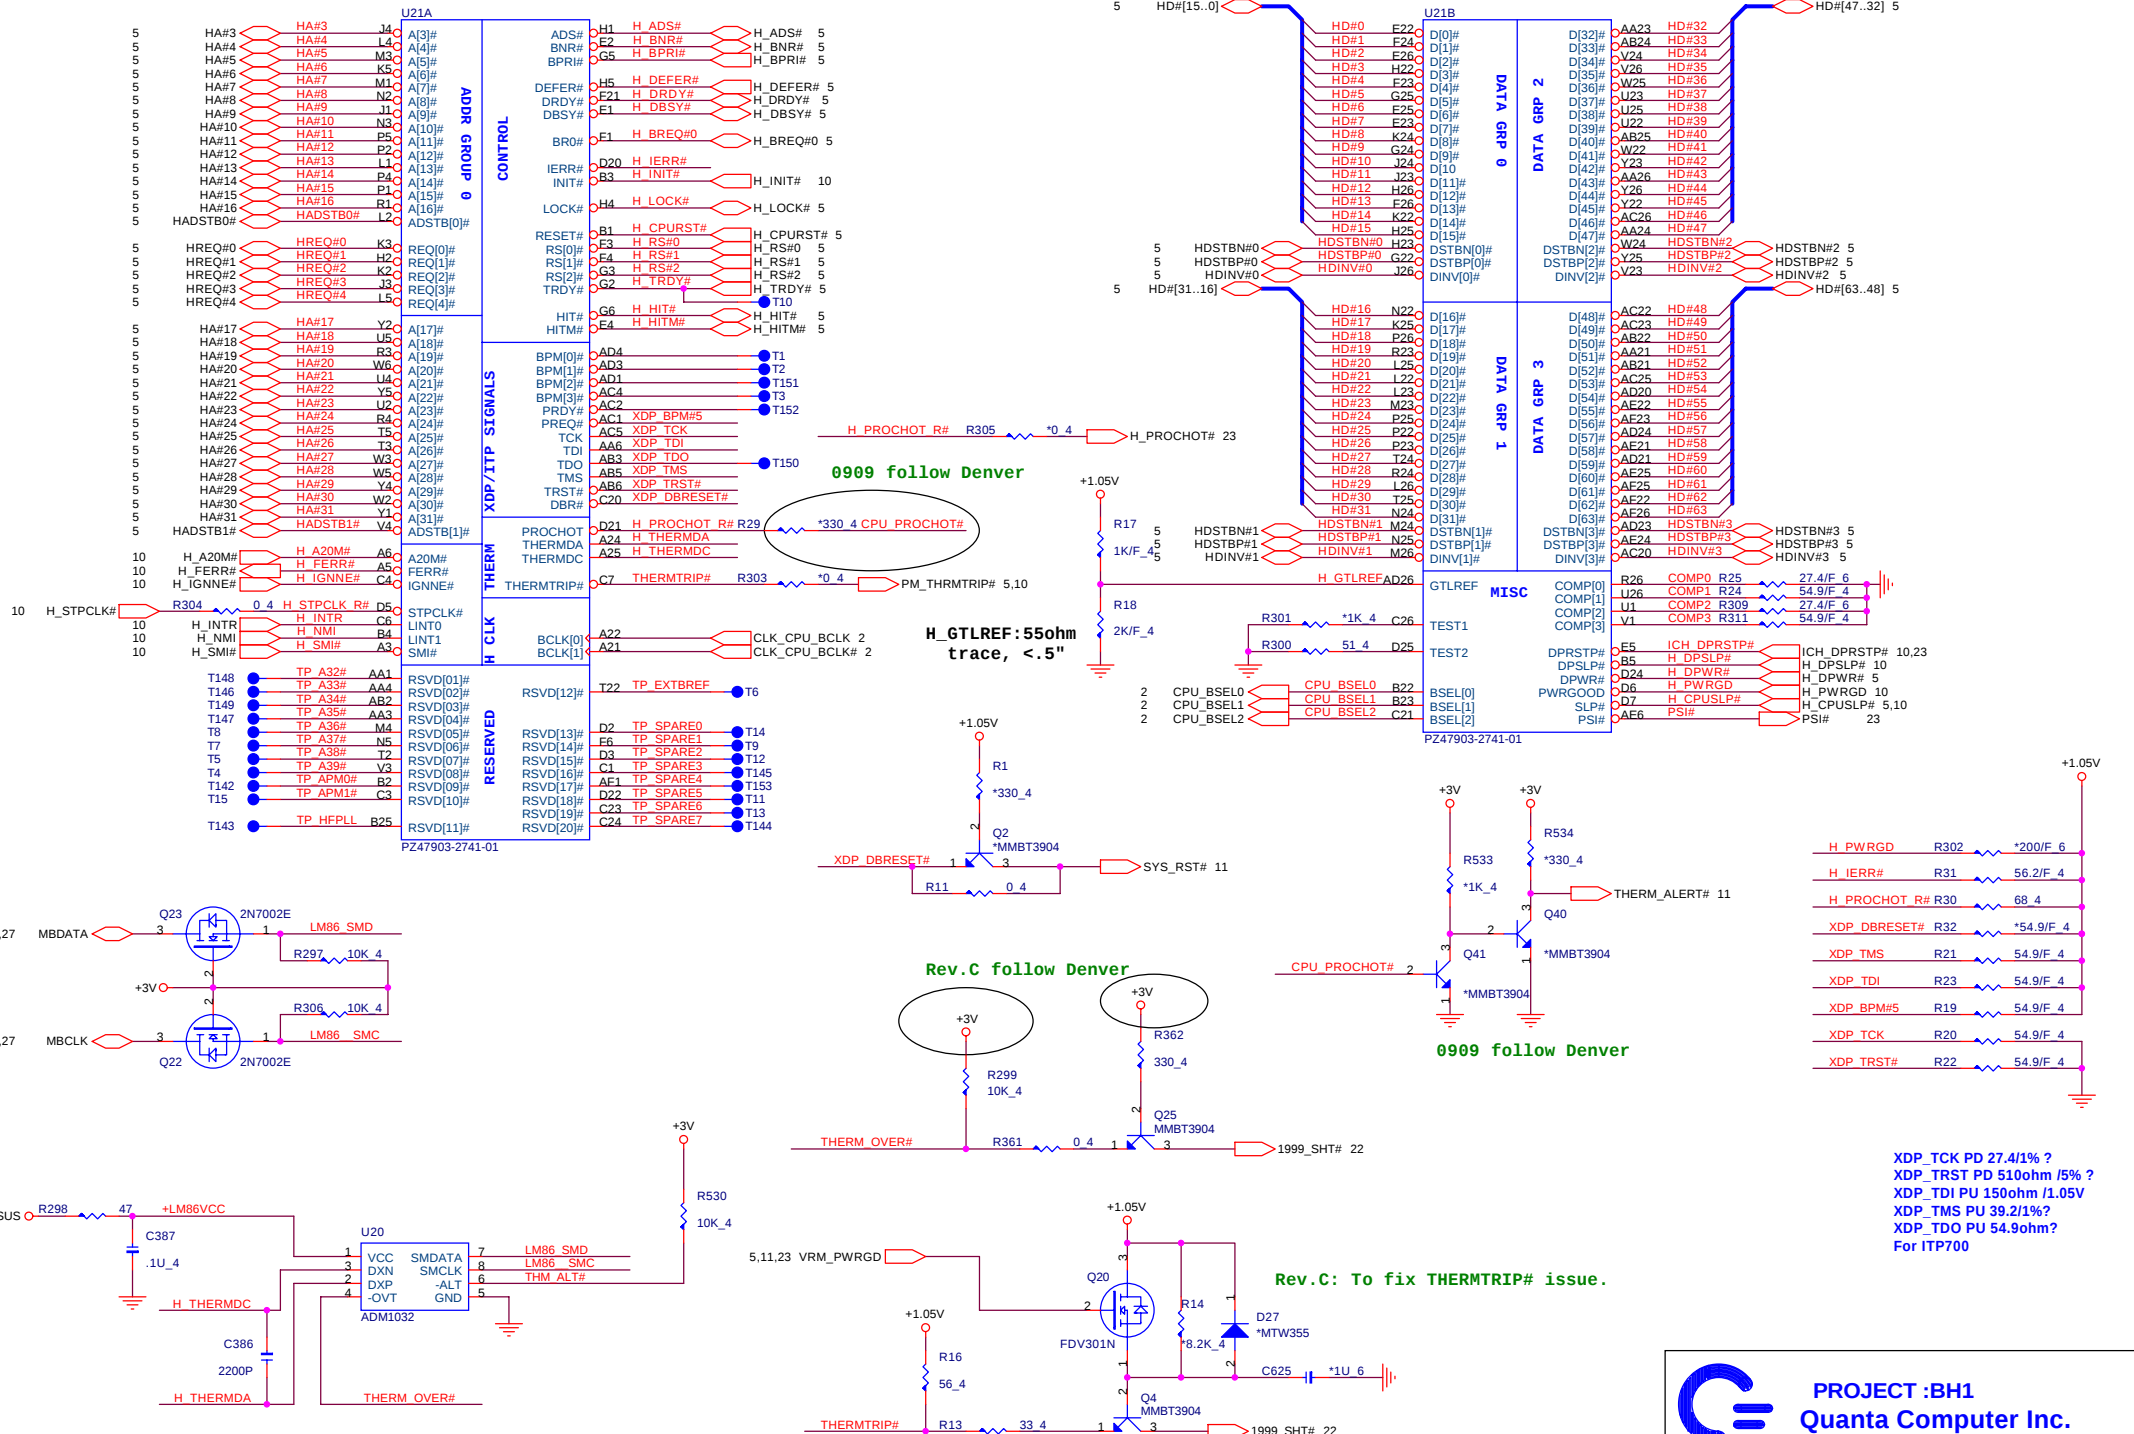


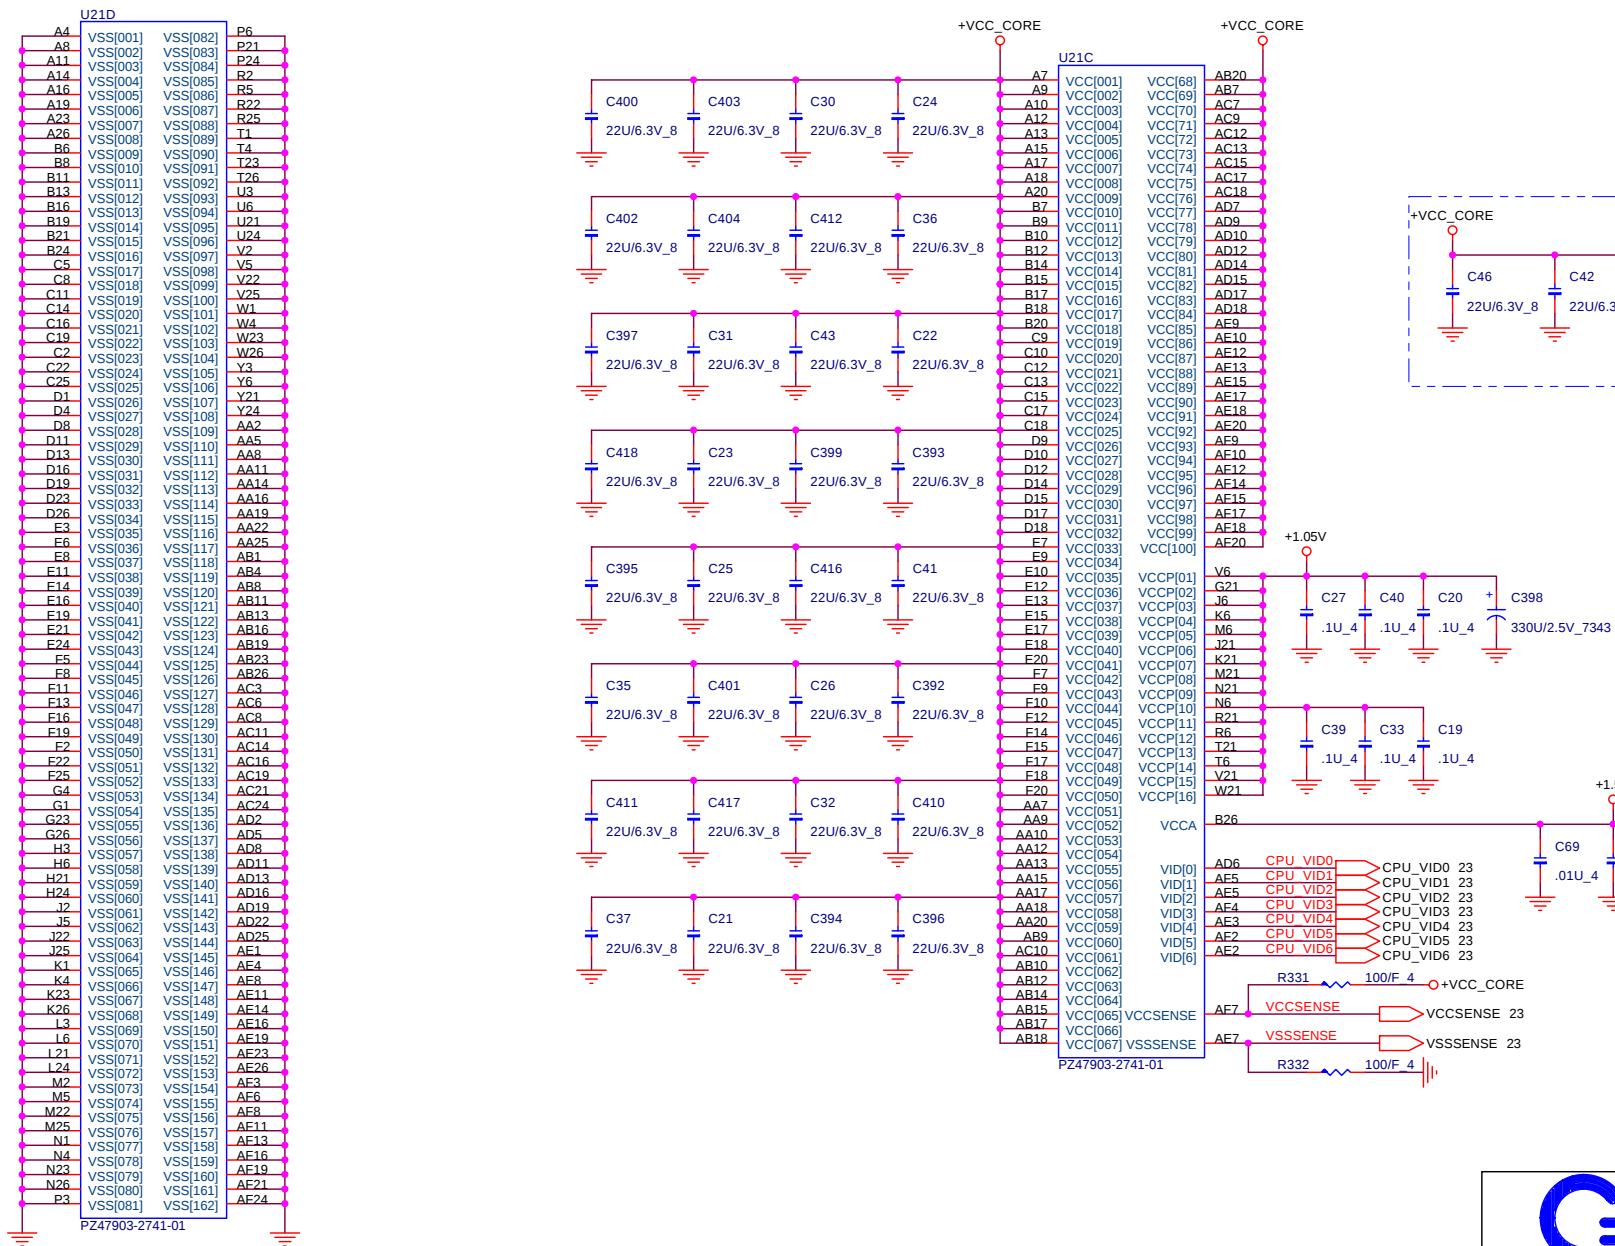

9 SMA_DQ[63..0]

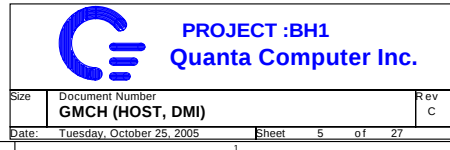

DDR SYSTEM MEMORY A

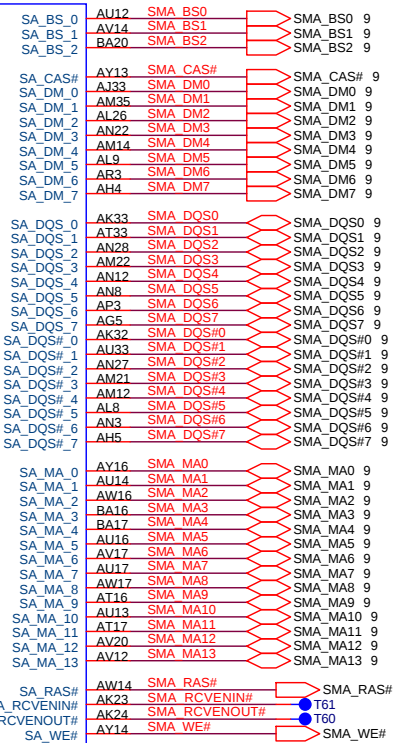


CALISTOGA

9 SMB_DQ[63..0]



DDR SYSTEM MEMORY B

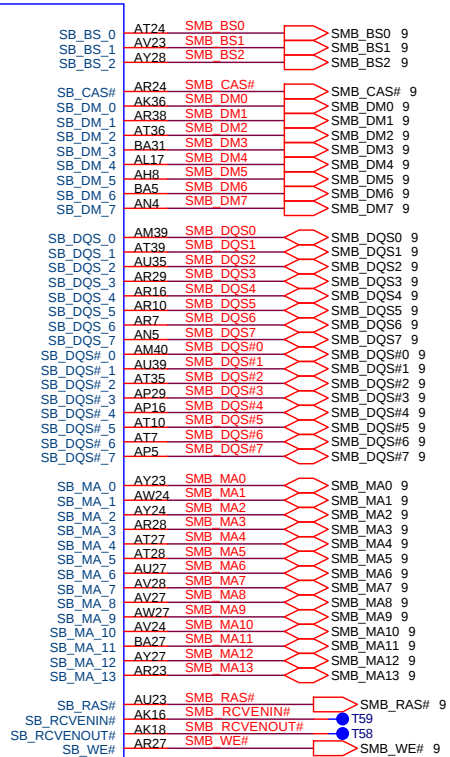



CALISTOGA










PROJECT :BH1
Quanta Computer Inc.

Size	Document Number	Rev
	GMCH (MEMORY)	C
Date:	Tuesday, October 25, 2005	Sheet 6 of 27

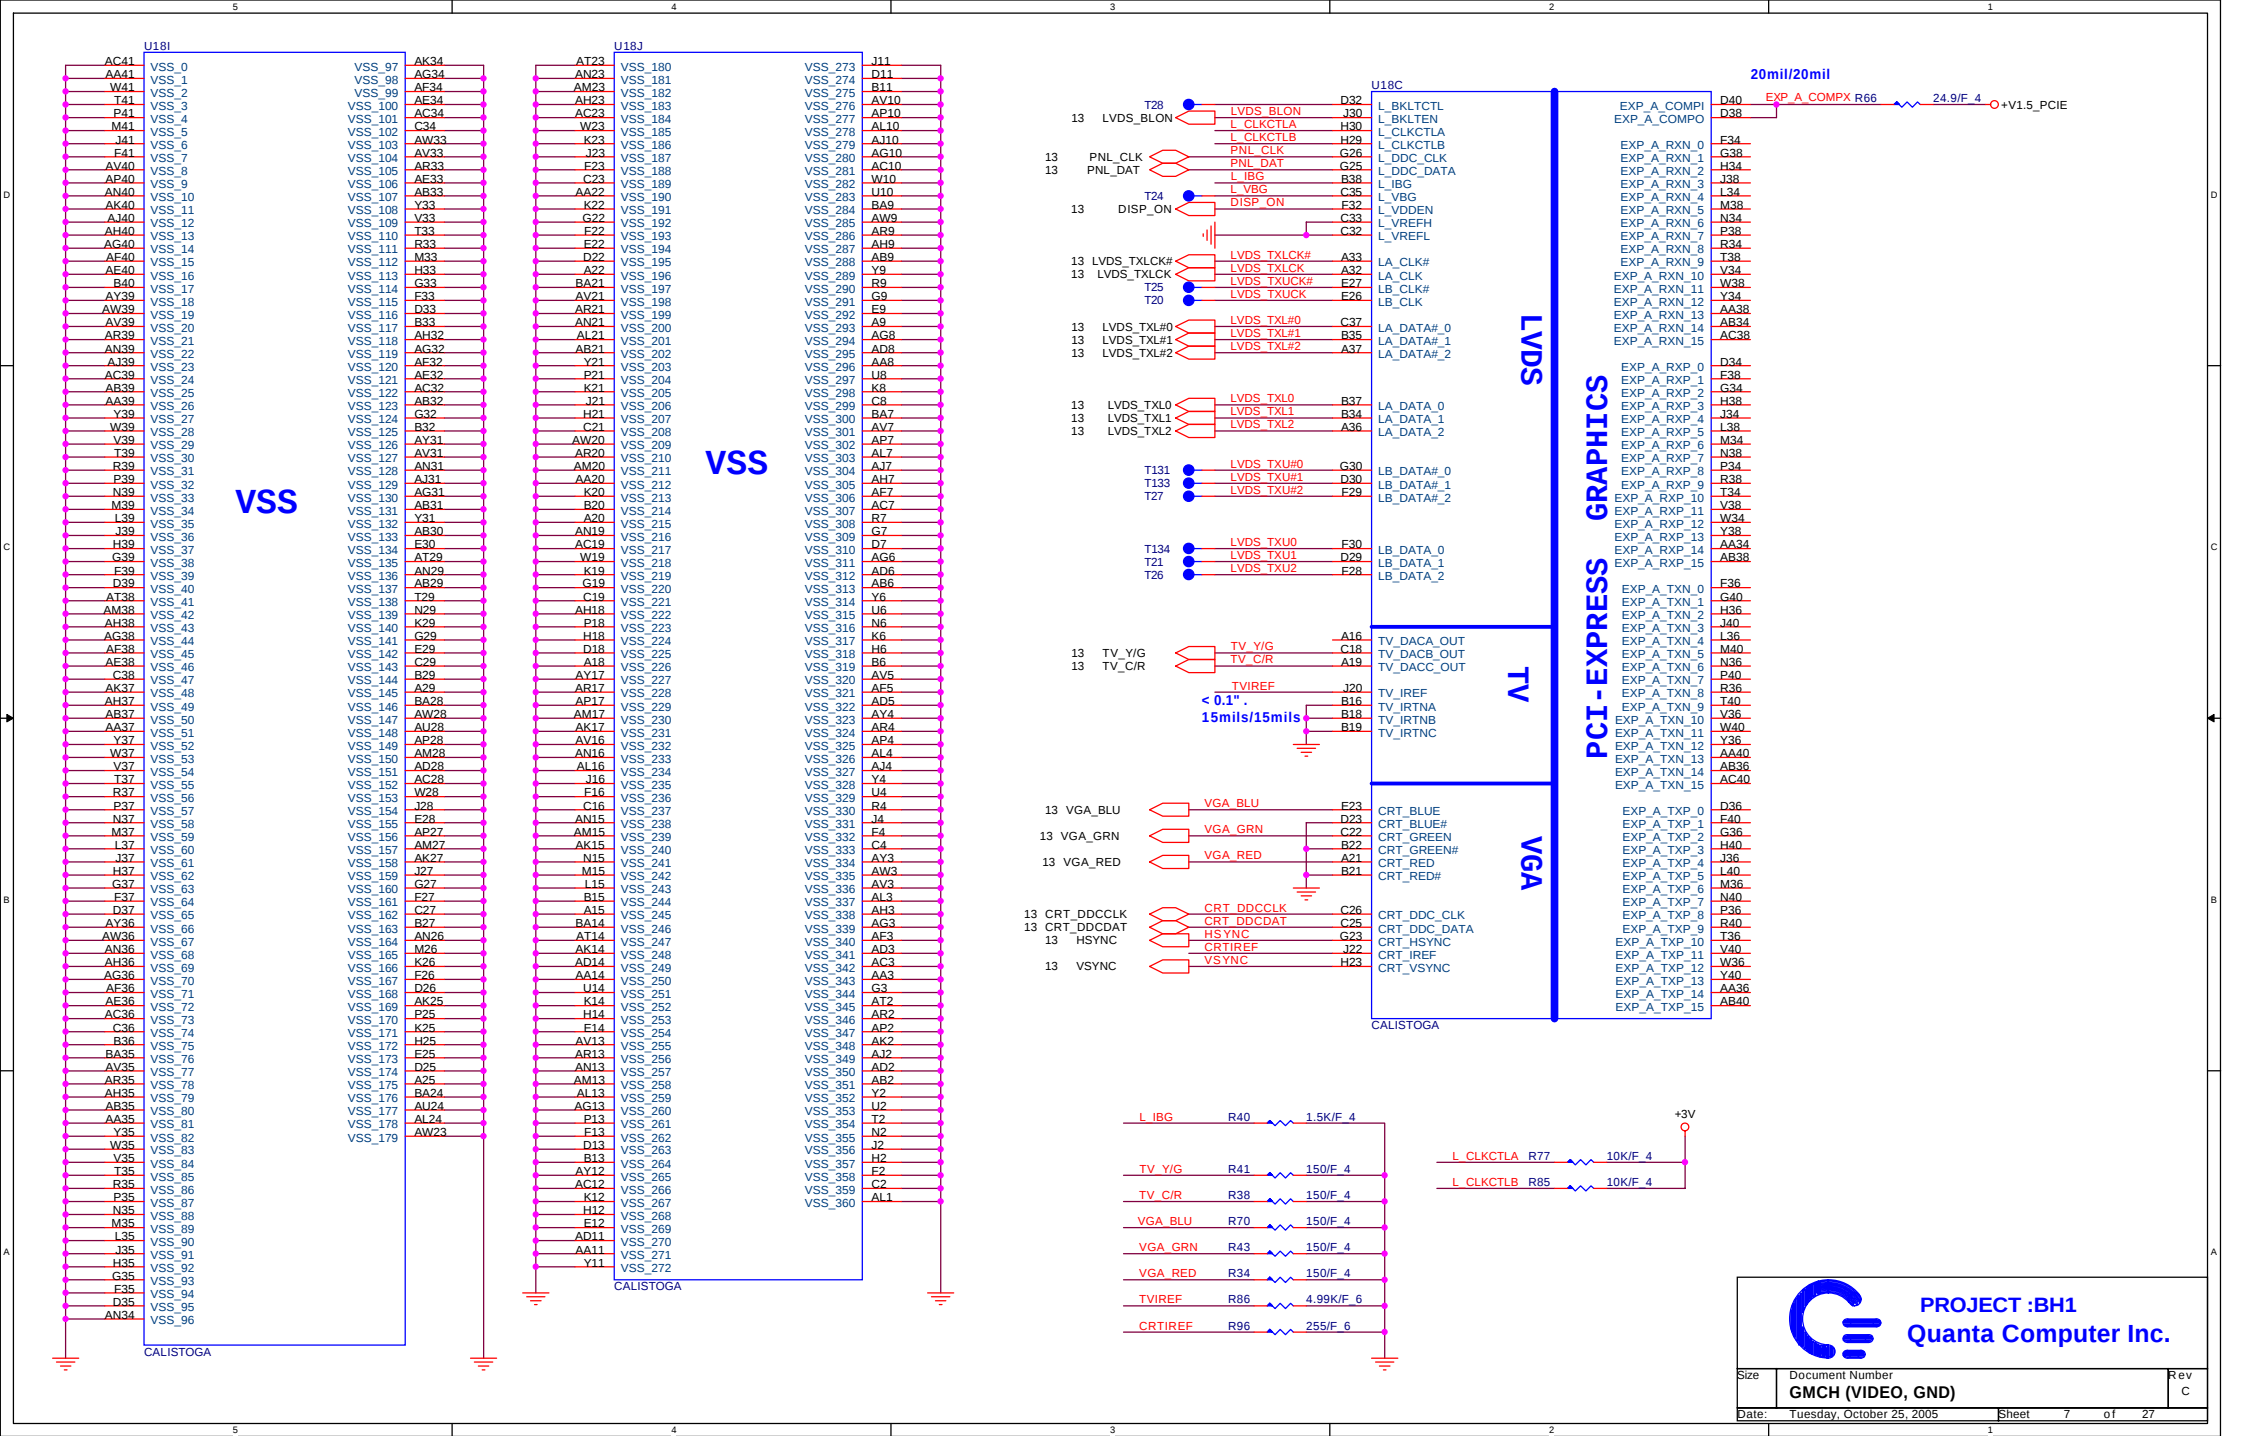

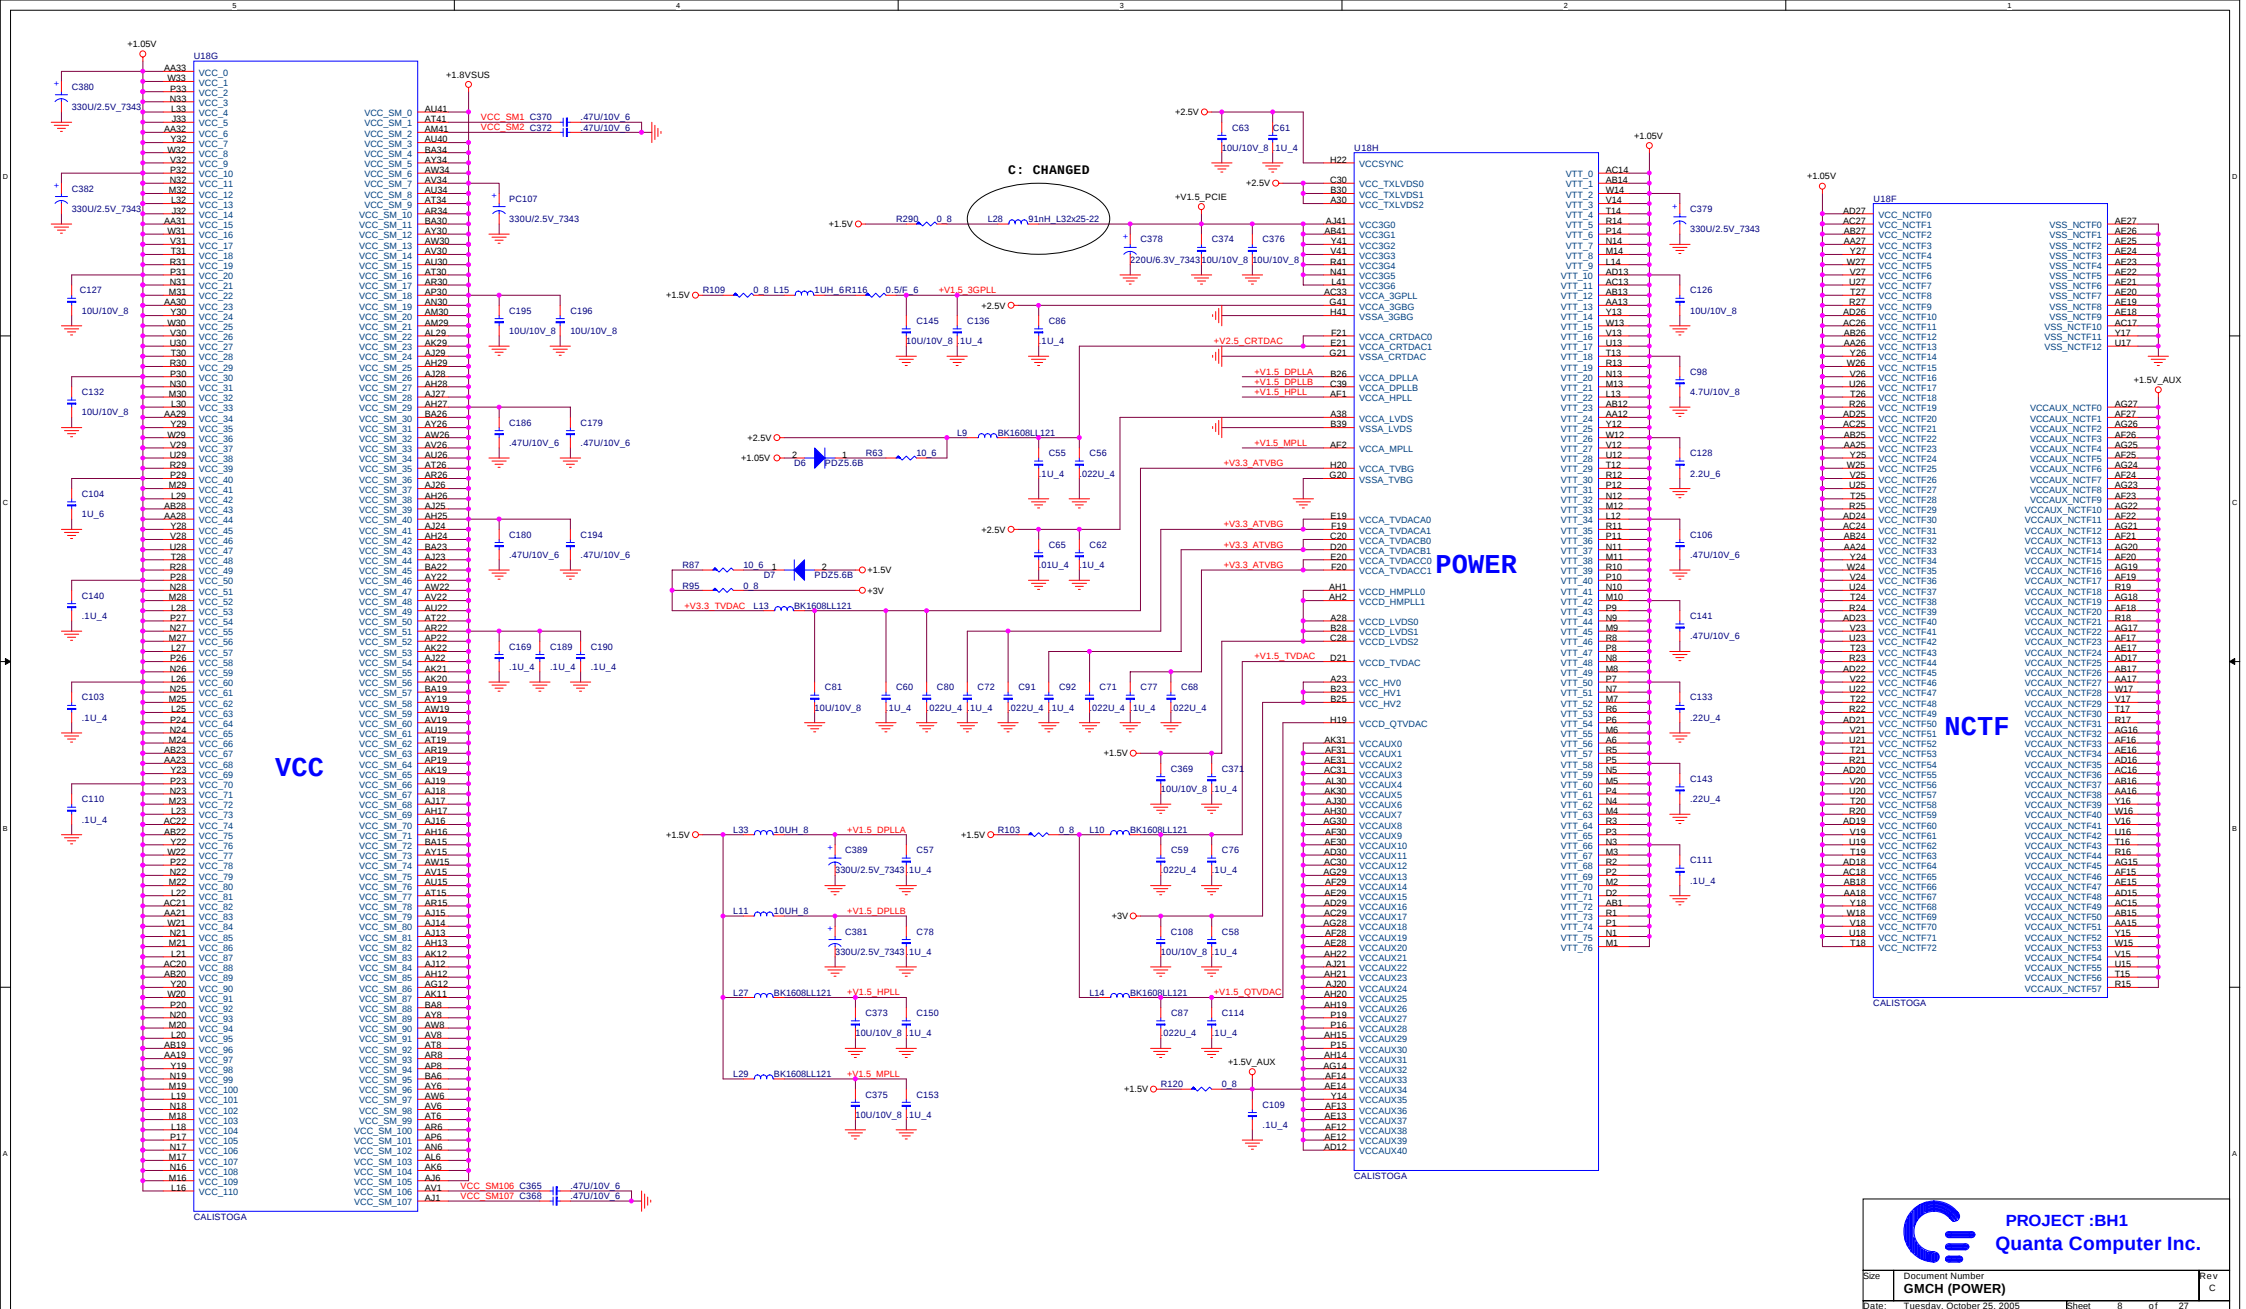


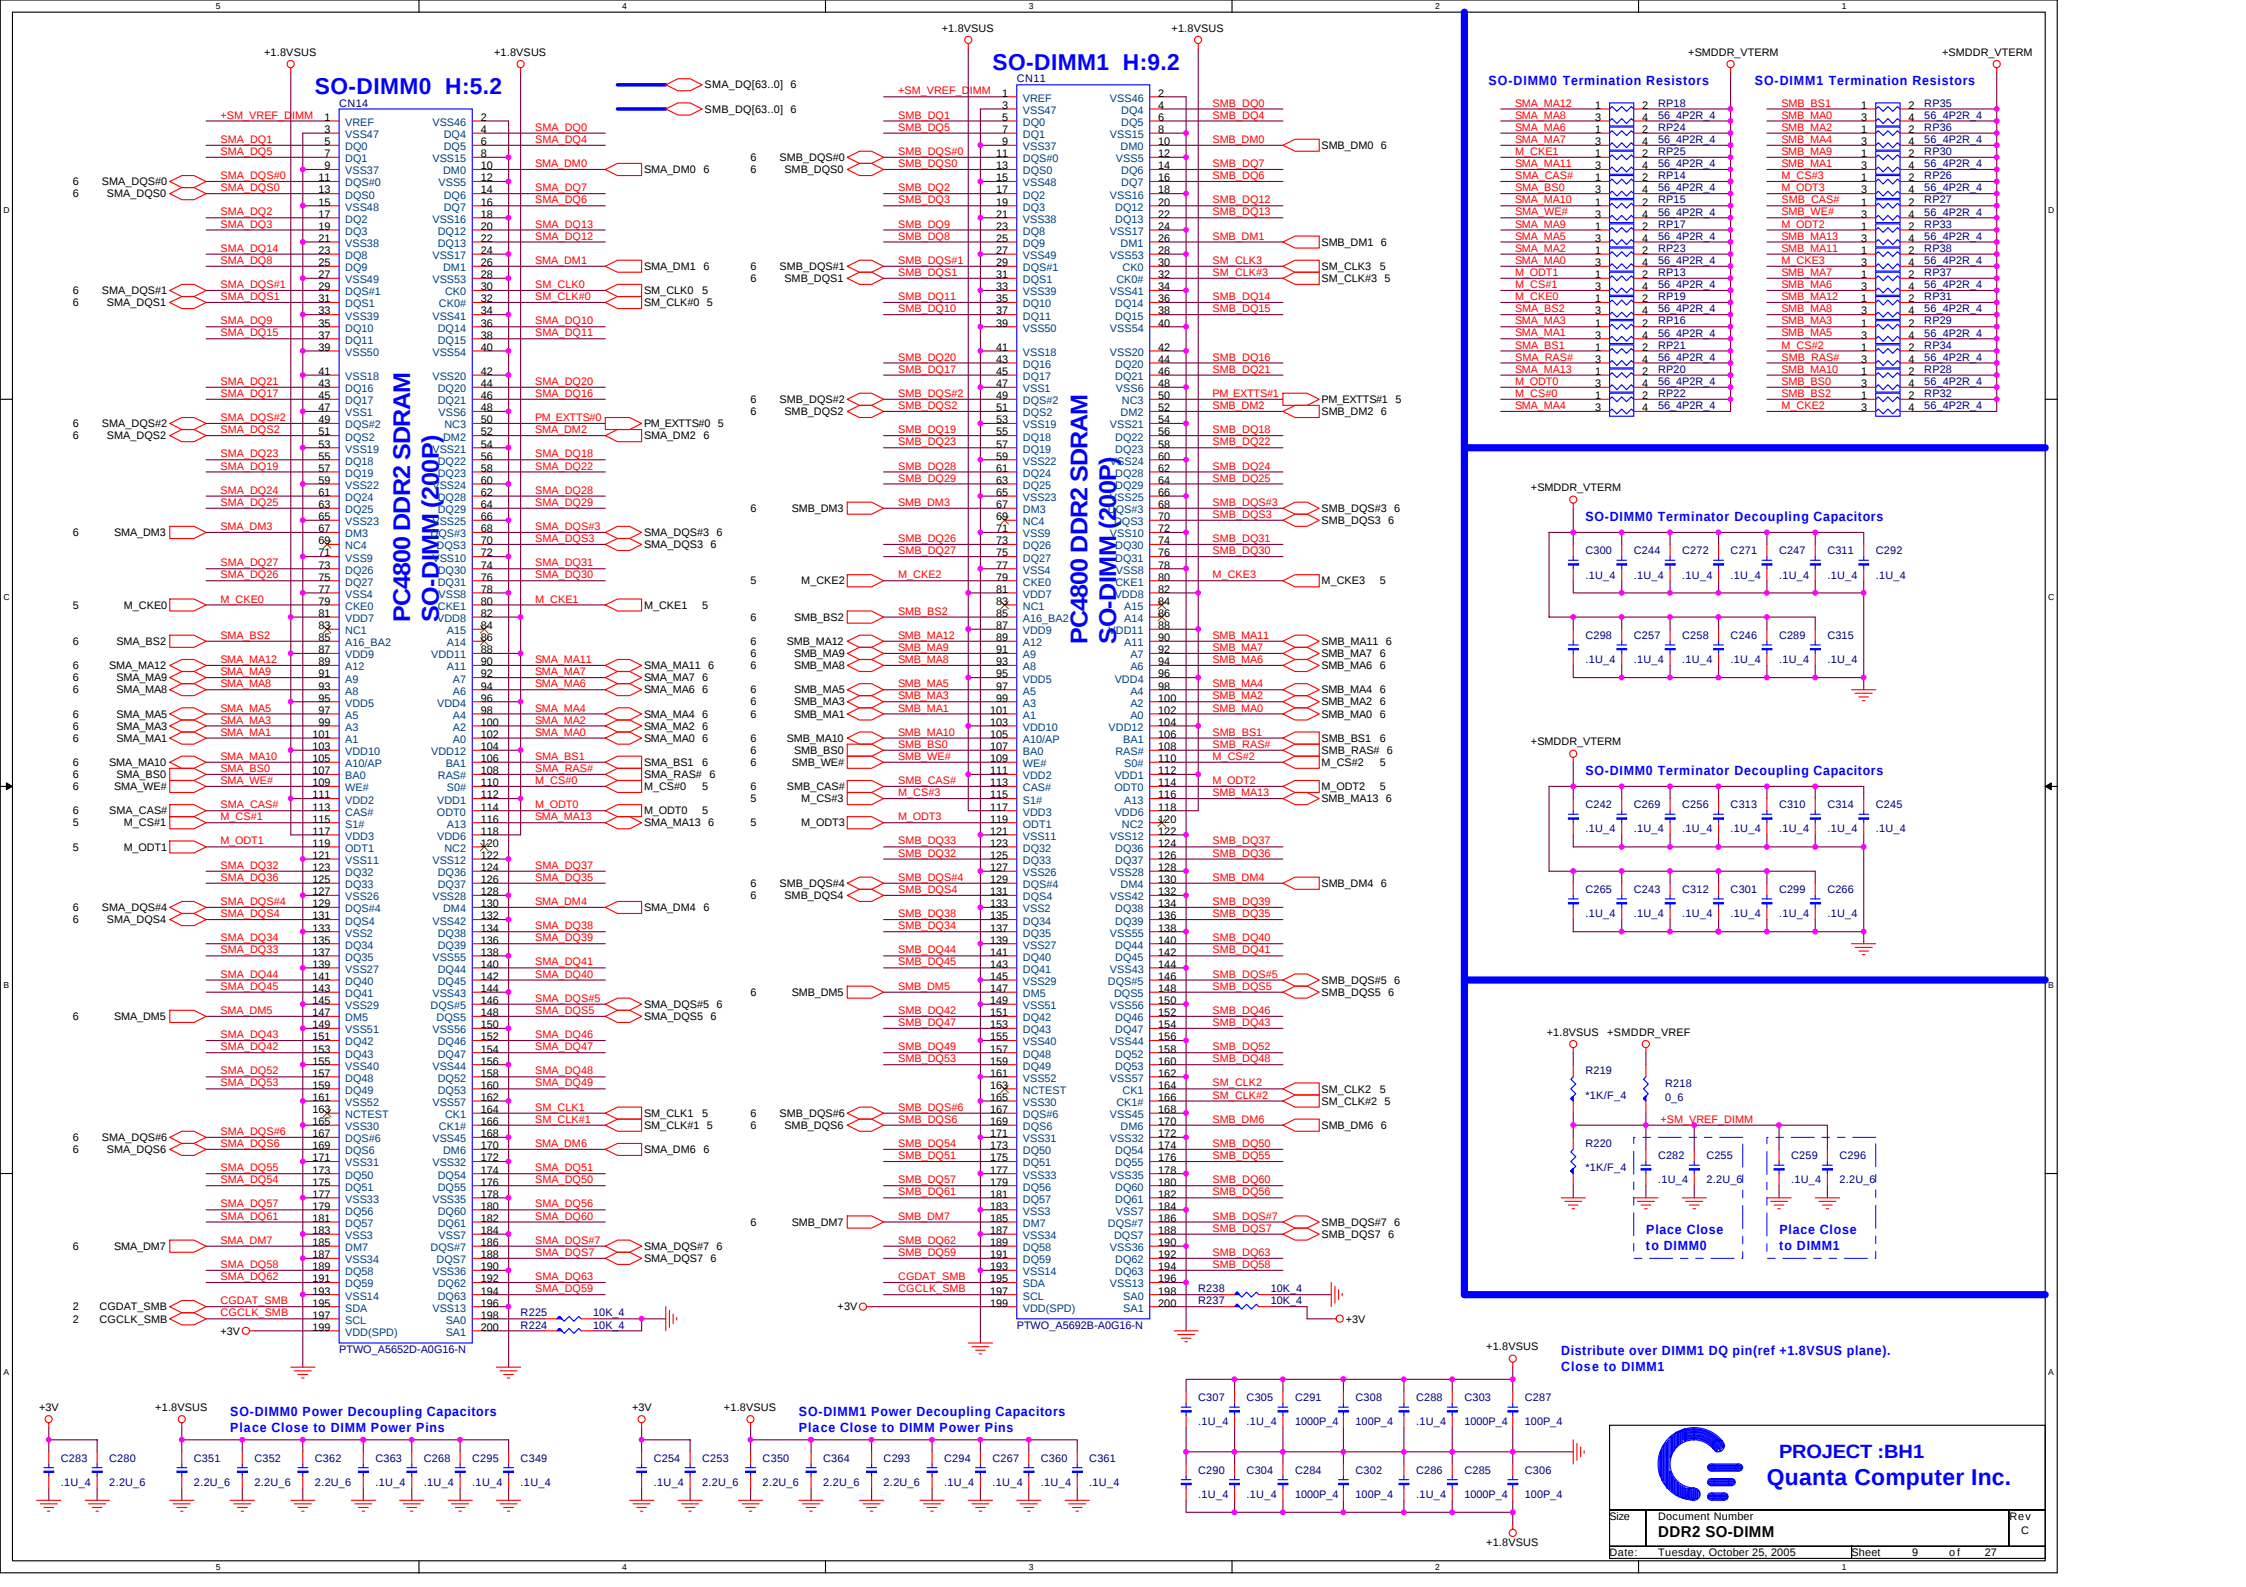

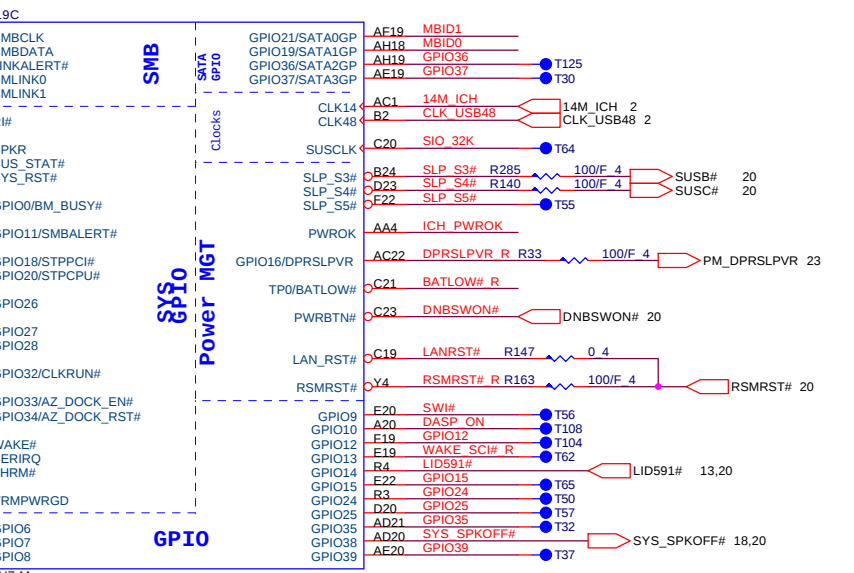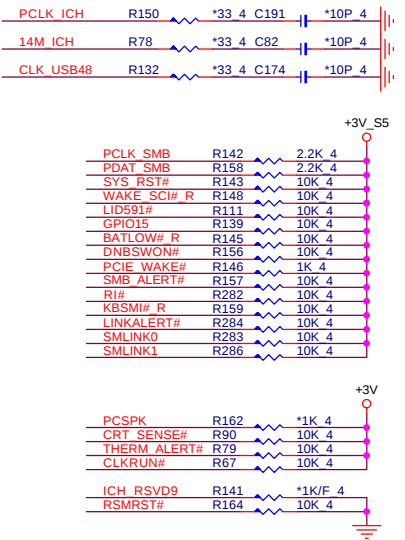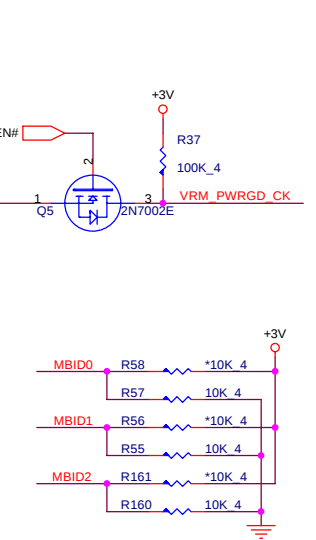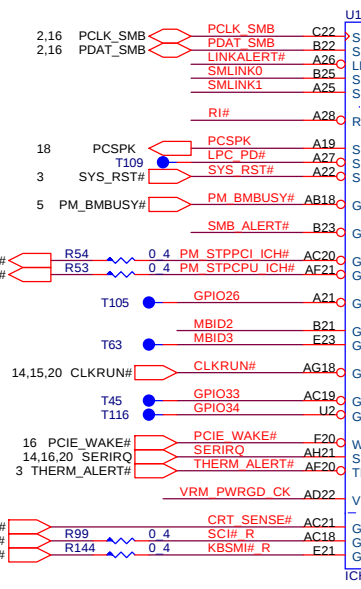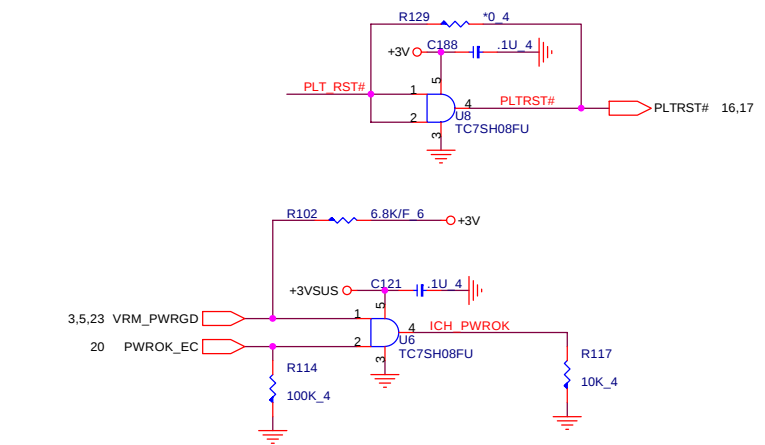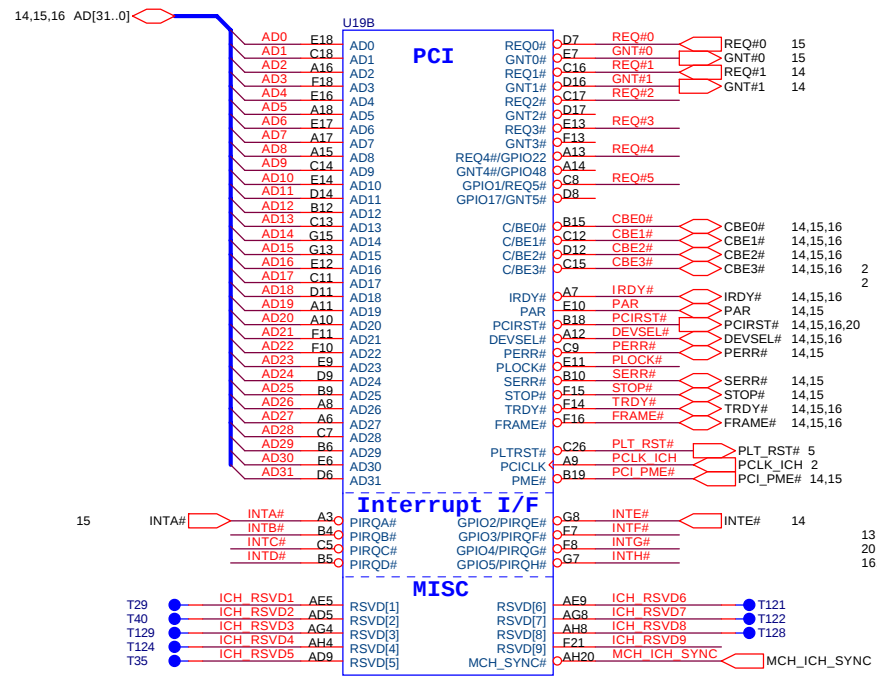


PROJECT :BH1
Quanta Computer Inc.


Size	Document Number	Rev
	ICH7-M (PCI, GPIO)	C
Date:	Tuesday, October 25, 2005	Sheet 11 of 27

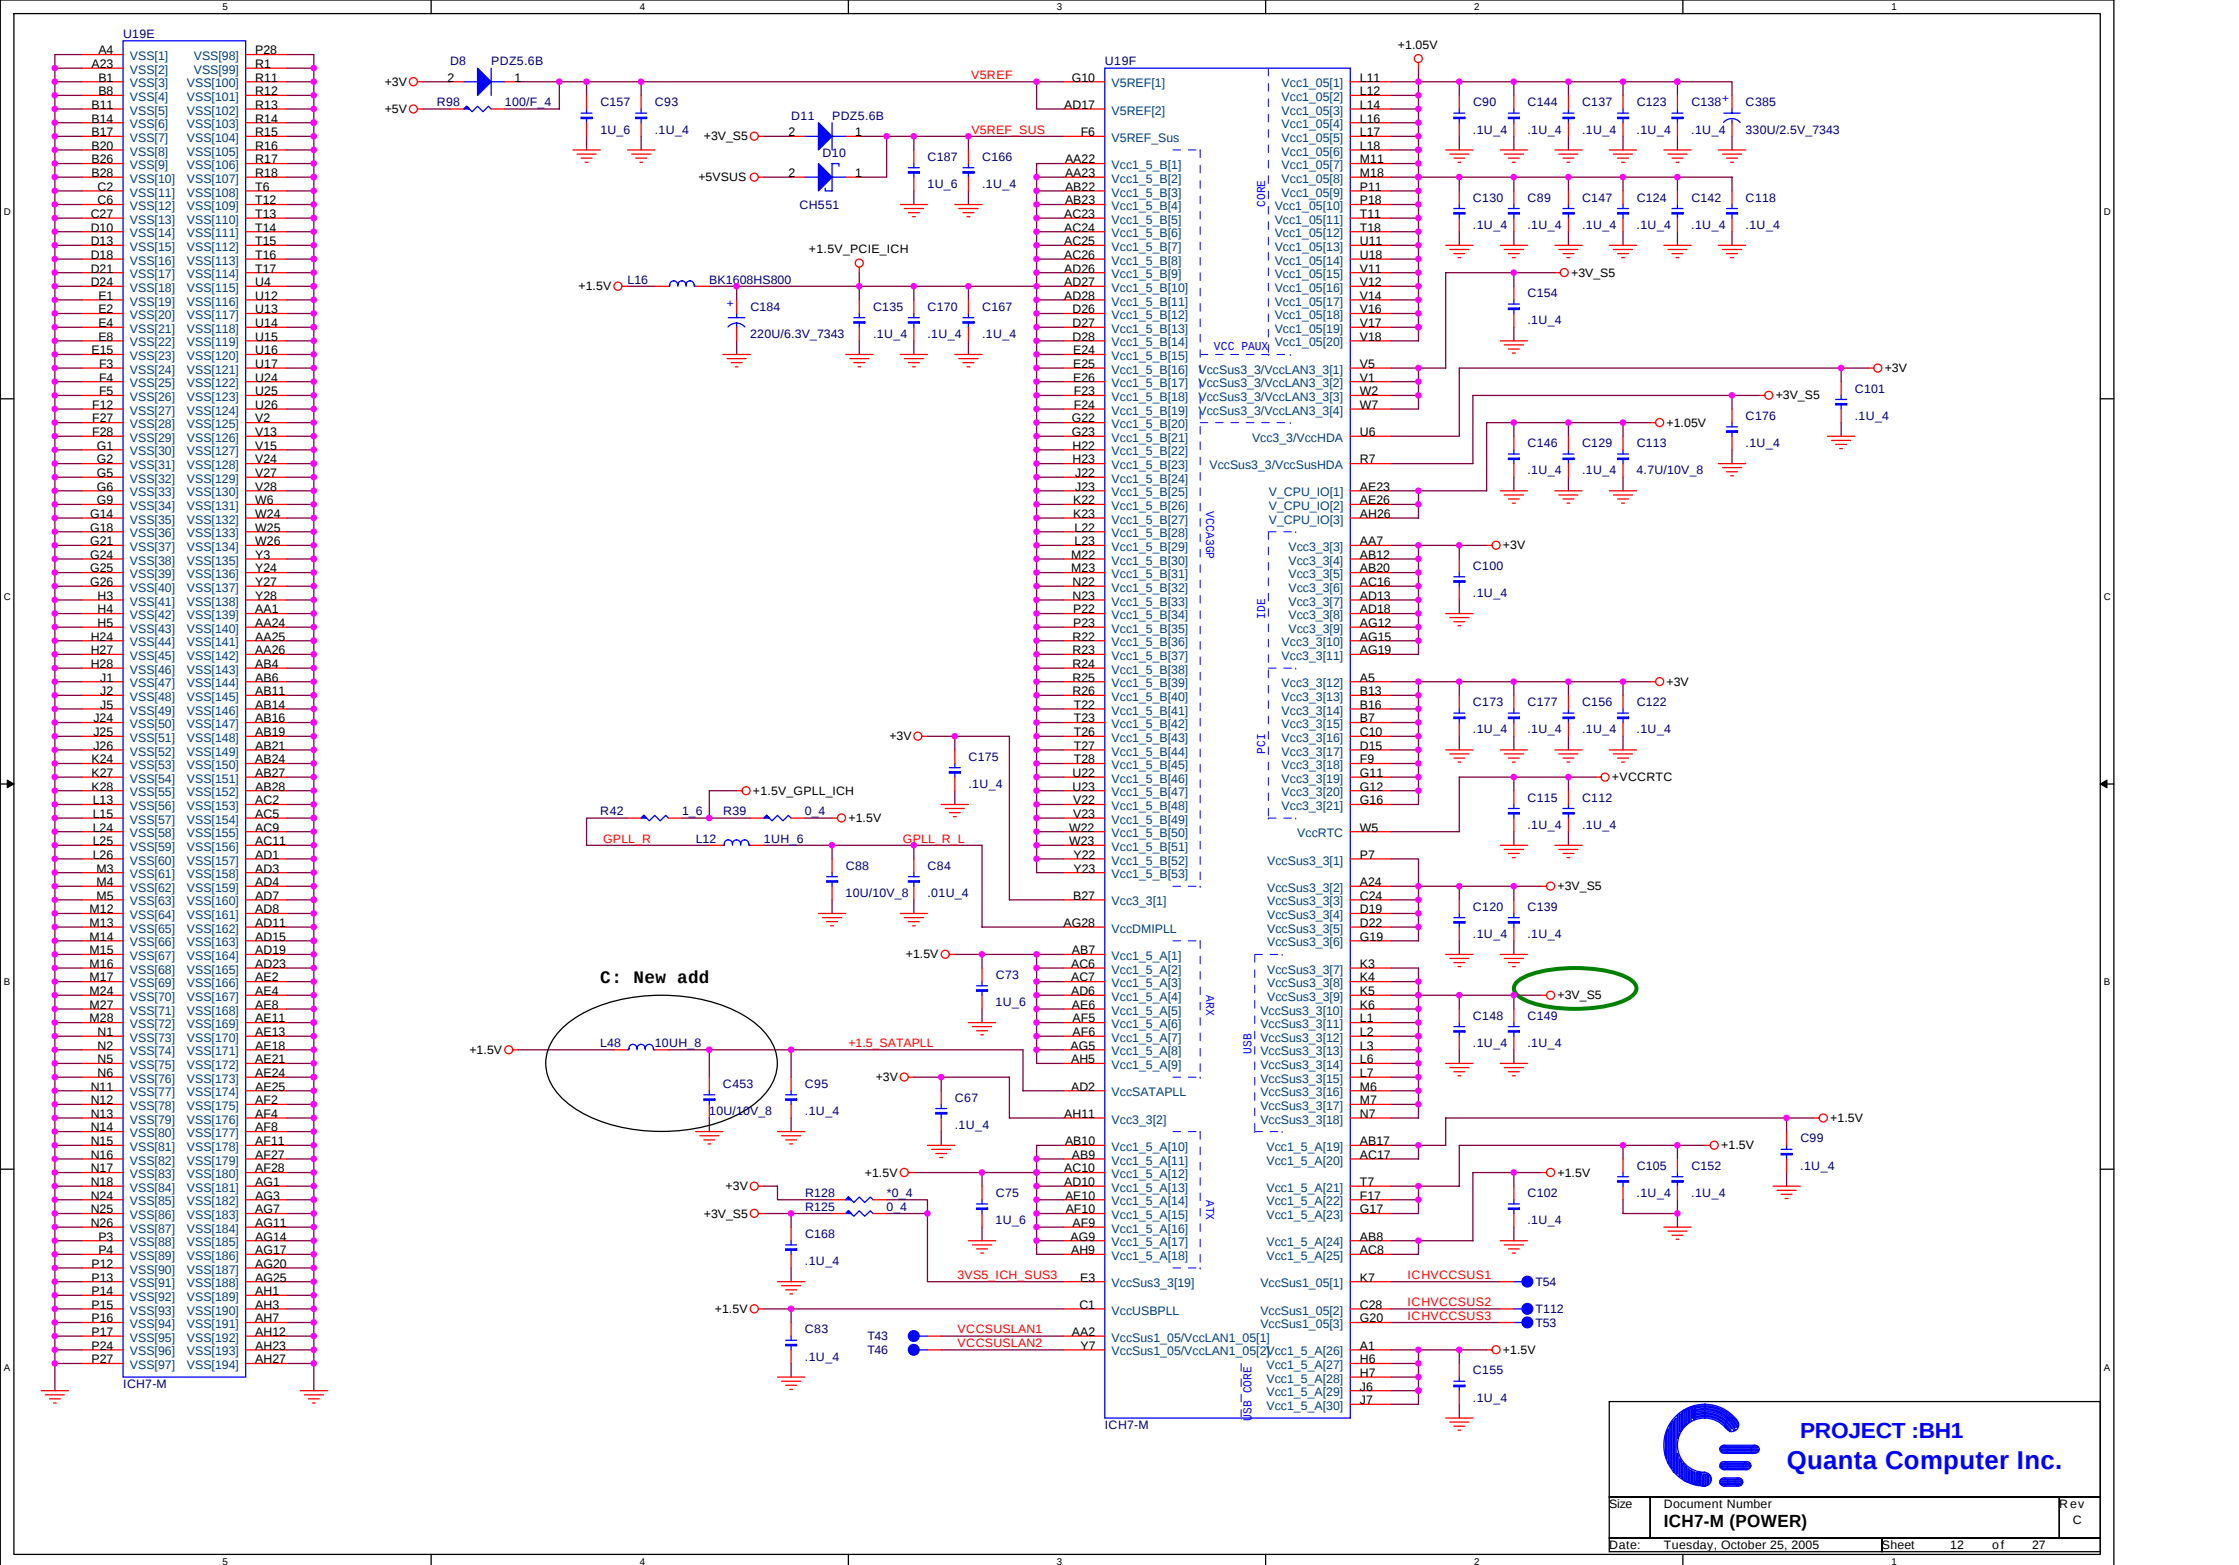


S-VIDEO

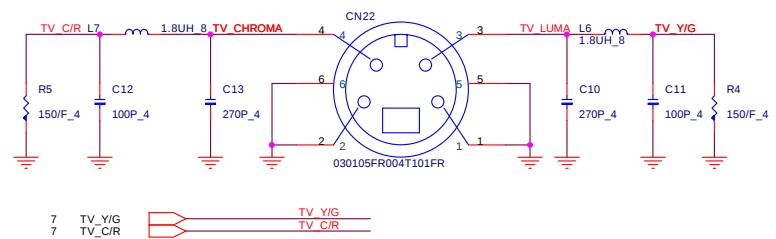







LVDS

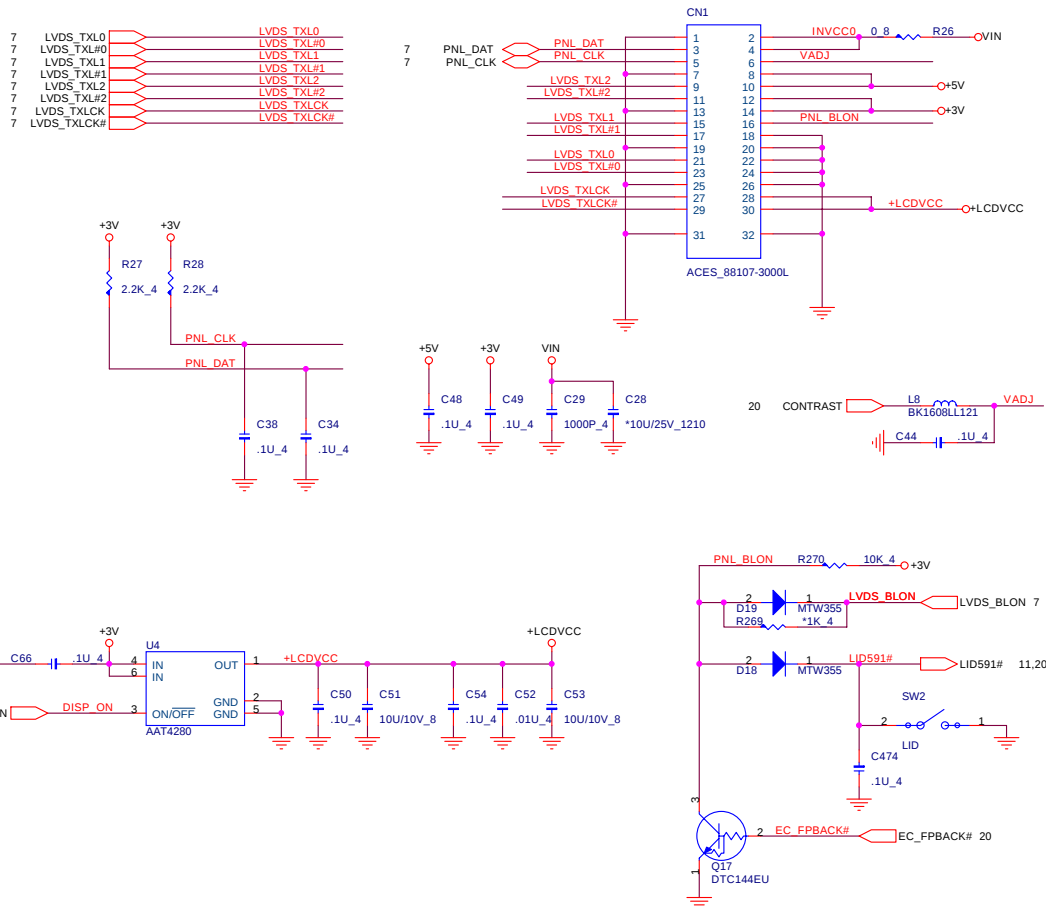

CRT

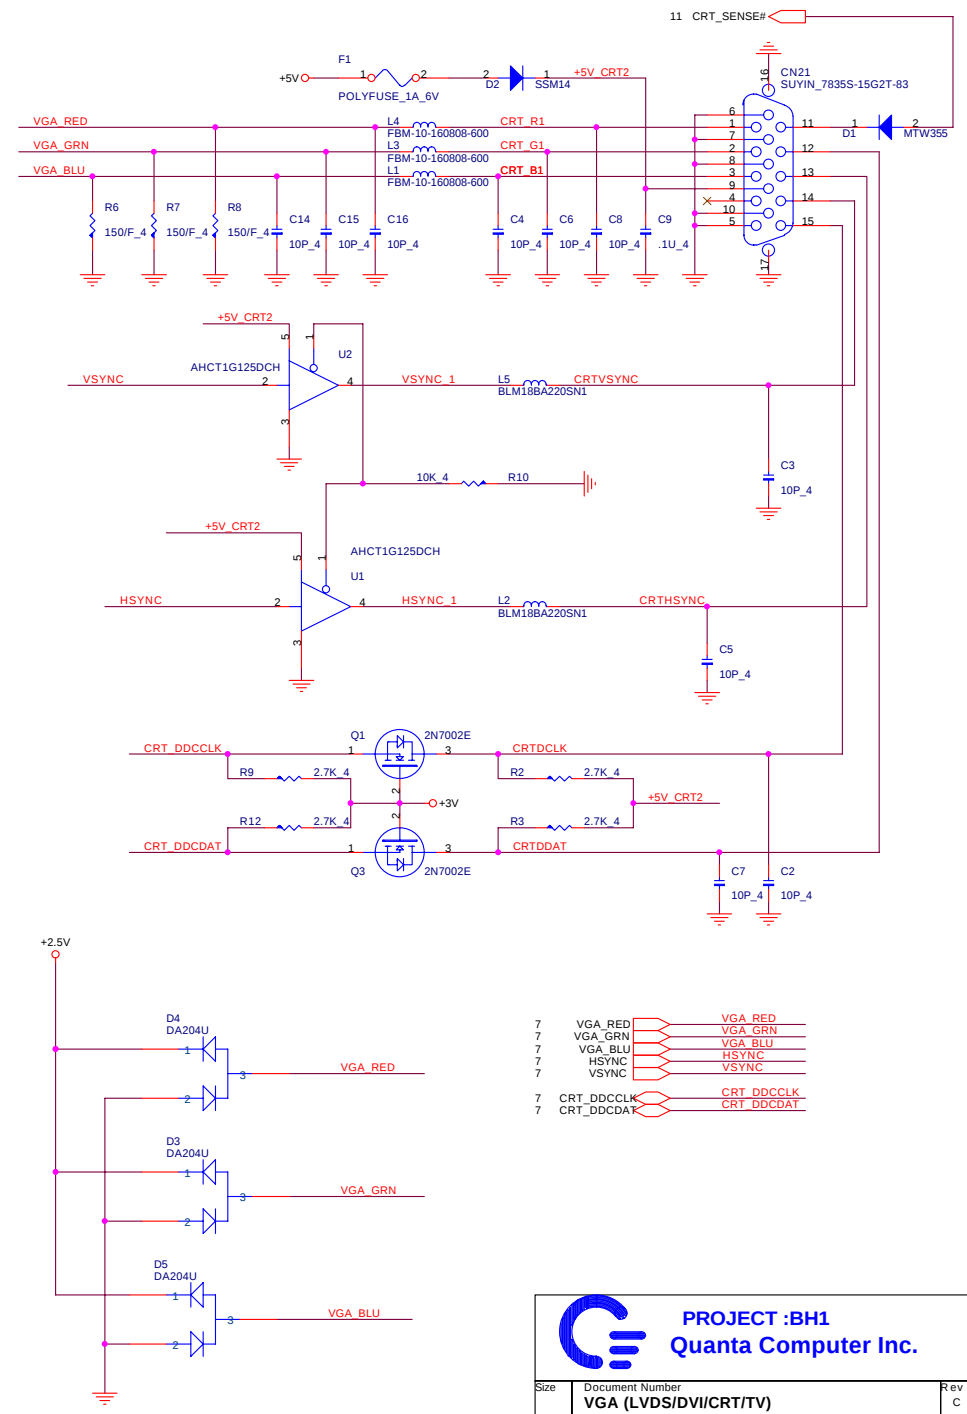








CBS

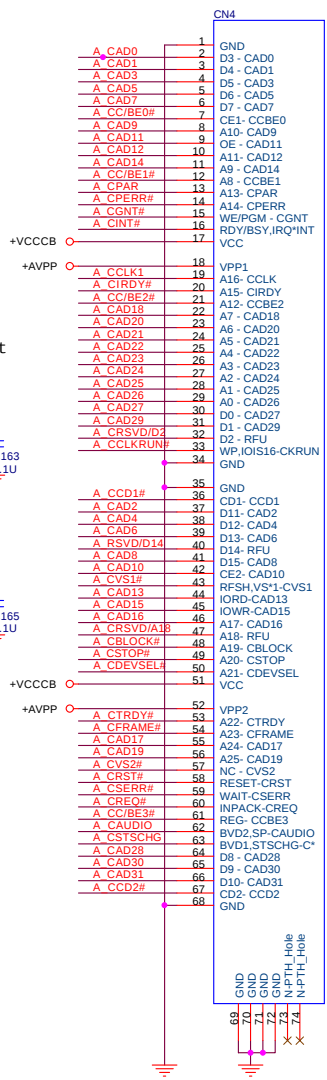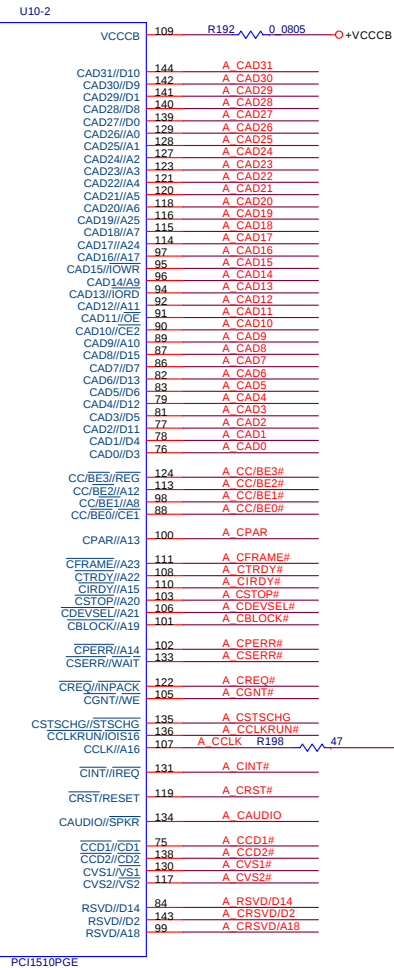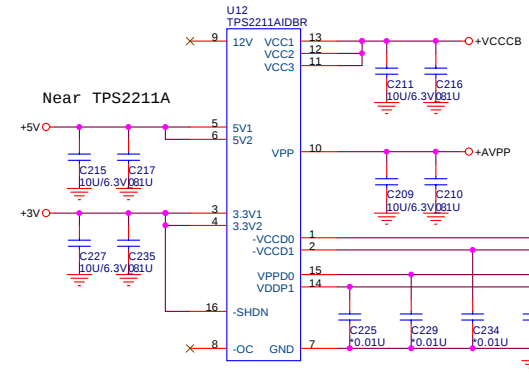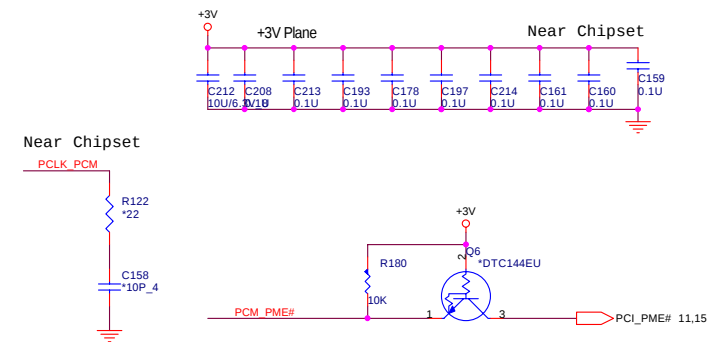


PROJECT :BH1
Quanta Computer Inc.

ID Select : AD16
Interrupt Pin : INTA#
Request Indicate : REQ0#
Grant Indicate : GNT0#


LAN

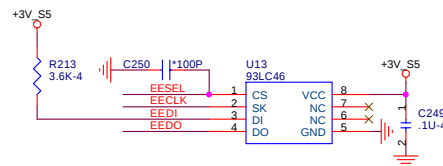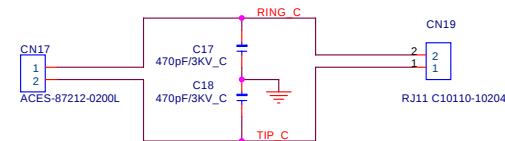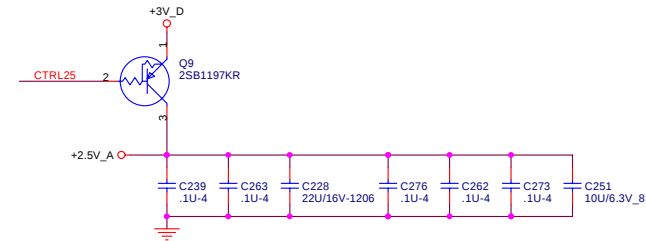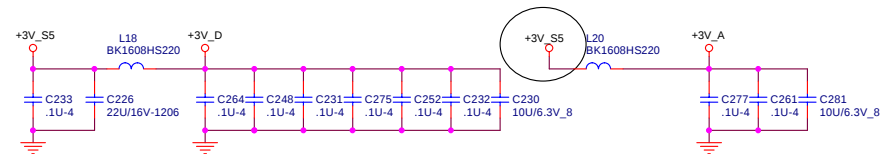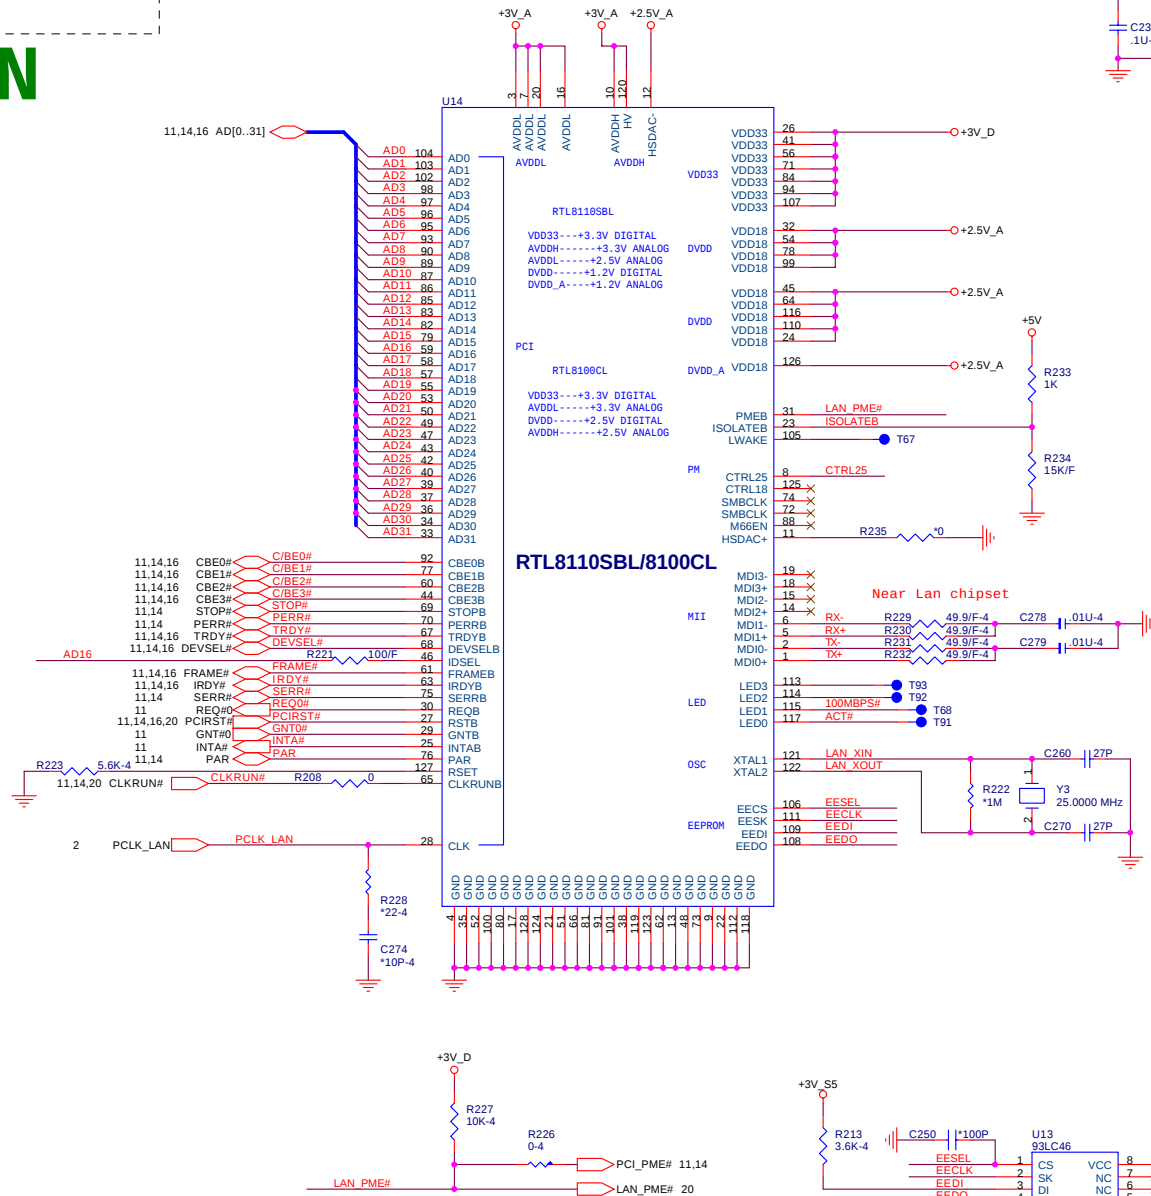


HDD (SATA)

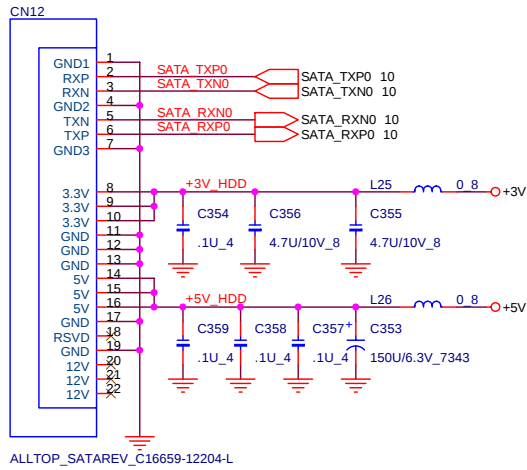


ODD (PATA)

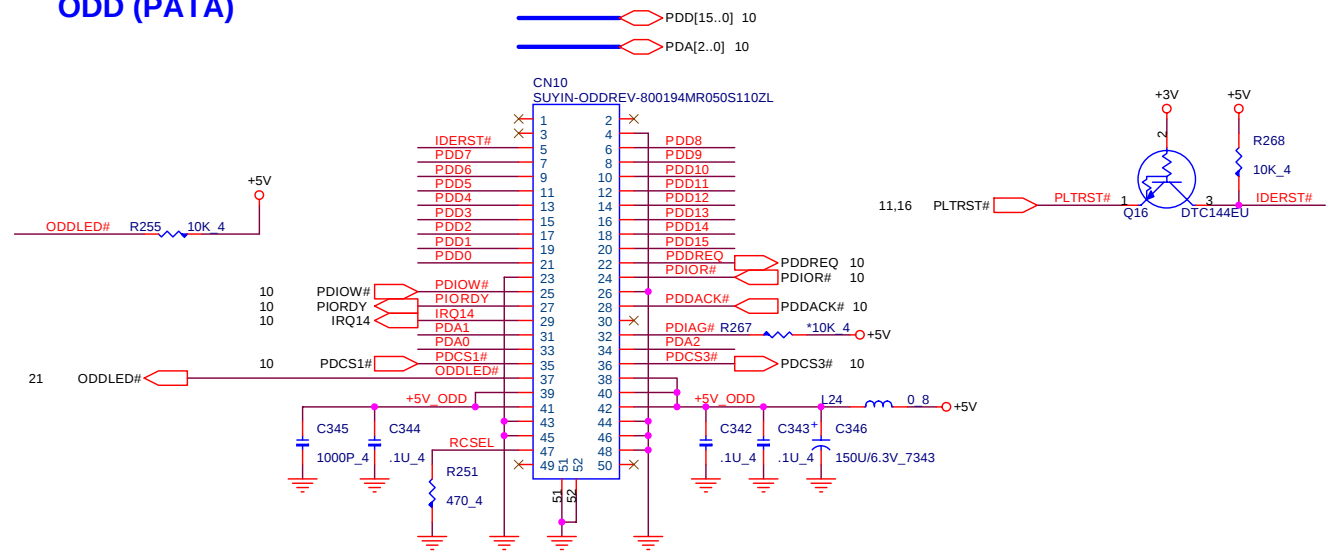


SCREW HOLE

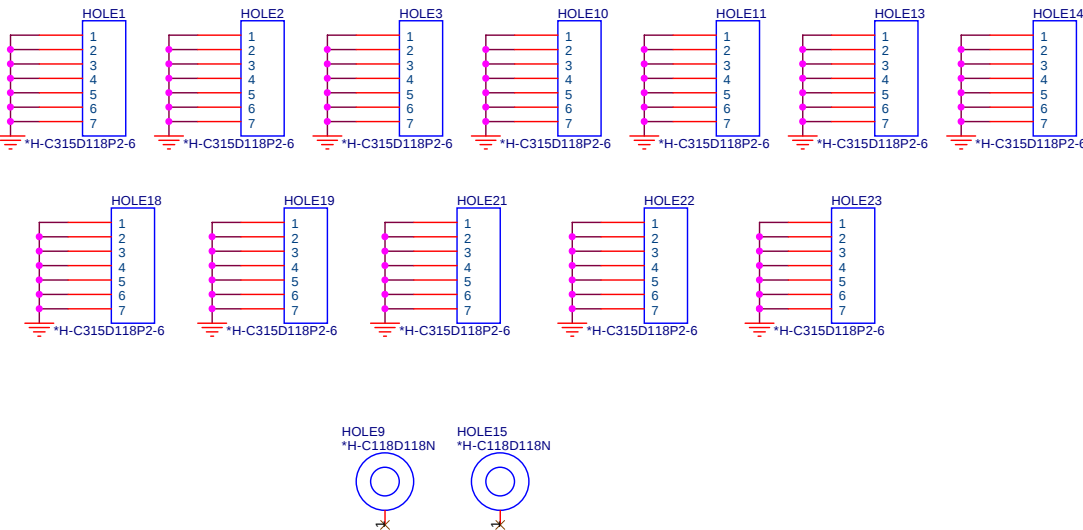


MINI CARD




MODEM




CPU

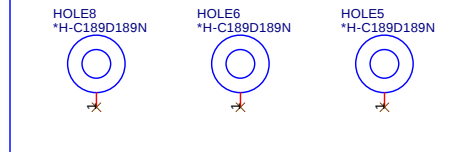


BATT



Wireless Antenna



NB




PROJECT :BH1
Quanta Computer Inc.




Size	Document Number	Rev
	HDD/ODD/SCREW	C

Date: Tuesday, October 25, 2005 Sheet 17 of 27



ADO

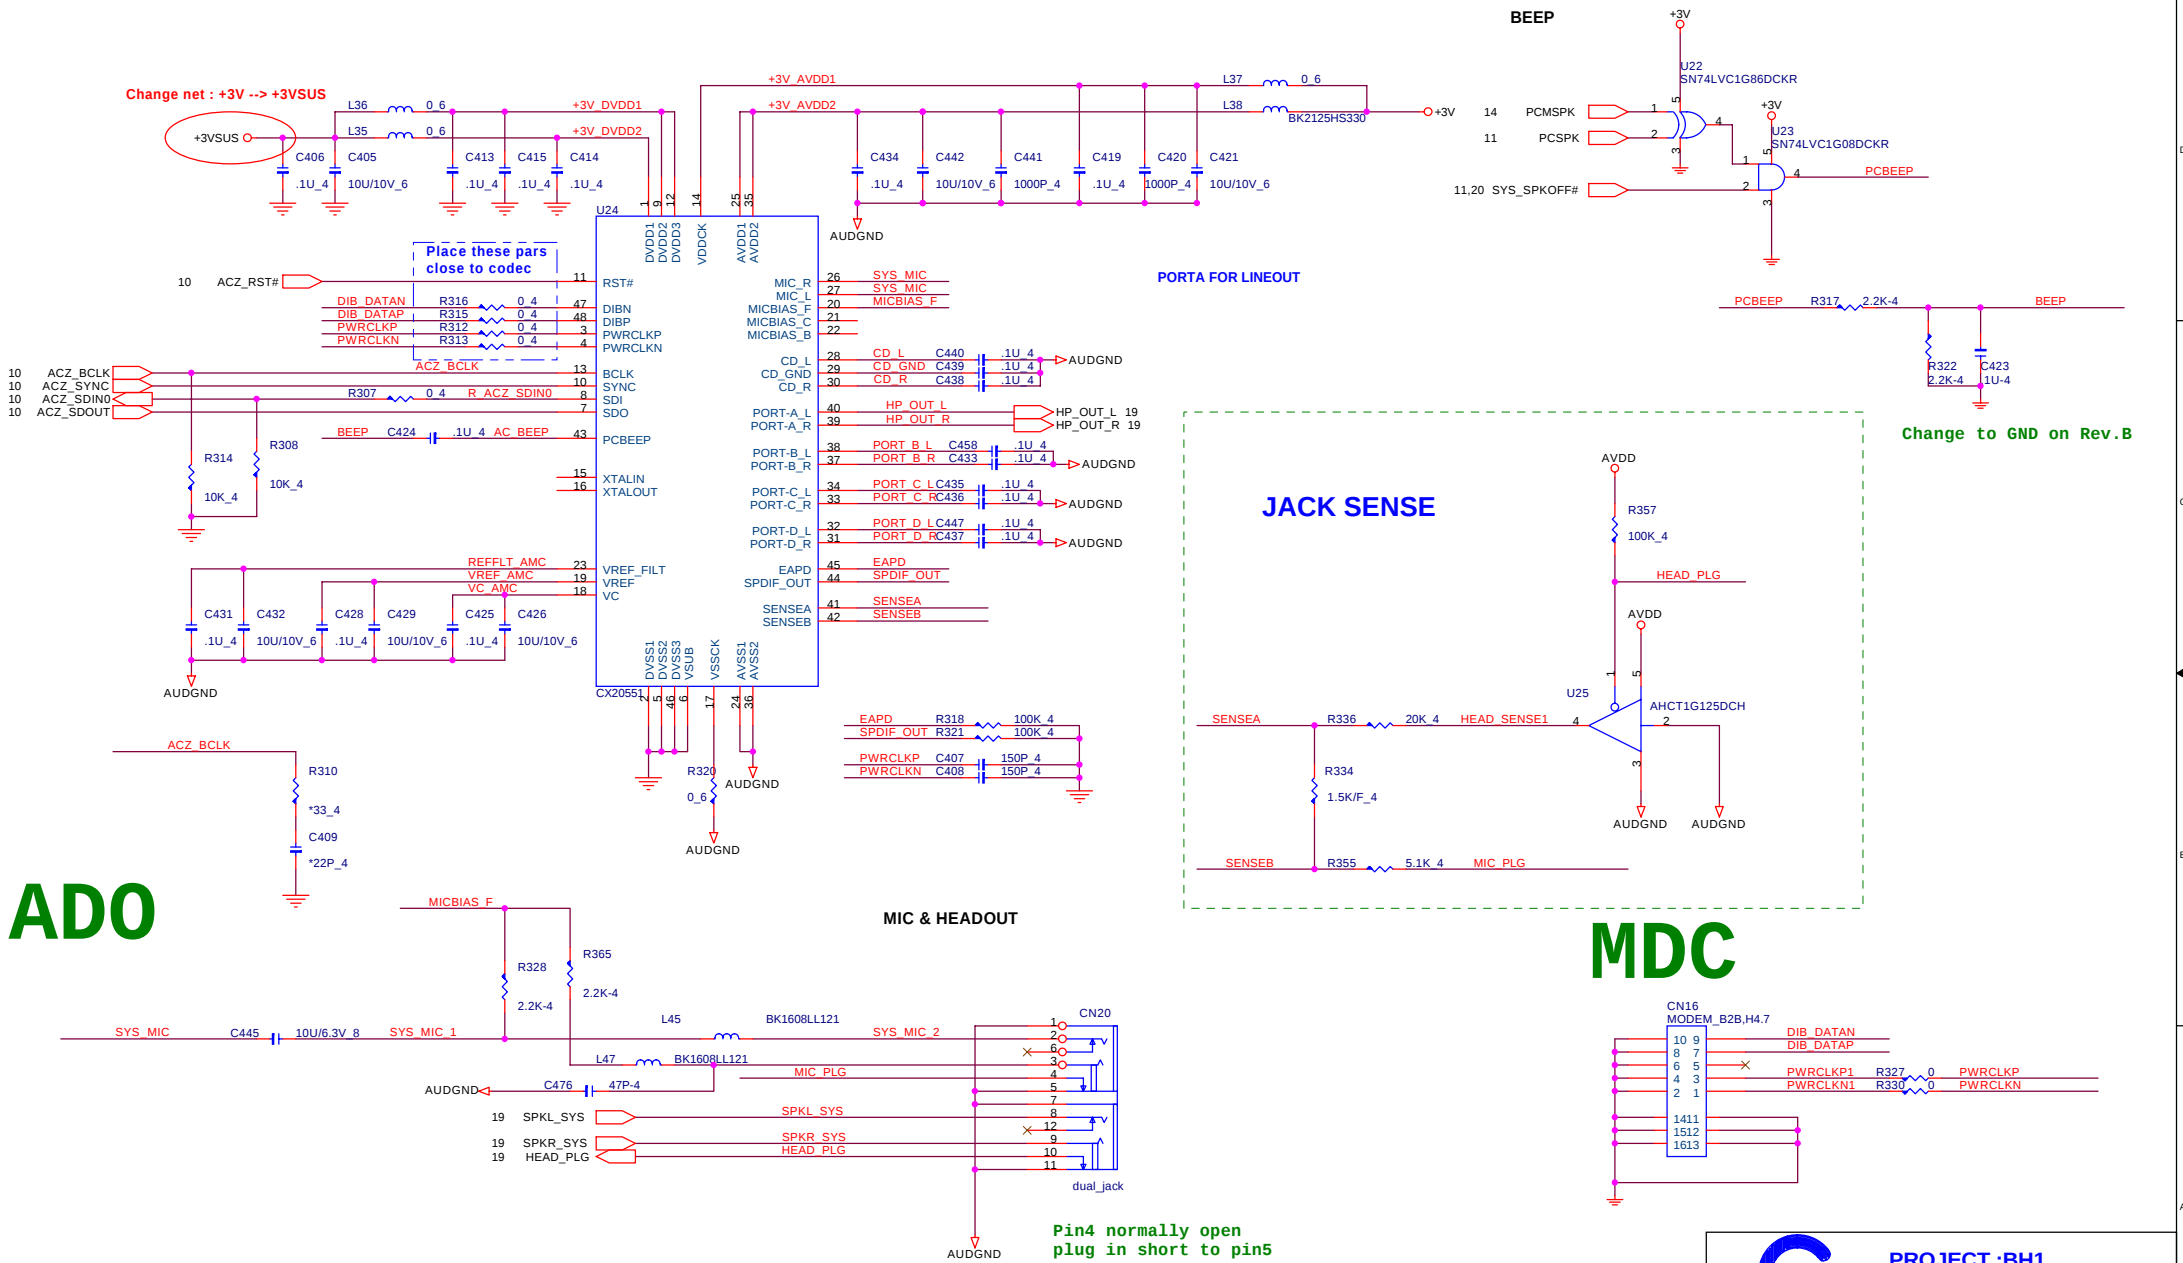

GAIN1	SPKR MODE	HP MODE
0	10.5	3
1	9	0

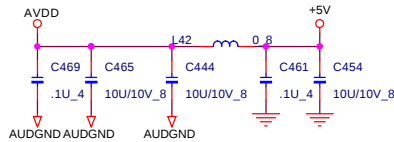
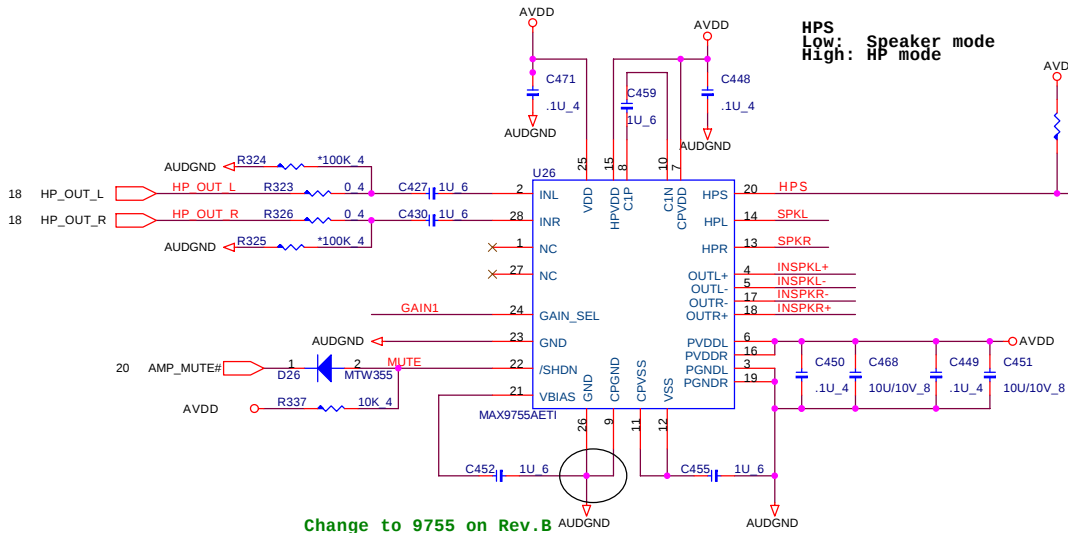





Change to 9755 on Rev.B




B: add on connector side

SPEAKER CON.

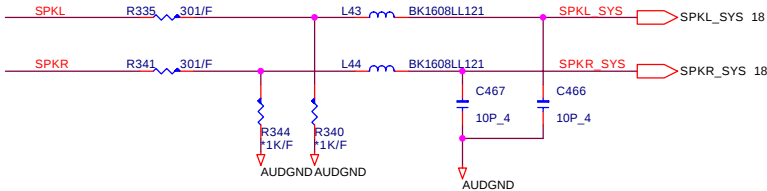
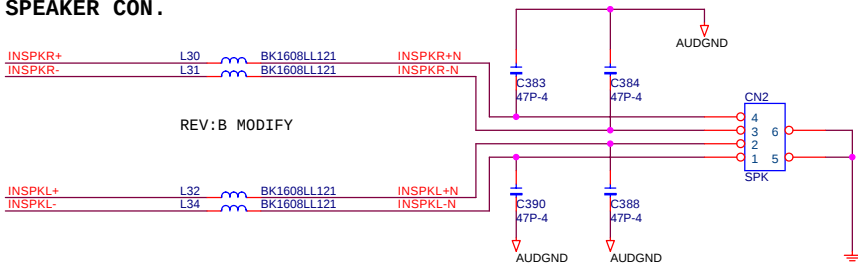




Should have a 0.1uF capacitor close to every GND-VCC pair + one larger cap on the supply.




I/O Address		
BADDR1-0	Index	Data
0 0	2E	2F
0 1	4E	4F
1 0	(HCFGBAH, HCFGBAL) / (HCFGBAH, HCFGBAL) * 2	
1 1	Reserved	

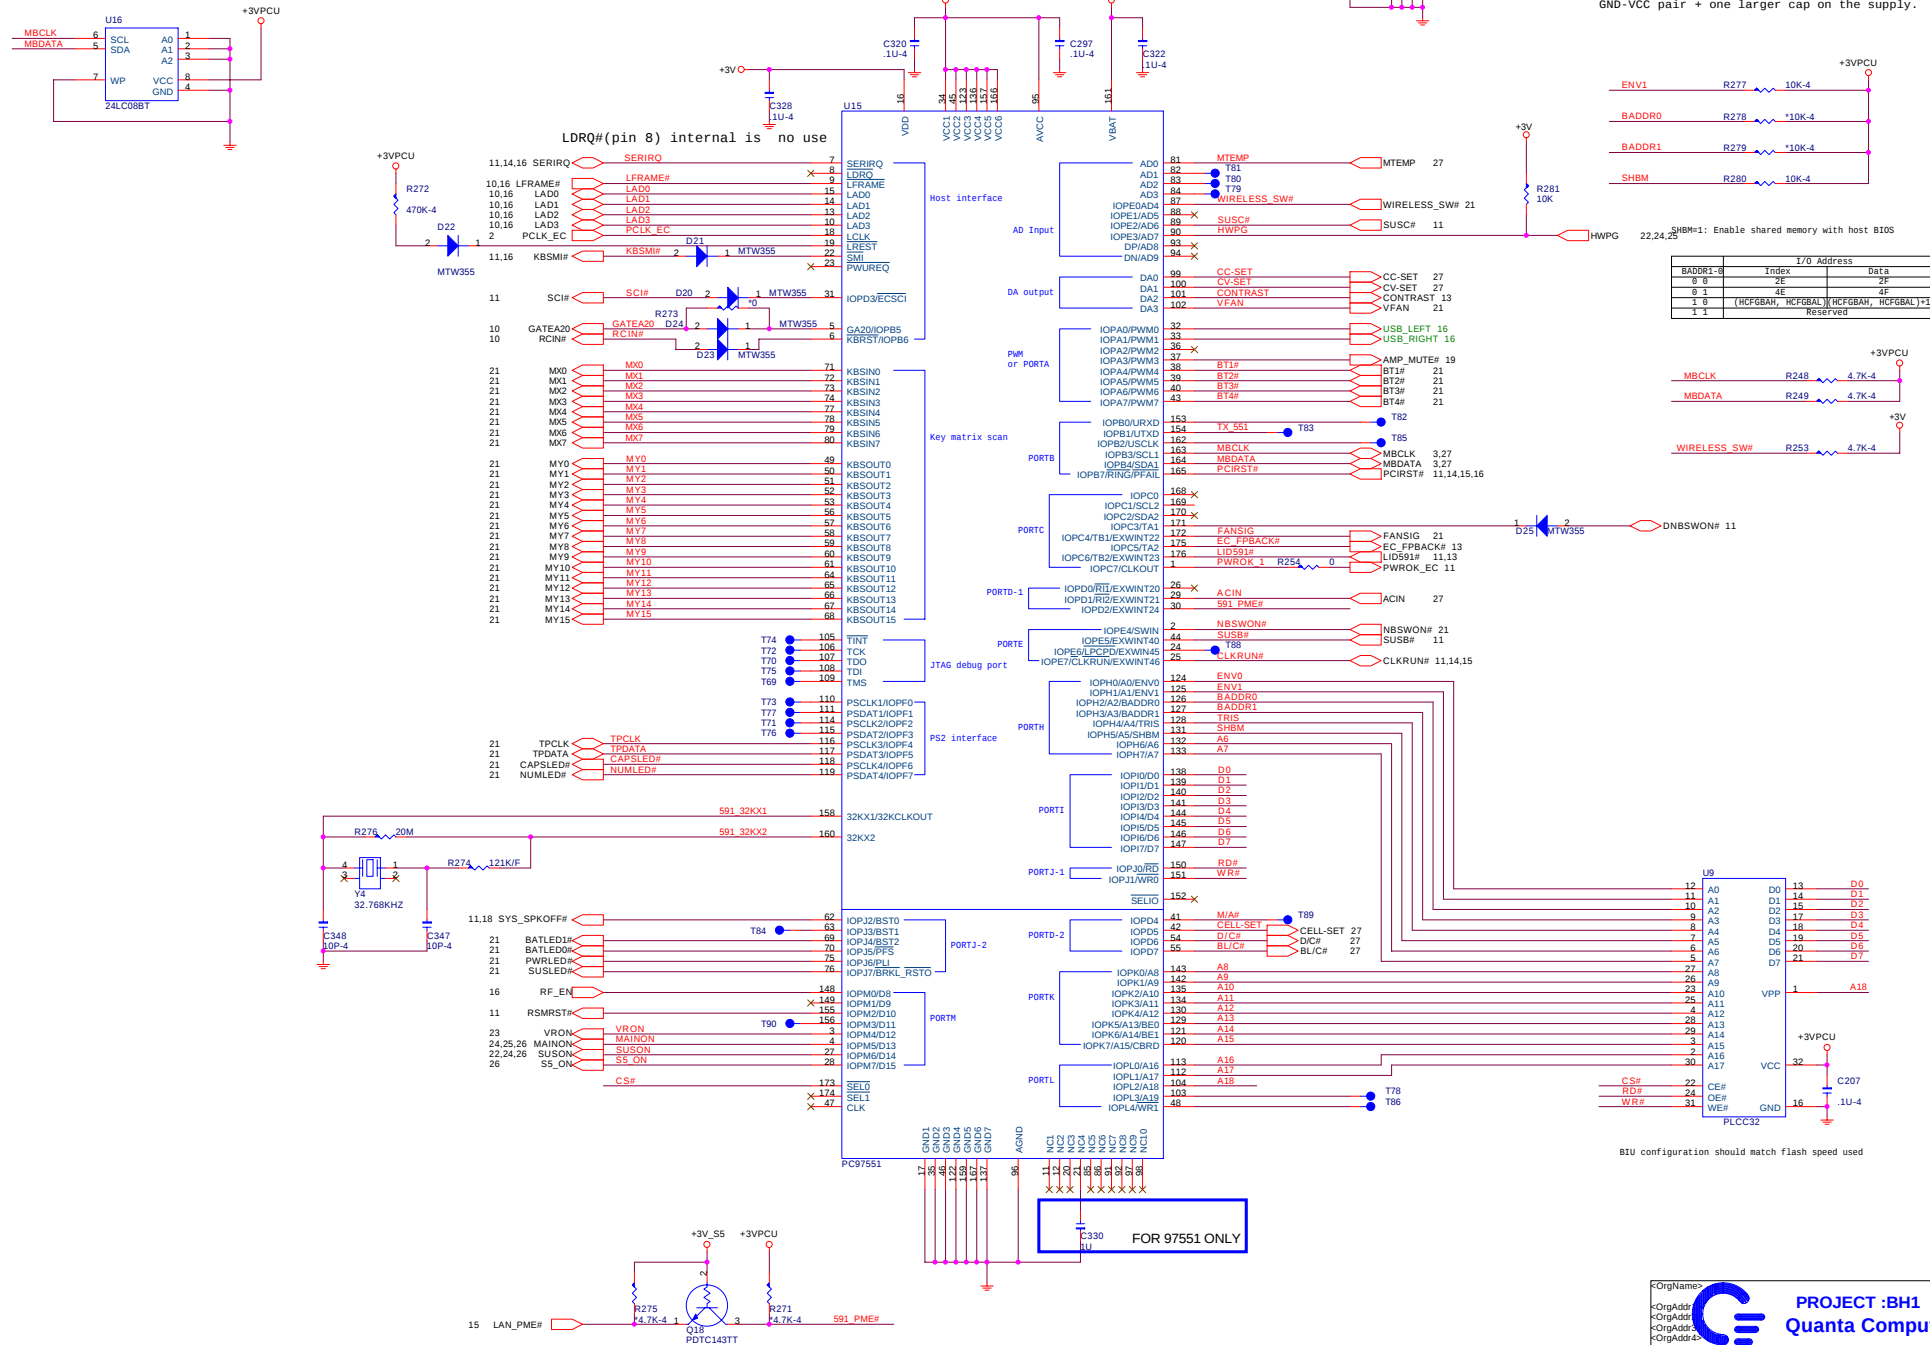


BIU configuration should match flash speed used

INT K/B

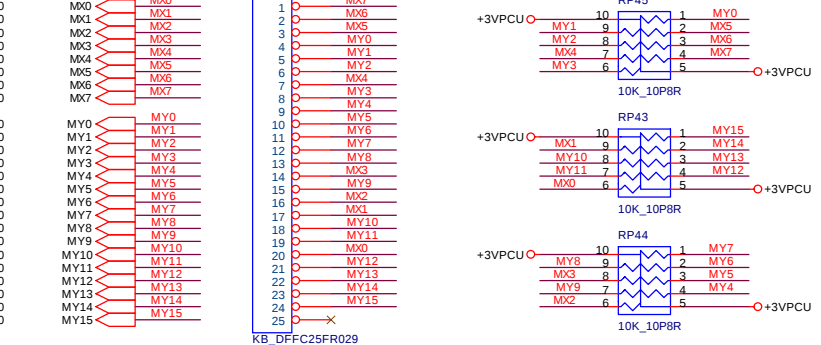


FAN CONTROL

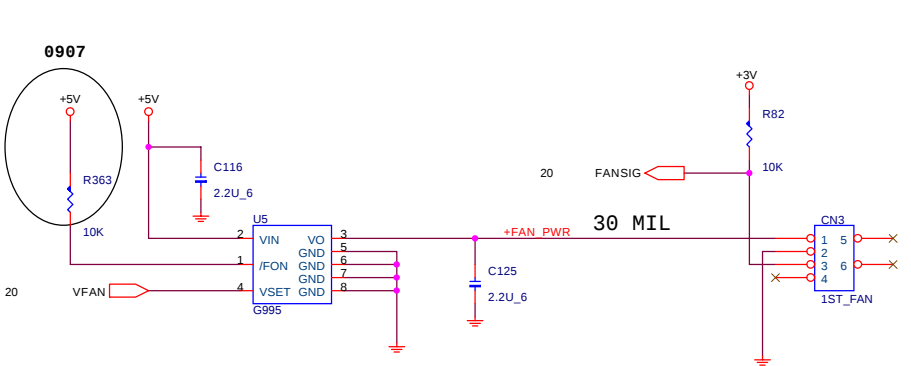


TP


20 MIL

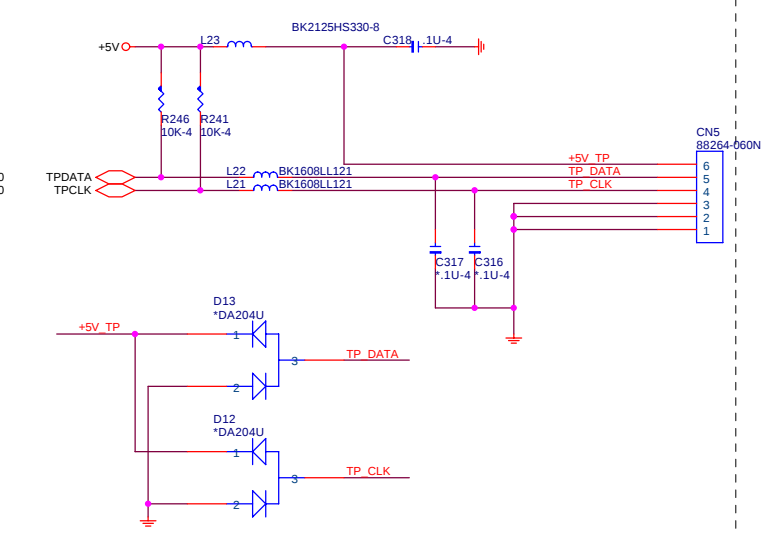


LED

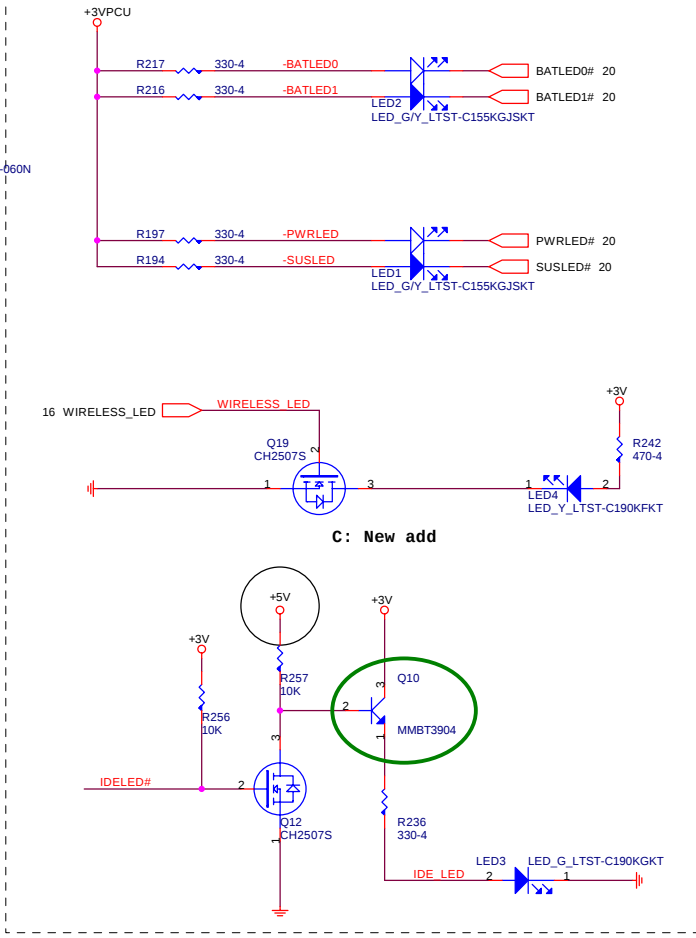


Wireless Switch

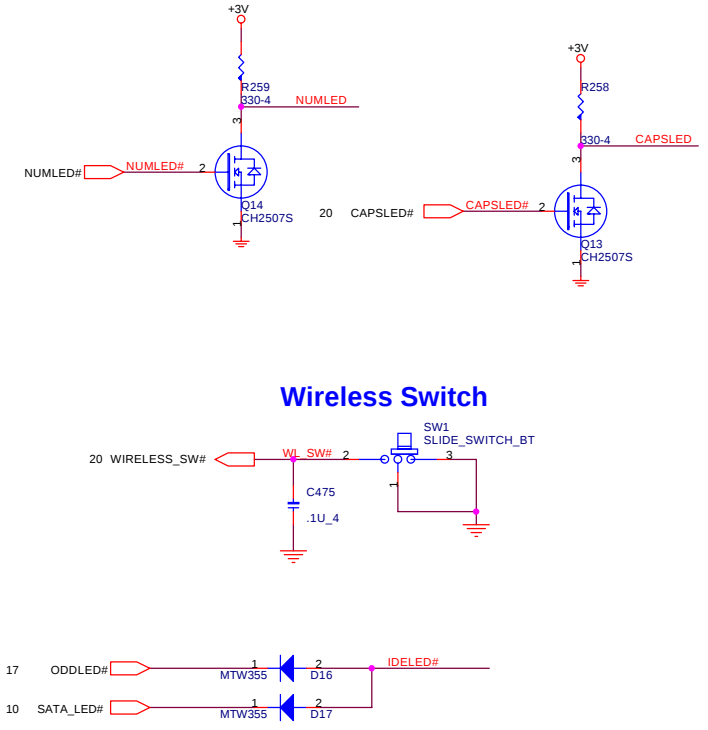


LED BD

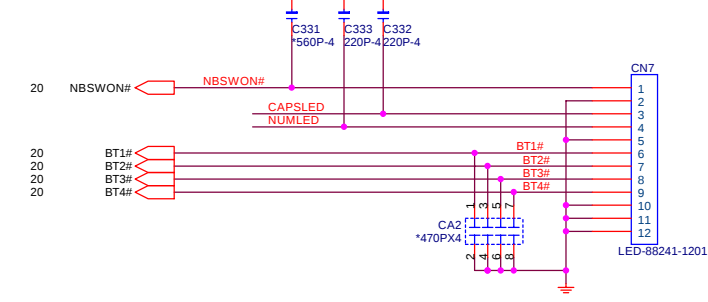

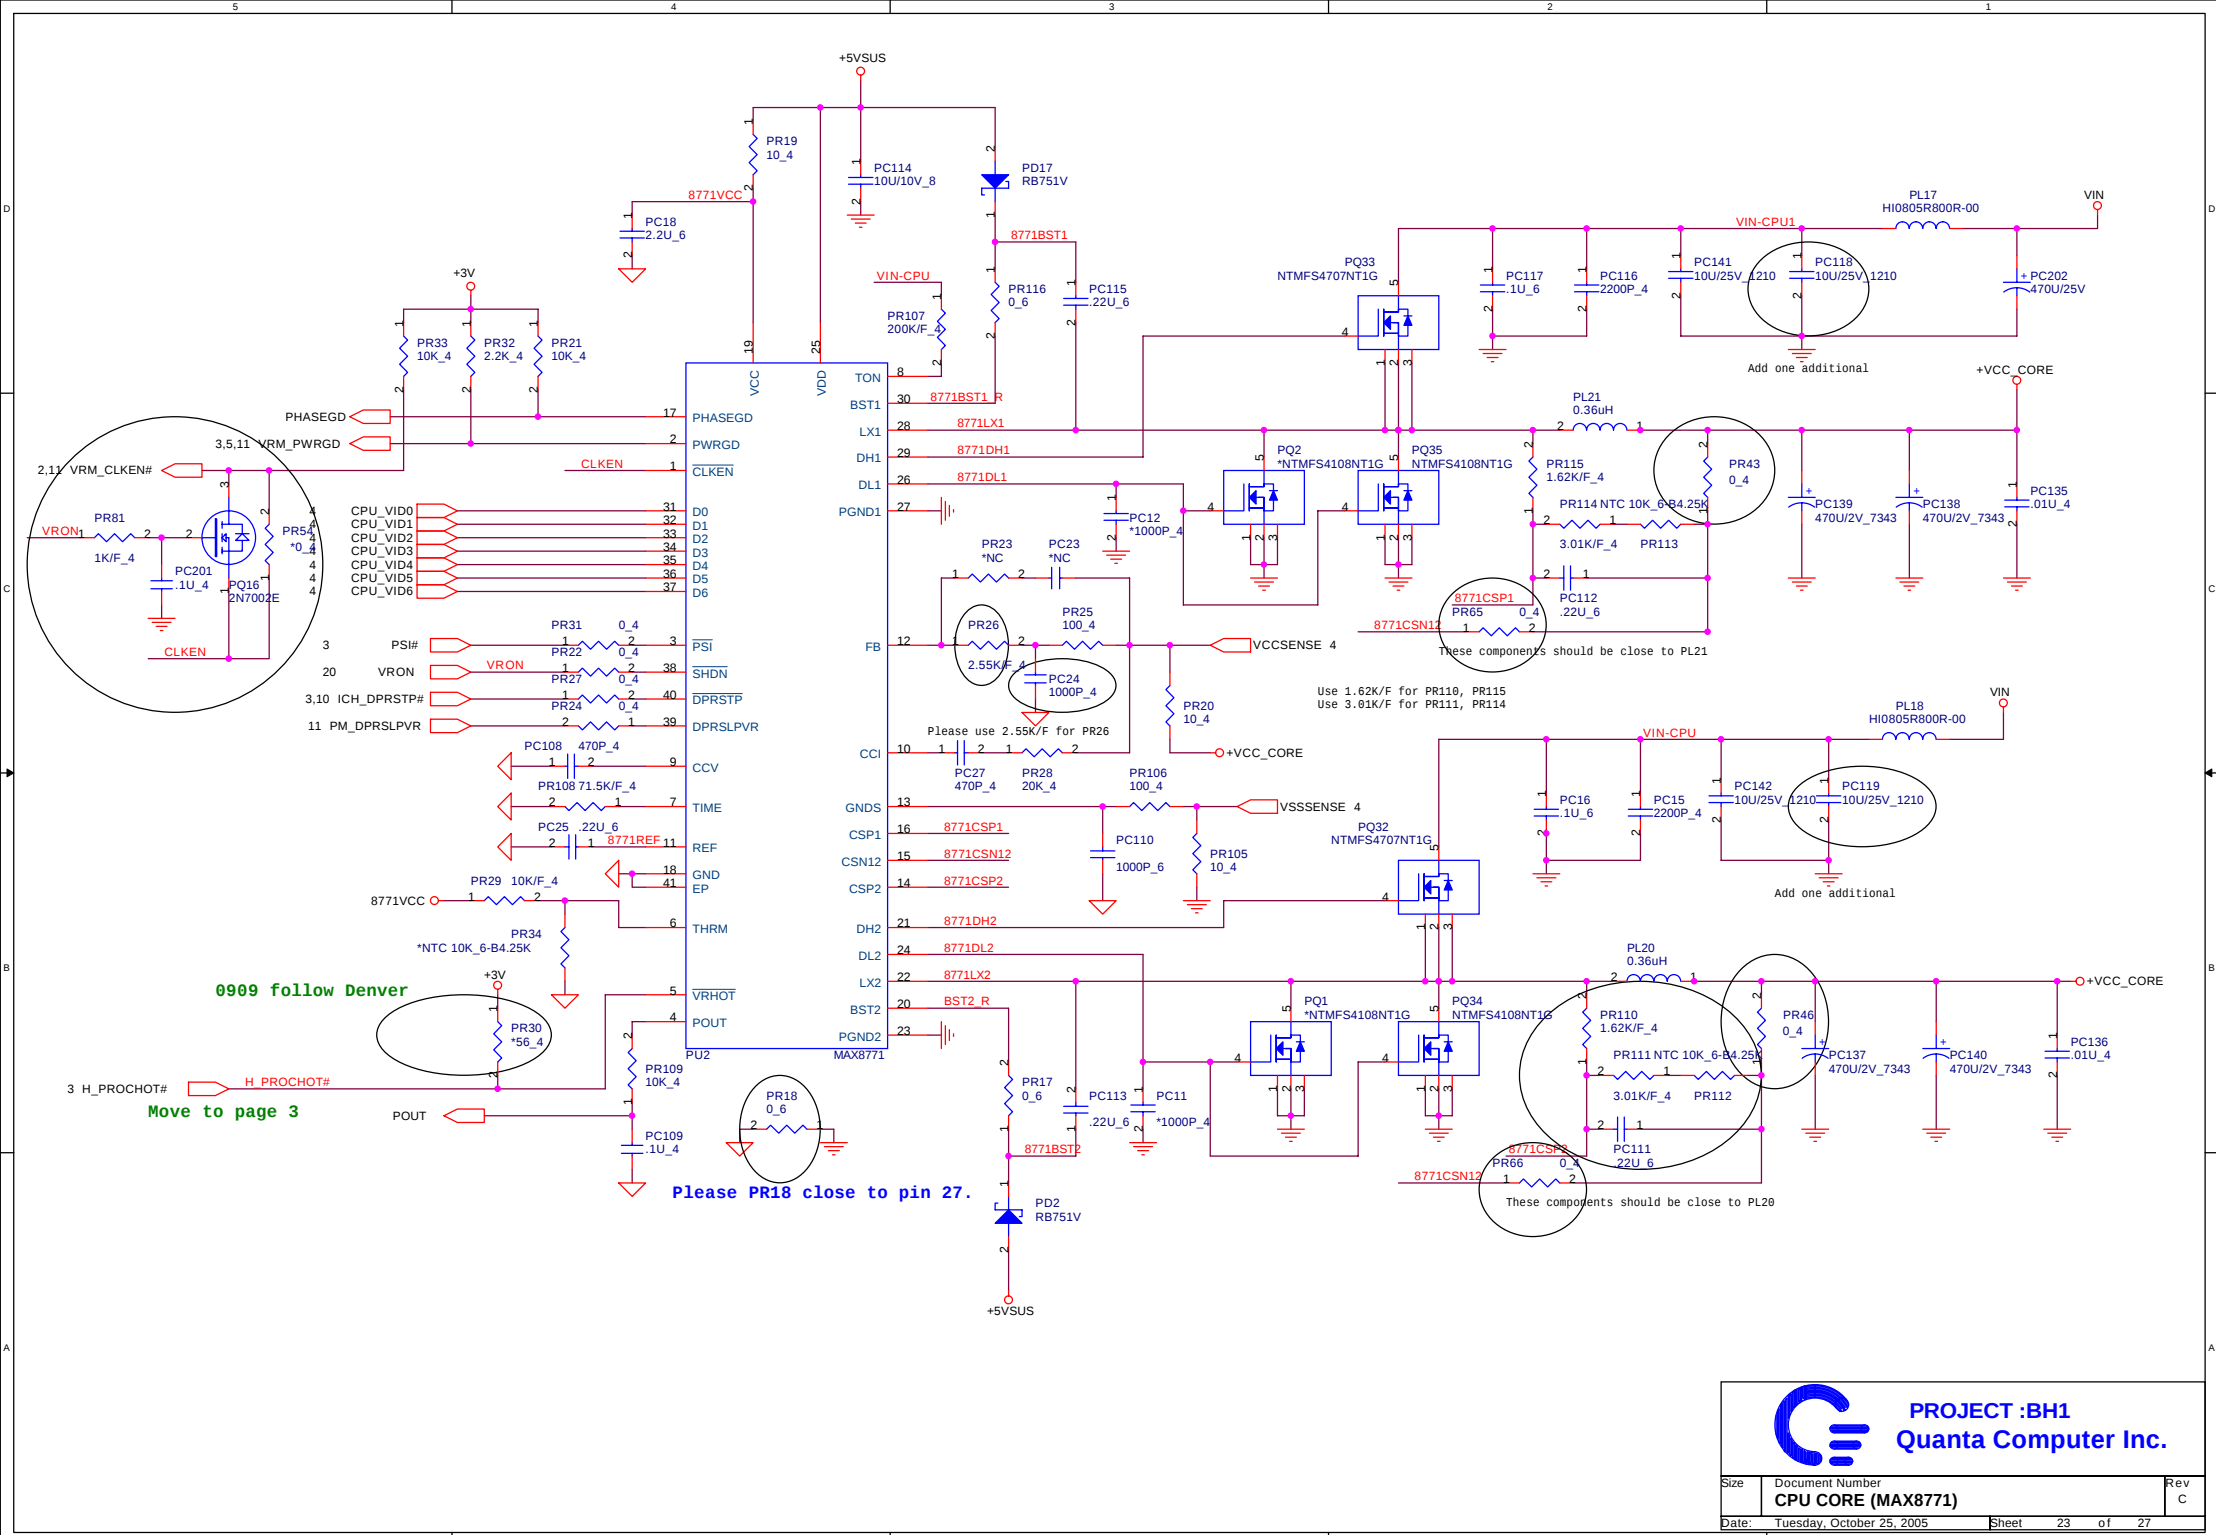

PROJECT :BH1
Quanta Computer Inc.

Size	Document Number	Rev
	CPU CORE (MAX8771)	C
Date:	Tuesday, October 25, 2005	Sheet 23 of 27

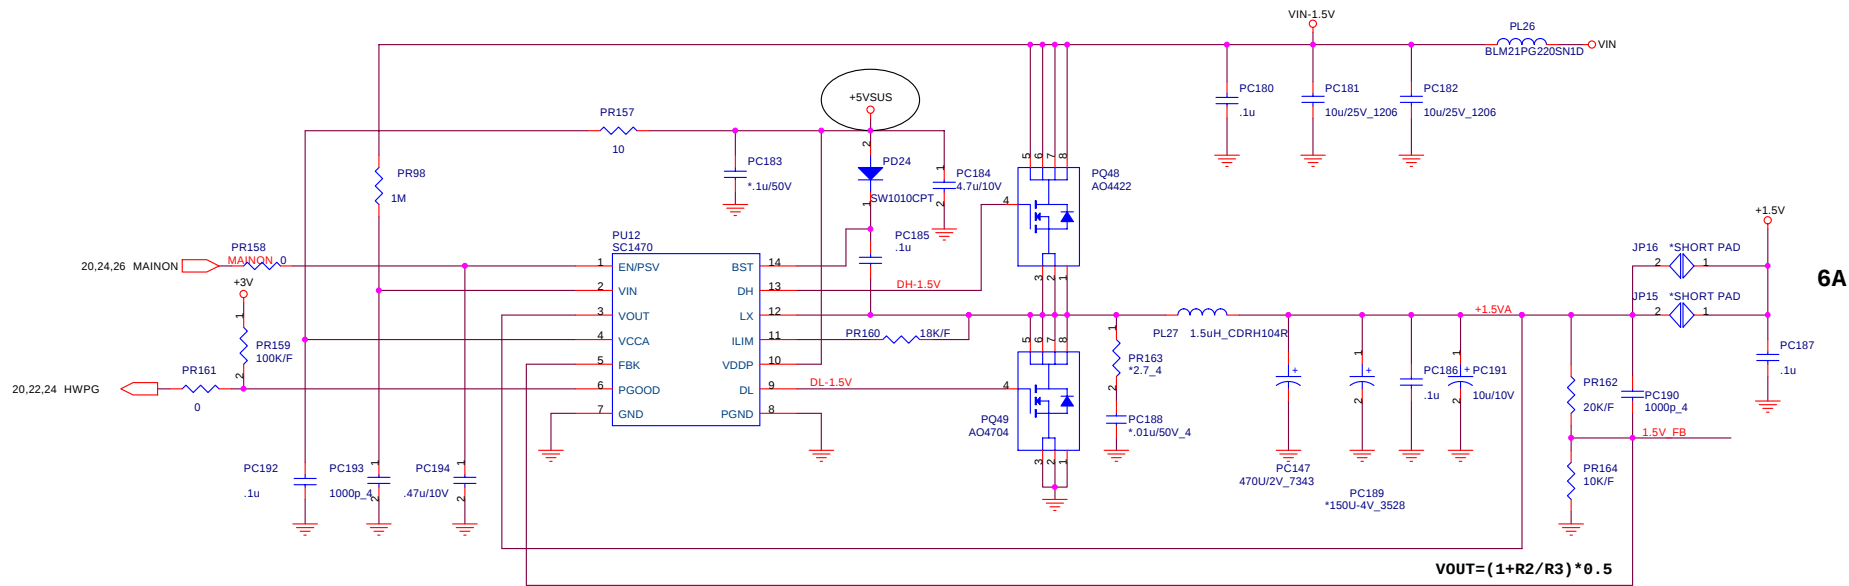

PROJECT : BH1
Quanta Computer Inc.

Size	Document Number	Rev
	+1.5V	C
Date:	Tuesday, October 25, 2005	Sheet 25 of 27

