

COMPAL CONFIDENTIAL

MODEL NAME : QXW00
PCB NO : LA-7901P (DA60000PM00)
BOM P/N : 4619F631L01 / L02
GPIO MAP: E4_VC_GPIO_map_rev_1.1

Korbel 14 UMA--Non vPRO
Ivy/Sandy Bridge + Panther POINT(HM77w/DASH)

2012-03-03

REV : 1.0 (A00)

@ : Nopop Component
CONN@ : Connector Component

MB Type	BOM P/N	
TPM	43*	1@ 3@ 5@
TCM		2@ 4@ 5@
TPM DIS		2@ 3@
HM77 w/o Vpro		
QM77 w/ Vpro		
PCH XDP		PXDP@
HDMI LOGO		46@

MB PCB	
Part Number	Description
DA60000PM00	PCB OLH LA-7901P REV0 M/S UMA

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title: **Cover Sheet**

Size	Document Number	Rev
	LA-7901P	1.0

Date: **Saturday, March 03, 2012** Sheet **1** of **61**

POWER STATES

Signal State	SLP S3#	SLP S4#	SLP S5#	SLP A#	ALWAYS PLANE	M PLANE	SUS PLANE	RUN PLANE	CLOCKS
S0 (Full ON) / M0	HIGH	HIGH	HIGH	HIGH	ON	ON	ON	ON	ON
S3 (Suspend to RAM) / M3	LOW	HIGH	HIGH	HIGH	ON	ON	ON	OFF	OFF
S4 (Suspend to DISK) / M3	LOW	LOW	HIGH	HIGH	ON	ON	OFF	OFF	OFF
S5 (SOFT OFF) / M3	LOW	LOW	LOW	HIGH	ON	ON	OFF	OFF	OFF
S3 (Suspend to RAM) / M-OFF	LOW	HIGH	HIGH	LOW	ON	OFF	ON	OFF	OFF
S4 (Suspend to DISK) / M-OFF	LOW	LOW	HIGH	LOW	ON	OFF	OFF	OFF	OFF
S5 (SOFT OFF) / M-OFF	LOW	LOW	LOW	LOW	ON	OFF	OFF	OFF	OFF

PM TABLE

power plane State	+15V_ALW +5V_ALW +3.3V_ALW_PCH +3.3V_RTC_LDO	+3.3V_SUS +1.5V_MEM	+5V_RUN +3.3V_RUN +1.8V_RUN +1.5V_RUN +0.75V_DDR_VTT +VCC_CORE +1.05V_RUN_VTT +1.05V_RUN	+3.3V_M +1.05V_M	+3.3V_M +1.05V_M (M-OFF)
S0	ON	ON	ON	ON	ON
S3	ON	ON	OFF	ON	OFF
S5 S4/AC	ON	OFF	OFF	ON	OFF
S5 S4/AC don't exist	OFF	OFF	OFF	OFF	OFF

need to update Power Status and
PM Table

USB 3.0 PORT#	Connetion
1	NA
2	JUSB1 (Left side)
3	JUSB2 (Left side)
4	DOCKING

PCH	USB PORT#	DESTINATION
	0	JUSB (Right side-IO/B)
	1	JUSB (Left side)
	2	JESA1 (Leftt side ESATA)
	3	MLK DOCK
	4	WLAN
	5	WWAN
	*1 6	JMINI3(Flash)-for w/ Vpro
	*1 7	DOCKING
	8	NA
	9	JUSB (Right side-Audio/B)
	10	Express card/Smart Card
	11	Bluetooth
	12	Camera
	13	BIO

*1: HM76 don't support port 6,7

SATA	DESTINATION
SATA 0	HDD
SATA 1	ODD/ E3 Module Bay
SATA 2	NA
SATA 3	NA
SATA 4	ESATA
SATA 5	Dock


UMA DP/HDMI Port	Connetion
Port B	MB HDMI Conn
Port C	Dock DP port 2
Port D	Dock DP port 1

PCI EXPRESS	DESTINATION
Lane 1	MINI CARD-1 WWAN
Lane 2	MINI CARD-2 WLAN
Lane 3	Express card
Lane 4	None
Lane 5	1/2vMINI CARD-3 PCIE
Lane 6	MMI
Lane 7	10/100/1G LOM
Lane 8	None

DELL CONFIDENTIAL/PROPRIETARY





Compal Electronics, Inc.			
Index and Config.			
Title	LA-7901P		
Size	Document Number	Rev	1.0
Date:	Friday, March 02, 2012	Sheet	3 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL
TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT
BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION,
NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD
PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Follow DG Rev0.71 SM_DRAMPWROK topology

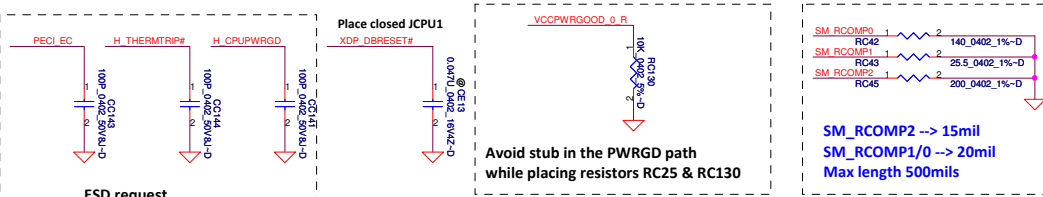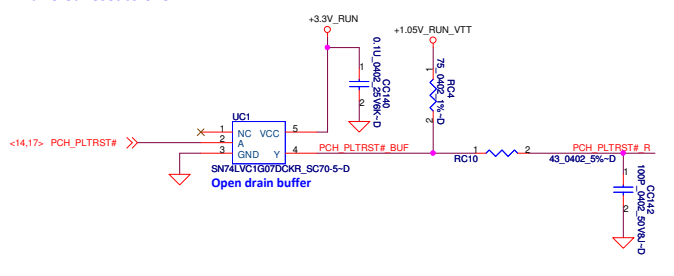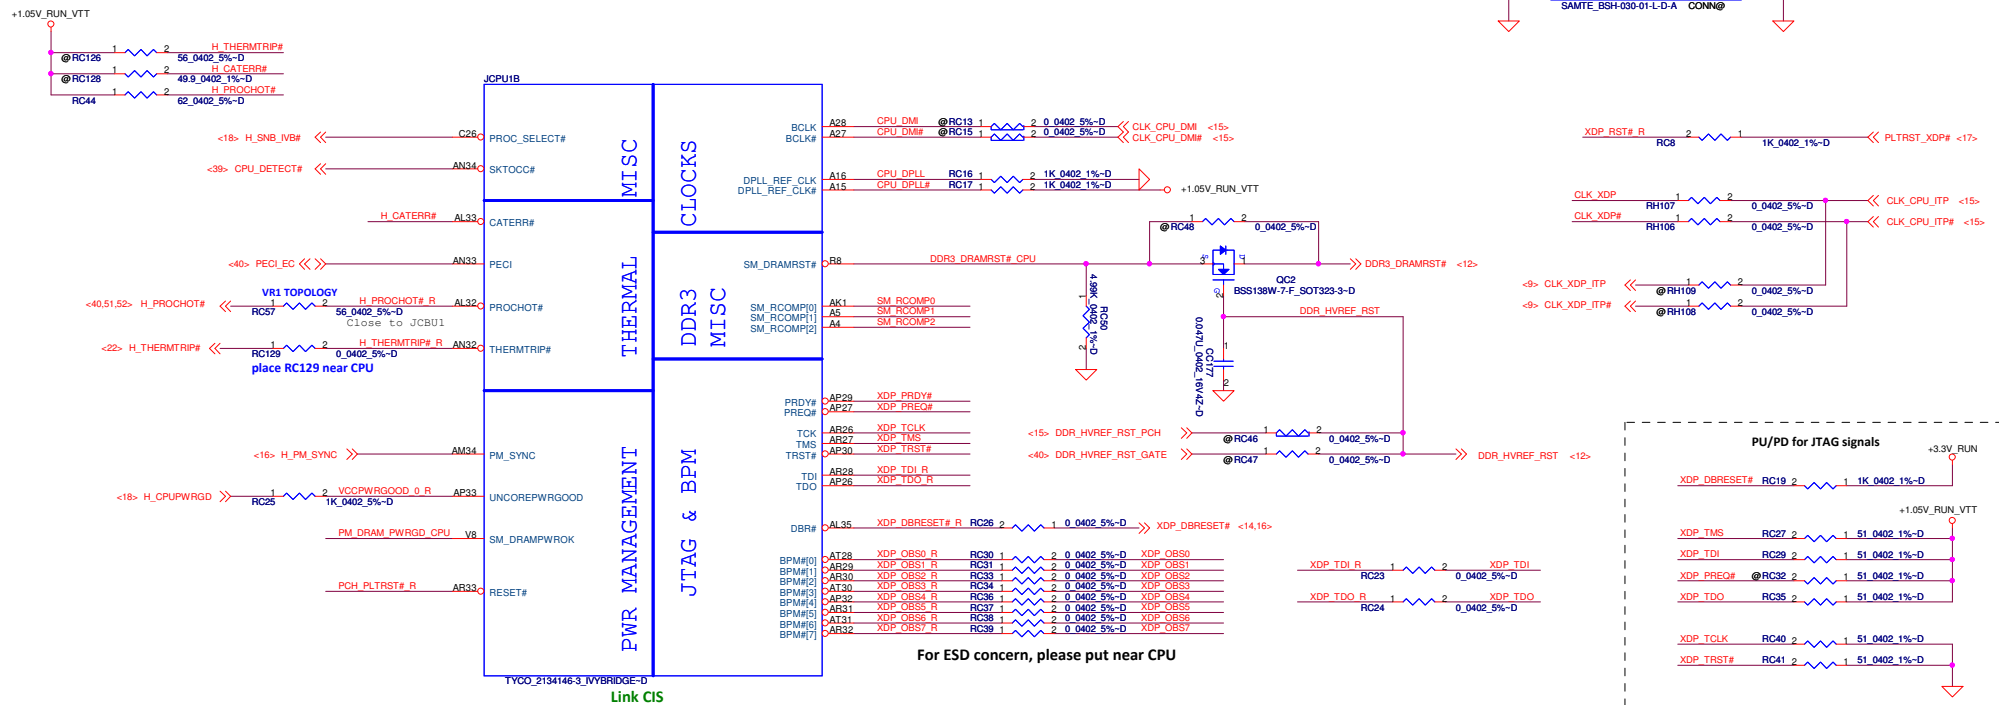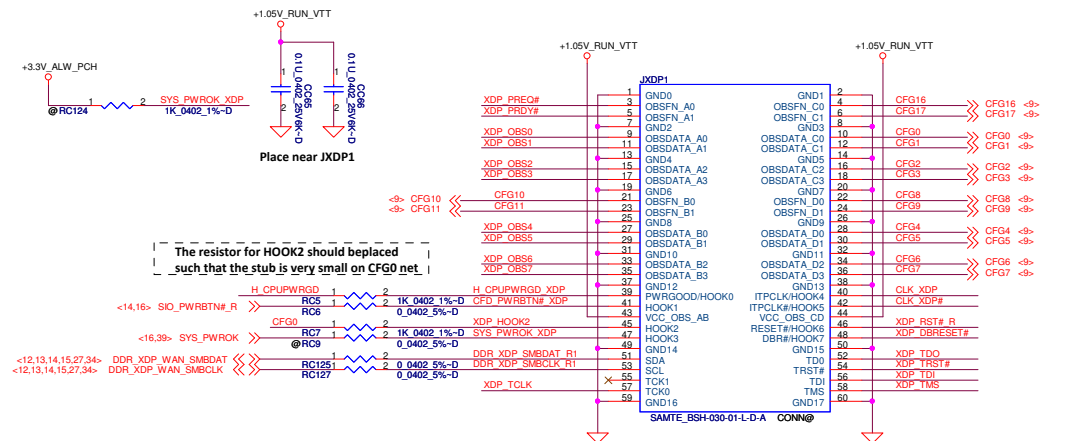

Compal Electronics, Inc.

Ivy/Sandy Bridge (2/6)





LA 500-15

LA-7901P

Date: Friday, March 02, 2012 Sheet 7 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL, TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



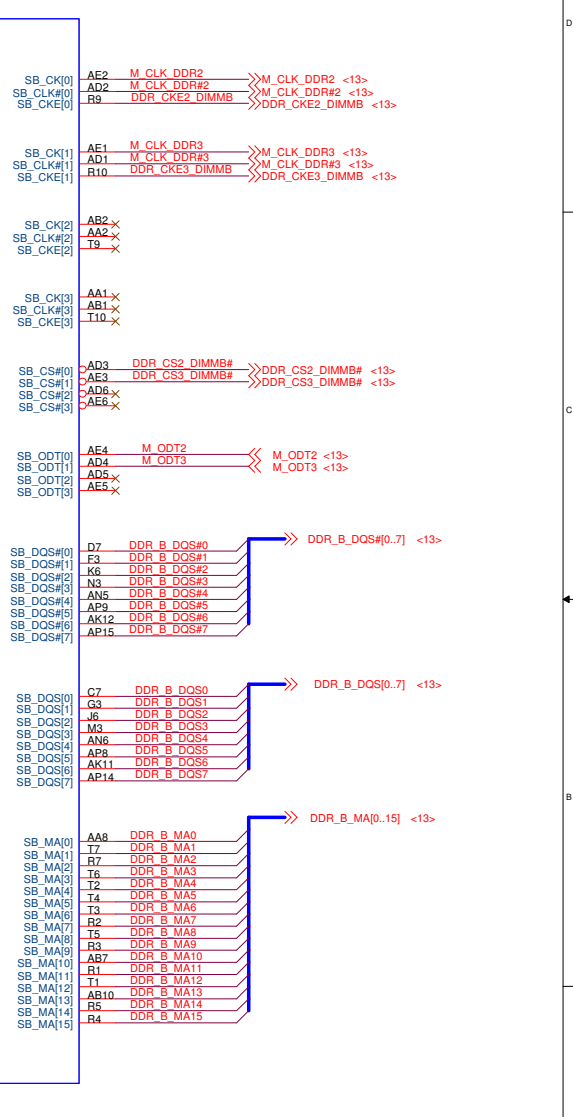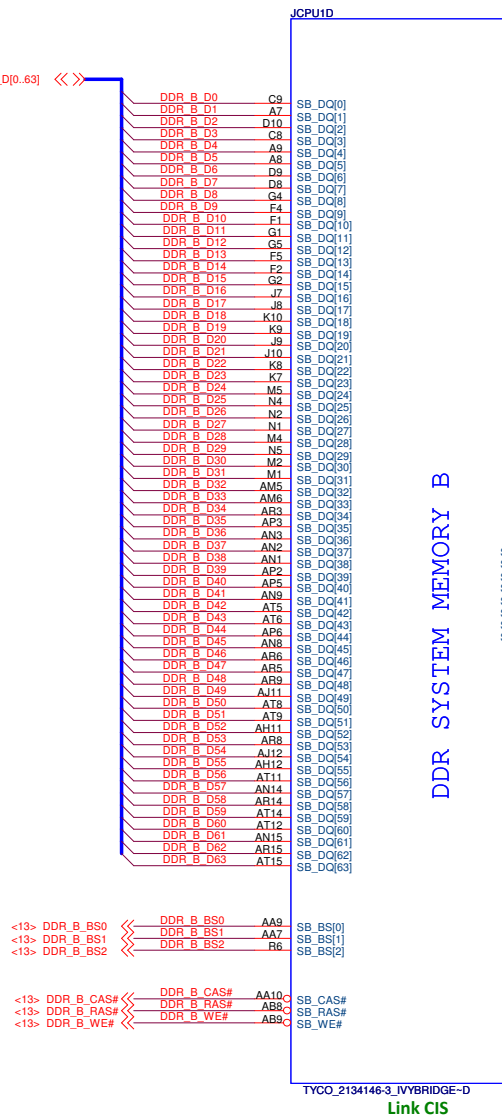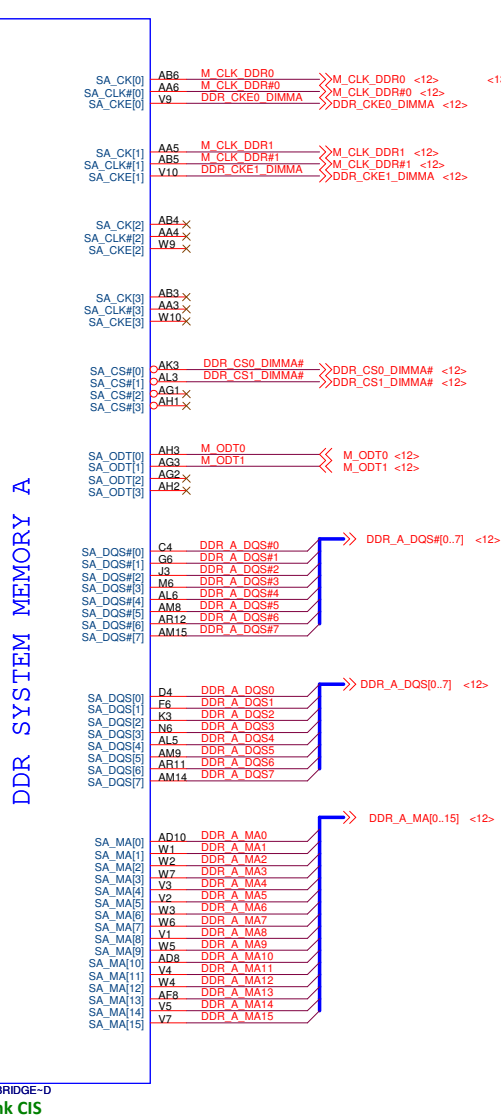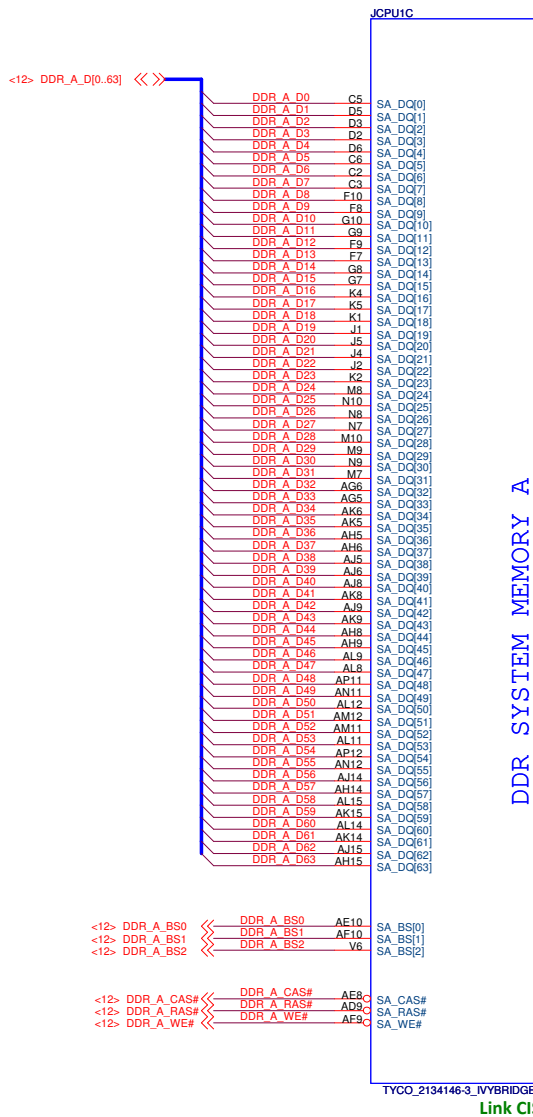

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Ivy/Sandy Bridge (3/6)

LA-7901P

Size

Document Number


Date: Friday, March 02, 2012

Rev 1.0

Sheet 8 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

CFG Straps for Processor




PEG Static Lane Reversal - CFG2 is for the 16x

CFG2	1:(Default) Normal Operation; Lane # definition matches socket pin map definition 0: Lane Reversed
------	---



Display Port Presence Strap

CFG4	1 : Disabled; No Physical Display Port attached to Embedded Display Port 0 : Enabled; An external Display Port device is connected to the Embedded Display Port
------	--




PCIe Port Bifurcation Straps

CFG[6:5]	11: (Default) x16 - Device 1 functions 1 and 2 disabled 10: x8, x8 - Device 1 function 1 enabled ; function 2 disabled 01: Reserved - (Device 1 function 1 disabled ; function 2 enabled) 00: x8,x4,x4 - Device 1 functions 1 and 2 enabled
----------	--



PEG DEFER TRAINING

CFG7	1: (Default) PEG Train immediately following xxRESETB de assertion 0: PEG Wait for BIOS for training
------	---

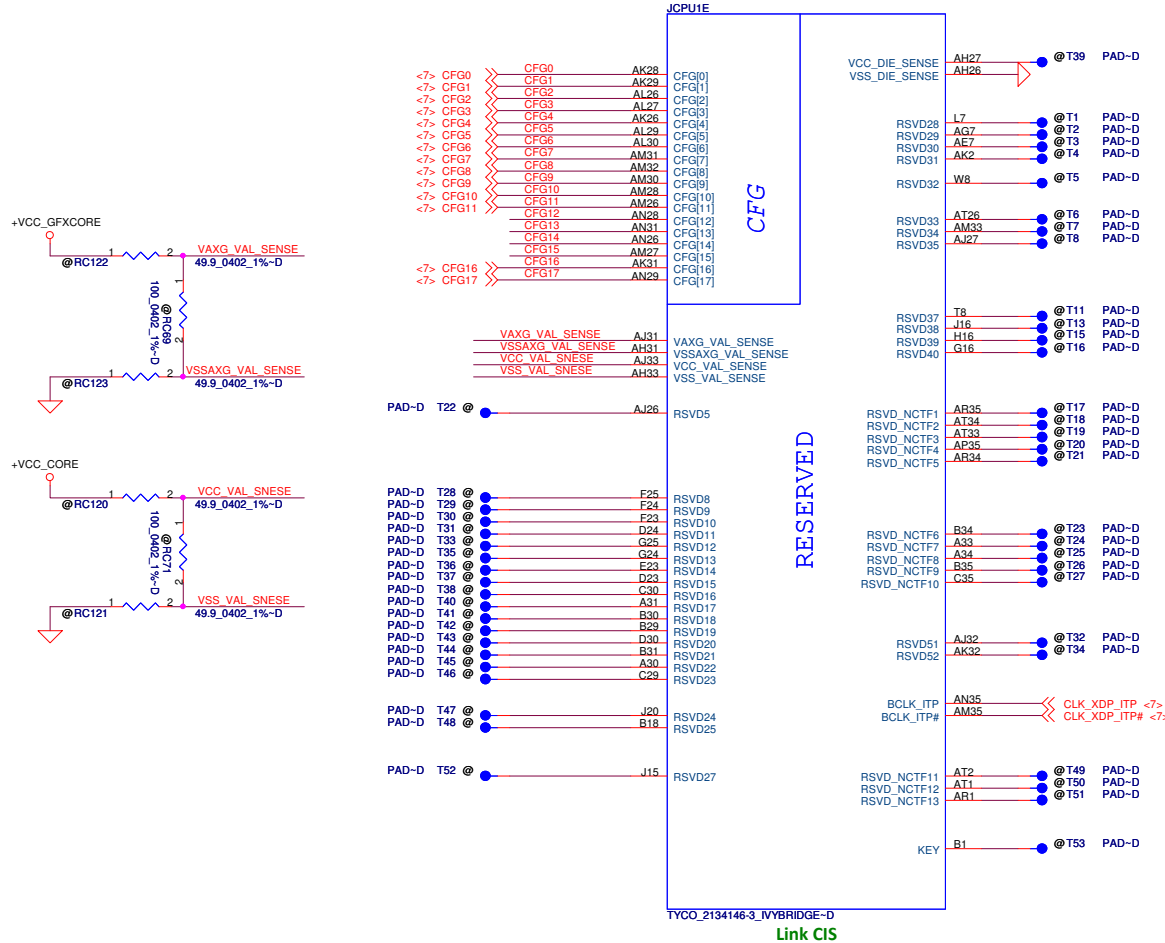

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.

Ivy/Sandy Bridge (4/6)

LA-7901P

Rev 1.0

Date: Friday, March 02, 2012 Sheet 9 of 61

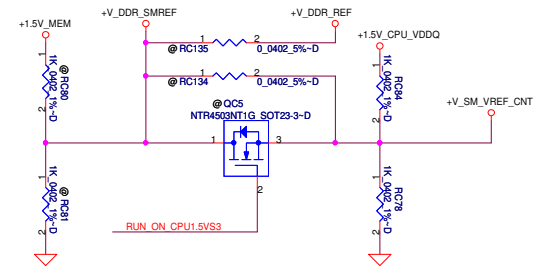[illegible]

POWER

GRAPHICS

SA RAIL

MISC


1.8V RAIL

5A

6A

ESD Request

Depop RC140 for ES2 CPU

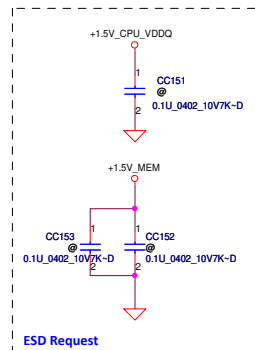

JCPU1H

AT35	VSS1	VSS81	A19	VSS101	A19
AT20	VSS3	VSS82	A16	VSS102	A17
AT27	VSS4	VSS83	A13	VSS103	A14
AT25	VSS5	VSS84	A10	VSS104	A03
AT22	VSS7	VSS85	A7	VSS105	A08
AT19	VSS8	VSS86	A4	VSS106	A06
AT16	VSS9	VSS87	A2	VSS107	A04
AT13	VSS10	VSS88	A1	VSS108	A03
AT10	VSS11	VSS89	A24	VSS109	A02
AT7	VSS12	VSS90	A21	VSS110	A01
AT4	VSS13	VSS91	A18	VSS111	A01
AR25	VSS14	VSS92	A15	VSS112	A02
AR22	VSS15	VSS93	A12	VSS113	A03
AR16	VSS17	VSS94	A9	VSS114	A03
AR13	VSS18	VSS95	A6	VSS115	A03
AR10	VSS19	VSS96	A3	VSS116	A03
AR7	VSS20	VSS97	A1	VSS117	A03
AR4	VSS21	VSS98	A1	VSS118	A03
AR2	VSS22	VSS99	A1	VSS119	A03
AP34	VSS23	VSS100	A1	VSS120	A03
AP31	VSS24	VSS101	A19	VSS121	A03
AP28	VSS25	VSS102	A17	VSS122	A03
AP25	VSS26	VSS103	A14	VSS123	A03
AP22	VSS27	VSS104	A03	VSS124	A03
AP19	VSS28	VSS105	A08	VSS125	A03
AP16	VSS29	VSS106	A06	VSS126	A03
AP13	VSS30	VSS107	A04	VSS127	A03
AP10	VSS31	VSS108	A03	VSS128	A03
AP7	VSS32	VSS109	A03	VSS129	A03
AP4	VSS33	VSS110	A03	VSS130	A03
AP1	VSS34	VSS111	A03	VSS131	A03
AN30	VSS35	VSS112	A03	VSS132	A03
AN27	VSS36	VSS113	A03	VSS133	A03
AN25	VSS37	VSS114	A03	VSS134	A03
AN22	VSS38	VSS115	A03	VSS135	A03
AN19	VSS39	VSS116	A03	VSS136	A03
AN16	VSS40	VSS117	A03	VSS137	A03
AN13	VSS41	VSS118	A03	VSS138	A03
AN10	VSS42	VSS119	A03	VSS139	A03
AN7	VSS43	VSS120	A03	VSS140	A03
AN4	VSS44	VSS121	A03	VSS141	A03
AN2	VSS45	VSS122	A03	VSS142	A03
AN29	VSS46	VSS123	A03	VSS143	A03
AN26	VSS47	VSS124	A03	VSS144	A03
AM19	VSS48	VSS125	A03	VSS145	A03
AM16	VSS49	VSS126	A03	VSS146	A03
AM13	VSS50	VSS127	A03	VSS147	A03
AM10	VSS51	VSS128	A03	VSS148	A03
AM7	VSS52	VSS129	A03	VSS149	A03
AM4	VSS53	VSS130	A03	VSS150	A03
AM2	VSS54	VSS131	A03	VSS151	A03
AM2	VSS55	VSS132	A03	VSS152	A03
AM1	VSS56	VSS133	A03	VSS153	A03
AL34	VSS57	VSS134	A03	VSS154	A03
AL31	VSS58	VSS135	A03	VSS155	A03
AL28	VSS59	VSS136	A03	VSS156	A03
AL25	VSS60	VSS137	A03	VSS157	A03
AL22	VSS61	VSS138	A03	VSS158	A03
AL19	VSS62	VSS139	A03	VSS159	A03
AL16	VSS63	VSS140	A03	VSS160	A03
AL13	VSS64				
AL10	VSS65				
AL7	VSS66				
AL4	VSS67				
AL2	VSS68				
AK33	VSS69				
AK30	VSS70				
AK27	VSS71				
AK25	VSS72				
AK22	VSS73				
AK18	VSS74				
AK16	VSS75				
AK13	VSS76				
AK10	VSS77				
AK7	VSS78				
AK4	VSS79				
A25	VSS80				


TYCO 21341-63 IVYBRIDGE-D


Title			
Ivy/Sandy Bridge (6/6)			
Size	Document Number		Rev
	LA-7901P		1.0
Date:	Friday, March 02, 2012	Sheet 11 of 61	





PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS WAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


















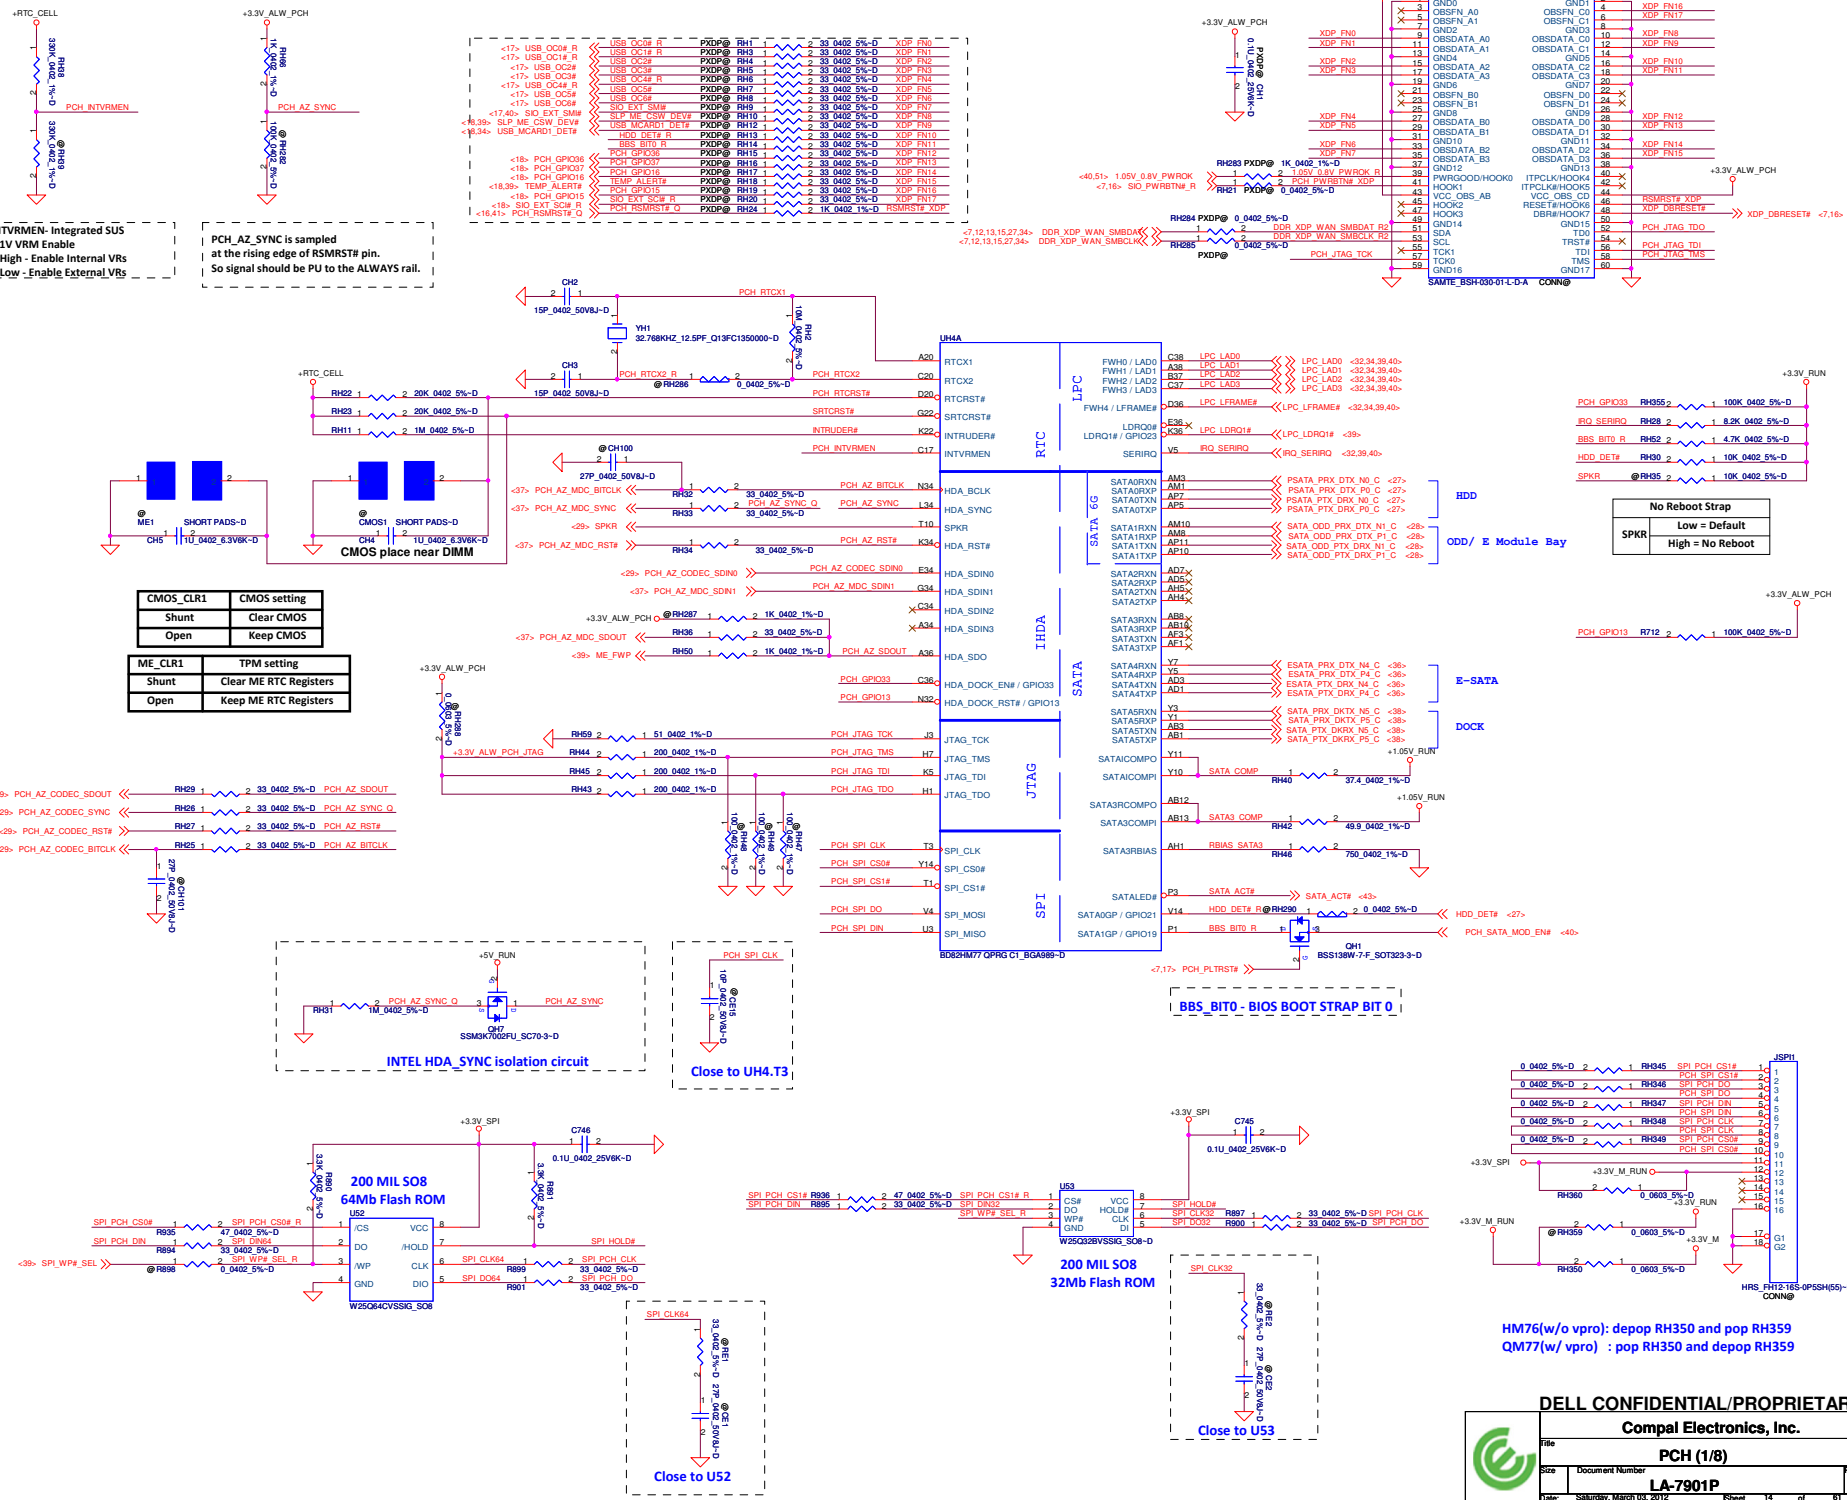

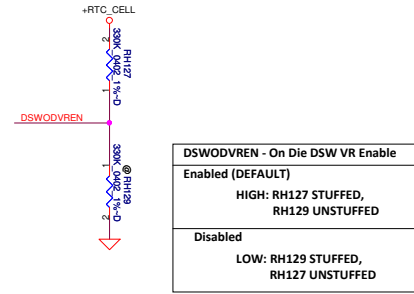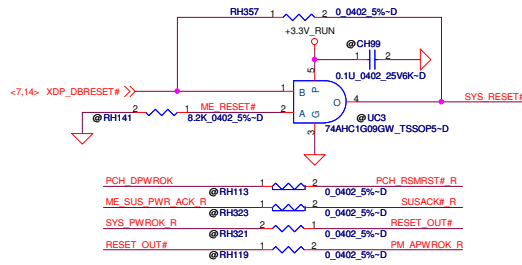

DSWODVREN - On Die DSW VR Enable
Enabled (DEFAULT)
HIGH: RH127 STUFFED,
RH129 UNSTUFFED
Disabled
LOW: RH129 STUFFED,
RH127 UNSTUFFED

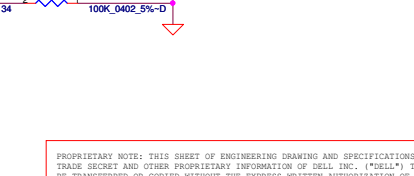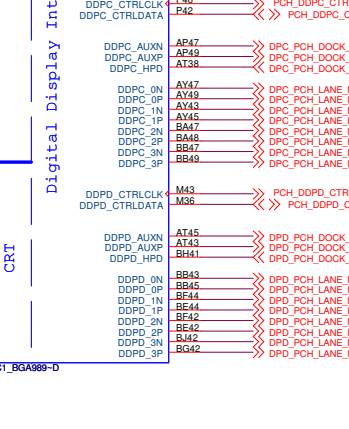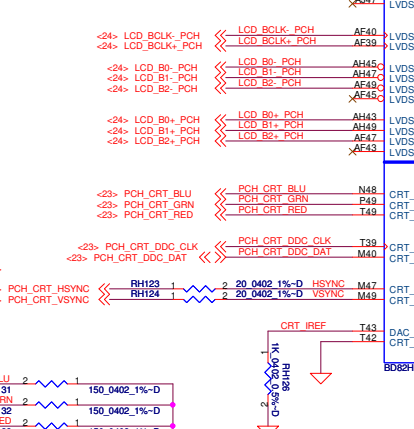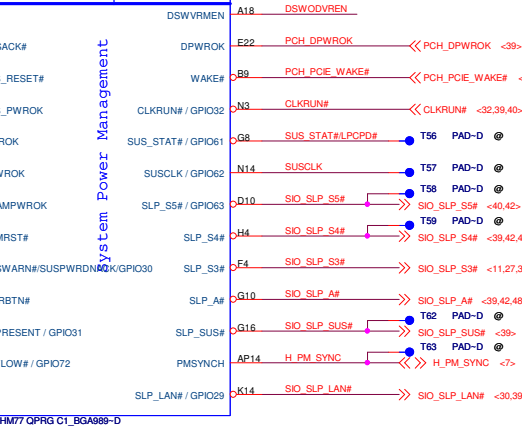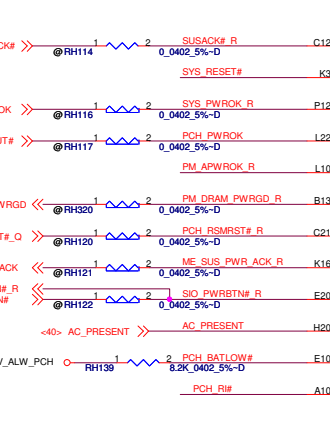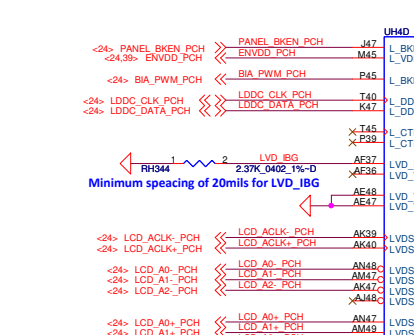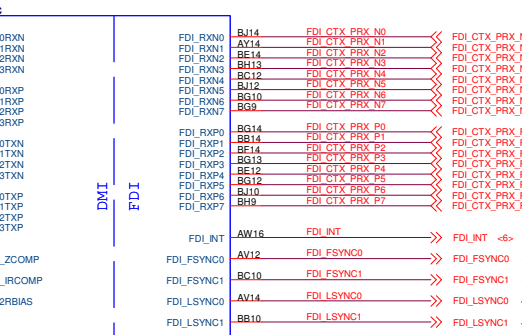

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


PCH (3/8)

LA-7901P




Date: Saturday, March 03, 2012 Sheet 16 of 61




SLP_ME_CSW_DEV# PLL ON DIE VR ENABLE	
ENABLED	HIGH (DEFAULT)
DISABLED	LOW



Layout note:
Trace wide 10mil & length 30mil
All NCTF pins should have thick traces at 45° from the pad.

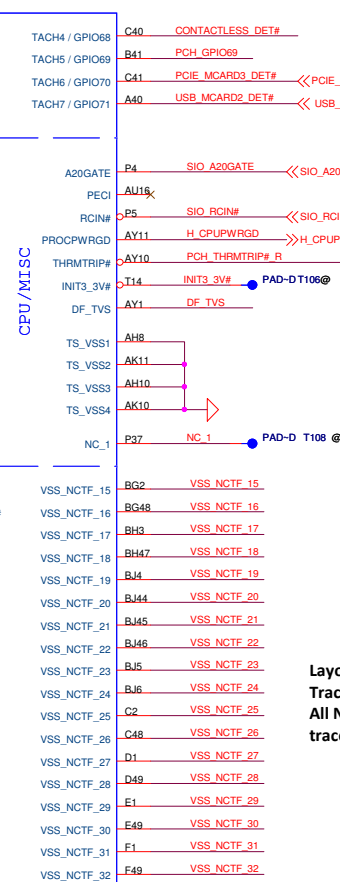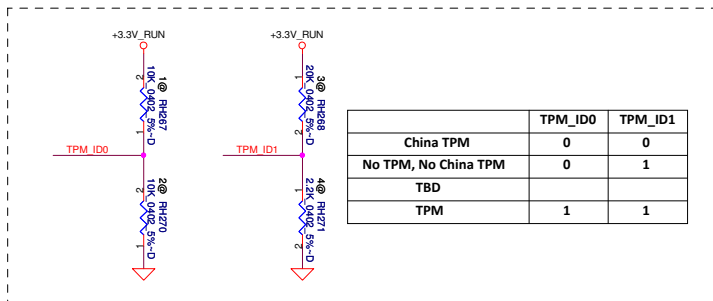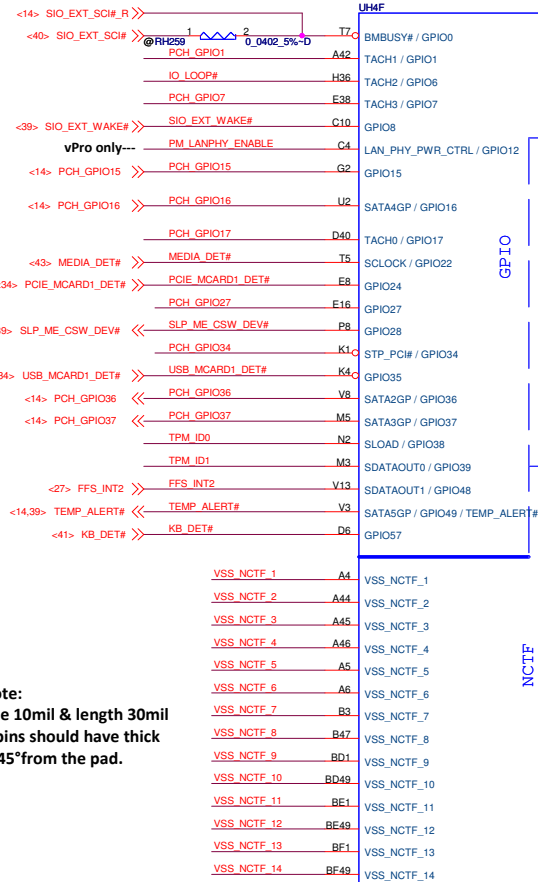

Layout note:
Trace wide 10mil & length 30mil
All NCTF pins should have thick traces at 45° from the pad.


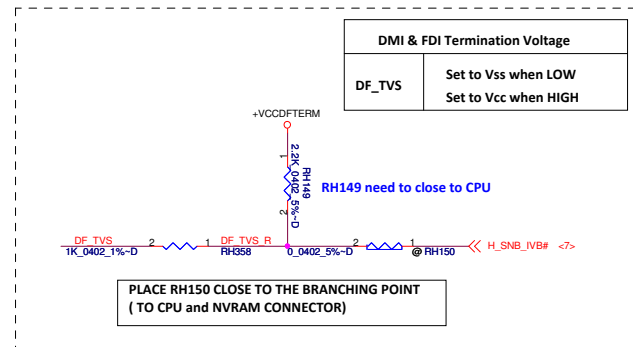


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title		PCH (5/8)	
Size	Document Number	LA-7901P	
Date	Saturday, March 03, 2012	Sheet	18 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

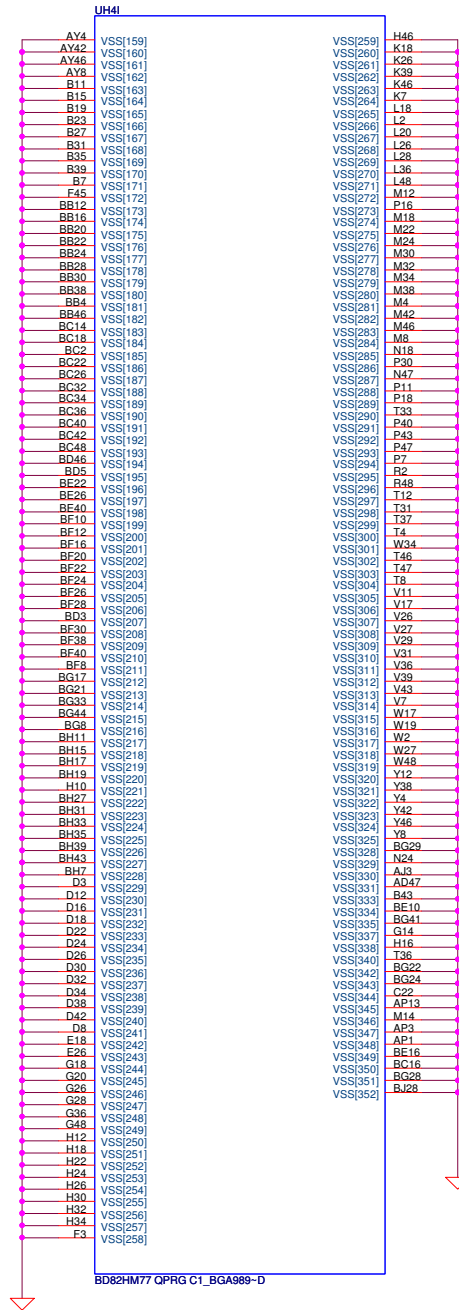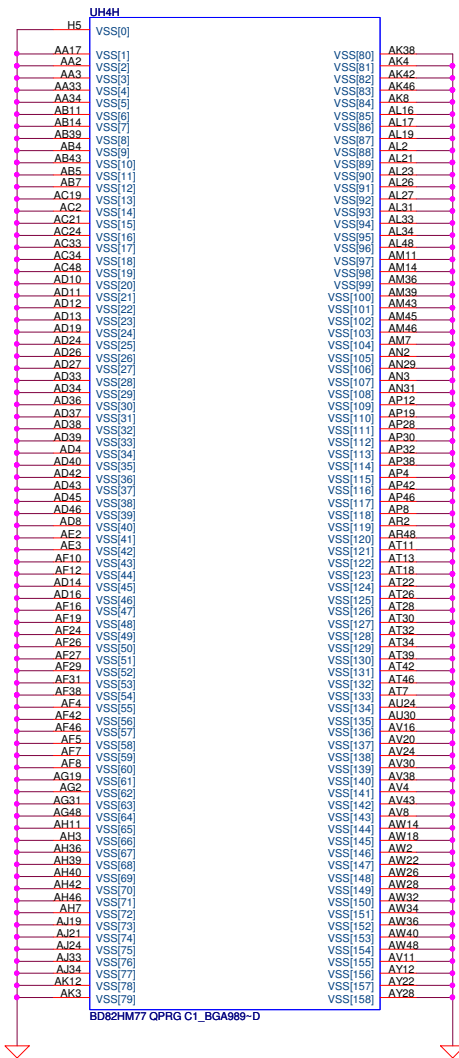


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.







Title			PCH (8/8)
Size			Document Number
Date			LA-7901P
Rev			1.0
Sheet			21 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


- (1) DP3/DN3 for SODIMM on Q14, place Q14 close to SODIMM and C272 close to Q14
 (2) DP5/DN5 for Skin on Q13, place Q13 close to Vcore VR choke.

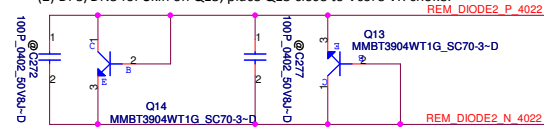

Place under CPU
 Place C266 close to the Q12 as possible

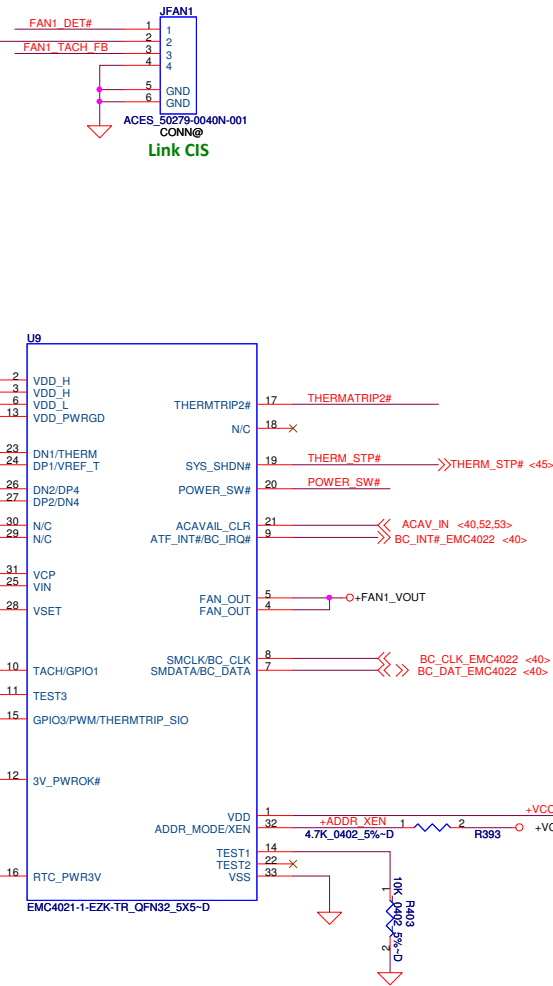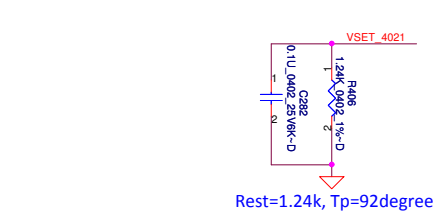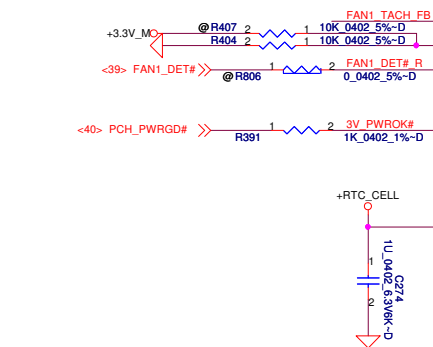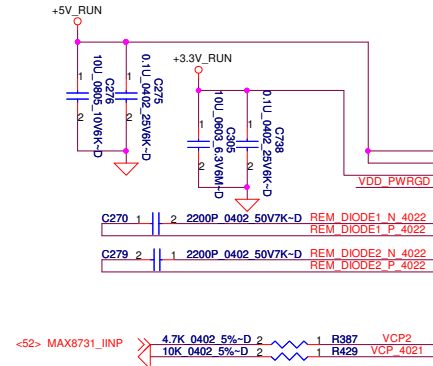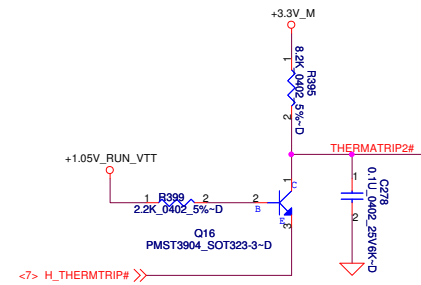

HM76(w/o vpro): depop R385 and pop R386
 QM77(w/ vpro) : pop R385 and depop R386

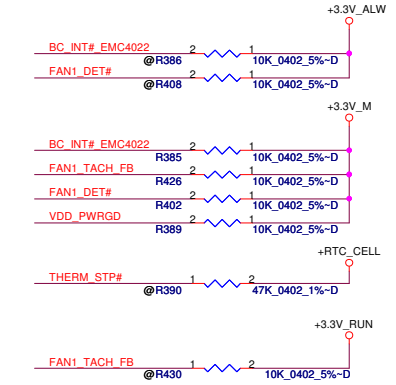

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.



FAN & Thermal Sensor			
Title	Document Number	Rev	1.0
Size	LA-7901P		
Date: Friday, March 02, 2012	Sheet 22	of	61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

SW for MB/DOCK

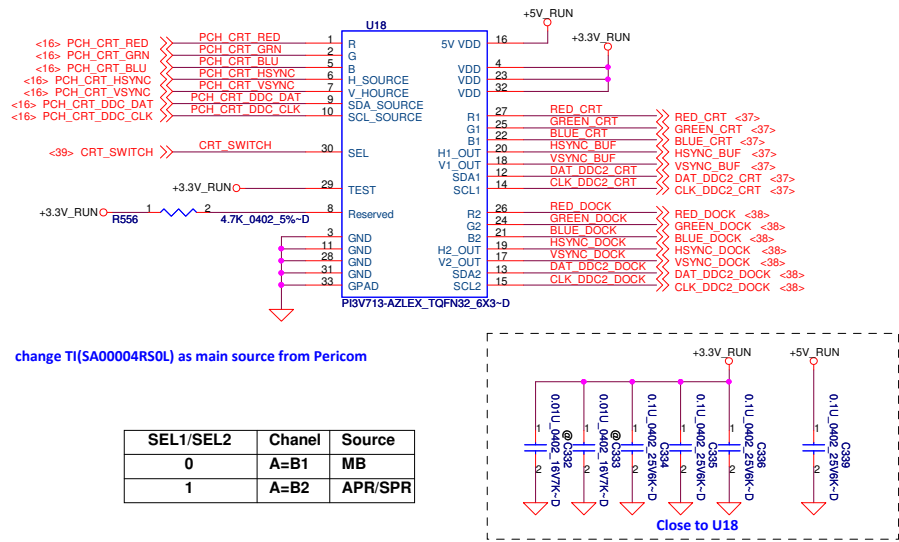

DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.

Title

CRT/Video switch

Size Document Number



LA-7901P

Date: Friday, March 02, 2012








Sheet 23 of 61

Rev 1.0


PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

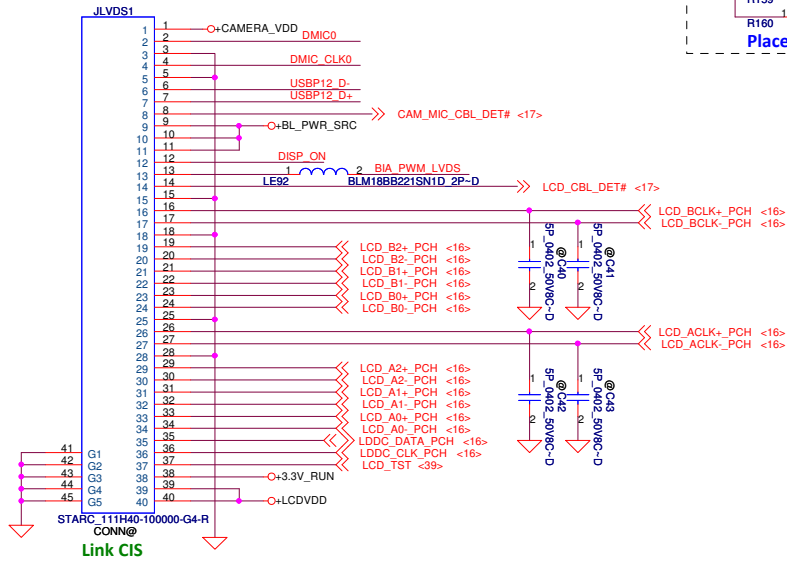

LCD Power

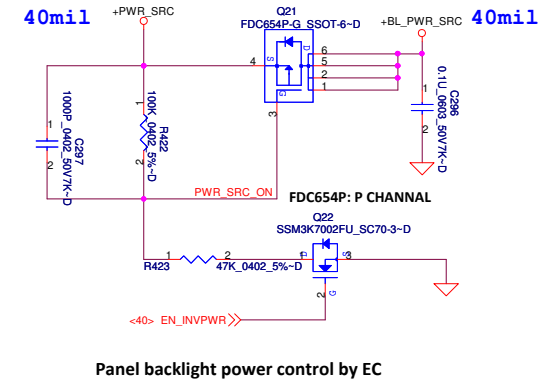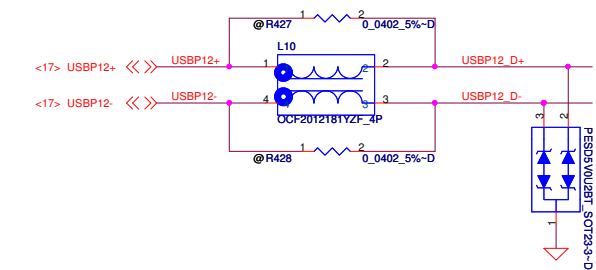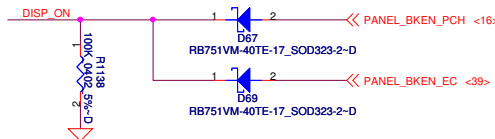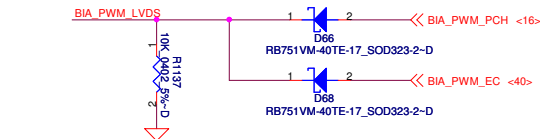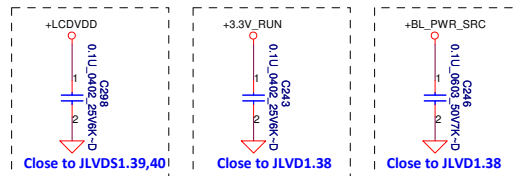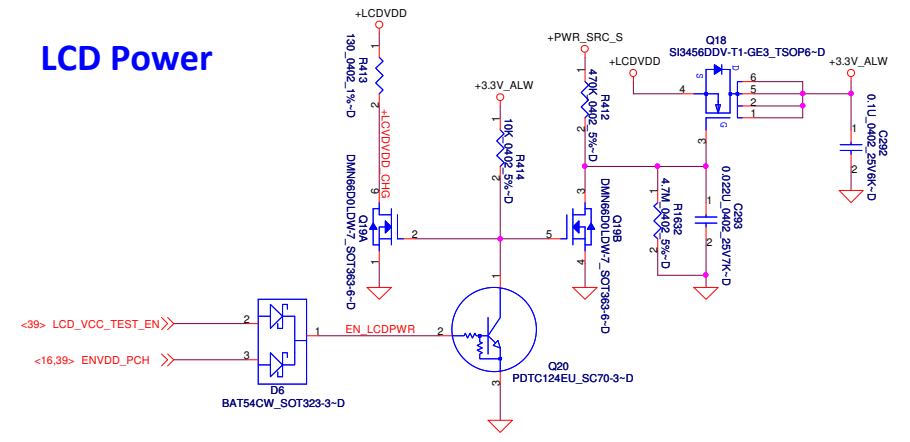

Webcam PWR CTRL

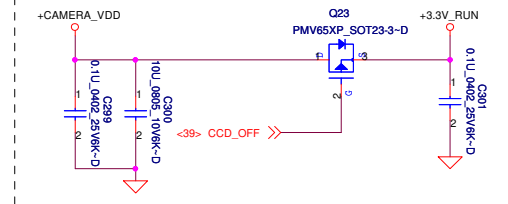

DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.

LVDS & CAM Conn

LA-7901P

Rev 1.0

Size


Document Number

Friday, March 02, 2012


Sheet 24 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

AUX/DDC SW for DPD to E-DOCK

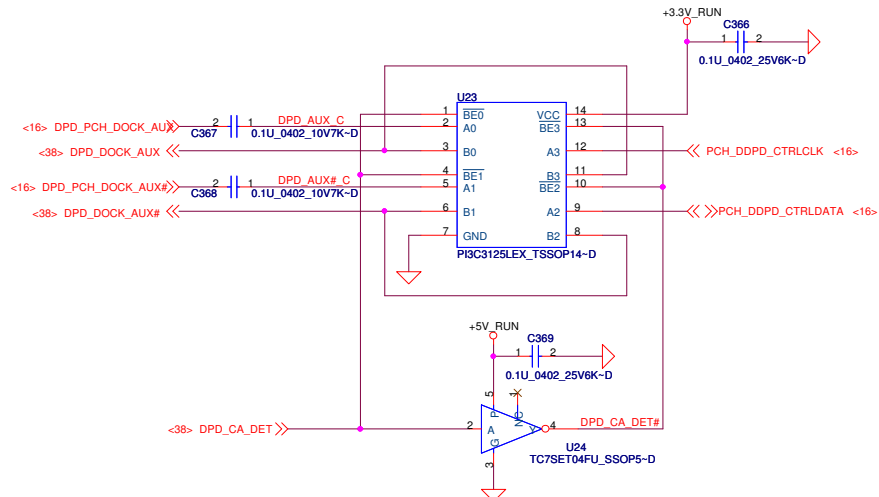


Note:When implement 2nd source, please check Vil and Vih spec is meet main source spec



Intel WW18 Strapping option

Intel WW18 Strapping option

AUX/DDC SW for DPC to E-DOCK

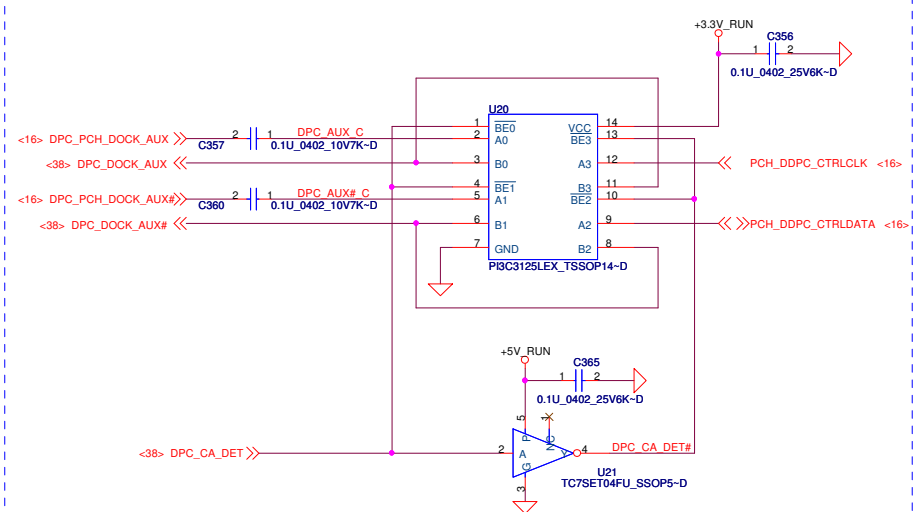

Note:When implement 2nd source, please check Vil and Vih spec is meet main source spec



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.




Title		
DP SW		
Size	Document Number	Rev
	LA-7901P	1.0
Date:	Friday, March 02, 2012	Sheet 26 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

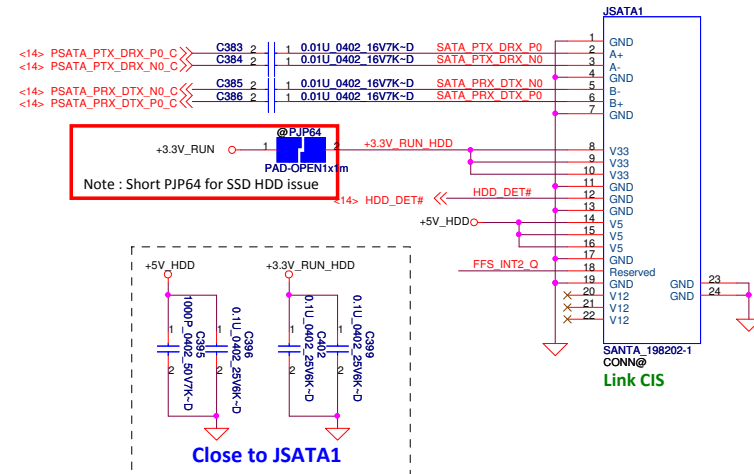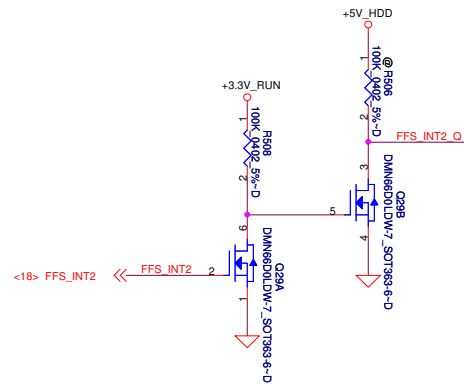

Sheet 27 of 61

ODD power



	Compal Electronics, Inc.		
	ODD CONNECTOR		
	Title	Size	
	Document Number	Rev 1.0	
LA-7901P			
Date: Friday, March 02, 2012 Sheet 28 of 61			

15 mils trace

INT SPK L
INT SPK R
INT SPK L
INT SPK R

L91 1
L92 2
L93 3
L94 4

2 BLM18PG121SN1D 0603 INT SPK L
2 BLM18PG121SN1D 0603 INT SPK R
2 BLM18PG121SN1D 0603 INT SPK L
2 BLM18PG121SN1D 0603 INT SPK R

1 2 3 4
5 6
GND GND

ACES 50279-0040N-001
CONN

Link CIS

PESD0V002 50733-3-0
PESD0V002 50733-3-0

Place closed U72

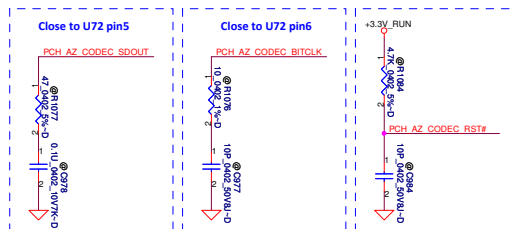
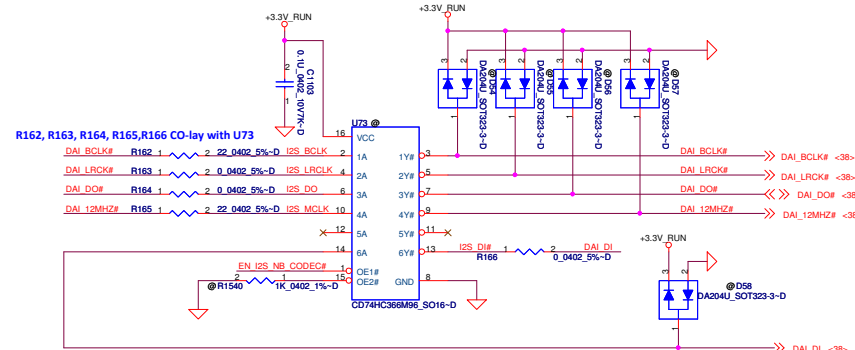


Diagram illustrating the HP sense circuit for the DMN66D0LDW-7. The circuit includes a 3.3V_VIN supply, a 100k resistor (R1087), a 0.1uF capacitor (C880), and a 20k resistor (R1088). The output is labeled AUD_HP_NB_SENSE and is connected to a 0.1uF capacitor (C887) and a 2.5V_VIN supply. The diagram is annotated with "Add for solve pop noise and detect issue".

[illegible]






Resistor	SENSE_A	SENSE_B
39.2K	PORT A	PORT E
20K	PORT B	PORT F
10K	NA	DMIC0
5.11K	SPDIFOUT0	SPDIFOUT1 (DMIC1)
2.49K	Pull-up to AVDD	

PORT A	External MIC
PORT B	HeadPhone Out
PORT C	Dock Audio
PORT D	Internal SPK

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Size	Document Number	Rev
	LA-7901P	1.0
Date:	Friday, March 02, 2012	Sheet 29 of 61

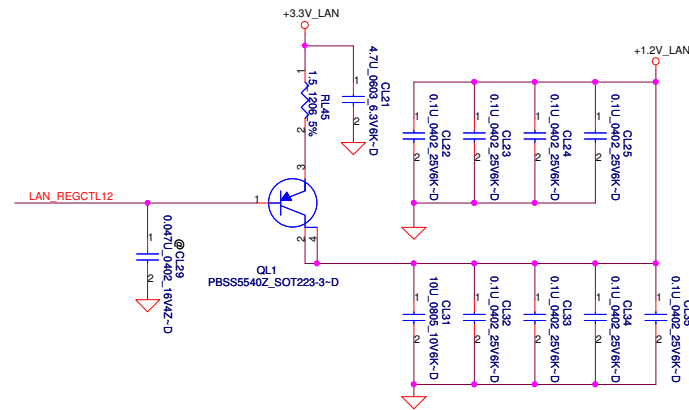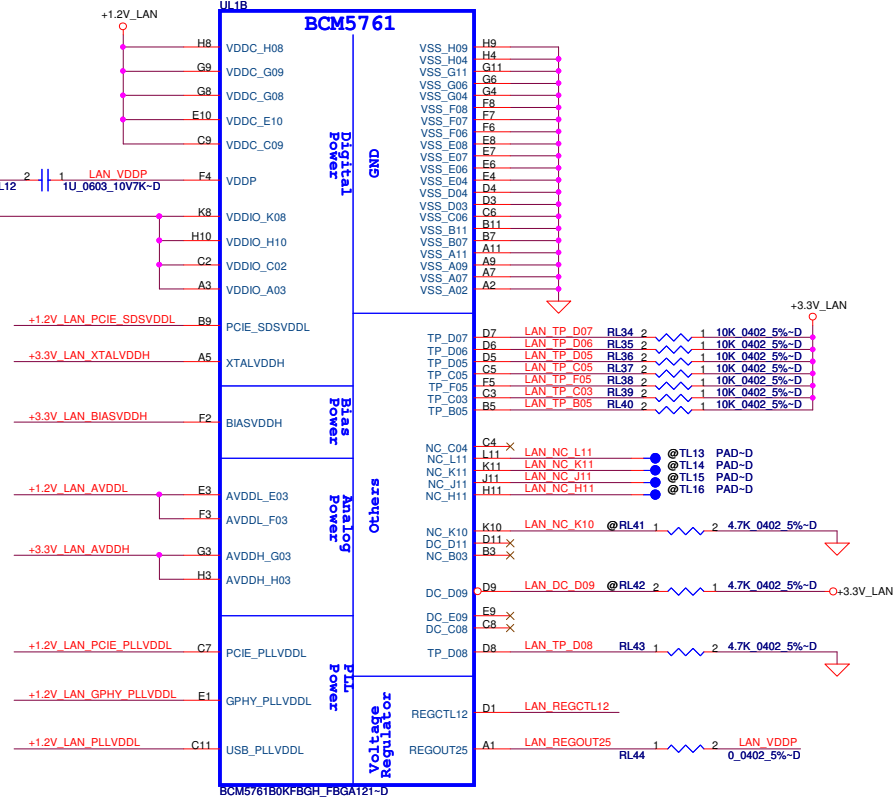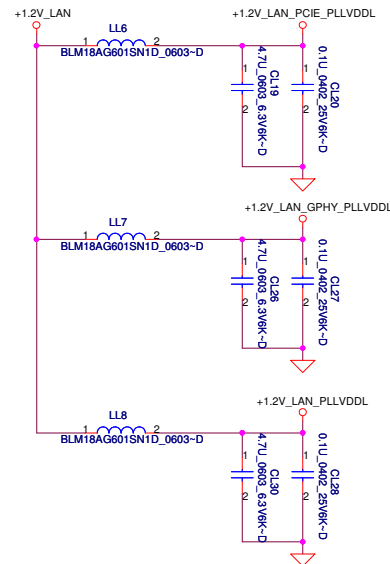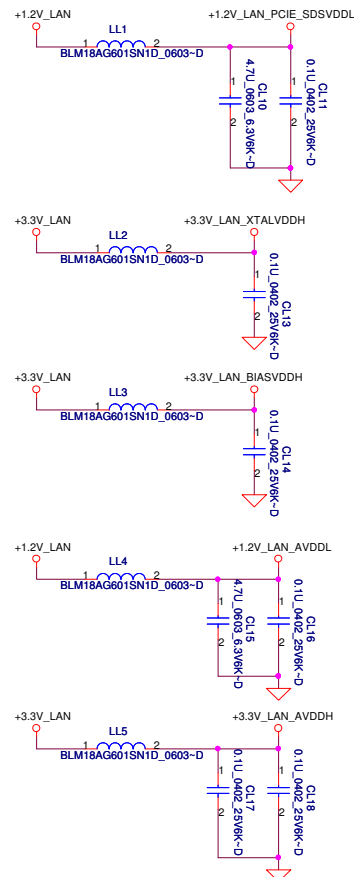

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


LAN (2/2) BCM5761

LA-7901P




Date: Friday, March 02, 2012

Sheet 31 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

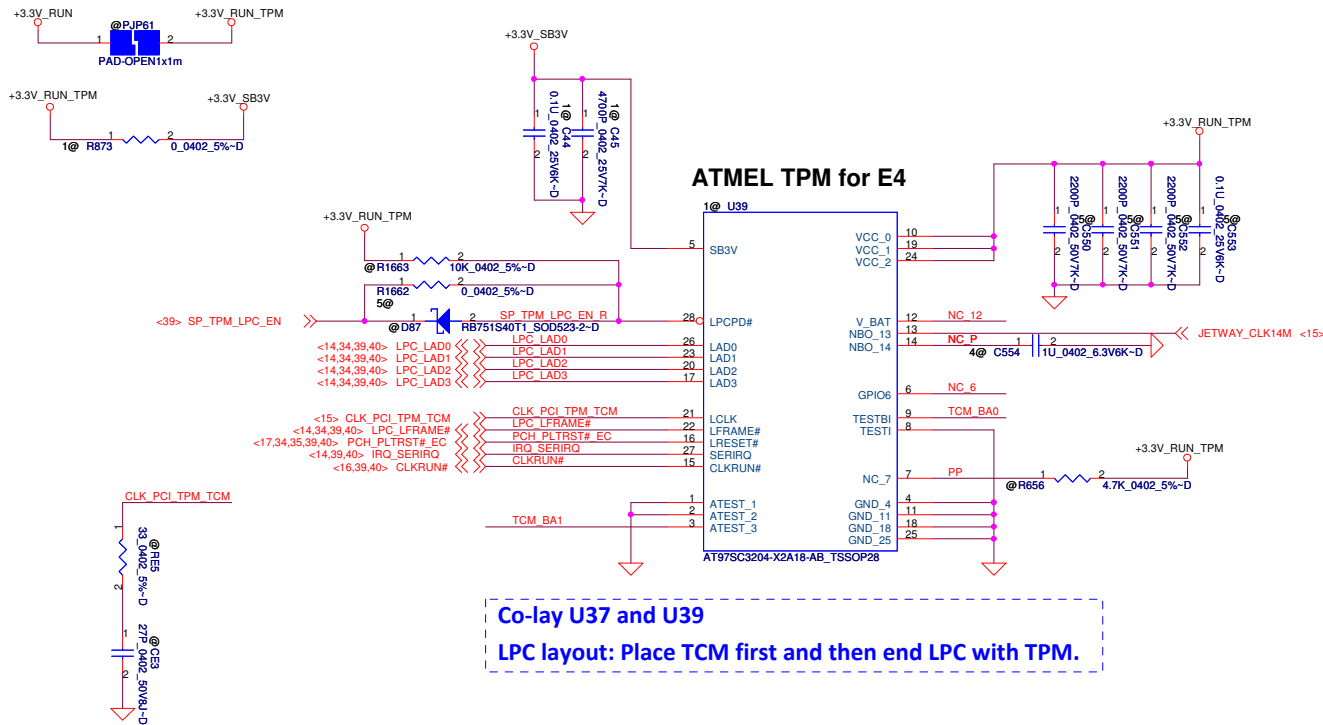




China TCM: NationZ & Jetway co-lay

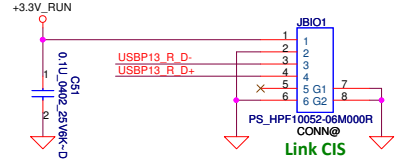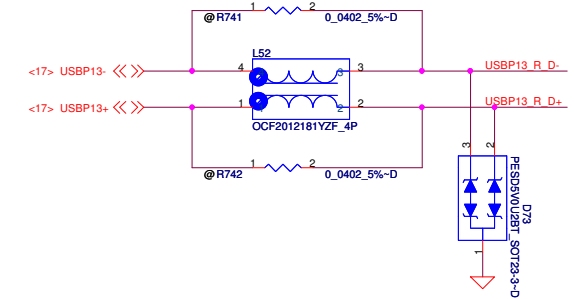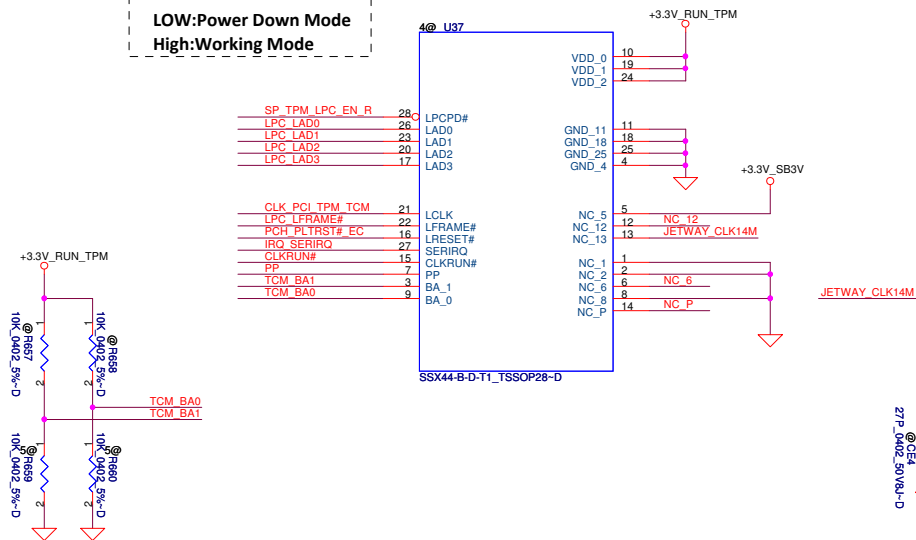

DELL CONFIDENTIAL/PROPRIETARY



		Compal Electronics, Inc.	
TPM/TCM/BIO Conn		LA-7901P	
Date: Friday, March 02, 2012	Document Number	Rev 1.0	Sheet 32 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

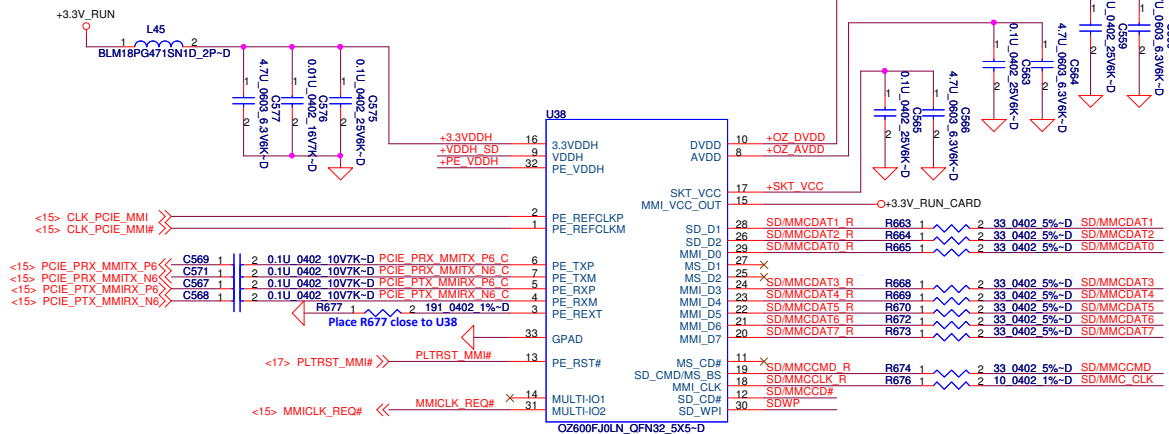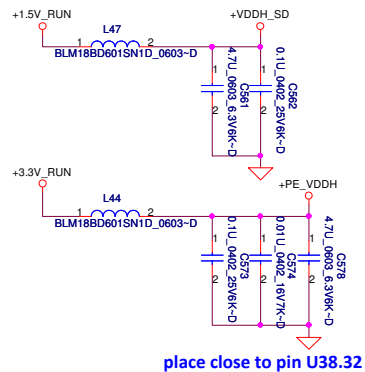

Note: The trace need to route as daisy-chain and the trace of SD signals need to route as short as possible

Vendor review in 6/22 and reserve for SD3.0 UHS-I 200MHz transfer

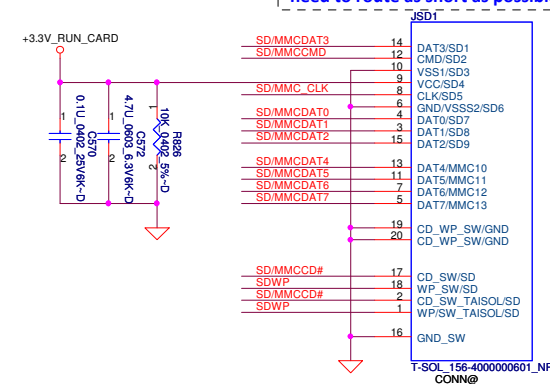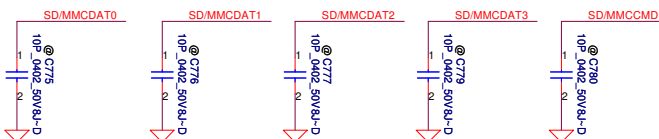

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


Card Reader OZ600FJ0

LA-7901P

Date: Friday, March 02, 2012 Sheet 33 of 61


PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Mini WWAN/GPS/LTE/UWB H=4

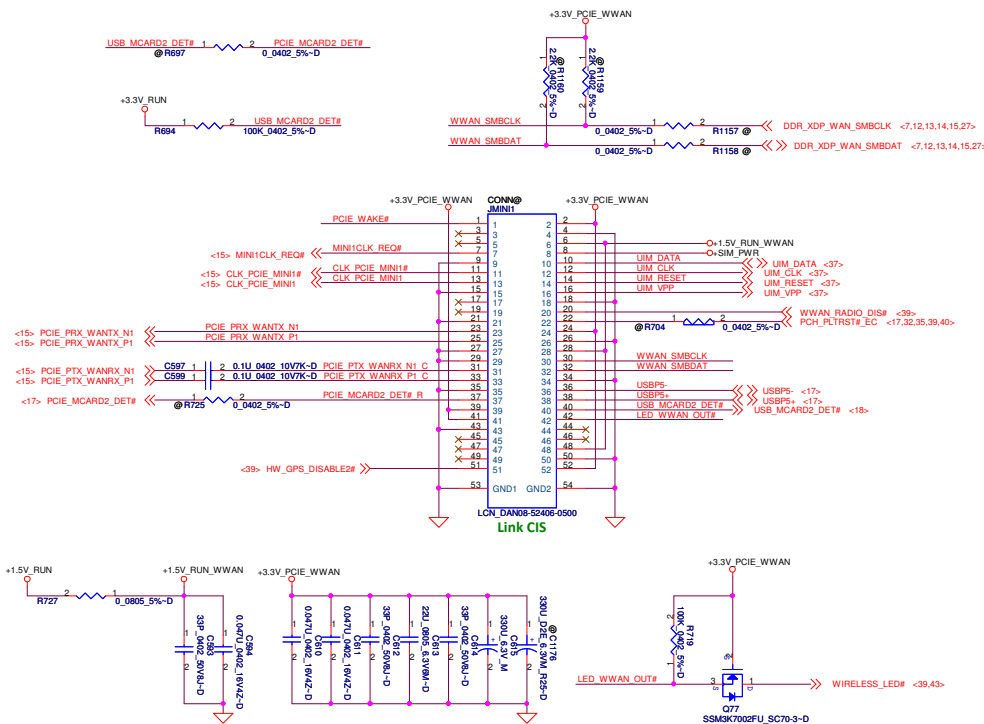


PWR Rail	Voltage Tolerance	Primary Power		Aux Power
		Peak	Normal	Normal
+3.3V	+9%	1000	750	
+3.3Vaux	+9%	330	250	250 (Wake enable) 5 (Not wake enable)
+1.5V	+5%	500	375	NA

Mini WLAN/WIMAX H=6.7

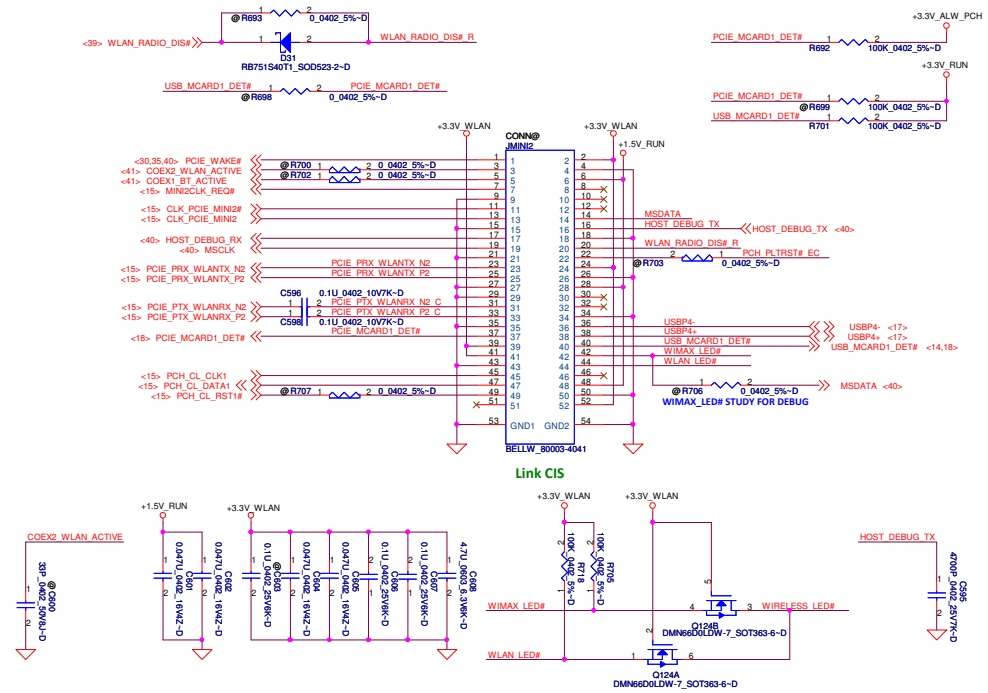

1/2 Minicard Pink Pather/60GHz Card H=6.7

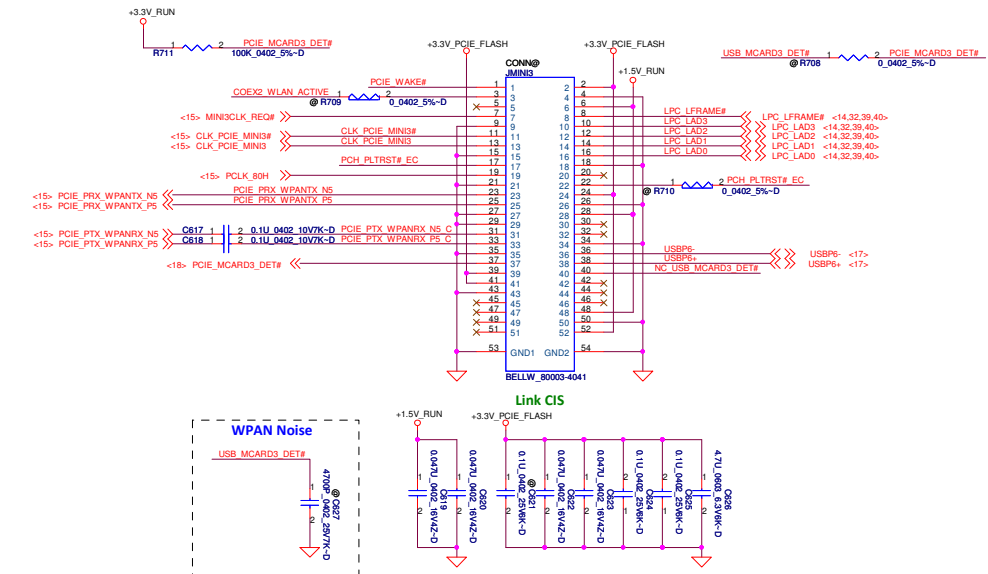

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.




Mini Card

LA-7901P


Date: Friday, March 02, 2012 Sheet 34 of 61

Express/Smart Card Conn.


Power Control for Mini card2

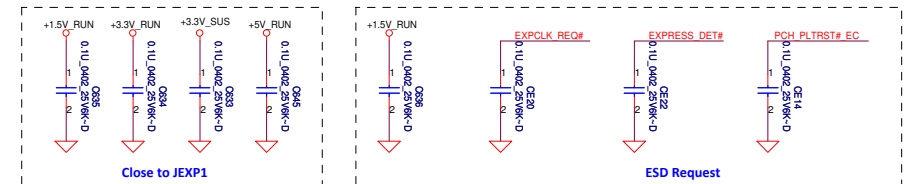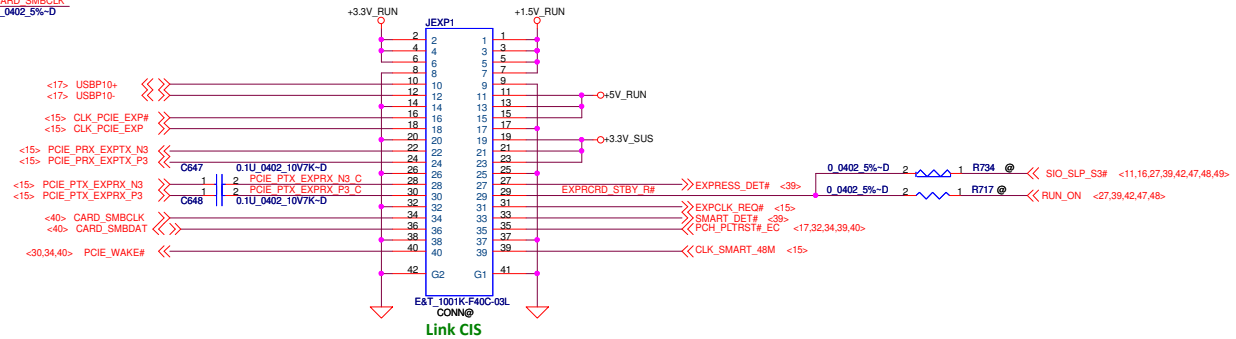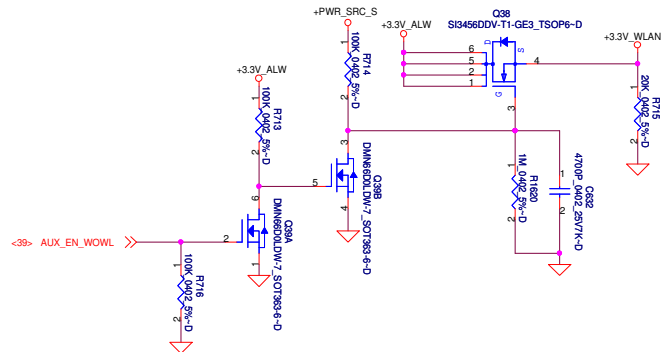

Power Control for Mini card1

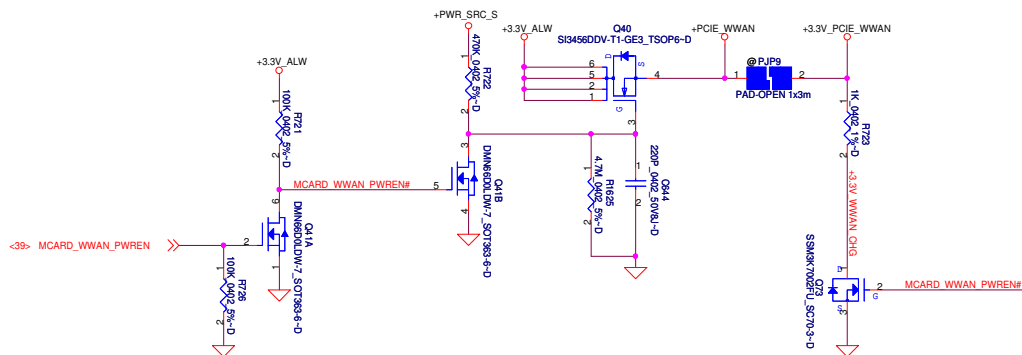

Power Control for Mini card3

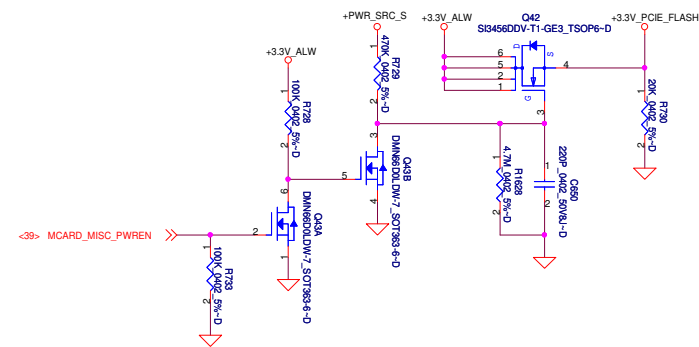

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

MINI CARD PWR/EXP SC




Number
LA-7901P

Date: Friday, March 02, 2012


Sheet 35 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS WAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.






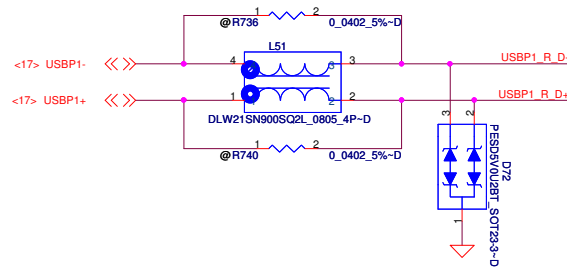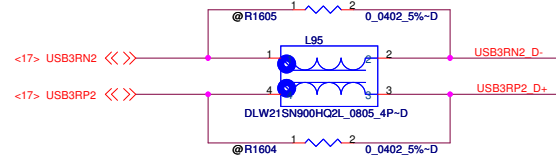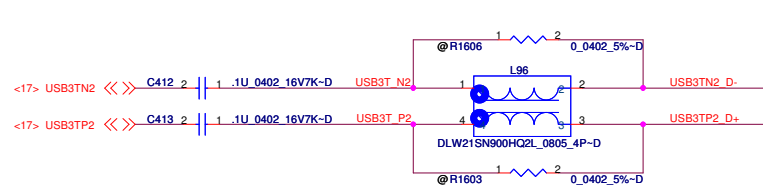



Place D72 close to JUSB1





Place D78 close to JUSB1

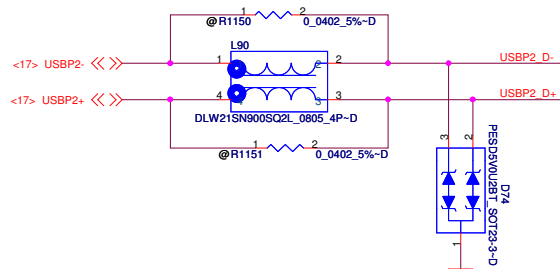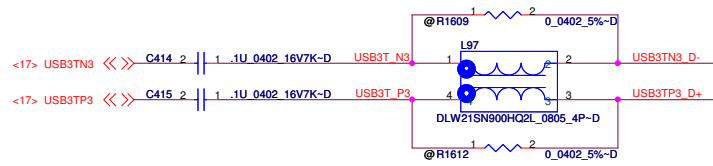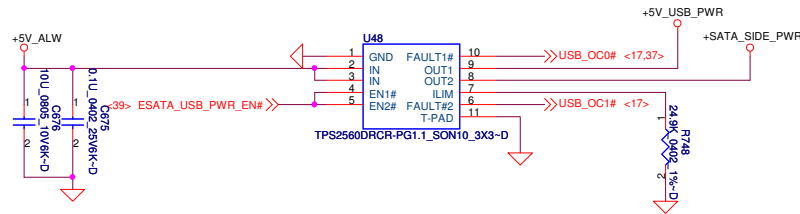

Place D74 close to JESATA1

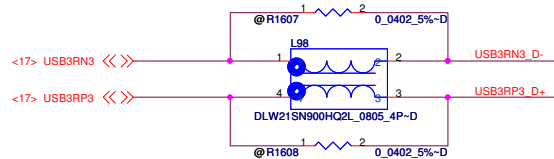

Place D79 close to JESATA1

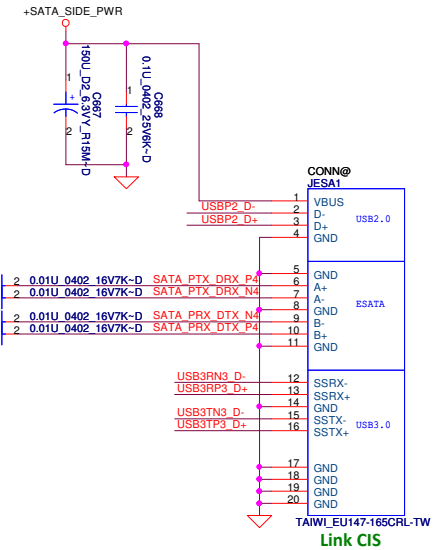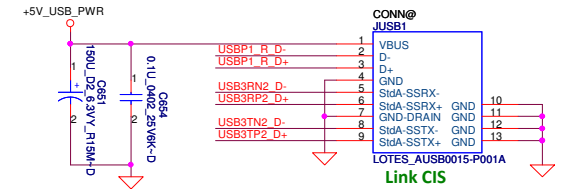

DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.		
USB2.0/3.0 ESATA		
LA-7901P		
Date:	Friday, March 02, 2012	Sheet 36 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

The diagram shows the pinout for the JAU01 connector. The pins are numbered 1 through 22. The connections are as follows:

- Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 are connected to various signals.
- Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 are connected to various signals.
- Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 are connected to various signals.

Pin	Signal
1	AUD_HP_OUT_R <29>
2	AUD_HP_OUT_L <29>
3	MIC_IN_R <29>
4	MIC_IN_L <29>
5	AUD_HP_NB_SENSE <29,39>
6	USB_S0C4# <17>
7	USB_S0C4_EN# <39>
8	+5V_ALW
9	USBP9 R D+
10	USBP9 R D-
11	GND
12	GND
13	GND
14	GND
15	GND
16	GND
17	GND
18	GND
19	GND
20	GND
21	GND
22	GND

CONNECTIONS:
ACES_51522-0200N-P01

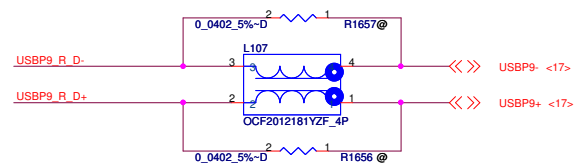


Diagram showing the connection for Pin 1 of the SF1 connector. The pin is labeled '1' and is connected to a red wire. A red 'X' is placed over the pin number '1'.

Pin-to-pin connection diagram for the E&T_1000K-F50E-Q4R connector. The diagram shows two rows of pins (1-50) and their corresponding connections to various signals.

Left Side Connections:



- +5V_ALW
- <17,36> USB_OC0#
- <39> USB_SIDE_EN#
- <17> USBP0
- <17> USBP+
- <30> SW_LAN_TX0
- <30> SW_LAN_TX0+
- <30> SW_LAN_TX1
- <30> SW_LAN_TX1+
- <30> SW_LAN_TX2
- <30> SW_LAN_TX2+
- <30> SW_LAN_TX3
- <30> SW_LAN_TX3+
- <30> LAN_ACTLED_YEL#
- <30> LED_100_ORG#
- <30> LED_10_GRN#


Right Side Connections:

- SIM_PWR
- UIM_CLK <34>
- UIM_RESET <34>
- UIM_VPP <34>
- UIM_DATA <34>
- +3.3V_ALW_PCH
- PCH_AZ_MDC_SDIN1 <14>
- PCH_AZ_MDC_SYNC <14>
- PCH_AZ_MDC_SDOUT <14>
- PCH_AZ_MDC_BITCLK <14>
- RED_CRT
- GREEN_CRT
- BLUE_CRT
- HSYNC_BUF
- VSYNC_BUF
- DAT_DDC2_CRT
- CLK_DDC2_CRT
- +5V_RUN
- +3.3V_LAN

Bottom Labels:

- E&T_1000K-F50E-Q4R CONN@
- Link CTS

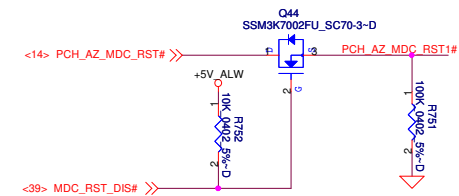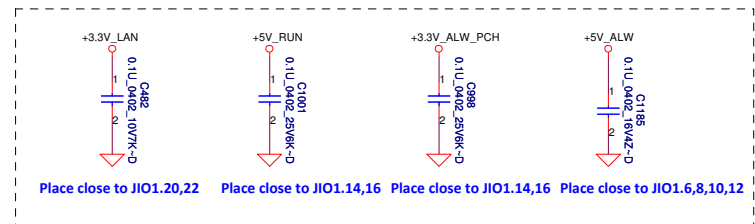

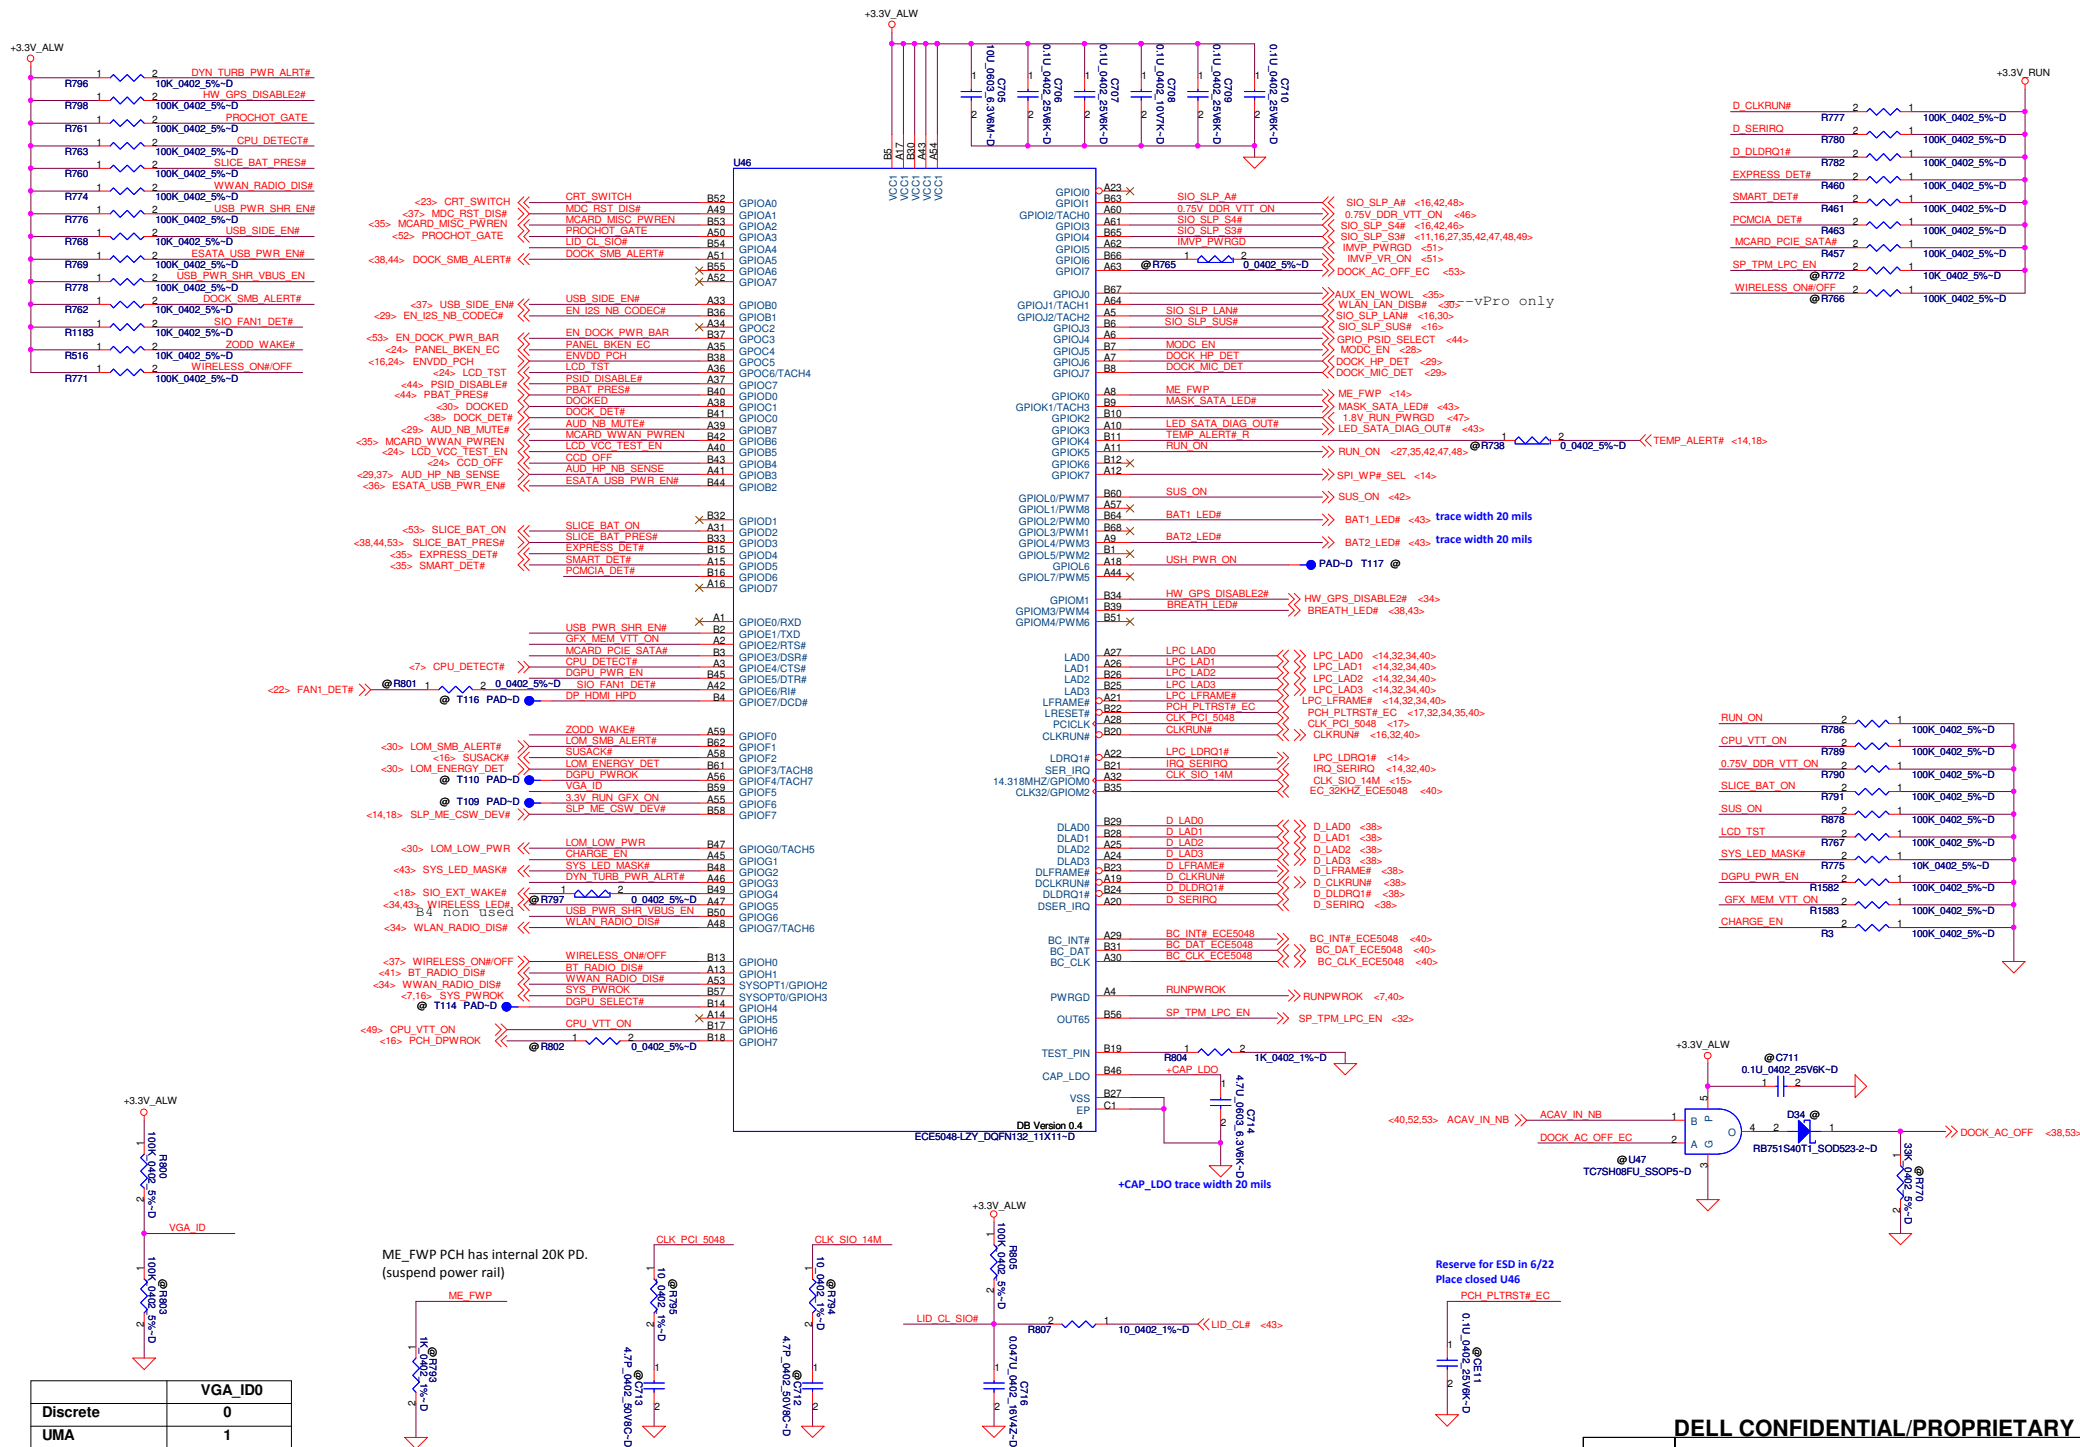


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.



Title		ECE5048	
Size	Document Number	LA-7901P	
		Rev 1.0	
Date:	Friday, March 02, 2012	Sheet	39 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

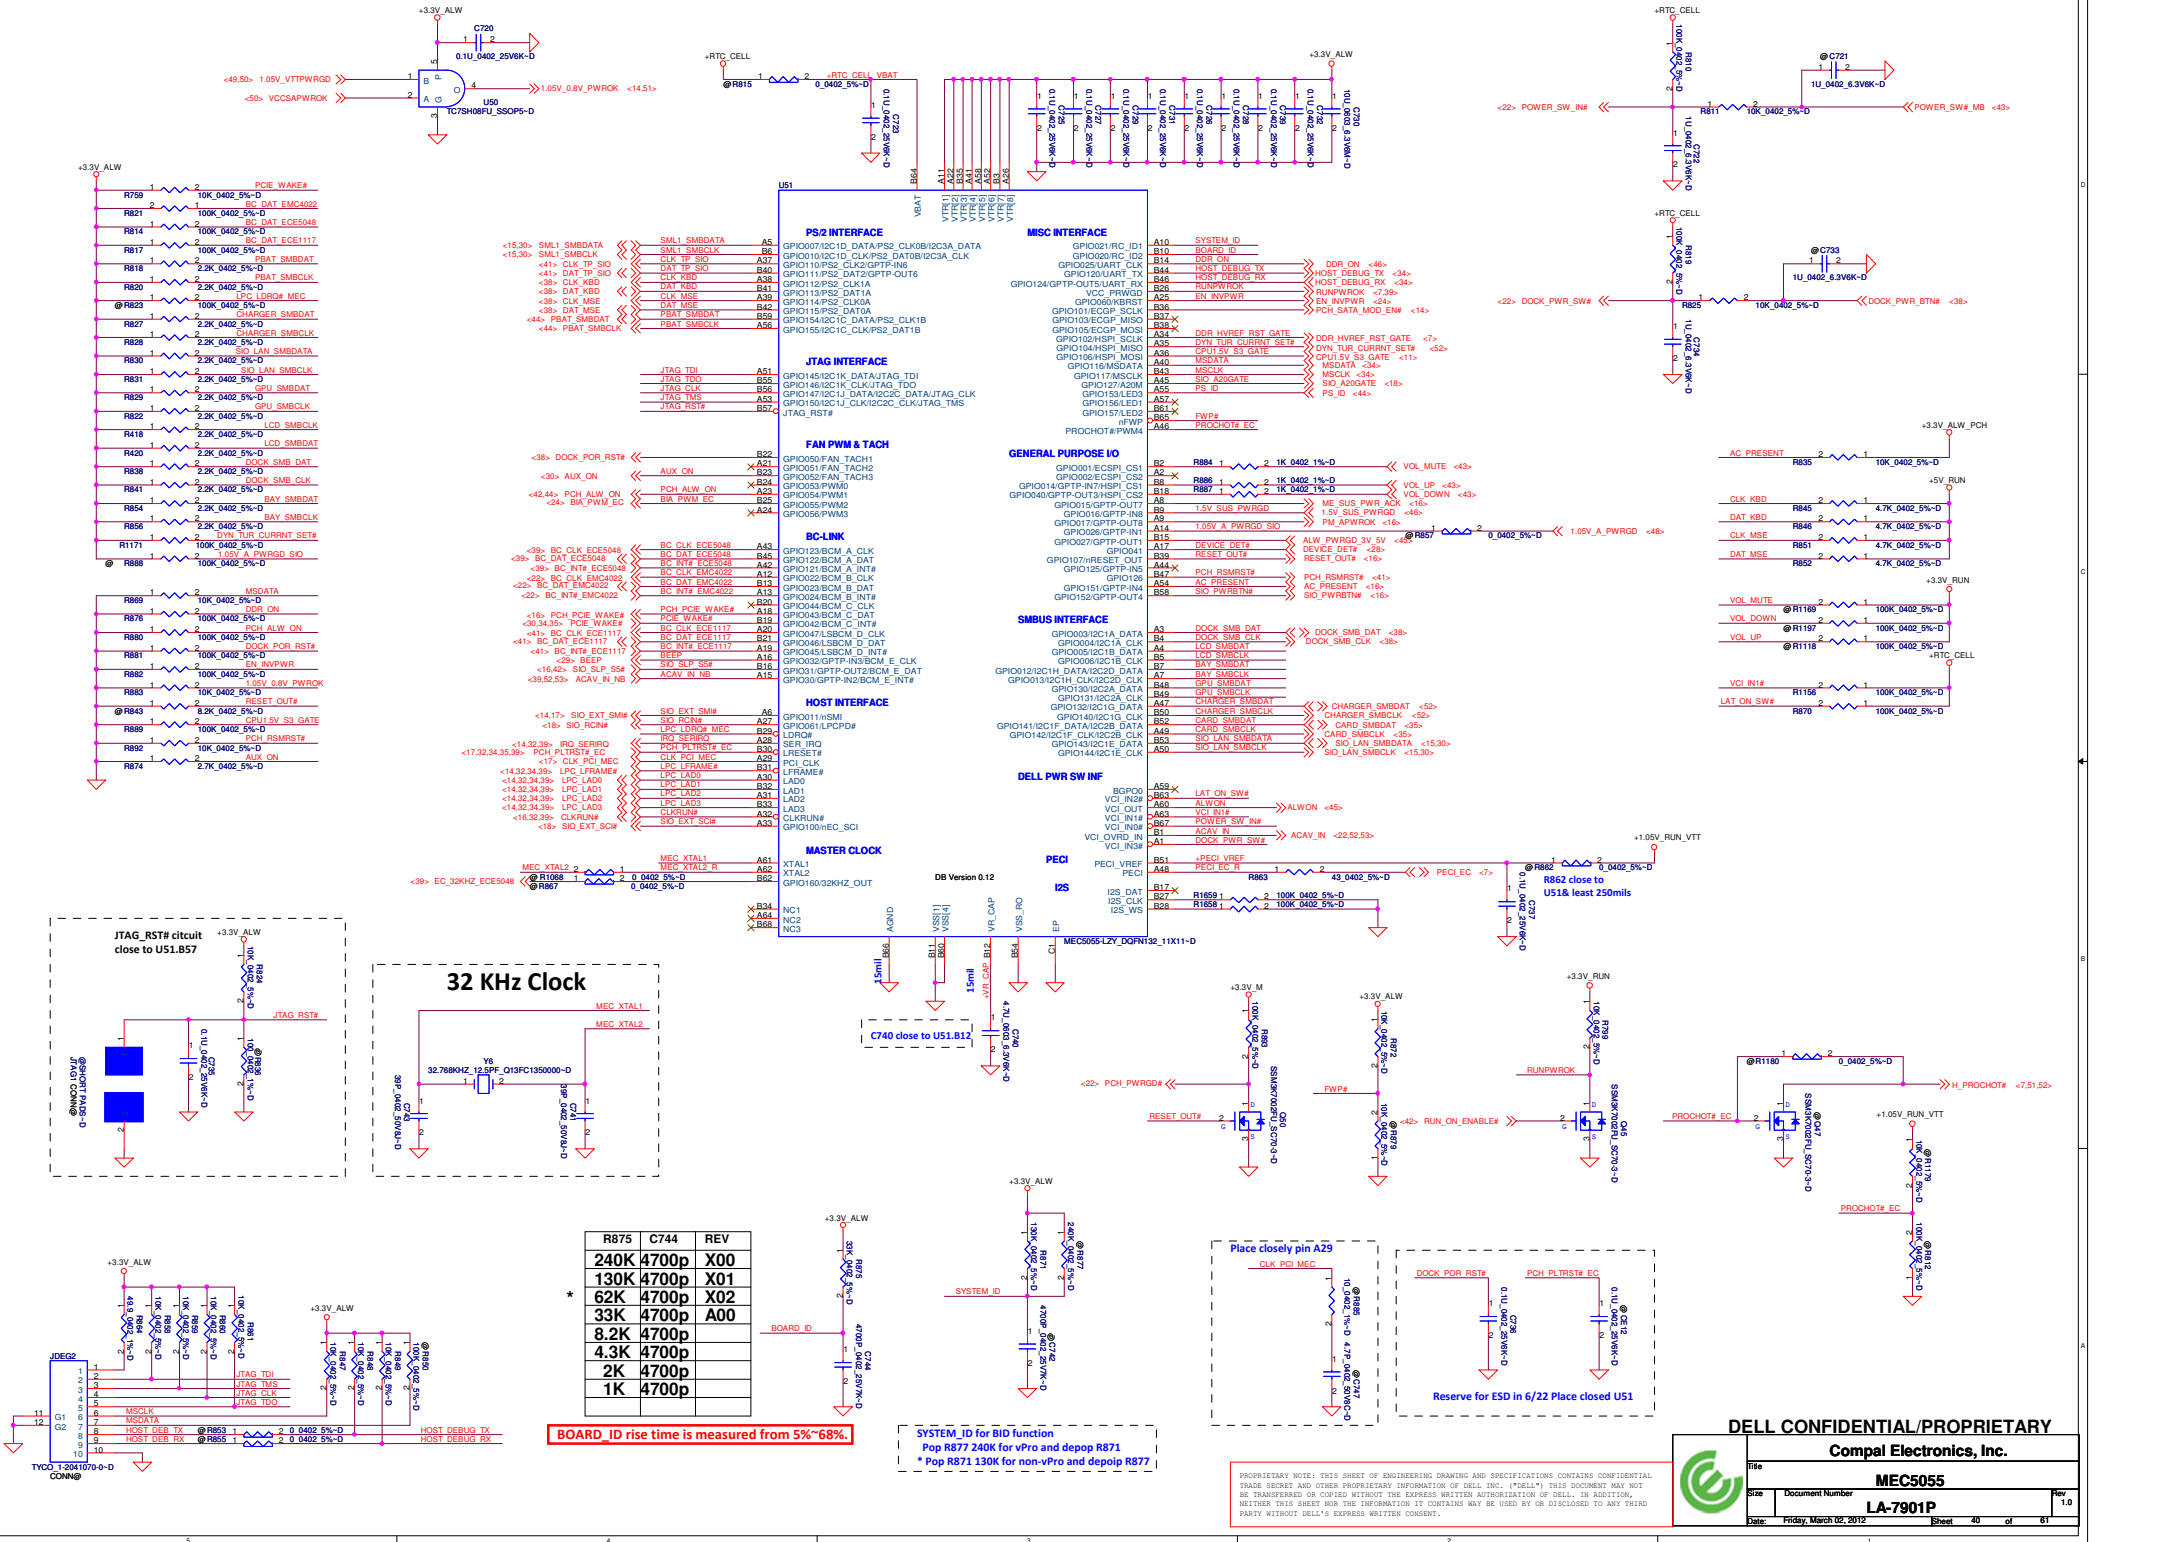

R875	C744	REV
240K	4700p	X00
130K	4700p	X01
62K	4700p	X02
33K	4700p	A00
8.2K	4700p	
4.3K	4700p	
2K	4700p	
1K	4700p	

BOARD_ID rise time is measured from 5%-68%.

SYSTEM_ID for BID function
Pop R877 240K for vPro and depop R871
Pop R871 130K for non-vPro and depop R877

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

File: **MEC5055**

Size: **LA-7901P**

Date: **Friday, March 02, 2012**

Sheet **40** of **61**

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSMITTED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

[illegible][illegible]

RSMRST circuit

The schematic diagram illustrates the RSMRST circuit. It features a reset button (R1623) connected to a pull-up resistor (33.0k) and a capacitor (0.1uF) to ground. The button is connected to the RESET# pin of the RT9818A-44GU3-SC70-3-D (U4). The RESET# pin is also connected to the RSMRST# signal. The RSMRST# signal is connected to the B input of a NAND gate (U7, TC7SH08FU_SSOP5-D). The A input of the NAND gate is connected to the +3.3V_ALW_PCH signal. The output of the NAND gate (Q) is connected to the PCH_RSMRST#_Q signal. The PCH_RSMRST#_Q signal is also connected to the RSMRST# signal. The RSMRST# signal is connected to the RSMRST#_Q signal.

Keyboard

Diagram illustrating the keyboard connection to the ACES_51524-0100N-001 connector (JKB1).

The connector pins are labeled 1 through 12. The connections are as follows:

- Pins 1, 2, 3: PS2_CLK, PS2_DAT, PS2_DAT
- Pins 4, 5, 6, 7, 8, 9, 10, 11, 12: +3.3V_ALW, +5V_RUN, BC_INT#_ECE1117, BC_DAT_ECE1117, BC_CLK_ECE1117, GND, GND


Additional components shown:

- Capacitor C756: 0.1uF, 0402, 25V06K-D, connected to +3.3V_ALW.
- Capacitor C758: 0.1uF, 0402, 25V06K-D, connected to +5V_RUN.


Place close to JKB1




DC/DC Interface

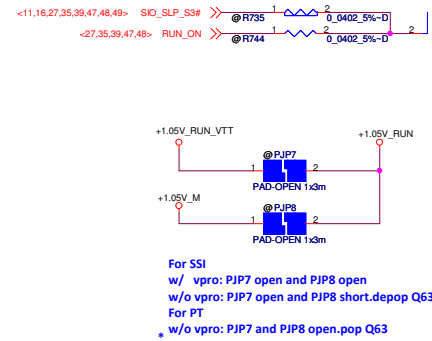


Discharge Circuit

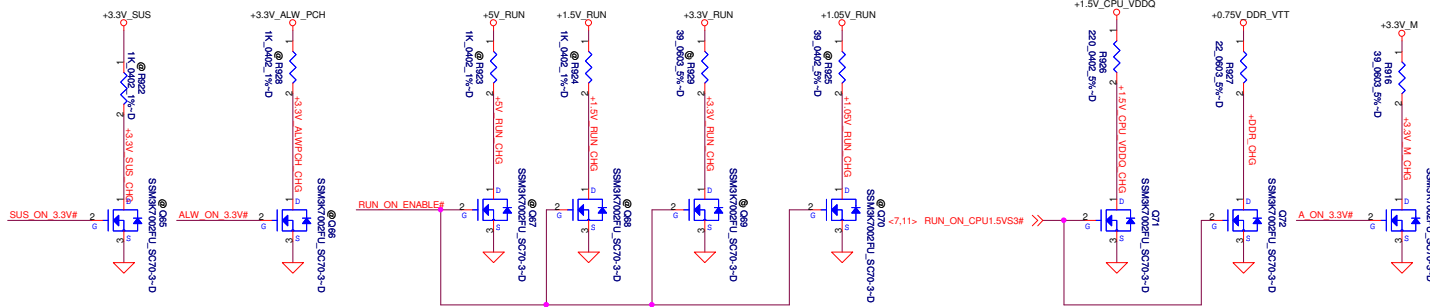


+1.5V_RUN Source

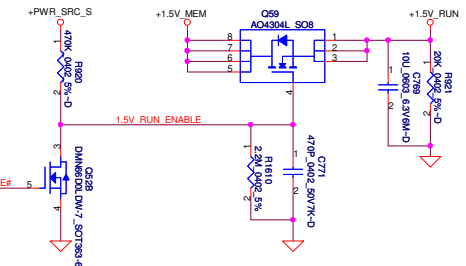


+1.05V_RUN Source

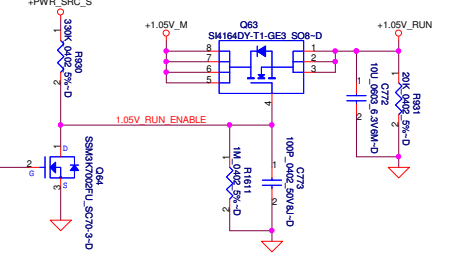


+5V_RUN Source

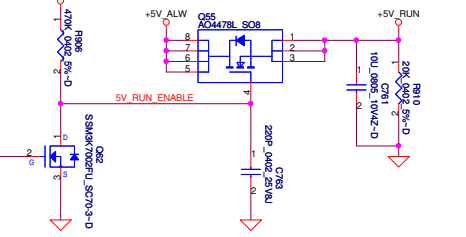


+3.3V_RUN Source

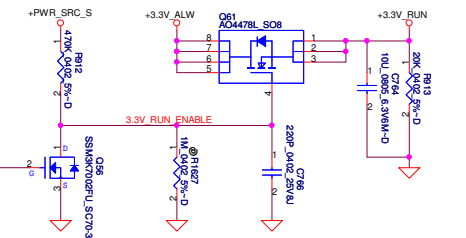


+3.3V_ALW_PCH Source

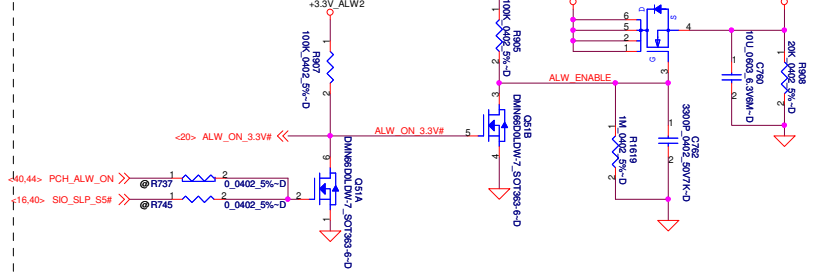

+3.3V_SUS Source

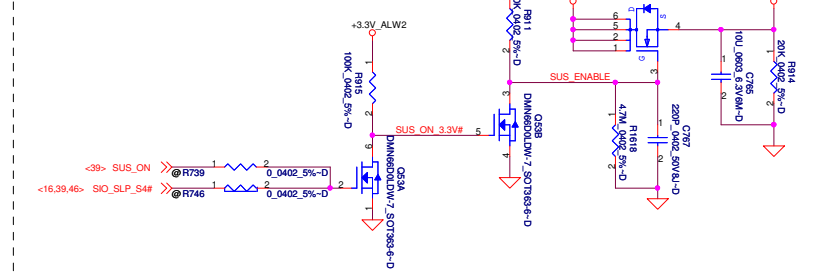

+3.3V_M Source

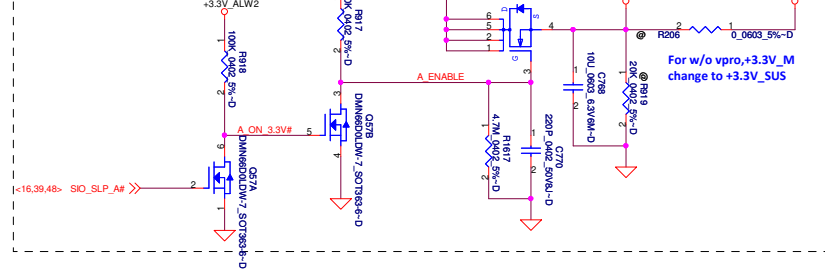

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.


POWER CONTROL

LA-7901P


Rev 1.0
Date: Friday, March 02, 2012 Sheet 42 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL"). THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.


BDD LED solution for White LED

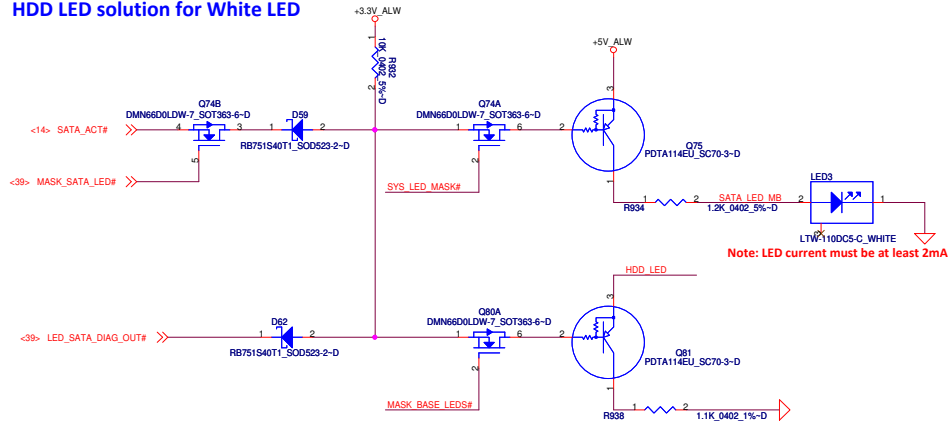


Battery LED

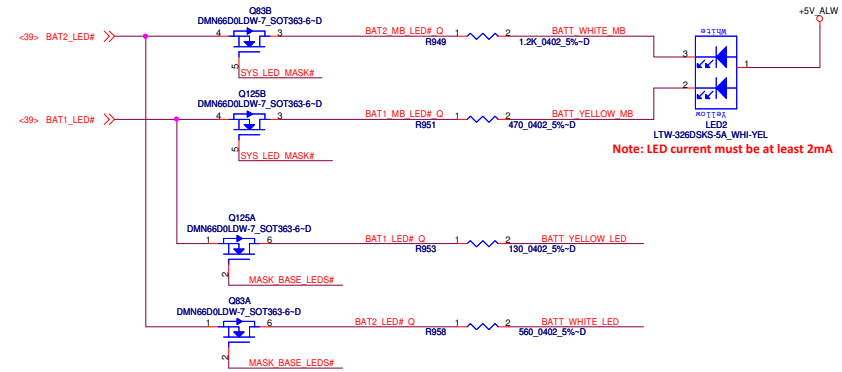

WLAN LED solution for White LED

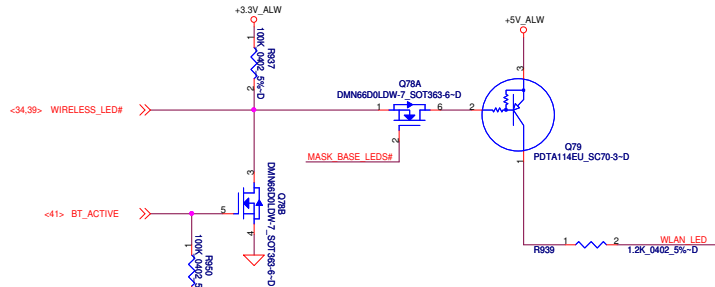


Breath LED

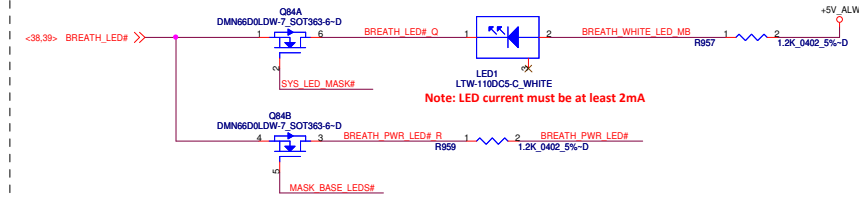


LED Circuit Control Table

	SYS_LED_MASK#	LID_CL#
Mask All LEDs (Sniffer Function)	0	X
Mask Base MB LEDs (Lid Closed)	1	0
Do not Mask LEDs (Lid Opened)	1	1

MEDIA BOARD

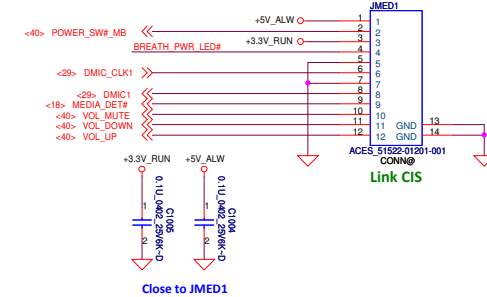


LED BOARD

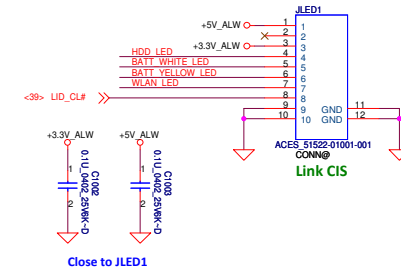


Fiducial Mark

- FD1
- FIDUCIAL MARK-D
- FD2
- FIDUCIAL MARK-D
- FD3
- FIDUCIAL MARK-D
- FD4
- FIDUCIAL MARK-D

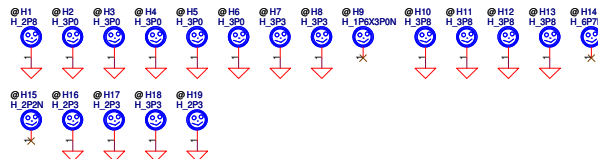




EMI CLIP



PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.	
PWR/LED Conn/PAD/ME	
Title	LA-7901P
Size	Document Number
Date	Friday, March 02, 2012
Sheet	43 of 61
Rev	1.0

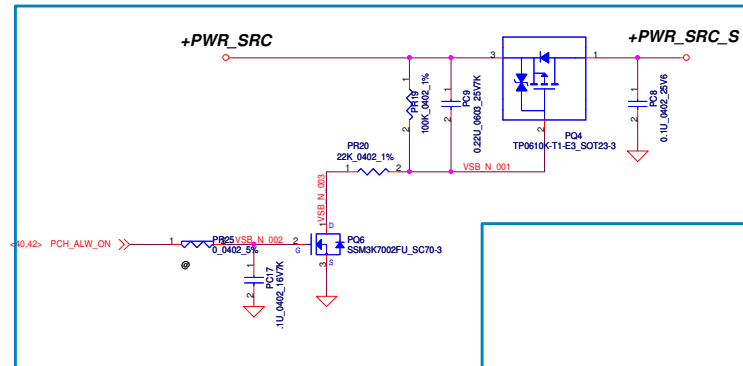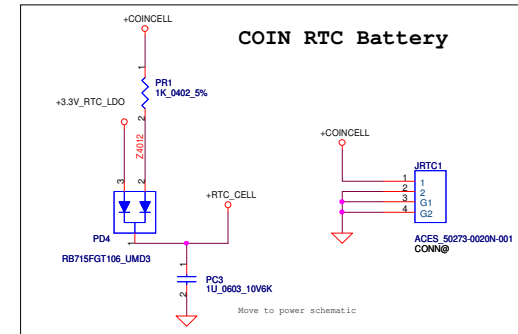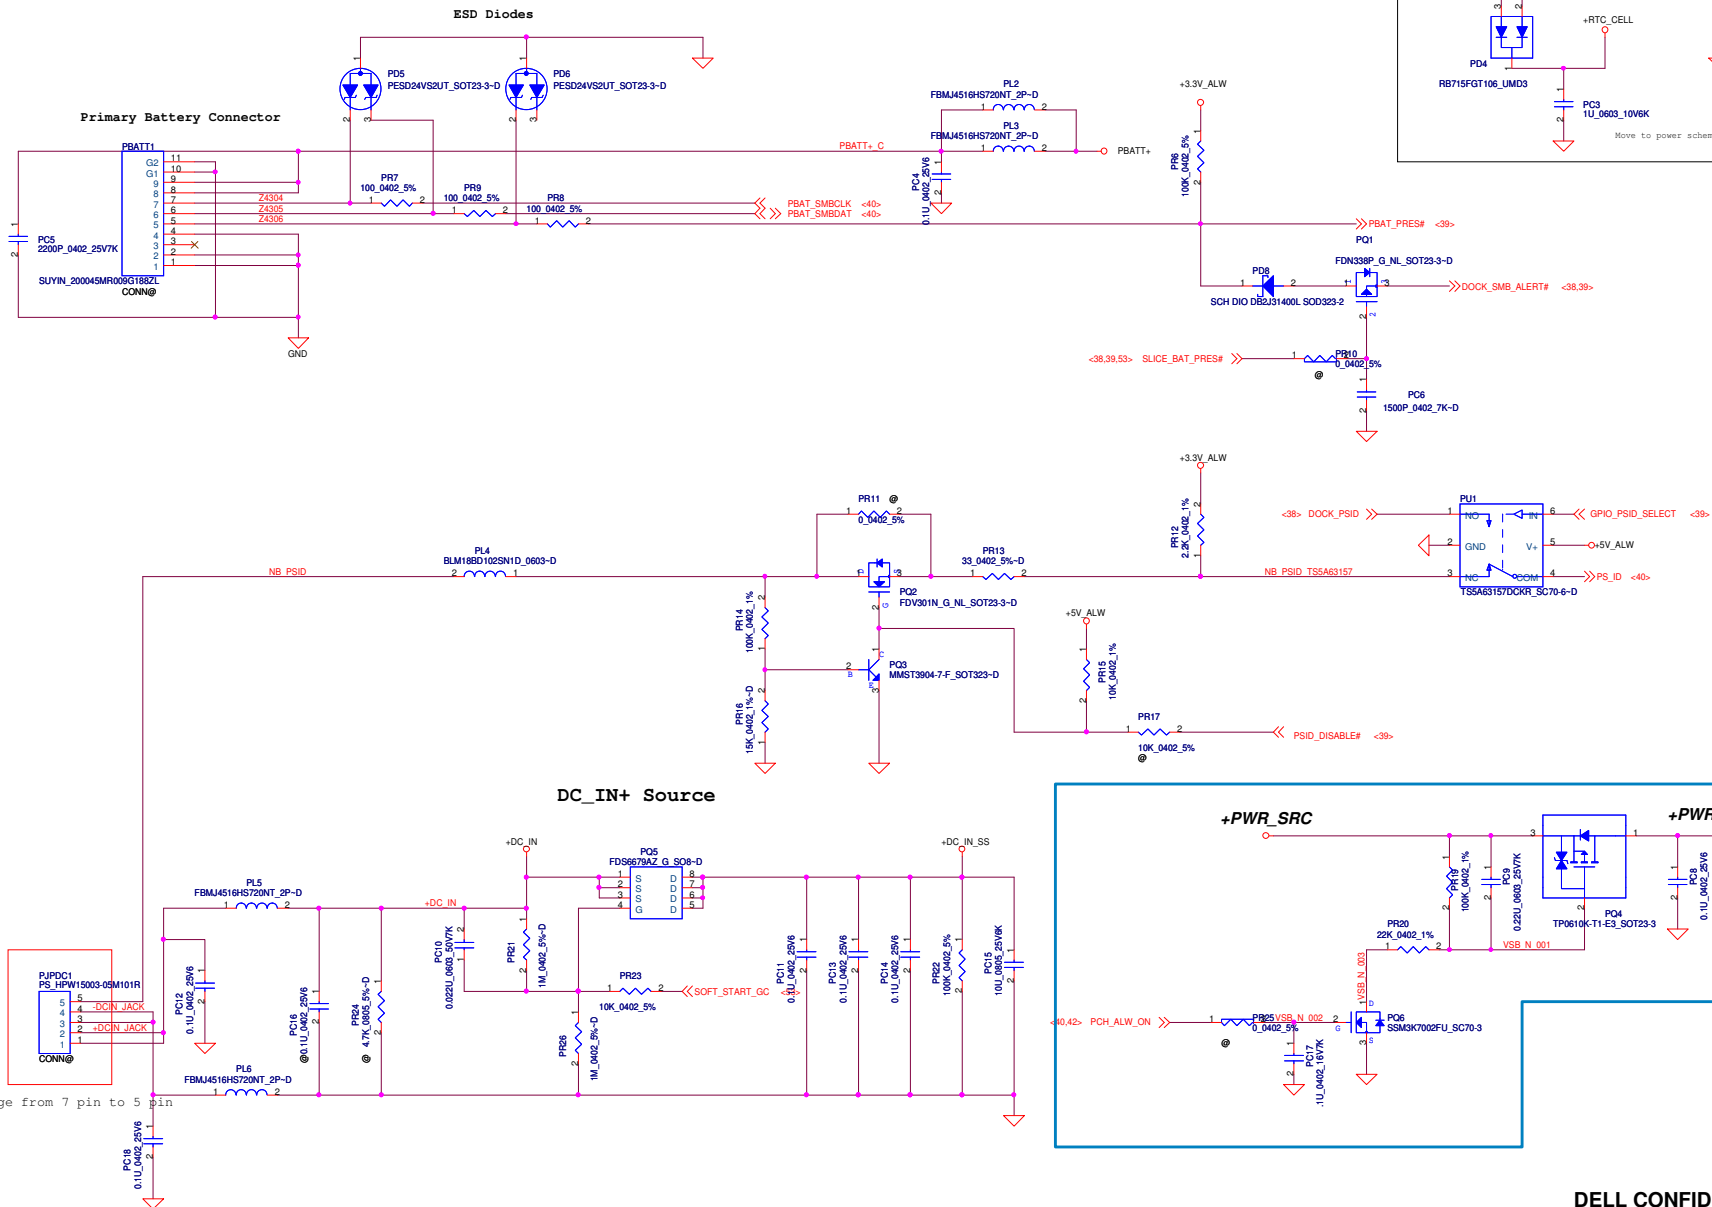


DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

+DCIN

Size	Document Number	Rev
	LA-7902P	1.0
Date:	Friday, March 02, 2012	Sheet 44 of 61


THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

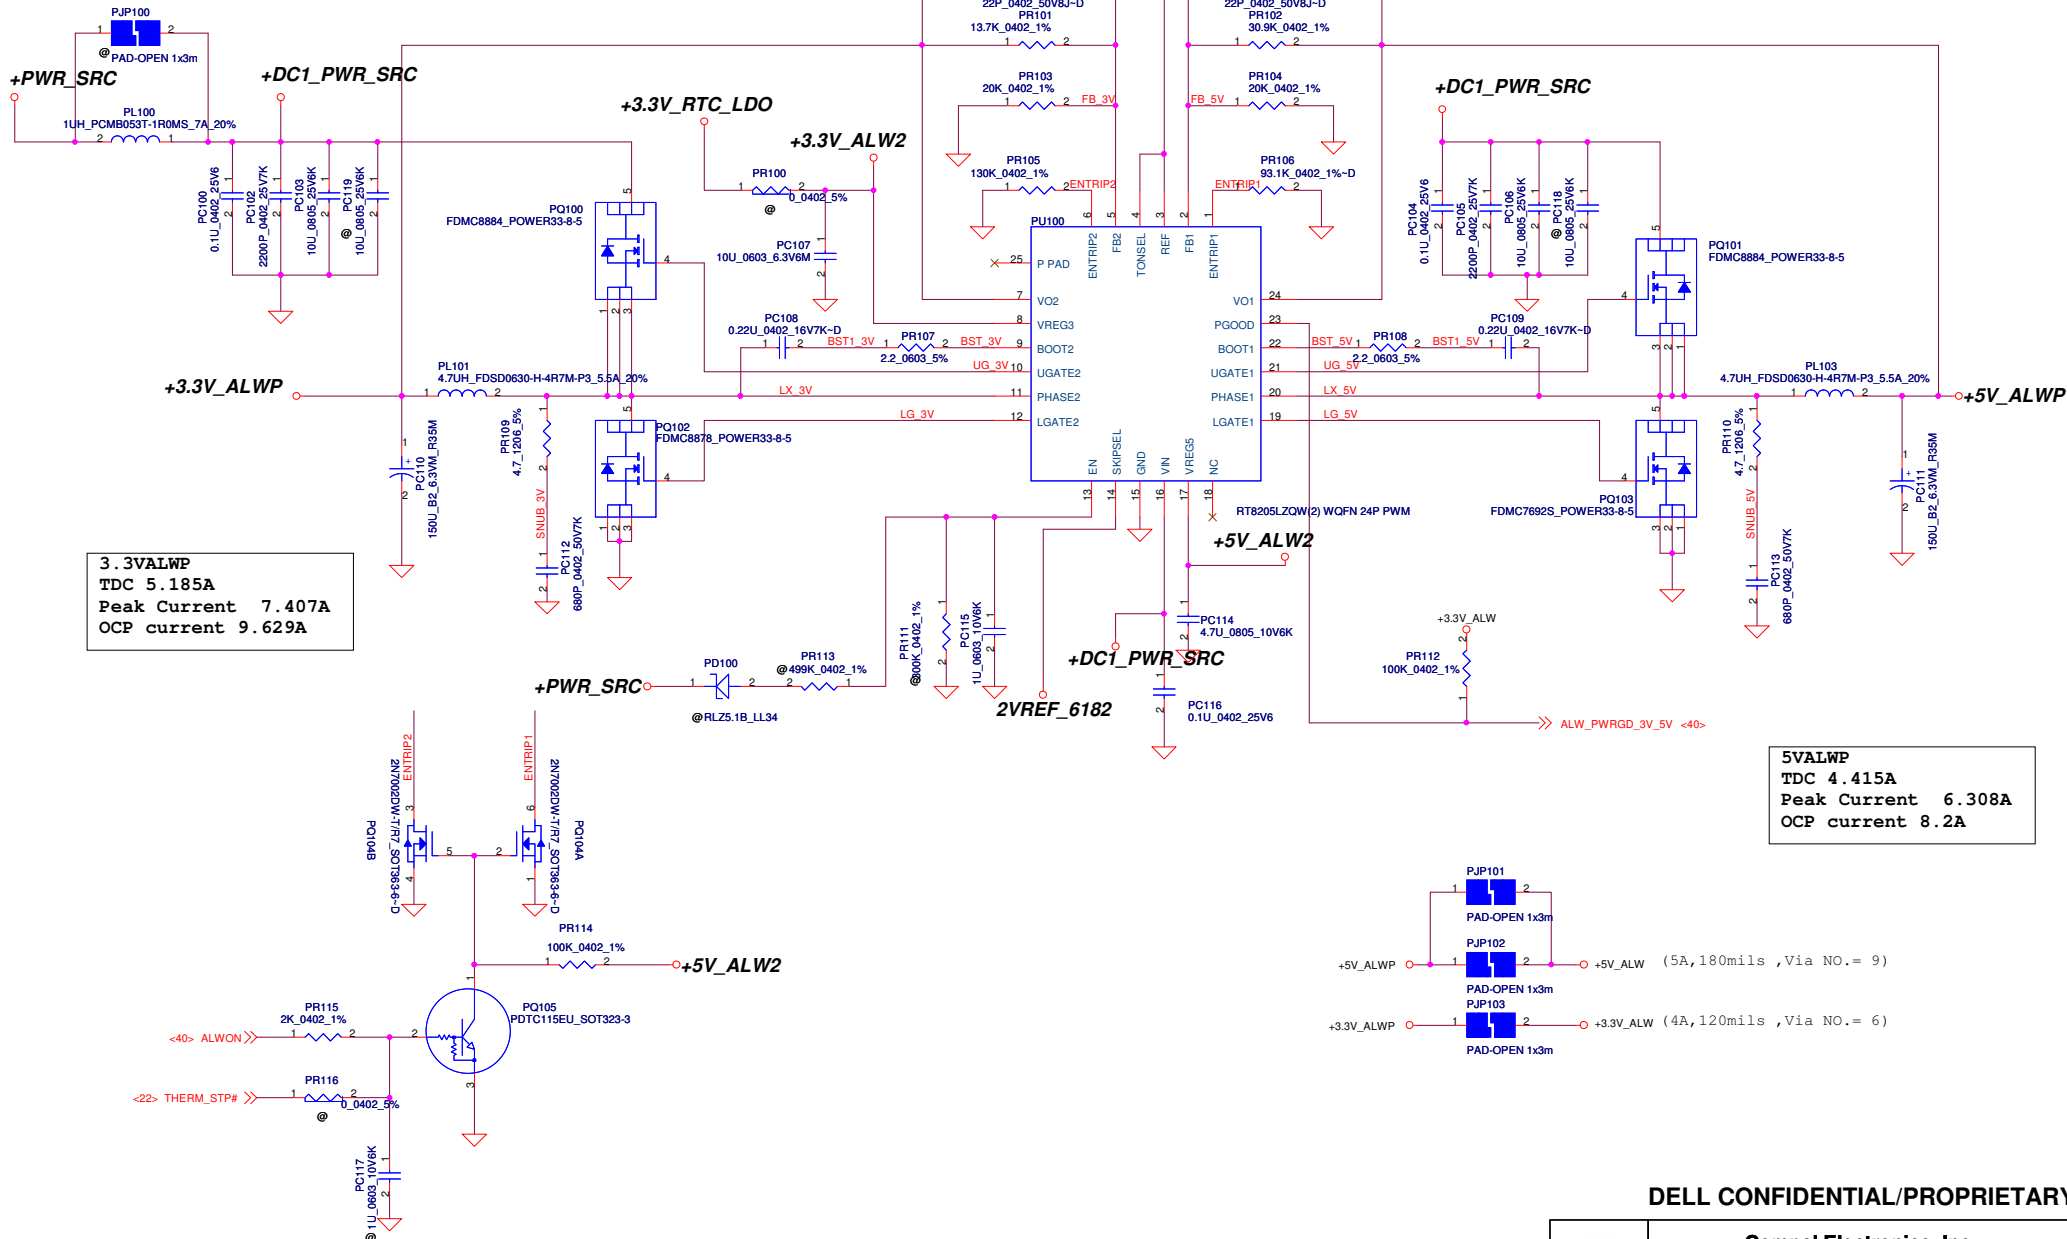

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

DELL CONFIDENTIAL/PROPRIETARY


Compal Electronics, Inc.			
Title			
+5V_ALW/3.3V_ALW			
Size	Document Number	Rev	
	LA-7902P	1.0	
Date: Friday, March 02, 2012		Sheet	45 of 61

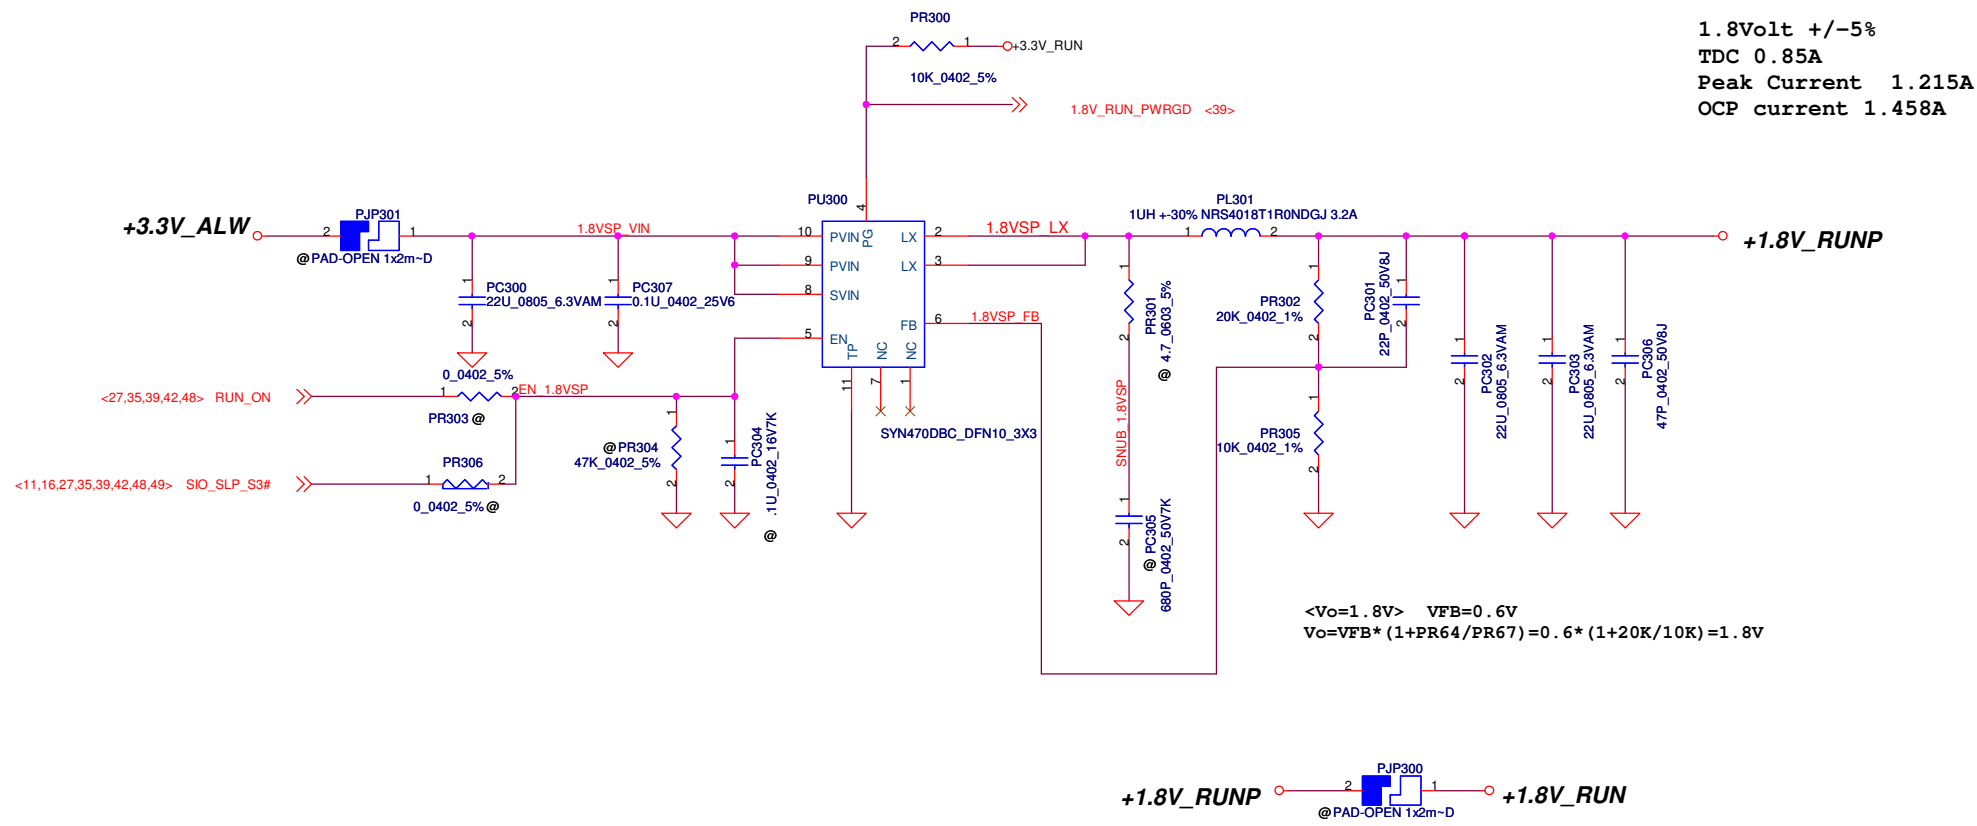



DELL CONFIDENTIAL/PROPRIETARY

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Compal Electronics, Inc.			
Title			
+1.8V_RUN			
Size	Document Number		Rev
	LA-7902P		1.0
Date:	Friday, March 02, 2012	Sheet	47 of 61

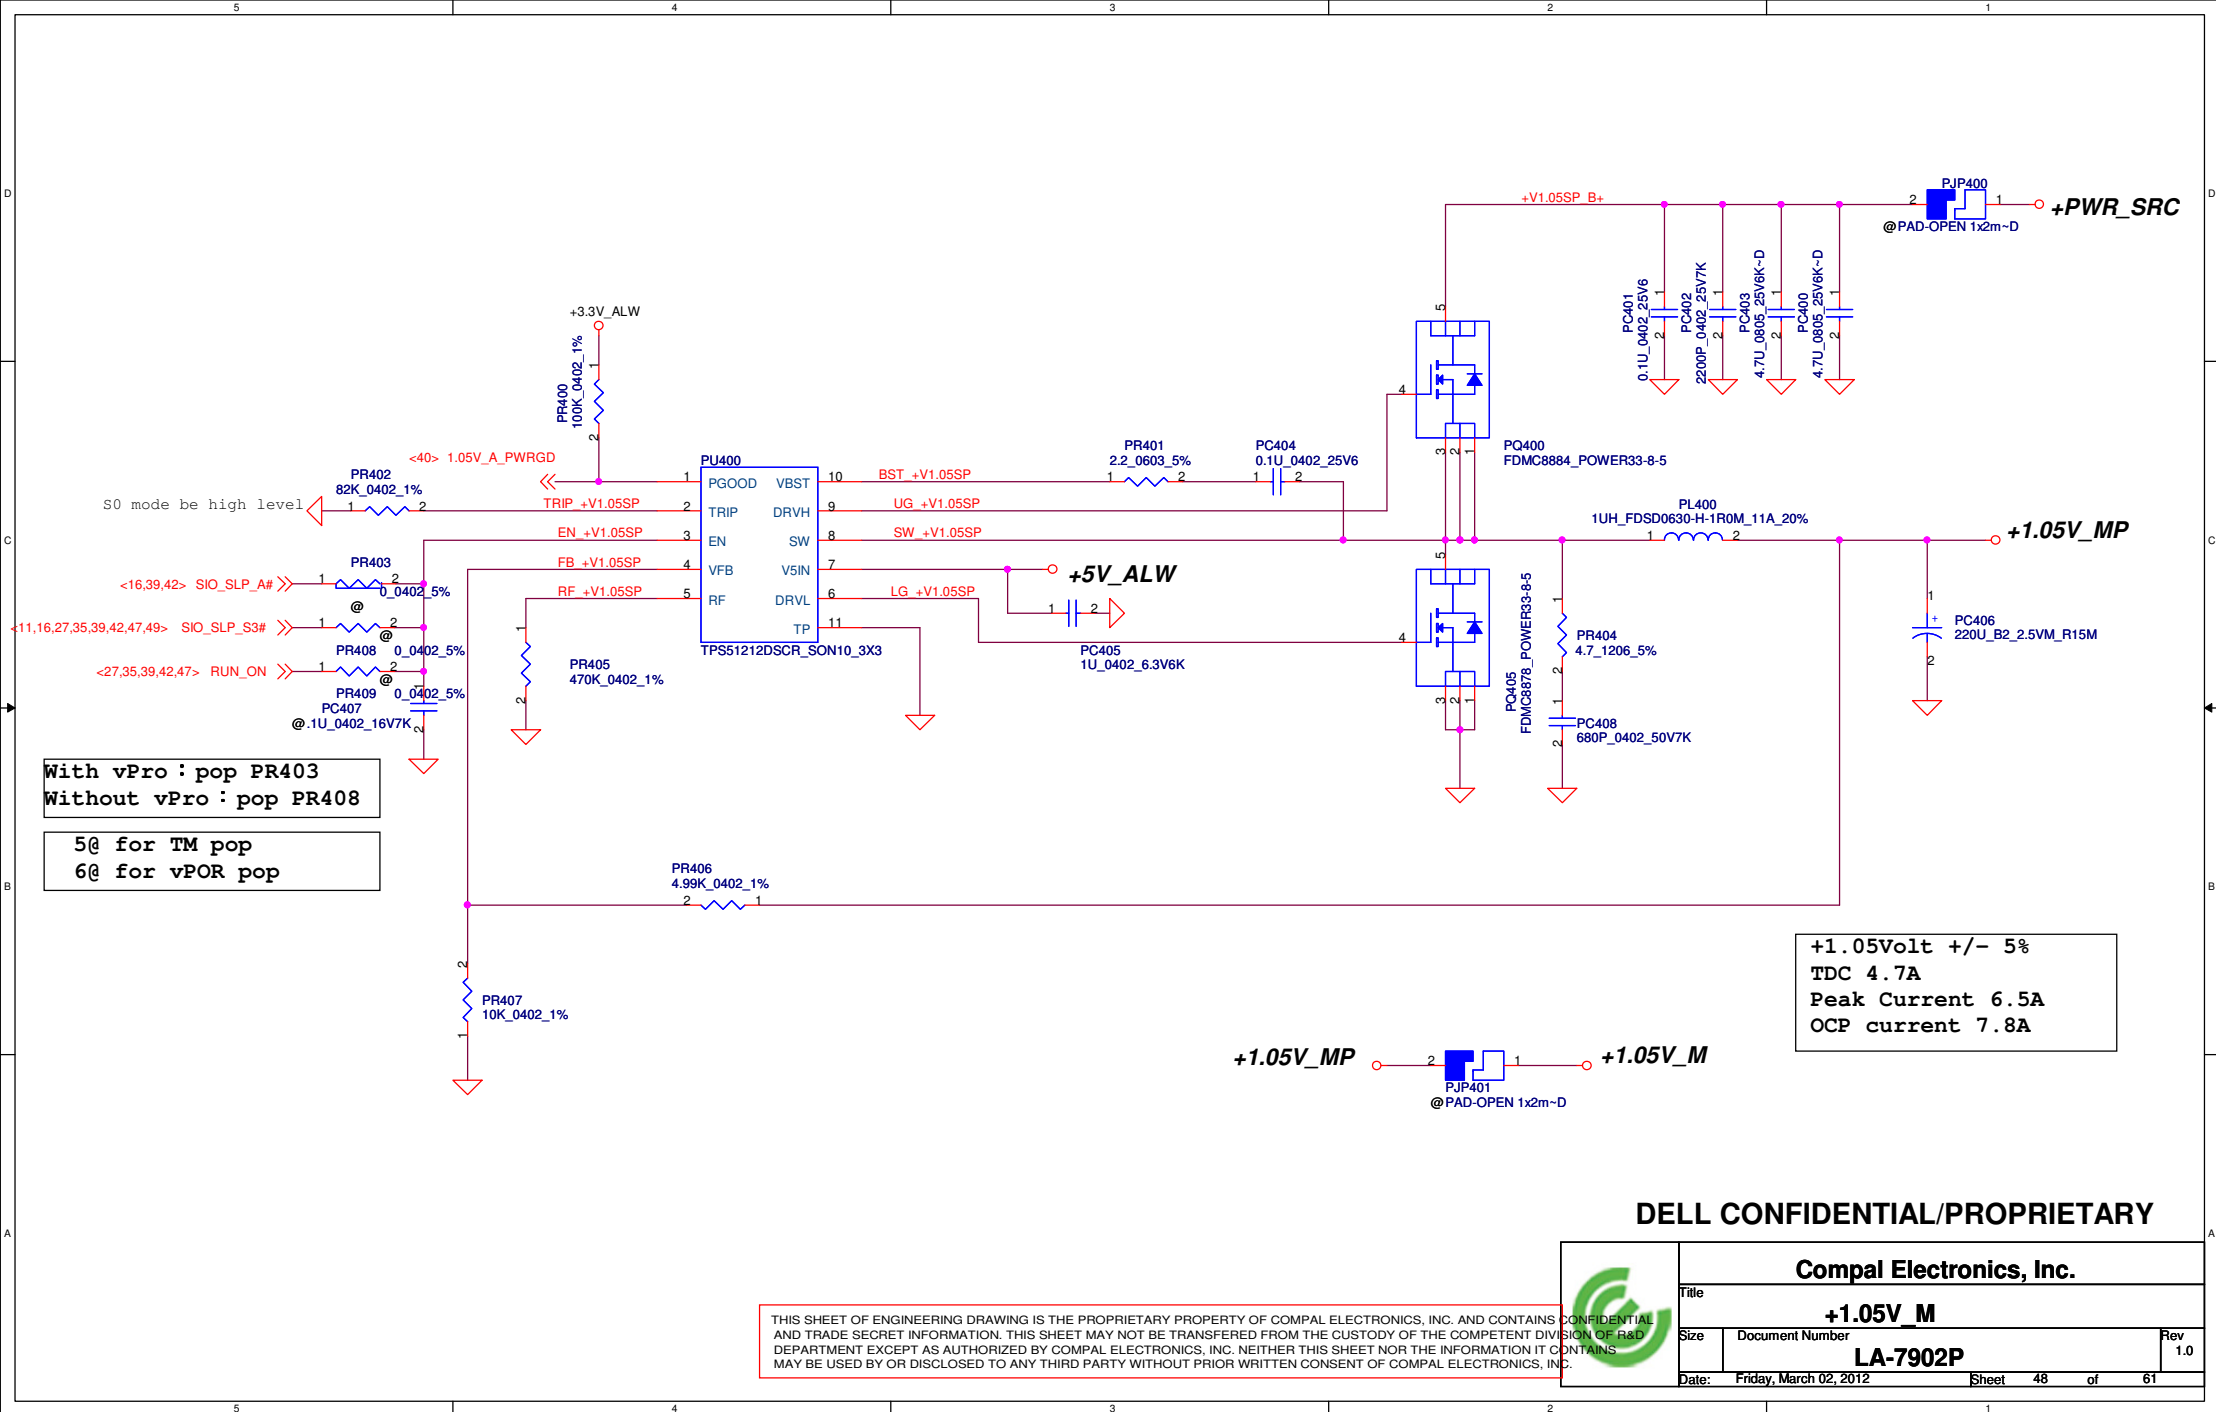

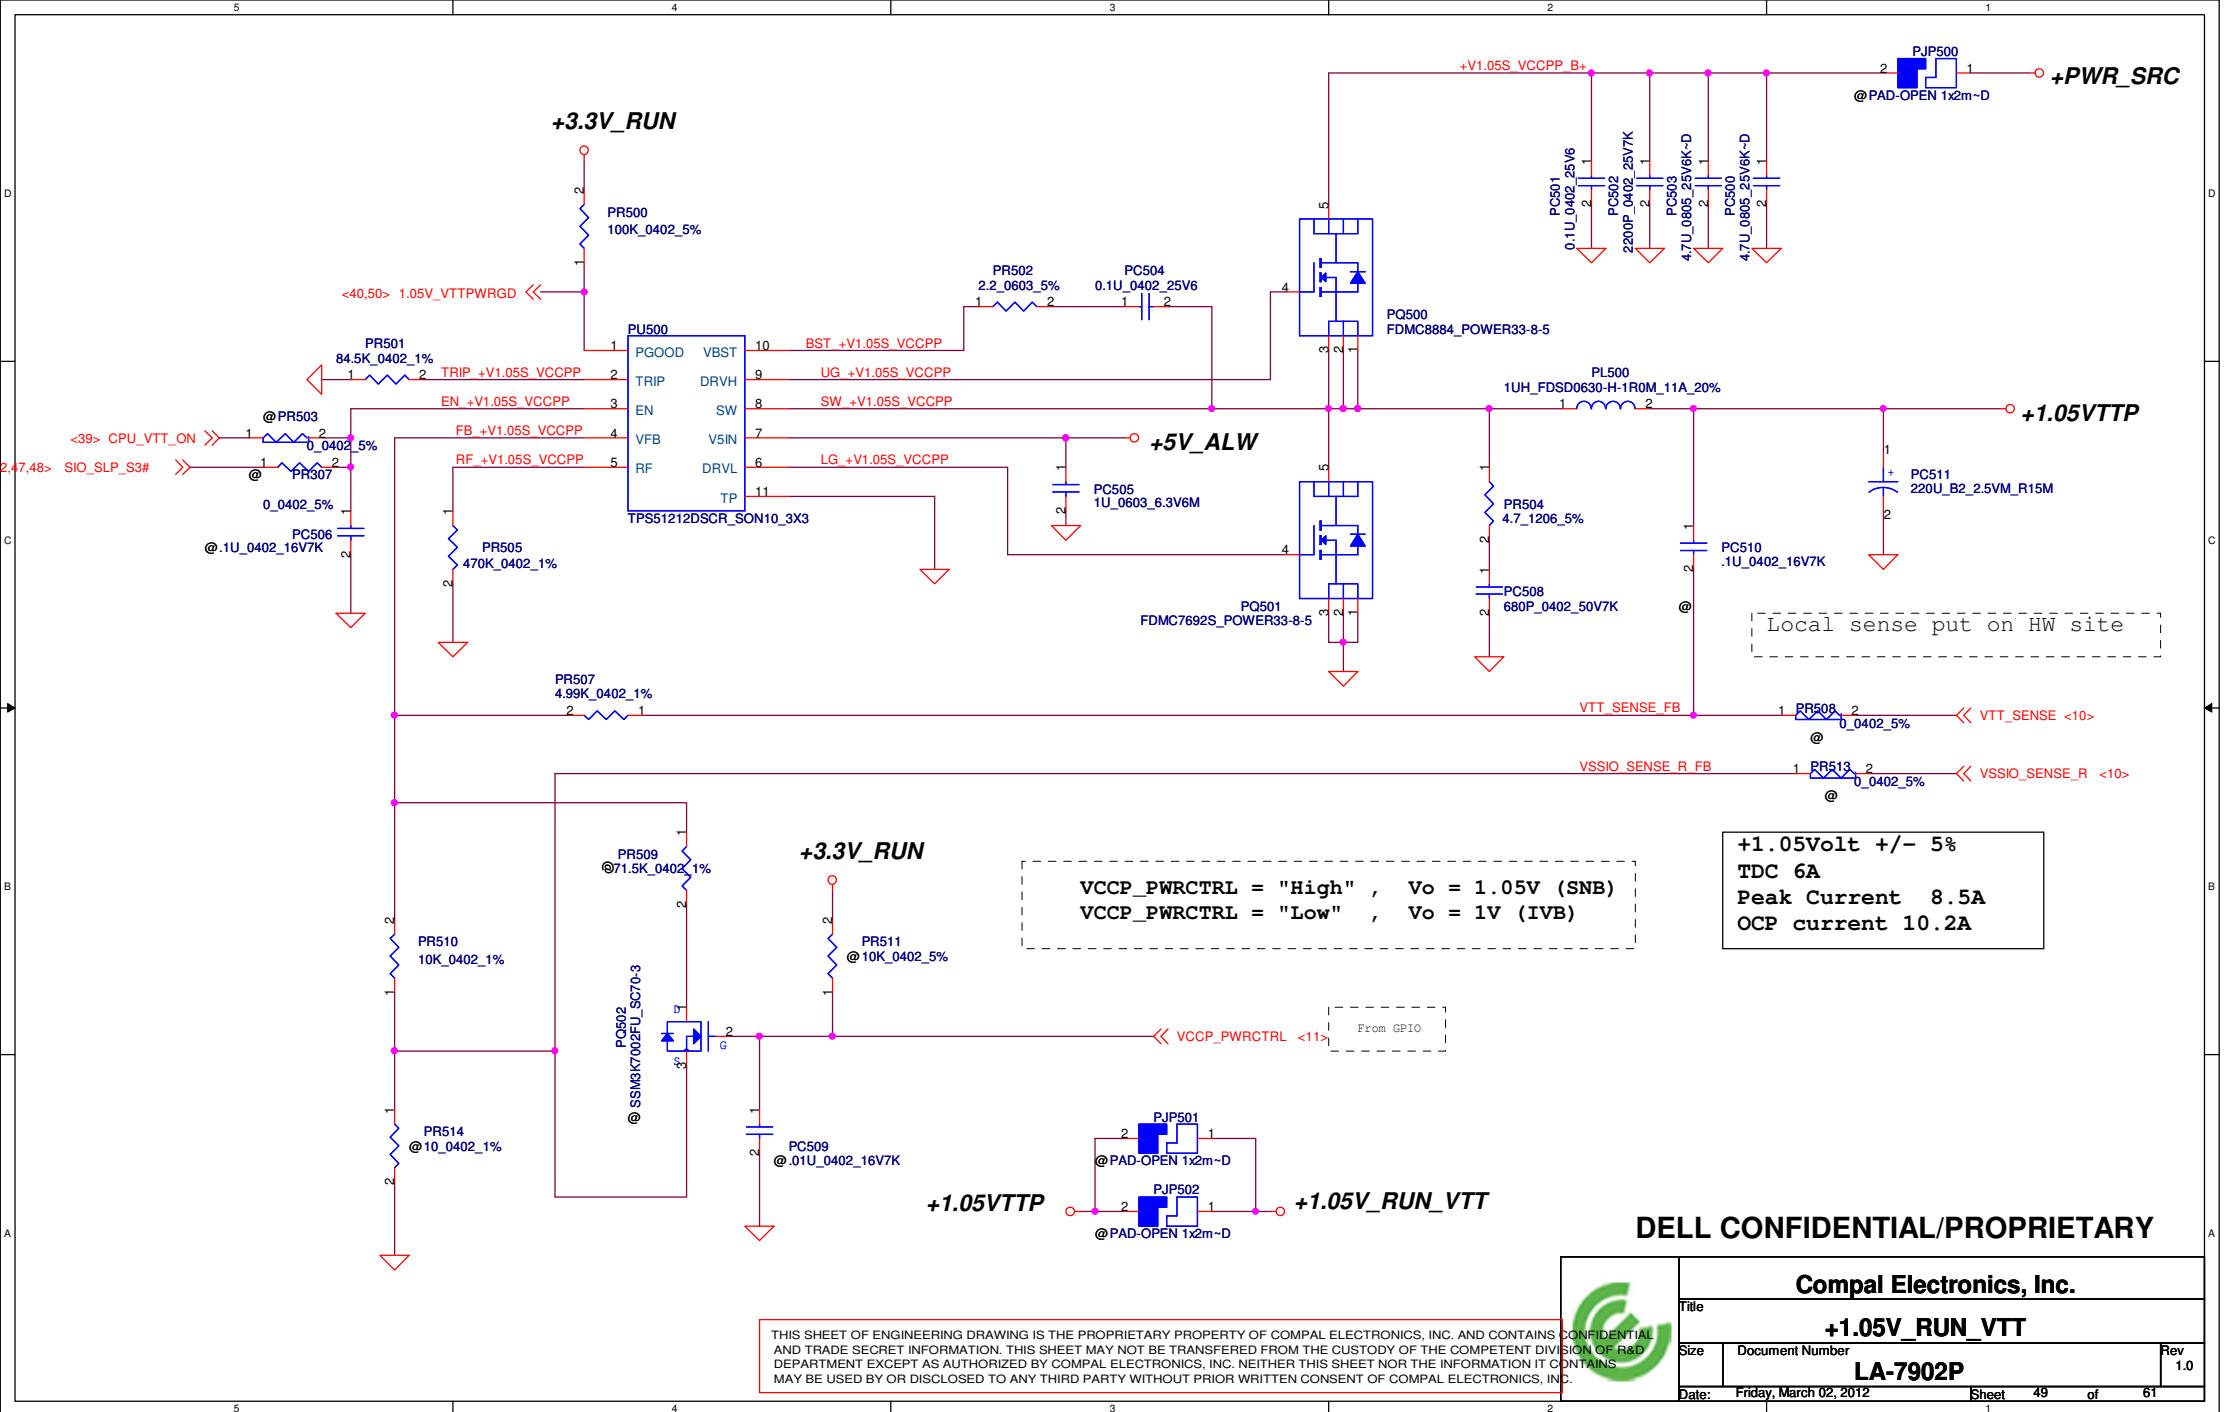

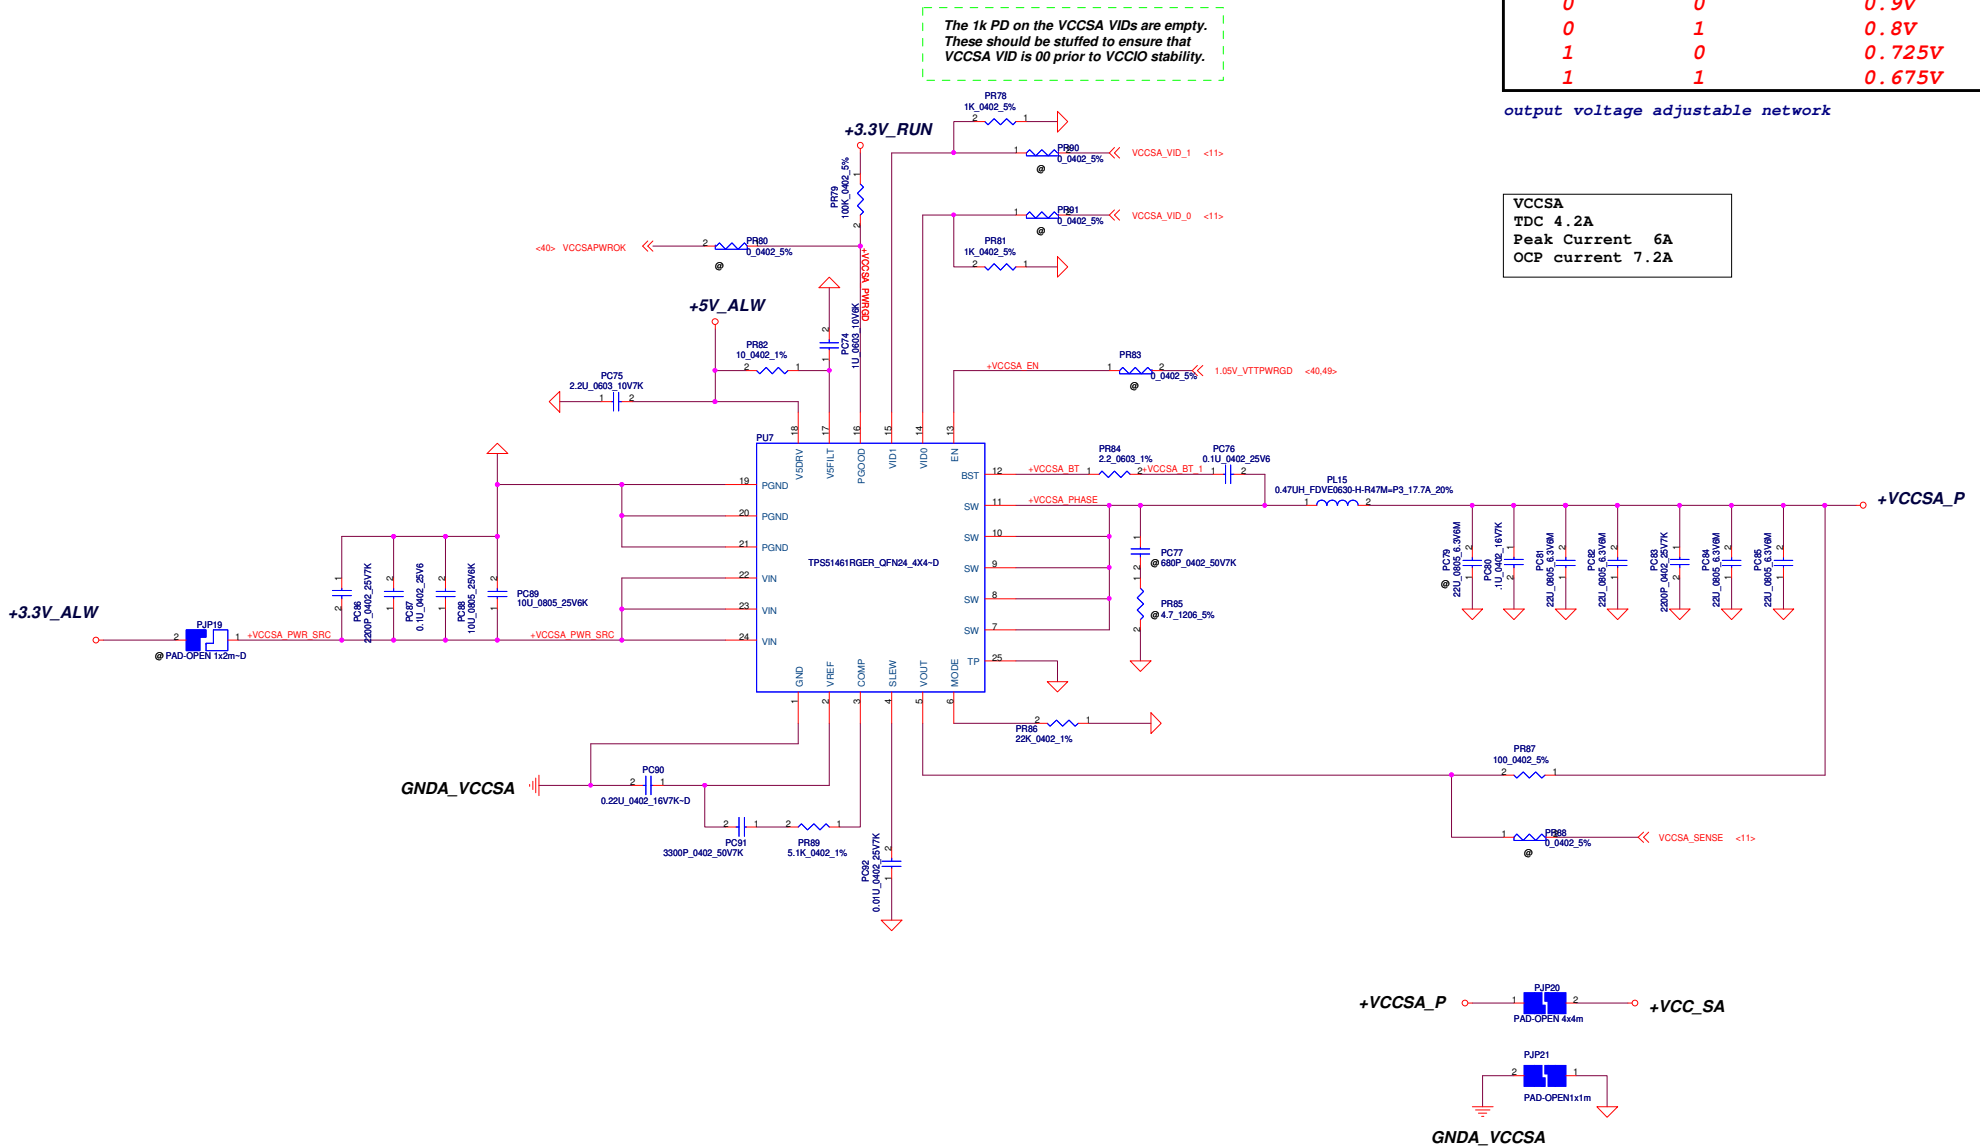




DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.		Title	
+VCC SA		Size	
LA-7902P		Document Number	
Date: Friday, March 02, 2012		Rev 1.0	
Sheet 50		of 61	

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Date: Friday, March 02, 2012 Sheet 51 of 61

ISL88731C 11@
BQ24747 22@

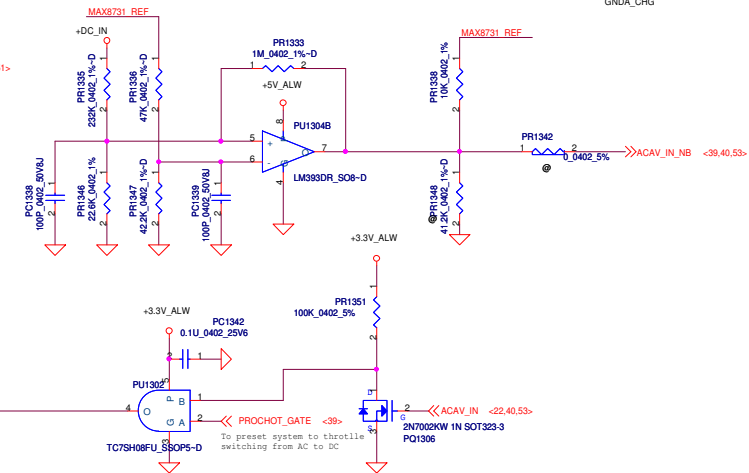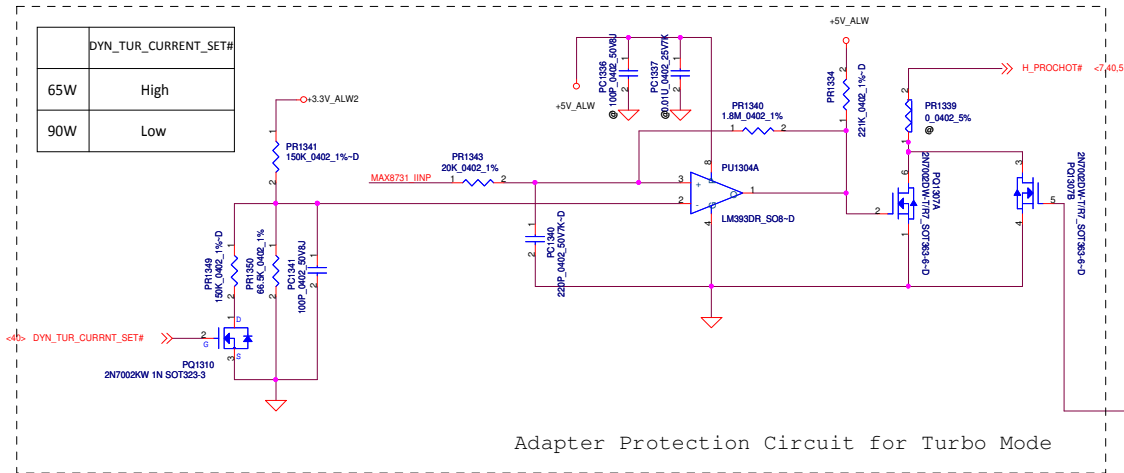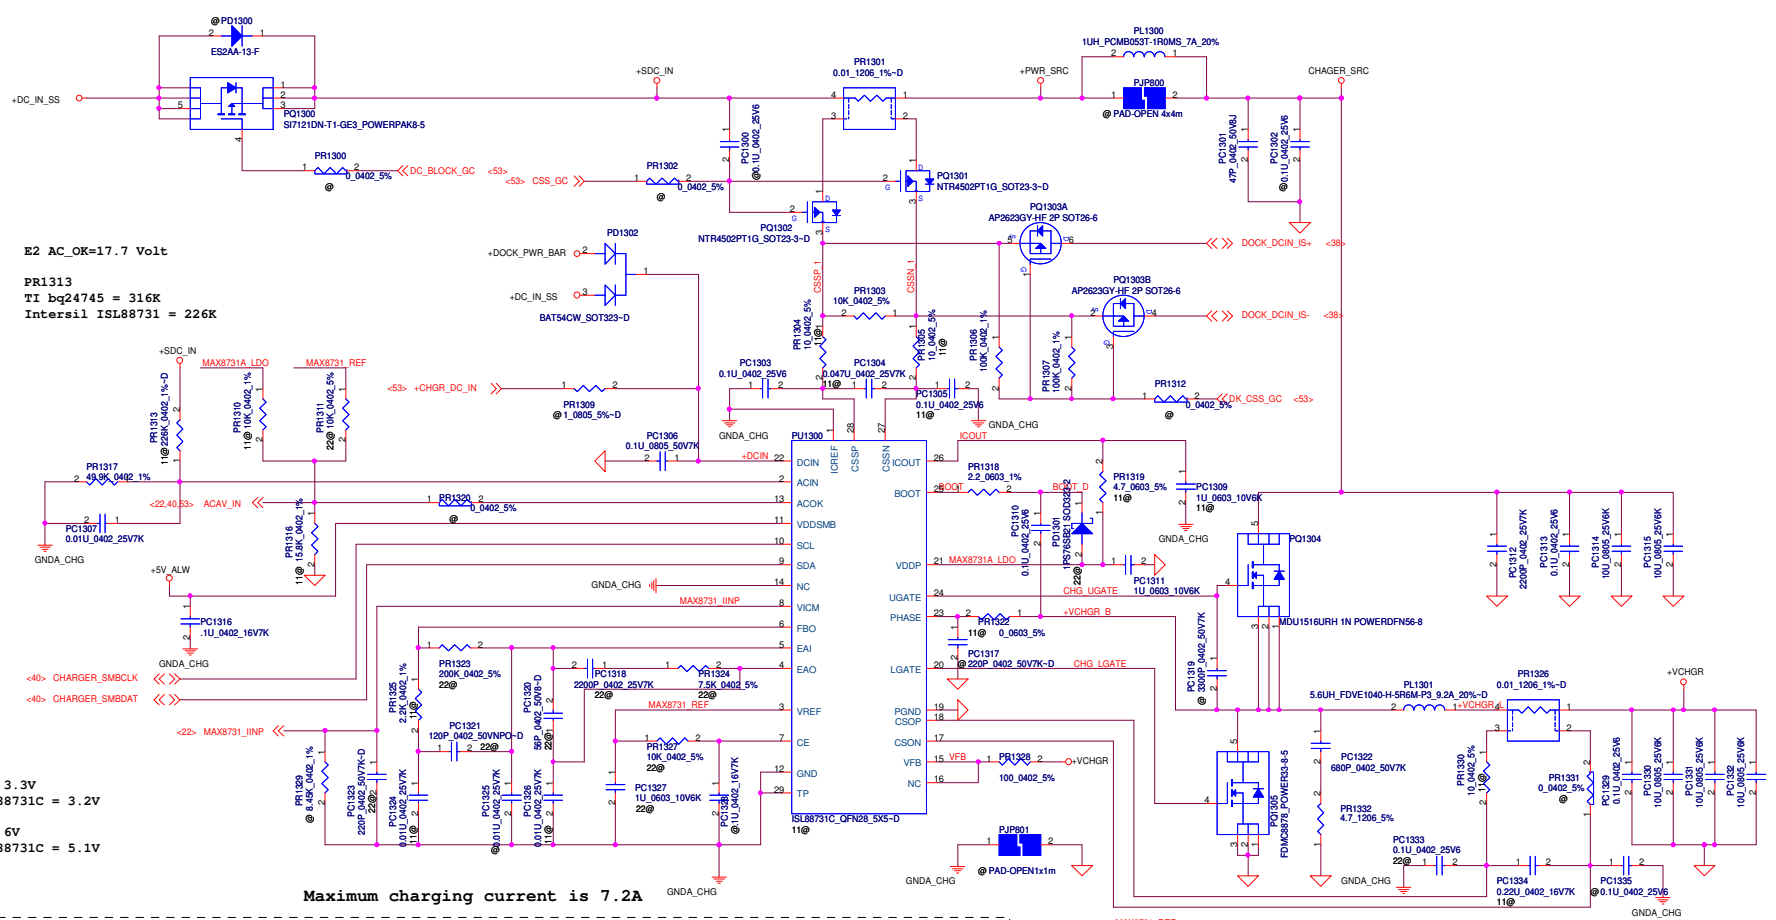


PDI300 22@	PDI313 22@	PDI325 22@	PDI334 22@	PDI330 22@	PDI304 22@	PDI305 22@	PDI304 22@	PDI322 22@
BQ24747	316k_0402_1%	4.7k_0402_1%	0.1U_0402_25V6	0_0402_5%	0_0402_5%	0_0402_5%	0.1U_0402_25V6 1+-5% 0603	

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF COMPAL ELECTRONICS, INC. WITHOUT THE WRITTEN CONSENT OF COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.	
Charger	
LA-7902P	Rev 1.0
Date: Friday, March 02, 2012	Sheet 52 of 61

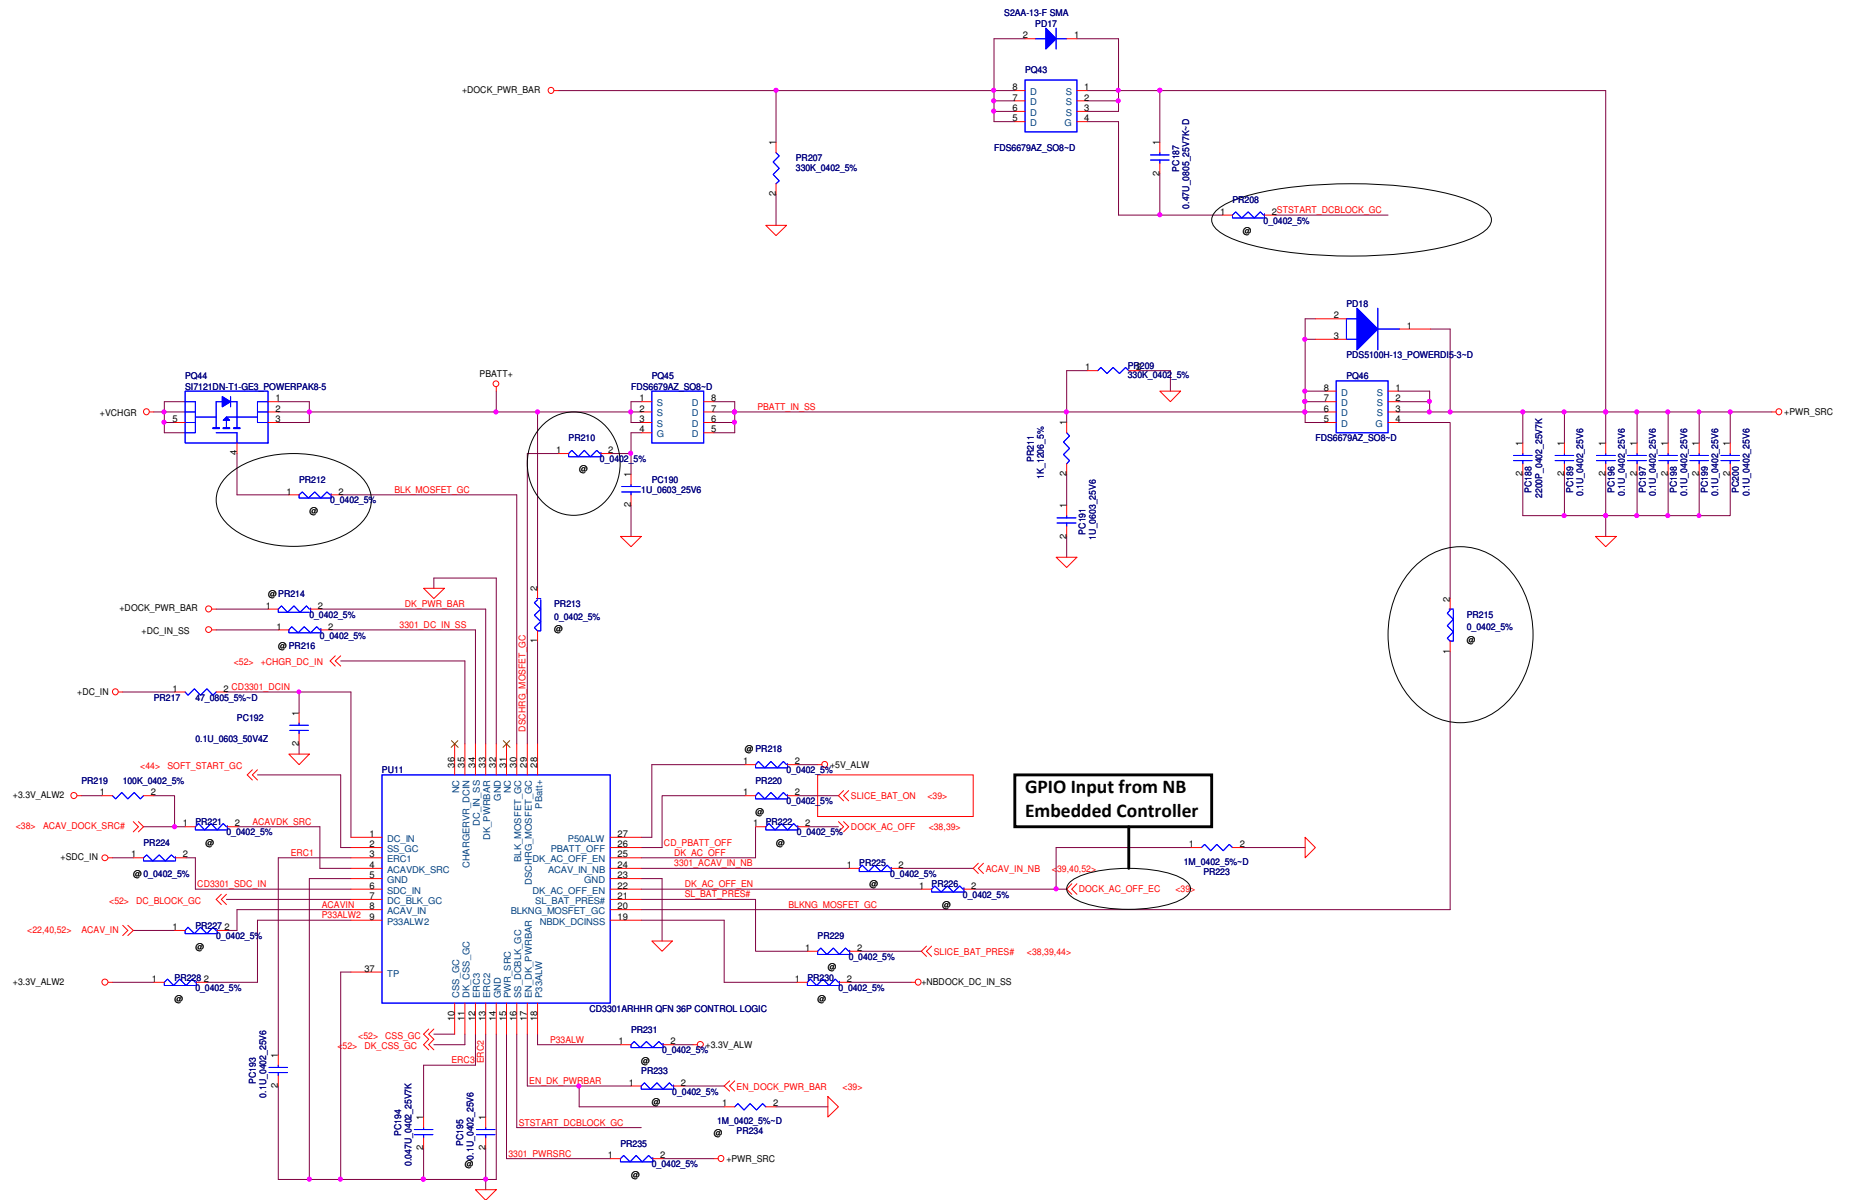

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Selector

LA-7902P

Friday, March 02, 2012 Sheet 53 of 61

Version Change List (P. I. R. List)

Page 1

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	44	Power	8/18	Compal	ME design change.	PJPDC1 change from 7pin to 5pin	X01
2	45	Power	8/18	Compal	Main and 2nd IC common setting.	De-pop PD100,PR113,PR111	X01
3	45 46	Power	8/18	Compal	Prevent Jitter issue.	Add PC120,PC121,PC215 parallel with PR101,PR102,PR207	X01
4	51	Power	8/18	Compal	Prevent output voltage glitch when power up.	PU700 VCCP and VDD change form +5V_RUN to +5V_ALW	X01
5	53	Power	8/18	Dell	Change net name PBATT to SLICE_BAT_ON.	Change net name same as E4.	X01
6	50	Power	8/18	Compal	Reserve 0 ohm resistance for test.	Add PR90, PR91	X01
7	45 52	Power	8/30	Compal	For reduce EMI radiation.	Pop PL100, PL1300	X01
8	54	Power	8/30	Compal	Reserve cap for improve transient response.	Reserve PC1176	X01
9	53	Power	8/30	Compal	For reduce EMI radiation.	Add PC196, PC197, PC198, PC199, PC200	X01
10	54	Power	8/31	Compal	Change to green P/N.	Change PQ4, PC1153, PC1163, PC1164, PC1168, PC1169, PC1170, PC1171, PC1108, PC1109, PC1110, PC1187, PC1173, PC1174, PC1175, PC1157, PC1158, PC179, PQ1310, PQ1306 to green P/N	X01
11	48	Power	9/1	Dell	For support TL+TM	Change 6@ to pop for PC400~PC406, PC408, PL400, PQ400, PQ405, PR400~PR407, PU400. 5@ to @ for PR408.	X01
12	49	Power	9/1	Compal	For fix 1.05V_RUN_VTT on 1.05V	Depop PR509, PR511, PQ502. Change PR507 to 4.99k.	X01
13	51	Power	9/5	Compal	Follow EMI requirement.	Change PL700 to SM01000DJ00	X01
14	45 46	Power	9/6	Compal	Change to green P/N.	Change PC107, PC263, PC280, PC405, PC505 to HF P/N.	X01
15	52	Power	9/13	Compal	For reduce EMI radiation.	Pop PC1400~1404, PC1500~PC1504.	X01

DELL CONFIDENTIAL/PROPRIETARY

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

			
Compal Electronics, Inc.			
Title PWR_PIR 1			
Size	Document Number LA-7902P		Rev 1.0
Date: Friday, March 02, 2012		Sheet 55	of 61

<i>Item</i>	<i>Page#</i>	<i>Title</i>	<i>Date</i>	<i>Request Owner</i>	<i>Issue Description</i>	<i>Solution Description</i>	<i>Rev.</i>
16	51	Power	9/14	Compal	Adjust CPU transient , loadline and OCP	Add PC740 to 0.1uF Change PR750 to 365 ohm Change PR741 to 130K ohm Change PC744 to 3300pF, PR754 to 649ohm.	X01
17	51	Power	9/14	Compal	Adjust AXG transient , loadline and OCP	Change PR703 to 130K ohm Change PC709 to 82nF Change PR702 to 2.74K ohm Change PR711 to 383 ohm	X01
18	52	Power	11/17	Compal	Shortage issue	Change PQ1303 from NTGD416 to AP2623	X02
19	52	Power	11/17	Compal	Need ESD protected	Change PQ1306, PQ1310 from SB57002040L to SB000009Q80	X02
20	53	Power	11/17	Compal	IC version upgrade	Change PU11 from CD3301 to CD3301A	X02
21	45	Power	11/17	Compal	Shortage issue	Change PC110, PC111 from SGA00004E00 to SGA00002N80	X02
22	45	Power	11/17	Compal	EMI request	Pop PC1138, PC1139, PC1149, PC1150	X02
23	44	Power	11/21	Compal	Erp lot6 tier2 Fail issue	PWR_SRC_S control signal change from +3.3V_ALW to PCH_ALW_ON	X02
24	44	Power	12/05	Compal	Prevent COS.	Change PD8 from SCS0340L01L to SCS00005C00 Change PD1301 from SCS00003M0L to SCS0000400L	X02
25	54	Power	12/13	Compal	Prevent COS.	Change PC1176, PC1174, PC1173, PC1187, PC1157, PC1158, PC1165, PC1166 to SGA00002U1L	X02
26	50	Power	12/13	Compal	Improve efficiency	change PR86 to 22K_0402_5%	X02
27	47	Power	12/16	Compal	Prevent COS.	Change PL301 from SH00000MN00 to SH00000MW00	X02

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.		
Title		
PWR_PIR 2		
Size	Document Number	Rev
	LA-7902P	1.0
Date: Friday, March 02, 2012		
Sheet 56 of 61		

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	11	HW	08/25/2011	COMPAL	INTEL review feedback	Add CC178,CC179,CC149,CC150	X01
2	14, 39	HW	08/25/2011	COMPAL	SMSC request to delete LPC_LDRQ0#	Leave LDRQ0# no connection on both of 5048 and PCH side Removed R743	X01
3	22	HW	08/25/2011	COMPAL	Removed reserve circuit for EMC4022	Removed R405,C280,R392,R394	X01
4	42	HW	08/25/2011	COMPAL	Load SW sources output rising time mismatch and COS. cost concern	Change back to E3 +3.3V/5V_RUN discrete solution Removed U78 and add Q55,Q61 circuit	X01
5	29	HW	08/25/2011	COMPAL	Codec is change to 92HD93	Pop R162~R166 and de-pop U73,R1540	X01
6	29	HW	08/25/2011	COMPAL	Reserve so lay with ALC290	Pop option for 92HD93/ALC290=>R1646/C1164; R1644/R1643; C965/R1642; Q107/R171 Reserve for ALC290 only: C1204, C1205, R1647, C1165, R1648 Reserve for 92HD93 only: R1645, C963 Add R174 depop and R175 pop	X01
7	20	HW	08/25/2011	COMPAL	Vgs less than cut-in voltage in battery mode	Add control circuit QH6,R279,CH107 for +5V_ALW_PCH	X01
8	27, 28	HW	08/25/2011	COMPAL	Vgs of 5V MOS maybe large than max rating	Add R517, R518	X01
9	11	HW	08/25/2011	COMPAL	Follow INTEL PDDG 0.8	De-pop RC140	X01
10	40	HW	08/25/2011	COMPAL	Change board ID to X01	Change R875 to 130Kohms	X01
11	34	HW	08/25/2011	COMPAL	PCH GPIO52 need 8.2~10K pull up +3.3VS	Change R695 from 100K to 10Kohms	X01
12	23	HW	08/25/2011	COMPAL	CRT SW 2nd source TI, TS3V713 pin29 is VDD	Connect U18 pin29 to +3.3V_RUN	X01
13	16	HW	08/25/2011	COMPAL	+1.05V_M turn off before APWROK de-assert	Add UH5,CH108 6@ circuit reserve for VPRO	X01
14	41	HW	08/25/2011	COMPAL	Reset IC threshold voltage issue	Change U4 to RT9801A (threshold adjustable) Add R1649~R1654;Reserve R1655 and pop R1623	X01
15	26	HW	08/25/2011	COMPAL	DPX_CA_DET voltage too low through dongle	Change U21 and U24 to SA000055G0L	X01
16	17, 18	HW	08/25/2011	COMPAL	Request from INTEL review feedback	Pop RH332 for PCH_GPIO3 and RH180 for GPIO27	X01
17	42	HW	08/25/2011	COMPAL	Material changed	Power team request Q59 change to SB00000L80L	X01
18	43	HW	08/25/2011	COMPAL	White light LED brightness is abnormal	Change R934, R938, R939, R949, R958, R957 and R959 to 1.2 Kohms	X01
19	40	HW	08/25/2011	COMPAL	Reserve C1208 for ESD backup plan	Reserve C1208 for ESD backup plan	X01
20	11	HW	08/25/2011	COMPAL	S3 can't resume issue	Control 1.5V_VDDQ by EC. Pop RC79 and de-pop RC82	X01
21	17	HW	08/25/2011	COMPAL	INTEL review feedback	Change RH331,RH272 to 10K ohm	X01

DELL CONFIDENTIAL/PROPRIETARY



Compal Electronics, Inc.			
Title	HW_PIR 1		
Size	Document Number	Rev	
	LA-7901P	1.0	
Date:	Friday, March 02, 2012	Sheet	57 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
22	34	HW	08/25/2011	COMPAL	WWAN card request	JMINI1 pin 1 connect to PCIE_WAKE#	X01
23	14	HW	08/25/2011	COMPAL	ROM size changed	Change U52 to 8M and R936,R895,R897,R900 to 6@	X01
24	11	HW	08/25/2011	COMPAL	Material package changed	Change CC161~CC166 from 0402 to 0603	X01
25	42	HW	08/25/2011	COMPAL	BOM changed	Change Q60 to 6@	X01
26	39	HW	08/25/2011	COMPAL	GPIO signal name changed same as E/P	Change PBATT_OFF to SLICE_BAT_ON	X01
27	34	HW	08/25/2011	COMPAL	Material package changed	Changed C615 to SF000002000	X01
28	30	HW	08/26/2011	COMPAL	LAN EA result	Changed RL23 to 1.2K Ohm.	X01
29	40	HW	08/26/2011	COMPAL	Backdrive issue	Depop R1169,R1197,R118 due to it has internal pull high.	X01
30	37	HW	08/29/2011	COMPAL	To avoid power short to GND	NC Pin 15 for JAUD1	X01
31	37	HW	08/30/2011	COMPAL	Follow connector list	Swap JAUD1 pin.	X01
32	12	HW	08/30/2011	COMPAL	Change part to HF part	Change QD1, QD2 part number to SB501380050 (for HF)	X01
33	15	HW	09/01/2011	COMPAL	For clock EA	Change RH311 and RH314 to 10 ohm	X01
34	43	HW	09/01/2011	COMPAL	ME drawing update	Add H19	X01
35	14, 16 19, 22 30, 40 42	HW	09/01/2011	COMPAL	BOM option change for TL	Change U53,R936,R895,R897,R900,RH350,UH5,CH108,RH116 RH202,R385,R426,R402,Q63,R931,Q58,Q60 R916,RL46,R871 to pop Change RH359,RH321,RH119,RH204,R430,R386,R408 ,R206,RL47,R877,to depop	X01
36	25	HW	09/02/2011	COMPAL	Due to EMI HDMI test Fail, add EMI solution	Change resistor to Inductor Change R451, R459, R462, R466, R468, R469, R470, R471 to 9nH L99, L100, L101, L102, L103, L104, L105, L106. Add C1209, C1210, C1211, C1212, C1213, C1214, C1215 and C1216 between Inductor and HDMI connector	X01
37	37	HW	09/05/2011	COMPAL	ME connector list change	Change JAU1 to 50271-0020N-001	X01
38	37	HW	09/06/2011	COMPAL	EMI issue	Add L107 & R1656,R1657	X01
39	15,30	HW	09/06/2011	COMPAL	Follow LL to reserve SM bus for BRCM LAN	Add QH8,RL50,RL51	X01
40	36	HW	09/08/2011	COMPAL	Follow Intel design guide	Change C412~C415 to 0.1uF for USB3.0 signal	X01
41	7	HW	09/08/2011	COMPAL	Follow ESD recommand.	Reserve CC1141~CC144 for ESD	X01
42	14,15,40	HW	09/08/2011	COMPAL	Crystal EA result	Change CH2,CH3 to 18pF Change C741,C743 to 39pF Change CH18,CH19 to 10pF Change CL5,CL6=33pF,RL22=510 ohm	X01

DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

HW_PIR 2

LA-7901P

Date: Friday, March 02, 2012

Sheet 58 of 61

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
43	29	HW	09/13/2011	COMPAL	Follow IDT recomment	Swap R169~R172,C973~C976 connection	X01
44	42	HW	09/13/2011	COMPAL	Change Q55,Q61 part for open soldering issue.	Change Q55,Q61 from DMN3030LSS-13 to AO4478L	X01
45	40	HW	10/13/2011	COMPAL	Change board ID to X02	Change R875 to 62Kohm	X02
46	42	HW	10/13/2011	COMPAL	Rated Vgs of Q61 is 25V	De-pop R1627	X02
47	39	HW	10/13/2011	COMPAL	SMSC change 5048 pin A23 to GPIOI0	Re-link ECE 5048 symbol	X02
48	40	HW	10/13/2011	COMPAL	SMSC review feedback	Reserve R1658 and R1659 100Kohms to GND for I2S disabled	X02
49	41	HW	10/13/2011	COMPAL	Change reset IC to RT9818A-44GU3	Update U4 symbol and add R1629 for backup of inrush prevention. Change RSMRST# pull up with 100Koms. Pop R1655 and de-pop R1623.Delete R1649~R1654	X02
50	39	HW	10/13/2011	COMPAL	When suspend/resume cycles, wireless SW GPIO IRQs keeps giving	Change pull up rail to +3.3V_ALW for WIRELESS_ON#/OFF	X02
51	29	HW	10/13/2011	COMPAL	15" UMA speaker no sound issue	Pop snubber on speaker trace with C: 2200pF and R: 3.3ohms. Change bead rated current from 200mA to 2A.	X02
52	29	HW	10/13/2011	COMPAL	EMI request	Pop C981,C982,C983,C985,C986,C987	X02
53	27	HW	10/13/2011	COMPAL	Depop HDD control power circuit for cost down.	Depop R1624,Q28,R500,R499,R617,C393	X02
54	30	HW	10/18/2011	COMPAL	Crystal EA result	Change YL1 to 3G025000FA1H, CL5,CL6 to 12pF.RL22 to 200 ohm.	X02
55	All	HW	10/18/2011	COMPAL	For cost saving.	Change 0 ohm to R-short.	X02
56	42	HW	10/26/2011	COMPAL	1V leakage on 3.3V_RUN during system boot	Pop Q69 and R929	X02
57	42	HW	10/26/2011	COMPAL	Inrush current with Smart Card detect fail issue	change C763 and C766 to 2200p	X02
58	43	HW	10/27/2011	COMPAL	LED Conn PIN definition change	JLED1 PIN define change	X02
59	37	HW	10/27/2011	COMPAL	Remove 2pin connector for Audio performance	Remove JAG1 2 pin connector.	X02
60	42	HW	11/01/2011	COMPAL	Change MOSFET to wihtout Schottky Diode for +1.5V_RUN leakage issue	change QC3, Q59 as AO4304L from AO4728L	X02
61	14	HW	11/15/2011	COMPAL	RTC issue	change CH2, CH3 to 15pF	X02
62	14	HW	11/15/2011	COMPAL	S5 power consumption over spec.	depop RH288	X02



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title

HW_PIR 3

Size

Document Number

LA-7901P

Date:

Friday, March 02, 2012

Sheet

59

of

61

Rev

1.0

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION, NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
63	34	HW	11/29/2011	COMPAL	S3 had leakage in +3/5V_RUN	De-pop R725, remove R695 and add +3.3V_RUN pull high at PCH side(RH361)	X02
64	32	HW	11/29/2011	COMPAL	TPM is changed to AT97SC3204-X2A18-AB	U39(TPM) is changed to SA00004WQ10 (AT97SC3204-X2A18-AB) for WIN8 support	X02
65	32	HW	11/29/2011	COMPAL	+3.3V_RUN Giltch when AC plugin	Add D87, R1662 and R1663 (pull high to +3.3V_RUN_TPM) for HW solution backup	X02
66	14~21	HW	11/29/2011	COMPAL	Change PCH to C1 version	Change UH4 to SA00005AG1L(HM77 for non vpro)	X02
67		HW	11/29/2011	COMPAL	Change RC value at Gate of MOS Load SW to modify power rail soft start timing	RC72 from 100K to 330K; RC143 form 330K to 1M; CC136 form 0.1u to 0.022u R412 from 100K to 470K; R1632 form 1M to 4.7M; C293 form 0.1u to 0.022u R507 from 100K to 470K; R517 form 1M to 4.7M; C400 form 0.1u to 0.022u R722 from 100K to 470K; R1625 form 1M to 4.7M; C644 form 4700p to 220p R729 from 100K to 470K; R1628 form 1M to 4.7M; C650 form 4700p to 220p R917 from 100K to 470K; R1617 form 1M to 4.7M; C770 form 4700p to 220p R920 from 100K to 470K; R1610 form 470K to 2.2M; C771 form 4700p to 470p R930 from 100K to 330K; R1611 form 470K to 1M; C773 form 2200p to 100p R906 from 100K to 470K; C763 form 2200p to 220p R912 from 100K to 470K; C766 form 470p to 220p	X02
68	36	HW	12/01/2011	COMPAL	Change P/N for HF	Change C412~C415 P/N to SE076104K8L	X02
69	35	HW	12/01/2011	COMPAL	Reserve 0.1uF CAP to GND for ESD request	reserve CE14, CE20, CE22, CC151, CC152, CC153 to GND	X02
70	19	HW	12/05/2011	COMPAL	Change LH1 from bead to Inductor for CRT	Change LH1 to 1uH Inductor(SHI00007W0L)	X02
71	17,38	HW	12/07/2011	COMPAL	EMI solution for E-Docking USB port	Swap USB Port7 and Port8 and reserve a choke(L108) at E-Docking side: Port7 from NA to E-docking Port8 from E-Docking to NA	X02
72	24,32,37	HW	12/07/2011	COMPAL	Change USB9,12,13 CMC to 180ohm for EMI request	Change L10,L52,L107 to SM070002X00(OCF2012181YZF)	X02
73	37	HW	12/08/2011	COMPAL	Follow CONN List_1130A Change JAUD1 to ACES_51522-0200N-P01	Change JAUD1 to ACES_51522-0200N-P01	X02
74	22	HW	12/09/2011	COMPAL	Thermal requests to change OTP from 88 to 92	Change R406 from 953ohm to 1.24Kohm	X02
75	41	HW	12/09/2011	COMPAL	To prevent inrush current at reset IC input	Change R1629 from 0ohms to 33ohms resistor	X02
76	19	HW	12/09/2011	COMPAL	For CRT issue	Change CH36 from 10uF to 22uF	X02
77	25	HW	12/13/2011	COMPAL	Change HDMI R,C value for EMI request	Change R448,R449,R450,R452,R453,R454,R455,R456 from 680ohm to 604ohm; C1209~C1216 from 4.7pF to 3.9pF	X02
78	42	HW	12/15/2011	COMPAL	+3.3V_SUS sequence timing	R911 from 100K to 470K; R1618 from 1M to 4.7M; C767 from 4700p to 220p	X02
79	43	HW	12/15/2011	COMPAL	Change current limit resistors of LED	R934 from 1.2K to 820, R957 from 1.2K to 1K, R951 from 330 to 270, R949 from 1.2K to 910,	X02



Compal Electronics, Inc.

HW PIR 4

Size	Document Number	Rev
------	-----------------	-----

	LA-7901P	1.0
--	-----------------	-----

Date: Friday, March 02, 2012 Sheet 60 of 61

Item	Page#	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
80	34	HW	01/04/2012	COMPAL	Change RC25 value for ESD	Change RC25 from 0ohm to 1kohm(ST MEMO)	A00
81	40	HW	01/17/2012	COMPAL	SMSC creates a new catalog part number and IC marking for the MEC5055	Change U51 P/N to SA00003TZ2L	A00
82	43	HW	02/20/2012	COMPAL	Change current limit resistors of LED	Change R938 to 1.1k ohm, R958 to 560 ohm, R953 to 130 ohm, R951 to 470 ohm, change R939, R959, R957, R934, R949 to 1.2k ohm	A00
83	38	HW	02/24/2012	COMPAL	Dalmore14 UMA hang on white screen issue when attached AC+media battery after hot dock.	Change R755 from 100k ohm to 10k ohm	A00
84	40	HW	02/24/2012	COMPAL	Change board ID to A00	Change R875 to 33K ohm	A00
85	33	HW	02/24/2012	COMPAL	Change SD CLK damping resistor for EMI request	Change R676 from 33 ohm to 10 ohm	A00
86	32	HW	02/24/2012	COMPAL	Change BOM option for TPM/TCM funtion	Change C550,C551,C552,C553,R659,R660,R1662,RH311 BOM option to 5@	A00
87	25	HW	03/03/2012	COMPAL	SMT request to change F2 footprint	For DFX concern of F2 2nd source, SP040003H0L, change F2 footprint to F_MF-MSMF050-2	A00
88	14~21,30	HW	03/03/2012	COMPAL	Change PCH P/N for X-build	UH4 is changed to SA00005AG3L	A00
89	14	HW	03/03/2012	COMPAL	De-pop resistor on PCH JTAG for power saving	De-pop RH288, RH47, RH48 and RH49	A00

PROPRIETARY NOTE: THIS SHEET OF ENGINEERING DRAWING AND SPECIFICATIONS CONTAINS CONFIDENTIAL
 TRADE SECRET AND OTHER PROPRIETARY INFORMATION OF DELL INC. ("DELL") THIS DOCUMENT MAY NOT
 BE TRANSFERRED OR COPIED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF DELL. IN ADDITION,
 NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD
 PARTY WITHOUT DELL'S EXPRESS WRITTEN CONSENT.



DELL CONFIDENTIAL/PROPRIETARY

Compal Electronics, Inc.

Title **HW_PIR 5**

Size Document Number **LA-7901P** Rev 1.0

Date: **Saturday, March 03, 2012** Sheet **61** of **61**

www.s-manuals.com