



DUAL BAND Mobile Cellular Phone SGH-T400

SERVICE Manual

DUAL BAND MOBILE CELLULAR PHONE



CONTENTS

1. Exploded Views and Parts List
2. PCB Diagrams
3. Electrical Parts List
4. Block Diagrams
5. Flow Chart of Troubleshooting and Circuit Diagrams

1. Exploded Views and Parts List

- 1-1 Main
- 1-2 Main Parts List
- 1-3 Travel Adapter
- 1-4 Travel Adapter Parts List
- 1-5 Ciger Light Adapter
- 1-6 Ciger Light Adapter Parts List
- 1-7 Test Jig
- 1-8 EAR Microphone
- 1-9 Data Kit
- 1-10 Battery Charger

2. PCB Diagrams

- 2-1 Main Top
- 2-2 Main Bottom

3. Electrical Parts List

- 3-1 Main Parts List Top
- 3-2 Main Parts List Bottom

4. Block Diagrams


- 4-1 Main Baseband
- 4-2 Main RF
 - 4-2-1 RF Transmit Part
 - 4-2-2 RF Receive Part

5. Flow Chart of Troubleshooting and Circuit Diagrams

- 5-1 Power ON
- 5-2 Initial
- 5-3 Charging Part
- 5-4 Sim Part
- 5-5 Microphone Part
- 5-6 Speaker Part
- 5-7 Key Data Input
- 5-8 Alert Tone
- 5-9 Ring Indicator
- 5-10 Back Light
- 5-11 GSM Receiver
- 5-12 GSM Transmitter
- 5-13 DCS Receiver
- 5-14 DCS Transmitter

1. SGH-T400 Exploded Views and Parts List


1-1 Main

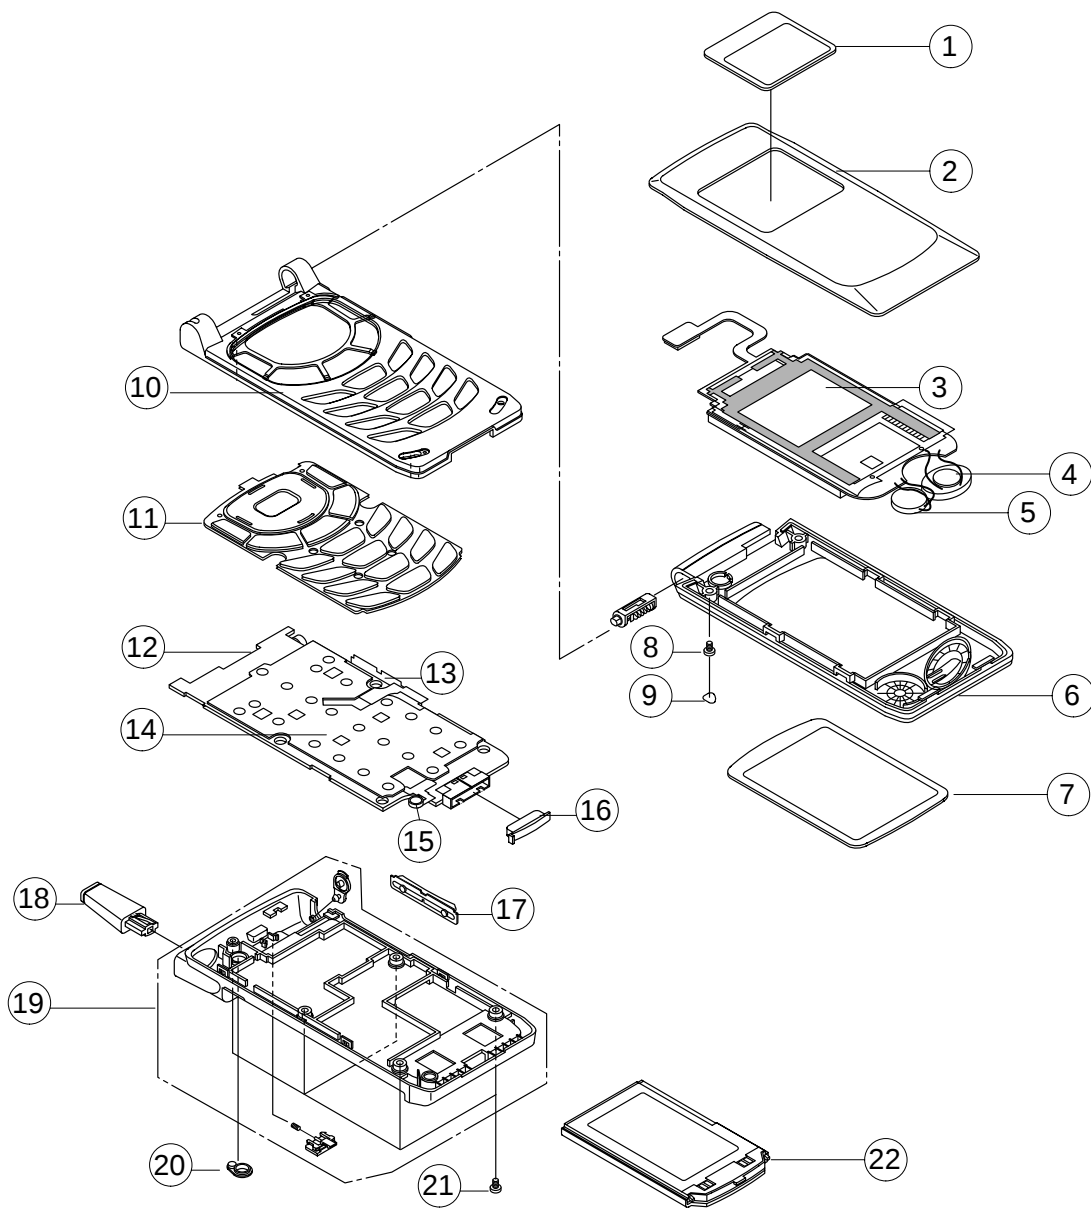

1-2 Main Parts List

Location No.		Description	SEC CODE	Remark
1		DUAL WINDOW LCD	GH72-05005A	
2		FOLDER UPPER	GH75-02368A	
3		LCD	GH96-01231A	
4		SPEAKER	3001-001360	
5		MOTOR	3101-001294	
6		FOLDER LOWER	GH75-02369A	
7		WINDOW LCD	GH72-05004A	
8		SCREW	6001-001429	
9		SCREW CAP	GH74-03025A	
10		FRONT COVER	GH75-02367A	
11		KEYPAD	GH75-02371A	
12		MAIN PBA	GH92-01367A	
13		VOLKEY F-PCB	GH59-00593A	
14		DOMESHEET	GH59-00598A	
15		MIC	GH59-00611A	
16		CONNECTOR COVER	GH73-01331A	
17		SIDE KEY	GH75-02372A	
18		ANTENNA	GH42-00236A	
19		REAR COVER	GH75-02370A	
20		RF/COVER	GH73-01332A	
21		SCREW	6001-001479	
22		BATTERY	GH43-00662A	


1-3 Travel Adapter

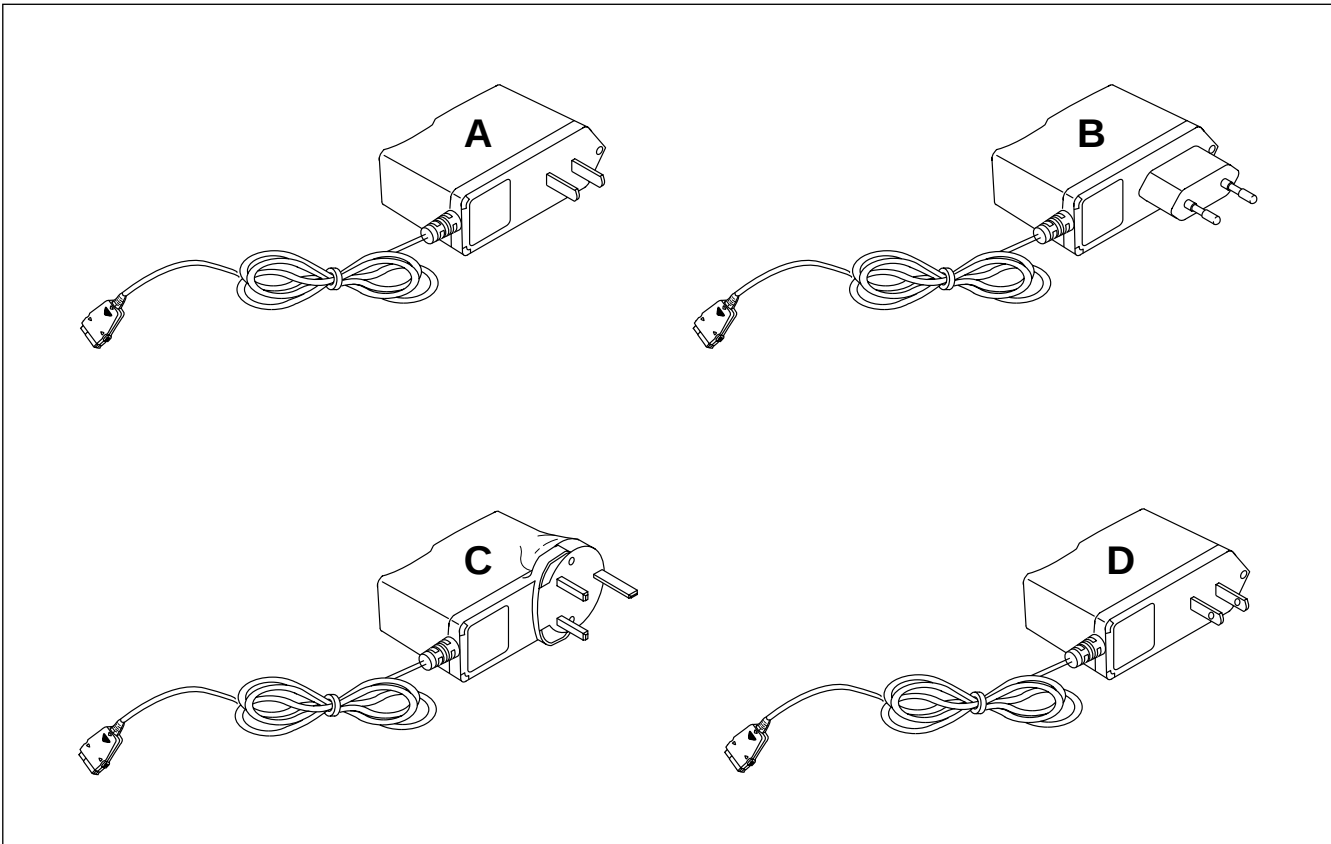

1-4 Travel Adapter Parts List

TYPE	SEC CODE	REMARK
A	GH44-00171A	CHINA
B	GH44-00184A	EUROPE
C	GH44-00171C	UNITED KINGDOM
D	Gh44-00171E	TAIWAN




1-5 Ciger Light Adapter

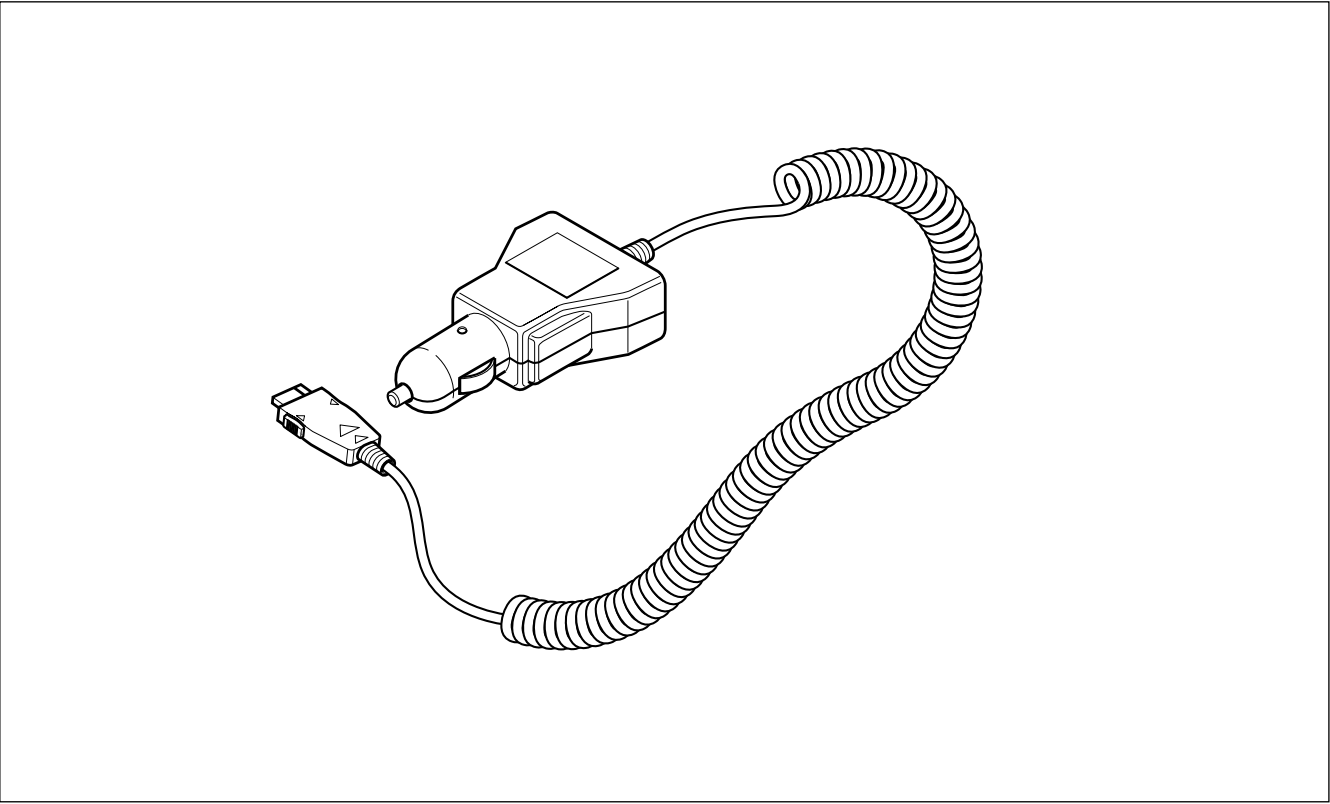


1-6 Ciger Light Adapter Parts List

DESCRIPTION	SEC CODE	REMARK
Ciger Light Adapter Code	GH44-00170A	BLACK


1-7 Test Jig

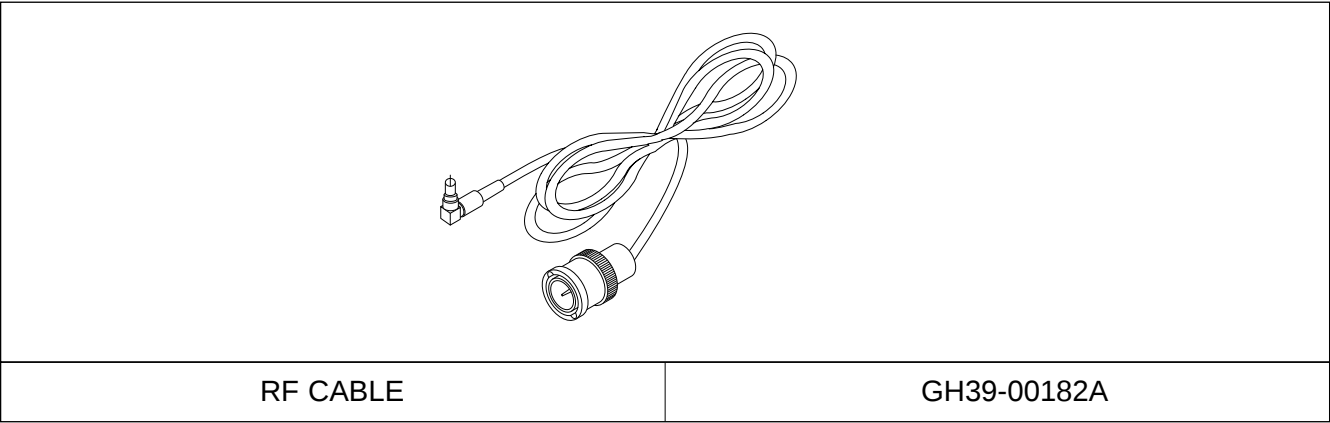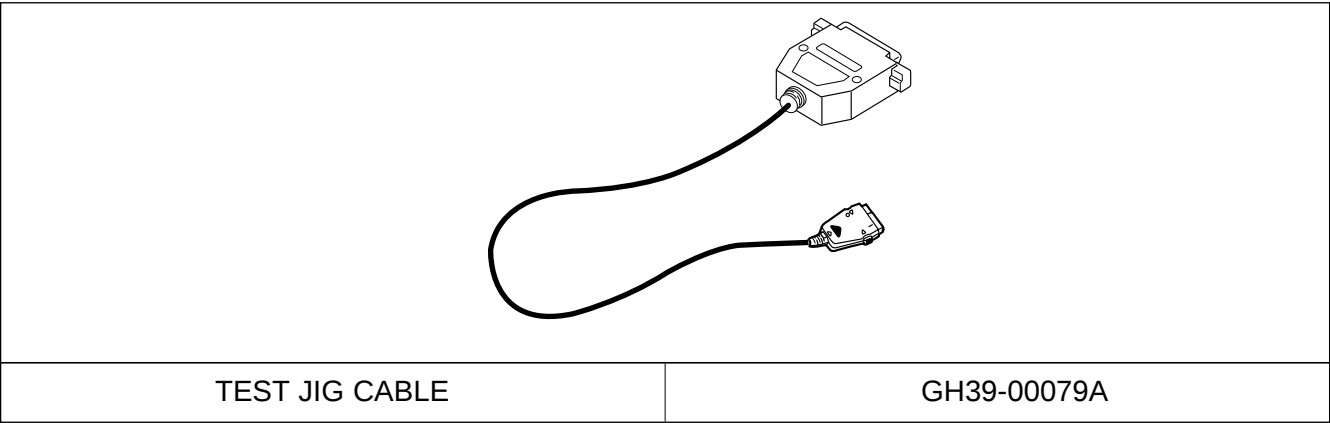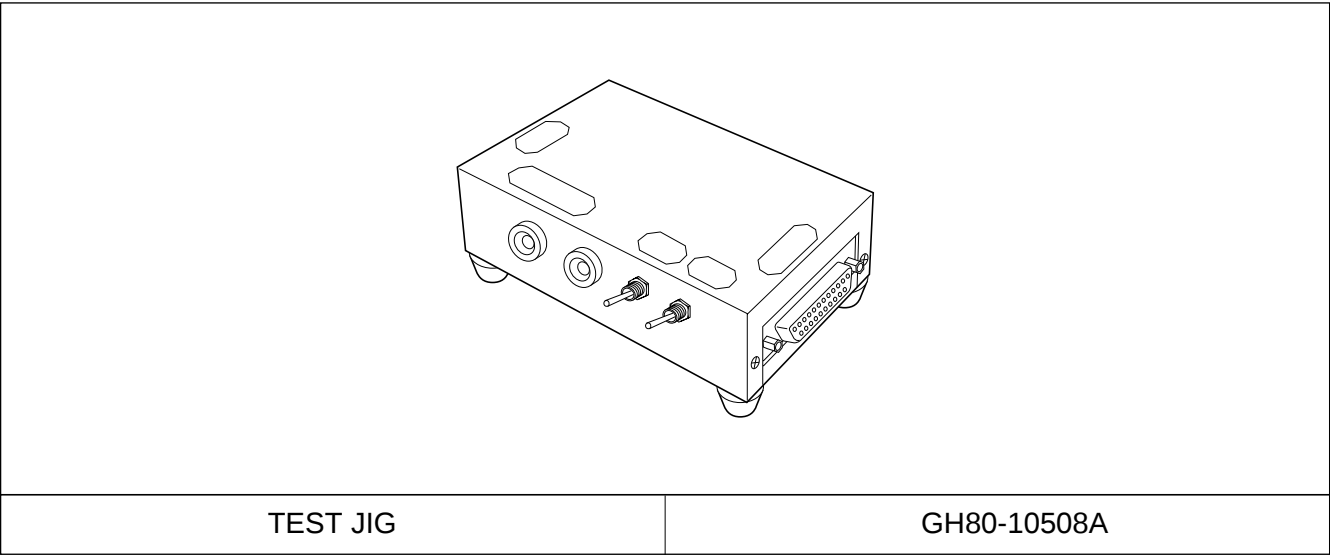

1-7-1 Test Jig

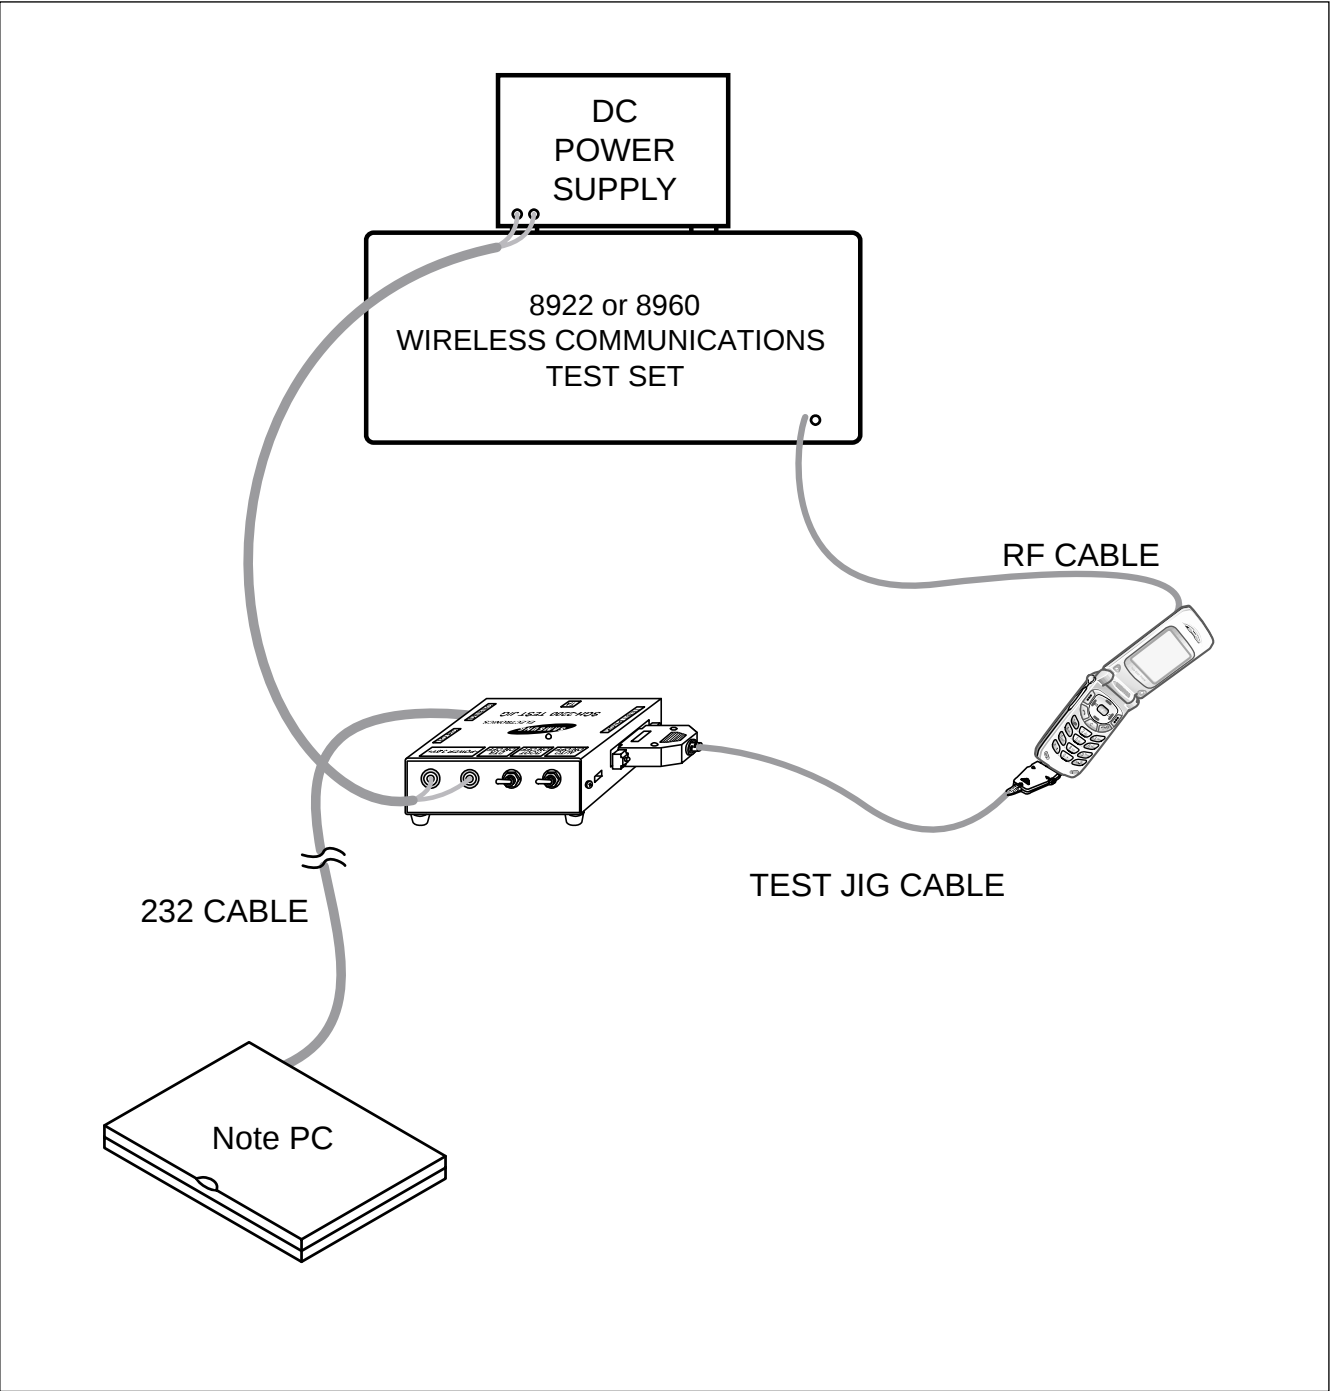


1-8 Wearable EAR Microphone

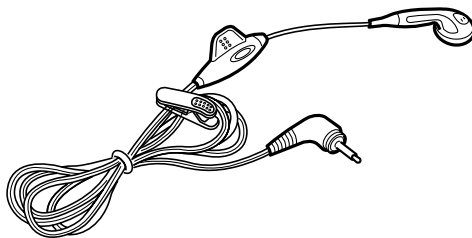

Wearable EAR Microphone

GH59-00394B


1-9 Data Kit

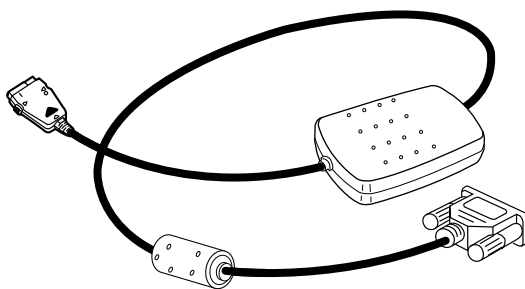

DATA KIT

GH39-00143B

1-10 Battery Charger

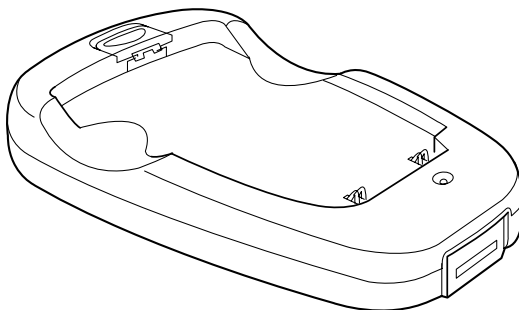


BATTERY CHARGER


GH44-00279A

2. PCB Diagrams

2-1 Main Top

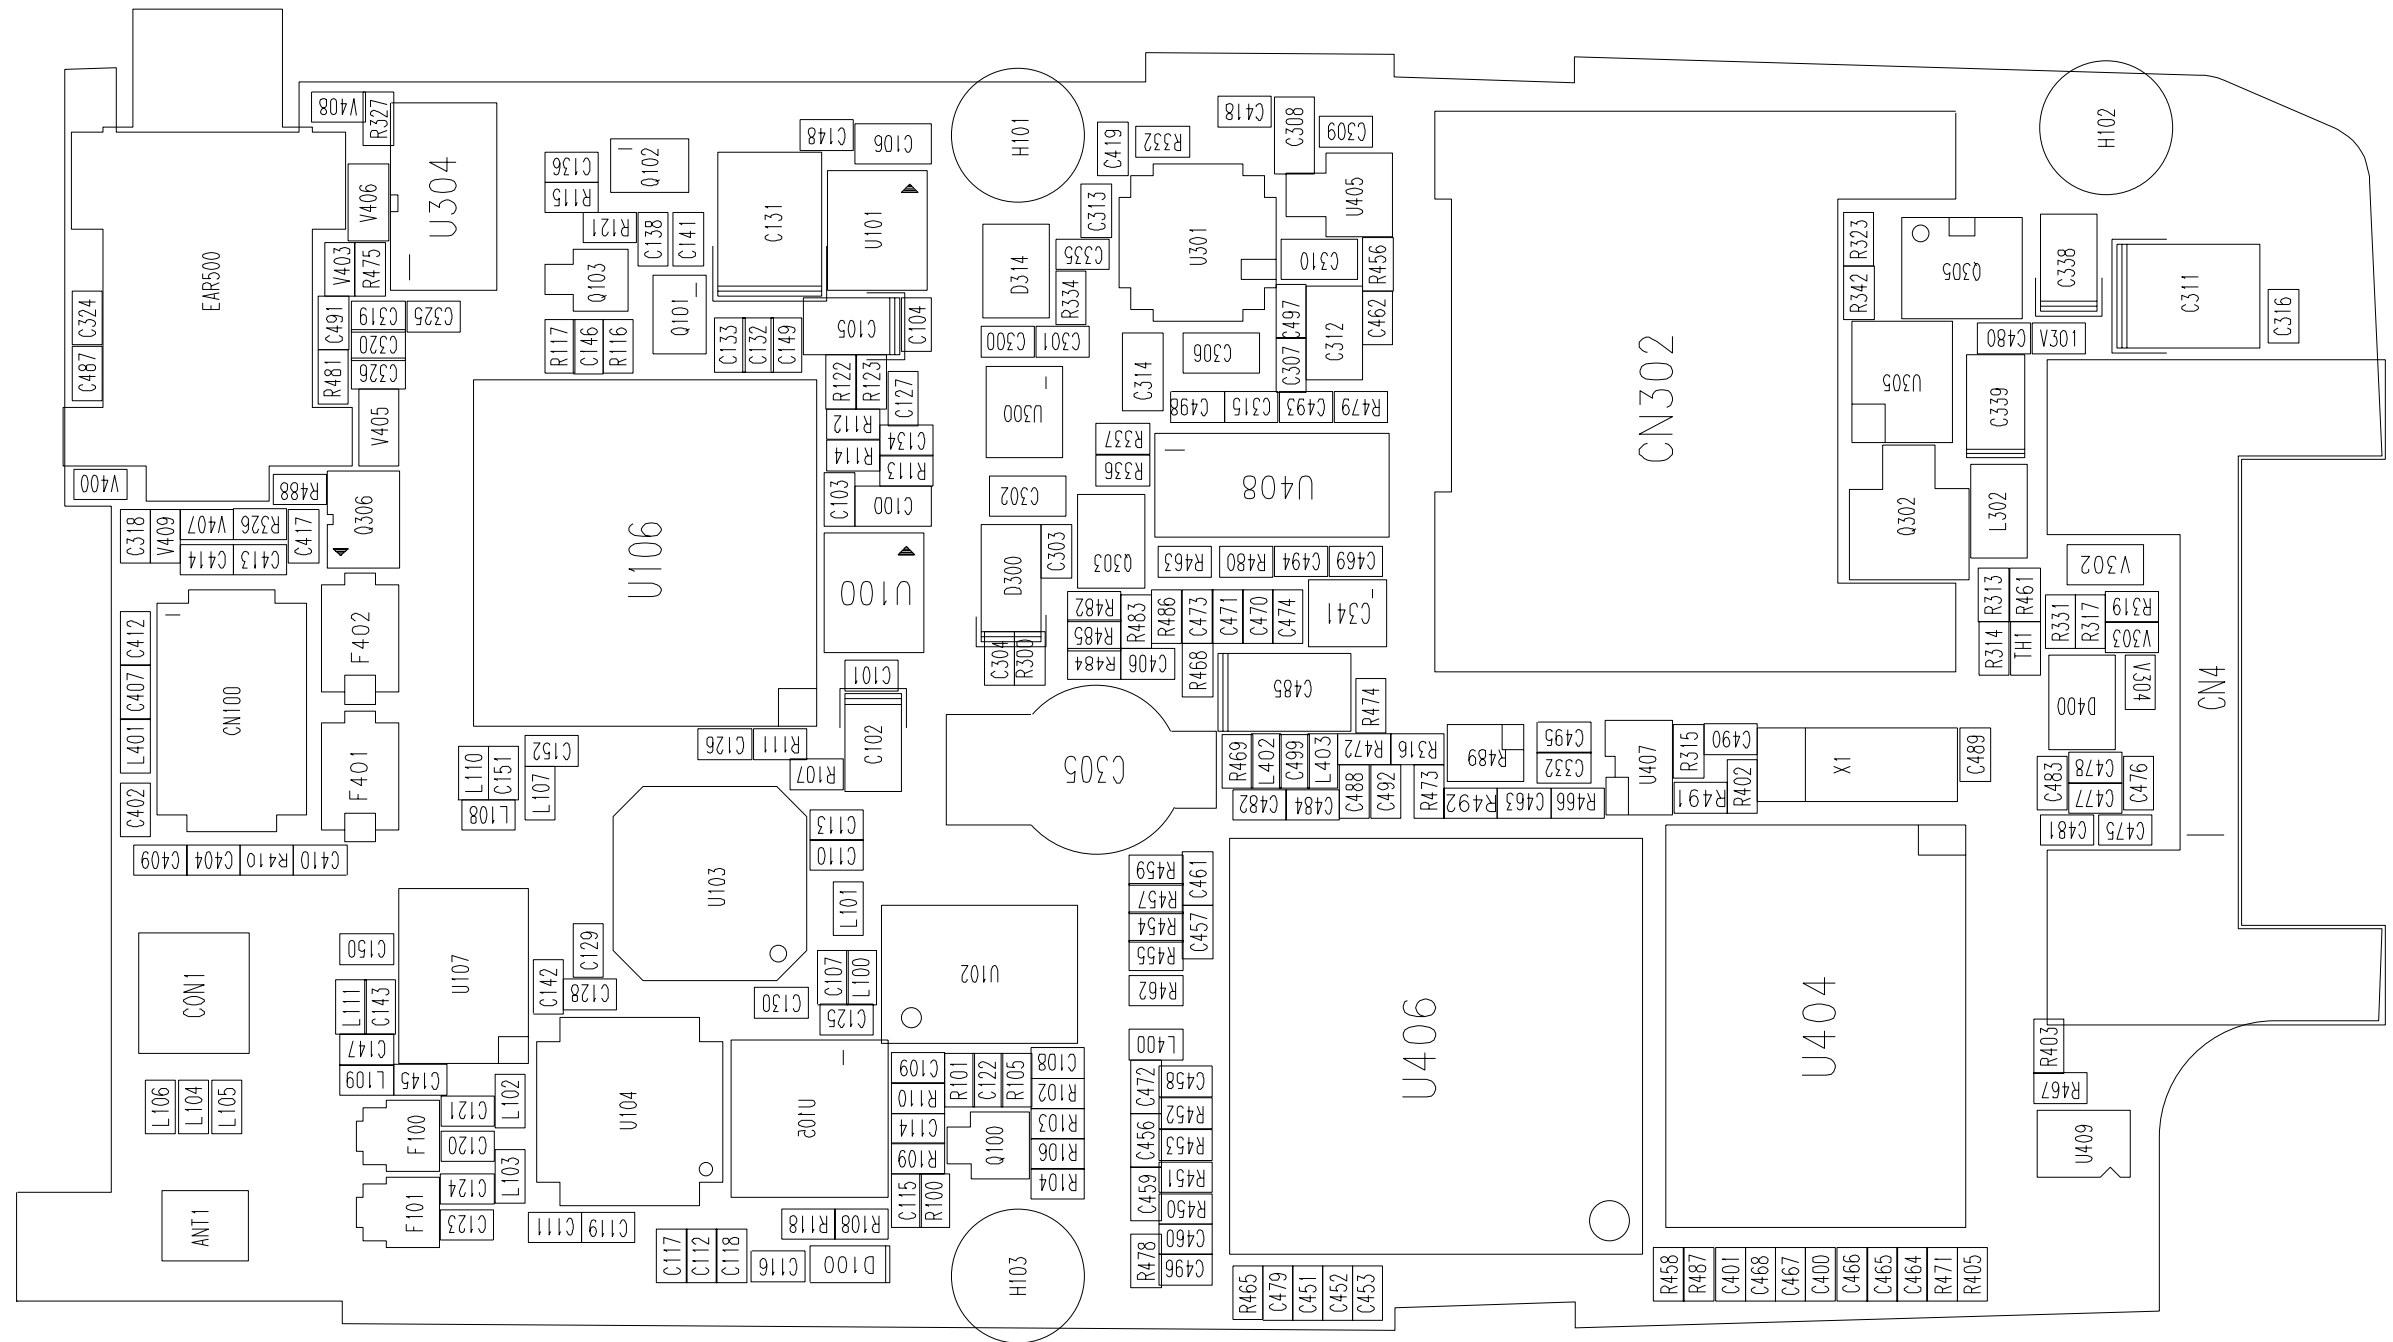

2-2 Main Bottom

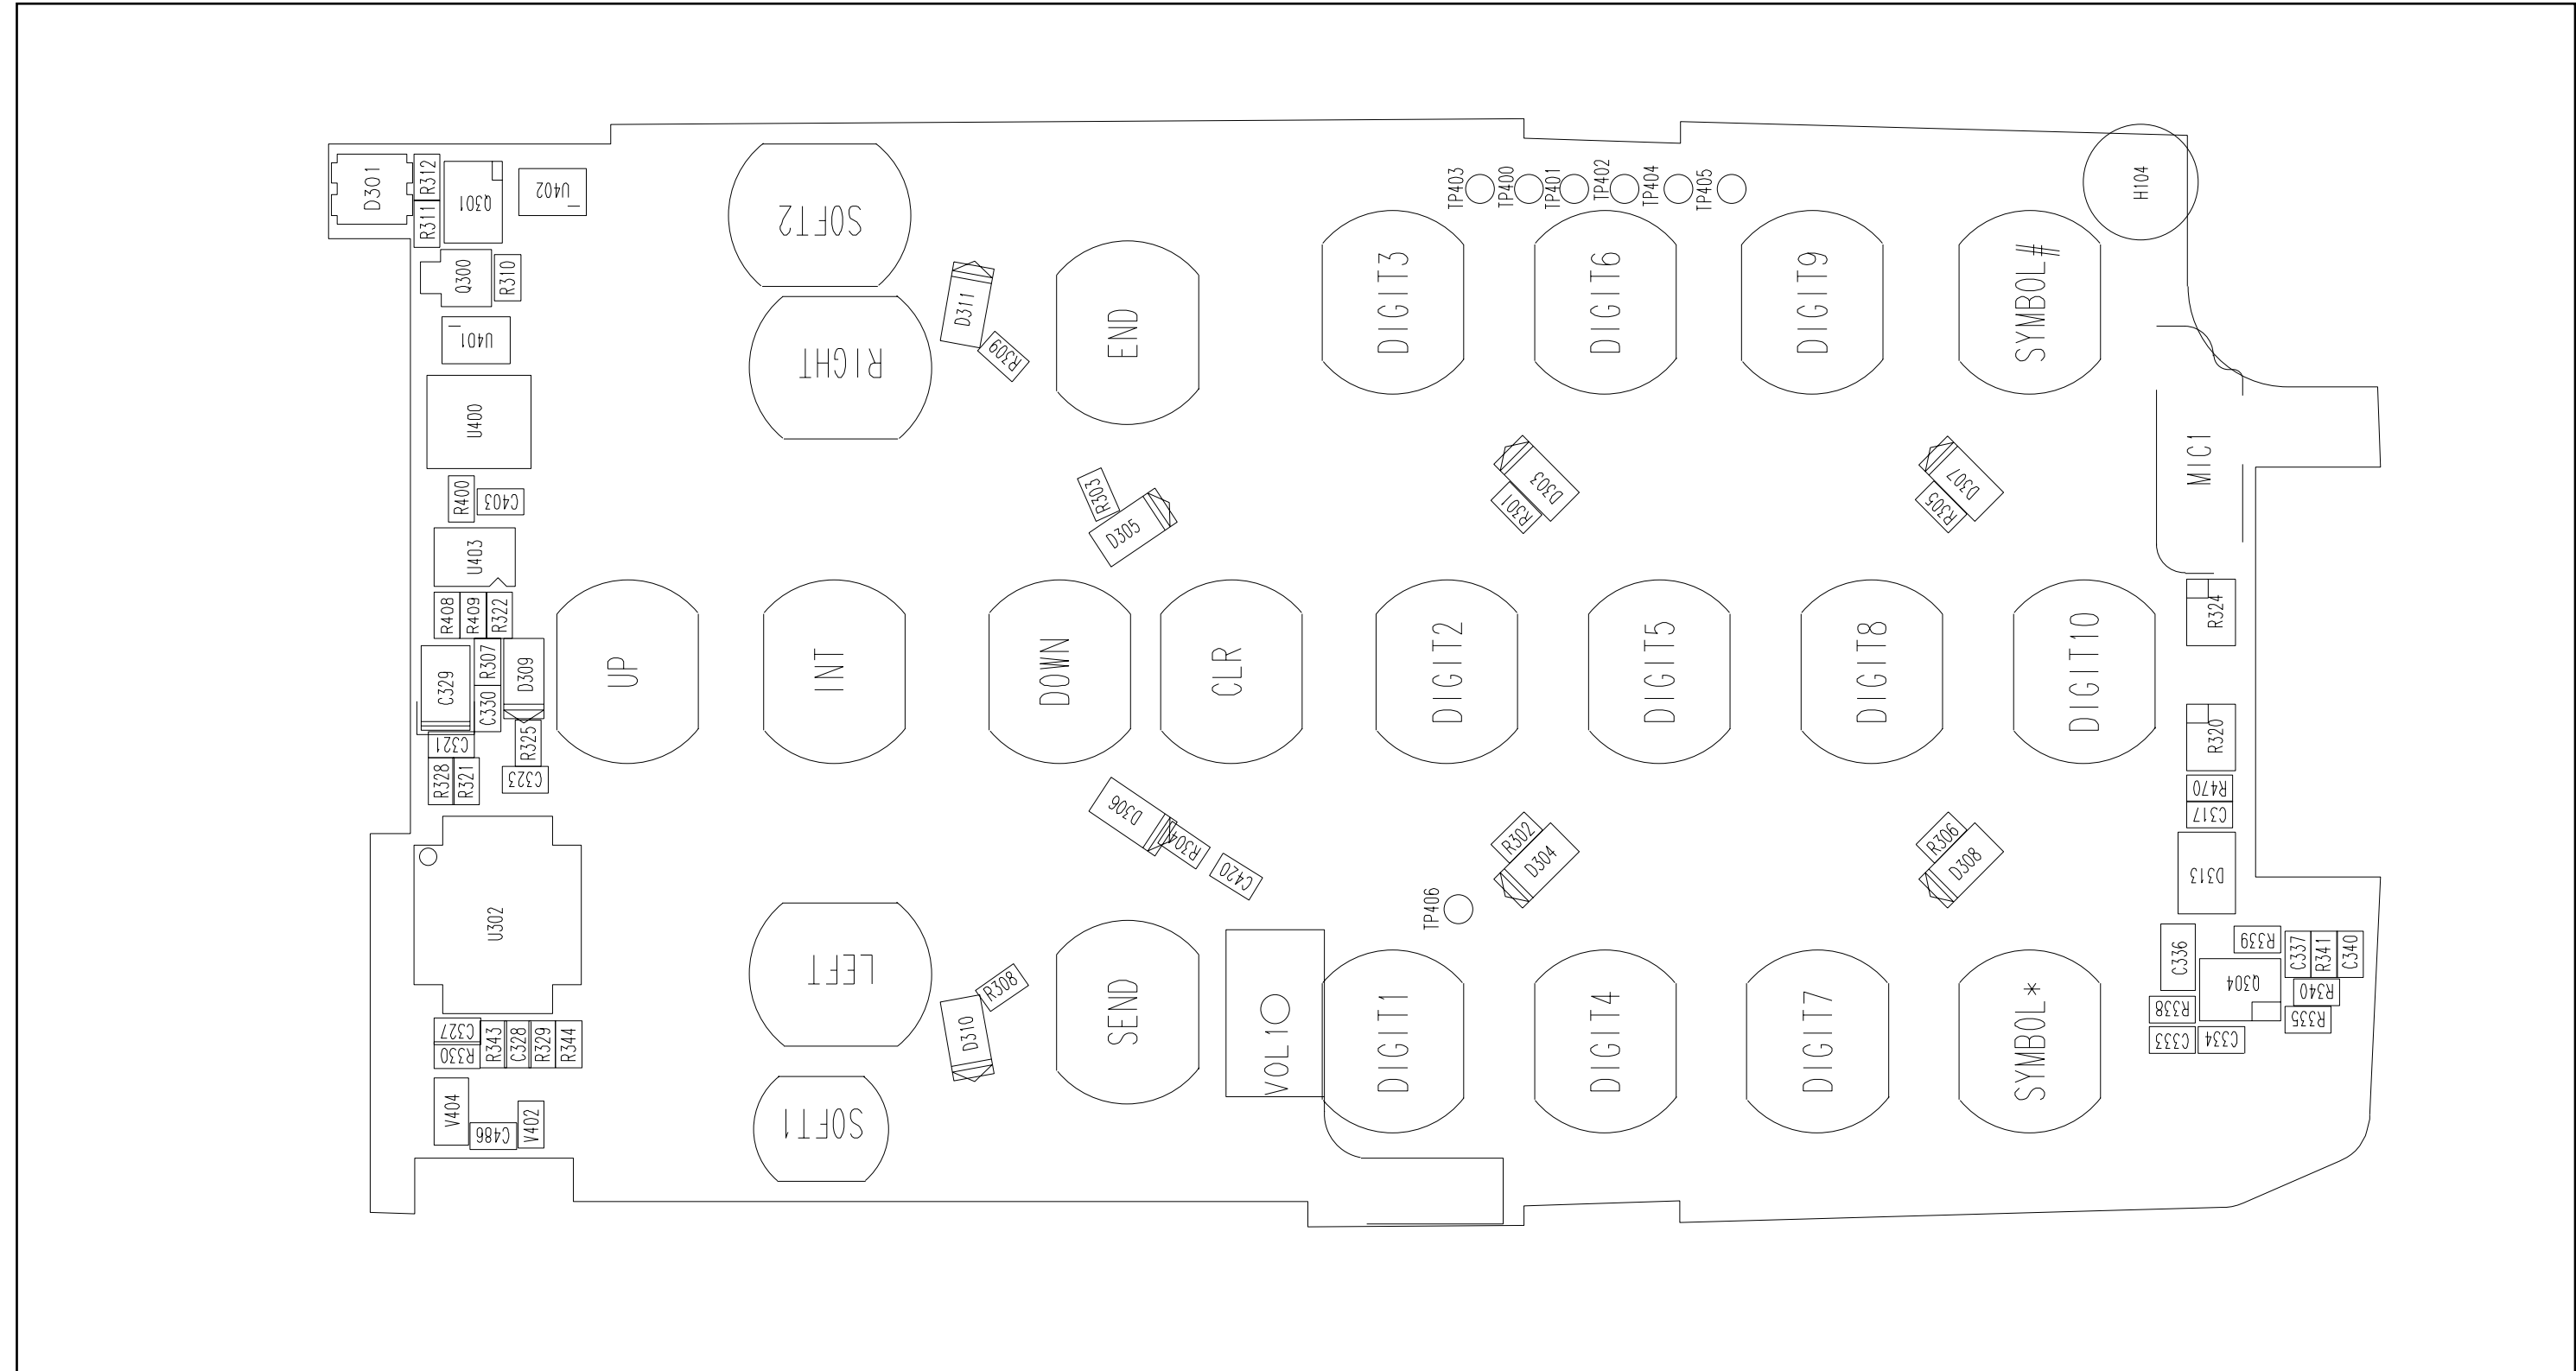

3. Electrical Parts List

3-1 Main Parts List Top

NO	Reference	SEC CODE	Part Description	Vendor Part No.
1	D300	0401-001033	DIODE-SWITCHING;MCL4154	MCL4154
2	D400	0406-001083	DIODE-TVS;ESDA6V1W5	ESDA6V1W5
3	D314	0407-001007	DIODE-ARRAY;UMN1	UMN1
4	Q100	0501-000225	TR-SMALL SIGNAL;2SC4617	2SC4617
5	Q302	0501-002011	TR-SMALL SIGNAL;2SD2114KT146V	2SD2114KT146V
6	Q305	0502-001201	TR-POWER;ZXT13P20DE6	ZXT13P20DE6
7	Q103	0504-001049	TR-DIGITAL;DTA114YET1	DTA114YET1
8	Q101	0504-001058	TR-DIGITAL;RN4985-TE85L	RN4985-TE85L
9	Q102	0504-001058	TR-DIGITAL;RN4985-TE85L	RN4985-TE85L
10	Q306	0505-001332	FET-SILICON;FDG6301N	FDG6301N
11	Q303	0506-001004	TR-ARRAY;UMC5NTL	UMC5NTL
12	U409	0801-002540	IC-CMOS LOGIC;NC7SZ19P6X	NC7SZ19P6X
13	U407	1001-001145	IC-ANALOG SWITCH;MAX4599EXT-T	MAX4599EXT-T
14	U304	1001-001183	IC-ANALOG SWITCH;MAX4684EUB	MAX4684EUB
15	U106	1201-001889	COMP-SMD;RF3110	RF3110
16	U305	1203-002127	IC-BATTERY;LTC1734ES6-4.2#TR	LTC1734ES6-4.2#TR
17	U405	1203-002187	IC-BATTERY;MAX6326XR26-T	MAX6326XR26-T
18	U100	1203-002598	COMP-SMD;LP2981AIMX-2.8	LP2981AIMX-2.8
19	U406	1205-002035	COMP-SMD;VP40578	VP40578
20	U105	1205-002185	IC-INTERFACE;SI4201-BM	SI4201-BM
21	U103	1209-001434	IC-PLL/SYNTHESISER;SI4133T-BM	SI4133T-BM
22	TH1	1404-001256	COMP-SMD;B57231-V2473-J60	B57231-V2473-J60
23	V302	1405-001018	VARISTOR;VC060314A300R	VC060314A300R
24	V405	1405-001019	VARISTOR;VC060305A150R	VC060305A150R
25	V406	1405-001019	VARISTOR;VC060305A150R	VC060305A150R
26	V301	1405-001082	VARISTOR;VC040205X150R	VC040205X150R
27	V303	1405-001082	VARISTOR;VC040205X150R	VC040205X150R
28	V400	1405-001082	VARISTOR;VC040205X150R	VC040205X150R
29	V403	1405-001082	VARISTOR;VC040205X150R	VC040205X150R
30	V407	1405-001093	COMP-SMD;AVL 14K 02 200	AVL 14K 02 200
31	V408	1405-001093	COMP-SMD;AVL 14K 02 200	AVL 14K 02 200
32	R105	2007-000138	"R-CHIP;100,5%"	ERJ2GEJ101X
33	R317	2007-000138	"R-CHIP;100,5%"	ERJ2GEJ101X
34	R468	2007-000138	"R-CHIP;100,5%"	ERJ2GEJ101X
35	R474	2007-000139	"R-CHIP;220,5%"	ERJ2GEJ221X
36	R106	2007-000140	"R-CHIP;1K,5%"	ERJ2GEJ102X
37	R300	2007-000140	"R-CHIP;1K,5%"	ERJ2GEJ102X
38	R313	2007-000140	"R-CHIP;1K,5%"	ERJ2GEJ102X
39	R102	2007-000141	"R-CHIP;2.2K,5%"	ERJ2GEJ222X

NO	Reference	SEC CODE	Part Description	Vendor Part No.
40	R479	2007-000141	"R-CHIP;2.2K,5%"	ERJ2GEJ222X
41	R480	2007-000141	"R-CHIP;2.2K,5%"	ERJ2GEJ222X
42	R335	2007-000143	"R-CHIP;4.7K,5%"	ERJ2GEJ472X
43	R101	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
44	R115	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
45	R117	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
46	R325	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
47	R337	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
48	R456	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
49	R461	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
50	R462	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
51	R463	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
52	R478	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
53	R113	2007-000153	"R-CHIP;22K,5%"	ERJ2GEJ223X
54	R114	2007-000153	"R-CHIP;22K,5%"	ERJ2GEJ223X
55	R104	2007-000155	"R-CHIP;27K,5%"	ERJ2GEJ273X
56	R473	2007-000157	"R-CHIP;47K,5%"	ERJ2GEJ473X
57	R331	2007-000159	"R-CHIP;56K,5%"	ERJ2GEJ563X
58	R116	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
59	R314	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
60	R332	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
61	R334	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
62	R336	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
63	R402	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
64	R403	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
65	R405	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
66	"R466,"	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
67	R467	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
68	R483	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
69	R485	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
70	R488	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
71	R492	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
72	R100	2007-001244	"R-CHIP;91K,5%"	RC1005J913CS
73	R111	2007-001288	"R-CHIP;18,5%"	MCR01MZSJ180
74	R112	2007-001288	"R-CHIP;18,5%"	MCR01MZSJ180
75	R107	2007-001298	"R-CHIP;51,5%"	MCR01MZSJ510
76	R108	2007-001298	"R-CHIP;51,5%"	MCR01MZSJ510
77	R109	2007-001298	"R-CHIP;51,5%"	MCR01MZSJ510
78	R110	2007-001298	"R-CHIP;51,5%"	MCR01MZSJ510
79	R476	2007-001298	"R-CHIP;51,5%"	MCR01MZSJ510
80	R469	2007-002796	"R-CHIP;510,5%"	MCR01MZSJ511
81	R472	2007-002796	"R-CHIP;510,5%"	MCR01MZSJ511
82	R103	2007-002797	"R-CHIP;560,5%"	MCR01MZSJ511

NO	Reference	SEC CODE	Part Description	Vendor Part No.
83	R326	2007-003001	"R-CHIP;12,5%"	RMC16S-120J-TP
84	R327	2007-003001	"R-CHIP;12,5%"	RMC16S-120J-TP
85	R120	2007-007008	"R-CHIP;300,5%"	MCR01MZSJ301
86	R121	2007-007008	"R-CHIP;300,5%"	MCR01MZSJ301
87	R122	2007-007008	"R-CHIP;300,5%"	MCR01MZSJ301
88	R123	2007-007008	"R-CHIP;300,5%"	MCR01MZSJ301
89	R307	2007-007009	"R-CHIP;75ohm,5%"	RC1005J750CS
90	R450	2007-007317	"R-CHIP;2.2K,1%"	MCR01MZSF2201
91	R451	2007-007317	"R-CHIP;2.2K,1%"	MCR01MZSF2201
92	R452	2007-007317	"R-CHIP;2.2K,1%"	MCR01MZSF2201
93	R453	2007-007317	"R-CHIP;2.2K,1%"	MCR01MZSF2201
94	R454	2007-007318	"R-CHIP;1K,1%"	RK73H1ETP1001F
95	R455	2007-007318	"R-CHIP;1K,1%"	RK73H1ETP1001F
96	R457	2007-007318	"R-CHIP;1K,1%"	RK73H1ETP1001F
97	R459	2007-007318	"R-CHIP;1K,1%"	RK73H1ETP1001F
98	R118	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
99	R119	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
100	R319	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
101	R410	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
102	R475	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
103	R477	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
104	R481	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
105	R484	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
106	R490	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
107	R491	2007-007771	"R-CHIP;0,5%"	RC1005J000CS
108	R342	2007-008117	"R-CHIP;2.7K,1%"	ERJ2RKF2701X
109	R489	2011-001345	R-NETWORK;EXB28V103JX	EXB28V103JX
110	C404	2203-000138	"C-CERAMIC,CHIP;C152K,1.5NF,50V"	CL05B152KBNC
111	C113	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
112	C114	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
113	C115	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
114	C116	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
115	C117	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
116	C122	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
117	C132	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
118	C134	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
119	C301	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
120	C456	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
121	C458	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
122	C459	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
123	C460	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"	GRP1555C1H101JD01E
124	C101	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
125	C104	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT

NO	Reference	SEC CODE	Part Description	Vendor Part No.
126	C107	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
127	C108	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
128	C109	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
129	C149	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
130	C300	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
131	C303	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
132	C307	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
133	C309	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
134	C313	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
135	C315	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
136	C318	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
137	C453	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
138	C462	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
139	C463	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
140	C470	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
141	C471	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
142	C473	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"	CM05X7R103K16AT
143	C143	2203-000278	"C-CERAMIC,CHIP;C100D,10PF,50V"	ECUE1H100DCQ
144	C138	2203-000438	"C-CERAMIC,CHIP;C102K,1NF,50V"	C1005X7R1H102KT
145	C103	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
146	C136	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
147	C141	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
148	C142	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
149	C146	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
150	C147	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
151	C148	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
152	C320	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
153	C325	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
154	C326	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
155	C406	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
156	C407	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
157	C409	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
158	C410	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
159	C412	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
160	C413	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
161	C414	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
162	C417	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
163	C480	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
164	C489	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
165	C490	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
166	C496	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"	GRP1555C1H270JZ01E
167	C126	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
168	C127	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E

NO	Reference	SEC CODE	Part Description	Vendor Part No.
169	C133	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
170	C150	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
171	C151	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
172	C451	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
173	C452	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
174	C467	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
175	C468	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
176	C469	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
177	C495	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"	GRP1555C1H330JZ01E
178	C476	2203-000854	"C-CERAMIC,CHIP;C390J,39PF,50V"	GRP1555C1H330JZ01E
179	C481	2203-000854	"C-CERAMIC,CHIP;C390J,39PF,50V"	GRP1555C1H330JZ01E
180	C487	2203-000854	"C-CERAMIC,CHIP;C390J,39PF,50V"	GRP1555C1H330JZ01E
181	C484	2203-000854	"C-CERAMIC,CHIP;39PF"	GRP1555C1H330JZ01E
182	C319	2203-000870	"C-CERAMIC,CHIP;C030C,3PF,50V"	GRP1555C1H3R0CZ01E
183	C477	2203-001017	"C-CERAMIC,CHIP;C040C,4PF,50V"	CM05CG040C50AT
184	C493	2203-001259	"C-CERAMIC,CHIP;C080D,8PF,50V"	GRP1555C1H8R0DZ01E
185	C494	2203-001259	"C-CERAMIC,CHIP;C080D,8PF,50V"	GRP1555C1H8R0DZ01E
186	C110	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
187	C111	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
188	C112	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
189	C118	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
190	C119	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
191	C125	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
192	C128	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
193	C129	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
194	C130	2203-001405	"C-CERAMIC,CHIP;C223Z,22NF,25V"	CL05F223ZANC
195	C474	2203-003054	"C-CERAMIC,CHIP;C090C,9PF,50V"	C1005CG1H090CT
196	C497	2203-003054	"C-CERAMIC,CHIP;C090C,9PF,50V"	C1005CG1H090CT
197	C498	2203-003054	"C-CERAMIC,CHIP;C090C,9PF,50V"	C1005CG1H090CT
198	C123	2203-005050	"C-CERAMIC,CHIP;C1R8C,1.8PF,50V"	ECUW1H1R8CCQ
199	C124	2203-005050	"C-CERAMIC,CHIP;C1R8C,1.8PF,50V"	ECUW1H1R8CCQ
200	C316	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"	MCH153F104ZK
201	C317	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"	MCH153F104ZK
202	C324	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"	MCH153F104ZK
203	C332	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"	MCH153F104ZK
204	C335	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"	MCH153F104ZK
205	C400	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"	MCH153F104ZK
206	C100	2203-005065	"C-CERAMIC,CHIP;C105Z,1UF,10V"	C1608Y5V1A105ZT
207	C106	2203-005065	"C-CERAMIC,CHIP;C105Z,1UF,10V"	C1608Y5V1A105ZT
208	C310	2203-005065	"C-CERAMIC,CHIP;C105Z,1UF,10V"	C1608Y5V1A105ZT
209	C120	2203-005234	"C-CERAMIC,CHIP;C1R2C,1.2PF,50V"	GRP1555C1H1R2CZ01E
210	C121	2203-005234	"C-CERAMIC,CHIP;C1R2C,1.2PF,50V"	GRP1555C1H1R2CZ01E
211	C475	2203-005382	"C-CERAMIC,CHIP;6PF"	GRM40X7R391K200PT

NO	Reference	SEC CODE	Part Description	Vendor Part No.
212	C483	2203-005382	"C-CERAMIC,CHIP;6PF"	GRM40X7R391K200PT
213	C140	2203-005444	"C-CERAMIC,CHIP;3PF"	CM05CG3R0B50AH
214	C491	2203-005444	"C-CERAMIC,CHIP;C030B,3PF,50V"	CM05CG3R0B50AH
215	C145	2203-005450	"C-CERAMIC,CHIP;C5R6B,5.6PF,50V"	GRP1555C1H5R6BZ01E
216	C482	2203-005480	"C-CERAMIC,CHIP;C333K,33NF,10V"	GRP155R71A333KA01E
217	C488	2203-005480	"C-CERAMIC,CHIP;C333K,33NF,10V"	GRP155R71A333KA01E
218	C492	2203-005481	"C-CERAMIC,CHIP;C473K,47NF,10V"	GRP155R71A473KA01E
219	C304	2203-005482	"C-CERAMIC,CHIP;C104K,100NF,10V"	GRP155R61A104KA01E
220	C457	2203-005503	"C-CERAMIC,CHIP;C1801J,180PF,25V"	C1005CG1E181JT
221	C461	2203-005503	"C-CERAMIC,CHIP;C1801J,180PF,25V"	C1005CG1E181JT
222	C302	2203-006105	"C-CERAMIC,CHIP;C475K,4.7UF,6.3V"	GRM219R60J475KE11D
223	C306	2203-006105	"C-CERAMIC,CHIP;C475K,4.7UF,6.3V"	GRM219R60J475KE11D
224	C308	2203-006105	"C-CERAMIC,CHIP;C475K,4.7UF,6.3V"	GRM219R60J475KE11D
225	C312	2203-006105	"C-CERAMIC,CHIP;C475K,4.7UF,6.3V"	GRM219R60J475KE11D
226	C314	2203-006105	"C-CERAMIC,CHIP;C475K,4.7UF,6.3V"	GRM219R60J475KE11D
227	C102	2404-001105	"C-TA,CHIP;10UF/6.3V"	TESVSP0J106M8RTJ
228	C105	2404-001105	"C-TA,CHIP;10UF/6.3V"	TESVSP0J106M8RTJ
229	C338	2404-001105	"C-TA,CHIP;10UF/6.3V"	TESVSP0J106M8RTJ
230	C131	2404-001134	"C-TA,CHIP;100UF/6.3V"	595D107X06R3B2T
231	C311	2404-001134	"C-TA,CHIP;100UF/6.3V"	595D107X06R3B2T
232	C485	2404-001162	"C-TA,CHIP;F950G476MAAJZTQ2"	F950G476MAAJZTQ2
233	C339	2404-001268	"C-TA,CHIP;10UF/10V"	F951A106MPAAQ2
234	C341	2503-001041	COMP-SMD;CAP_4ARRAY_100PF	W2A43A101KAT2A
235	L101	2703-001751	INDUCTOR-SMD;LL1005-FH3N9S	LL1005-FH3N9S
236	L109	2703-001751	INDUCTOR-SMD;LL1005-FH3N9S	LL1005-FH3N9S
237	L100	2703-001943	INDUCTOR-SMD;HK1005-10NJ-T	HK1005-10NJ-T
238	L105	2703-002170	INDUCTOR-SMD;CIH05T6N8JNC	CIH05T6N8JNC
239	L107	2703-002176	INDUCTOR-SMD;CIH05T2N7SNC	CIH05T2N7SNC
240	L111	2703-002203	INDUCTOR-SMD;CIH05T15NJNC	CIH05T15NJNC
241	L400	2703-002269	INDUCTOR-SMD;CIH05T56NJNC	CIH05T56NJNC
242	X1	2801-004025	CRYSTAL-UNIT;FC-255	FC-255
243	F401	2901-001234	FILTER-EMI SMD;NFA31GD4704704D	NFA31GD4704704D
244	F402	2901-001234	FILTER-EMI SMD;NFA31GD4704704D	NFA31GD4704704D
245	L302	3301-001120	CORE-FERRITE BEAD;BLM21P300SPT	BLM21P300SPT
246	L401	3301-001362	CORE-FERRITE BEAD;BLM10A102SGPT	BLM10A102SGPT
247	CN4	3710-001816	CONNECTOR-SOCKET;1004-0018-319	1004-0018-319
248	EAR500	3722-001715	JACK-PHONE;02-828P0-53BKA	02-828P0-53BKA
249	C305	4302-001119	BATTERY-LI;RB414II06N	RB414II06N


3-2 Main Parts List Bottom

NO	Reference	SEC CODE	Part Description	Vendor Part No.
1	D313	0406-001083	DIODE-TVS;ESDA6V1W5	ESDA6V1W5
2	Q300	0504-001012	TR-DIGITAL;DTC114YE	DTC114YE
3	U401	0504-001060	TR-DIGITAL;BCR08PN	BCR08PN
4	U402	0504-001060	TR-DIGITAL;BCR08PN	BCR08PN
5	Q304	0505-001570	FET-SILICON;SI1865DL	SI1865DL
6	Q301	0506-001052	TR-ARRAY;UMH9N-TN	UMH9N-TN
7	D301	0601-001543	COMP-SMD;HL500-F01	HL500-F01
8	D303	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
9	D304	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
10	D305	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
11	D306	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
12	D308	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
13	D309	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
14	D310	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
15	D307	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
16	D311	0601-001611	LED;SLS-NNWH102TS	SLS-NNWH102TS
17	U403	0801-002540	IC-CMOS LOGIC;NC7SZ19P6X	NC7SZ19P6X
18	U400	1009-001010	IC-HALL EFFECT S/W;A3212ELH-SAMSUNG	A3212ELH-SAMSUNG
19	U302	1204-001960	IC-MELODY;YMU762 MA-3	YMU762 MA-3
20	V401	1405-001019	VARISTOR;VC060305A150R	VC060305A150R
21	V402	1405-001082	VARISTOR;VC040205X150R	VC040205X150R
22	V304	1405-001082	VARISTOR;VC040205X150R	VC040205X150R
23	R315	2007-000138	"R-CHIP;100,5%"	ERJ2GEJ101X
24	R316	2007-000138	"R-CHIP;100,5%"	ERJ2GEJ101X
25	R465	2007-000148	"R-CHIP;10K,5%"	ERJ2GEJ103X
26	R339	2007-000152	"R-CHIP;20K,5%"	MCR01MZSJ203
27	R400	2007-000157	"R-CHIP;47K,5%"	ERJ2GEJ473X
28	R470	2007-000157	"R-CHIP;47K,5%"	ERJ2GEJ473X
29	R338	2007-000157	"R-CHIP;47K,5%"	ERJ2GEJ473X
30	R323	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
31	R322	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
32	R408	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
33	R409	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
34	R487	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
35	R458	2007-000162	"R-CHIP;100K,5%"	RC1005J104CS
36	R471	2007-000168	"R-CHIP;470K,5%"	ERJ2GEJ474X
37	R330	2007-000775	"R-CHIP;33K,5%"	ERJ2GEJ333X
38	R343	2007-001244	"R-CHIP;91K,5%"	RC1005J913CS
39	R311	2007-001301	"R-CHIP;68,5%"	ERJ2GEJ680X
40	R312	2007-001306	"R-CHIP;150,5%"	MCR01MZSJ151
41	R328	2007-001325	"R-CHIP;3.3K,5%"	MCR01MZSJ332


NO	Refer ence	SEC CODE	Part Description	Vendor Part No.	
42	R310	2007-007008	"R-CHIP;300,5%"		MCR01MZSJ301
43	R308	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
44	R309	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
45	R301	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
46	R302	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
47	R303	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
48	R304	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
49	R305	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
50	R306	2007-007009	"R-CHIP;75ohm,5%"		RC1005J750CS
51	R344	2007-007090	"R-CHIP;11K,5%"		RK73K1ETP113J
52	R341	2007-007107	"R-CHIP;100K,1%"		RK73H1ETP1003F
53	R340	2007-007590	"R-CHIP;82K,1%"		MCR01MZSF8202
54	R329	2007-007771	"R-CHIP;0,5%"		RC1005J000CS
55	R321	2007-007771	"R-CHIP;0,5%"		RC1005J000CS
56	R320	2011-001344	COMP-SMD;CRB2A4E101JT		CRB2A4E101JT
57	C328	2203-000233	"C-CERAMIC,CHIP;C101J,100PF,50V"		GRP1555C1H101JD01E
58	C401	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"		CM05X7R103K16AT
59	C464	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"		CM05X7R103K16AT
60	C465	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"		CM05X7R103K16AT
61	C337	2203-000254	"C-CERAMIC,CHIP;C103K,10NF,16V"		CM05X7R103K16AT
62	C321	2203-000438	"C-CERAMIC,CHIP;C102K,1NF,50V"		C1005X7R1H102KT
63	C420	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"		GRP1555C1H270JZ01E
64	C479	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"		GRP1555C1H270JZ01E
65	C419	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"		GRP1555C1H270JZ01E
66	C418	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"		GRP1555C1H270JZ01E
67	C334	2203-000679	"C-CERAMIC,CHIP;C270J,27PF,50V"		GRP1555C1H270JZ01E
68	C466	2203-000812	"C-CERAMIC,CHIP;C330J,33PF,50V"		GRP1555C1H330JZ01E
69	C486	2203-000854	"C-CERAMIC,CHIP;C390J,39PF,50V"		GRP1555C1H330JZ01E
70	C403	2203-002443	"C-CERAMIC,CHIP;C331K,330PF,50V"		GRP155R71H331KD01E
71	C500	2203-003054	"C-CERAMIC,CHIP;C090C,9PF,50V"		C1005CG1H090CT
72	C499	2203-003054	"C-CERAMIC,CHIP;C090C,9PF,50V"		C1005CG1H090CT
73	C323	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"		MCH153F104ZK
74	C330	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"		MCH153F104ZK
75	C402	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"		MCH153F104ZK
76	C333	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"		MCH153F104ZK
77	C340	2203-005061	"C-CERAMIC,CHIP;C104Z,100NF,16V"		MCH153F104ZK
78	C336	2203-005065	"C-CERAMIC,CHIP;C105Z,1UF,10V"		C1608Y5V1A105ZT
79	C327	2203-005483	"C-CERAMIC,CHIP;C683K,68NF,10V"		GRP155R61A683KA01E
80	C322	2404-001086	"C-TA,CHIP;4.7UF/6.3V"		TESVSPOJ475M8RTJ
81	C329	2404-001086	"C-TA,CHIP;4.7UF/6.3V"		TESVSPOJ475M8RTJ

4. Block Diagrams


4-1 Main Baseband

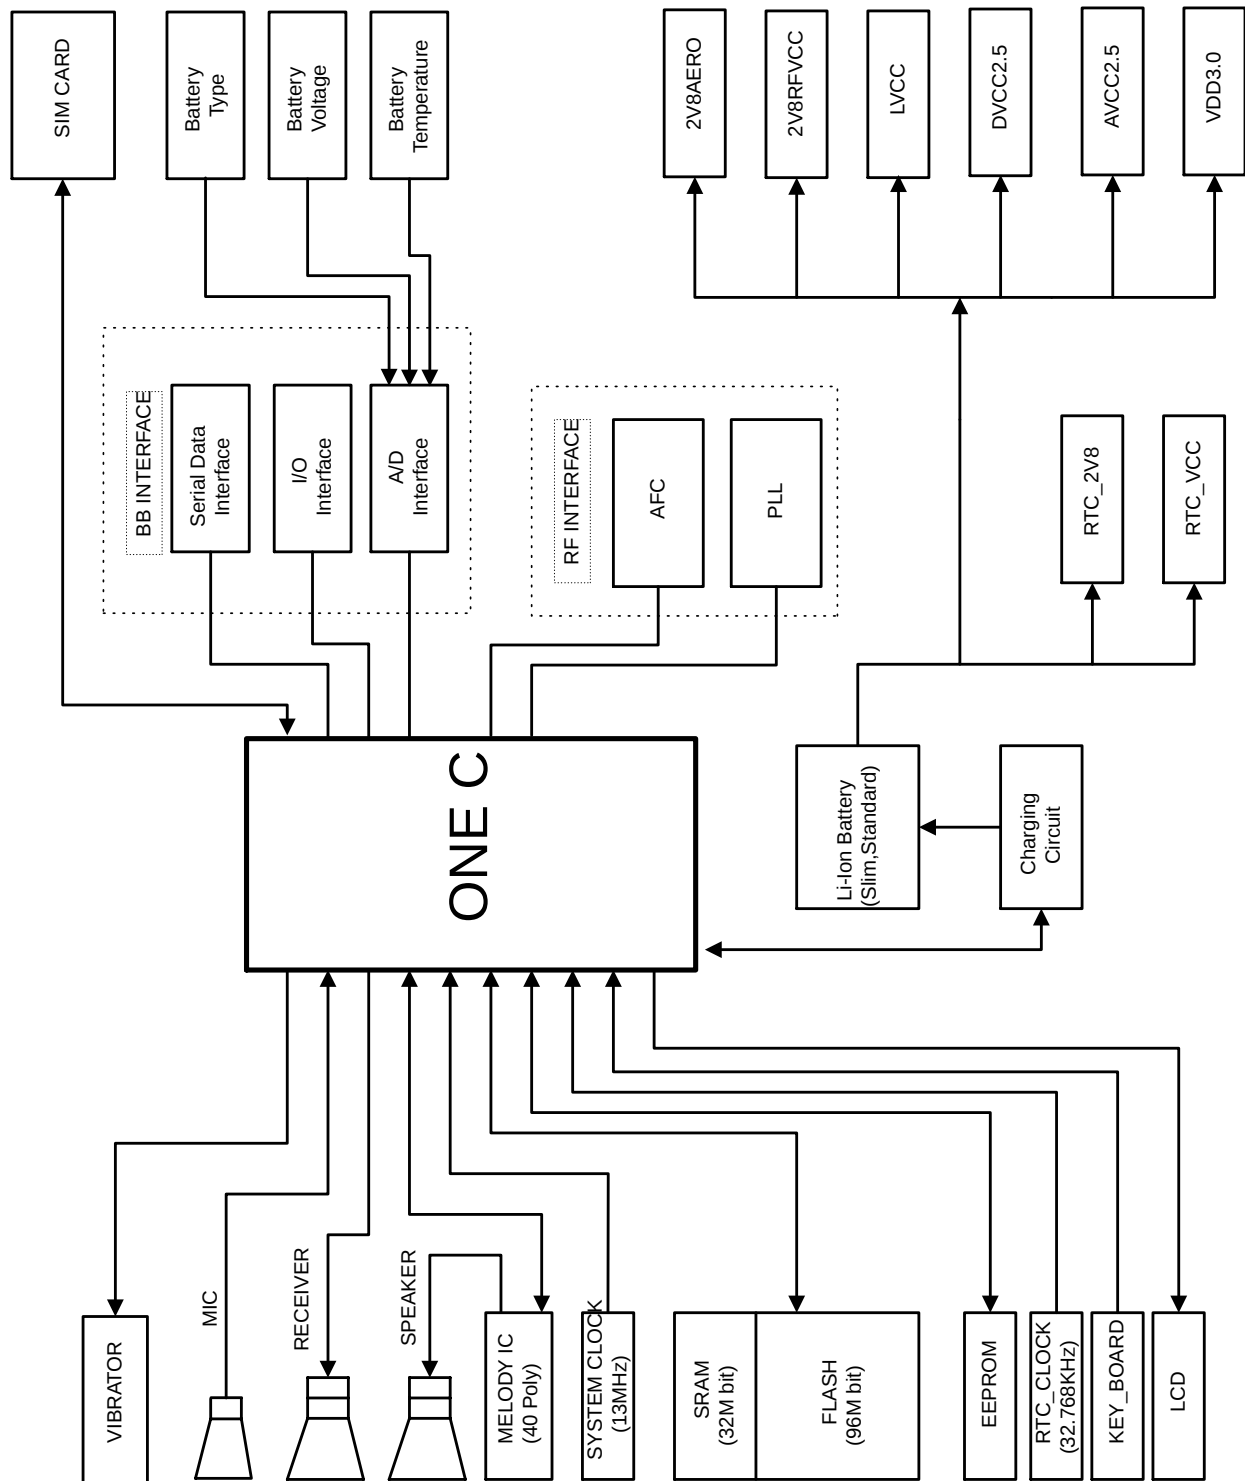


4-2 Main RF

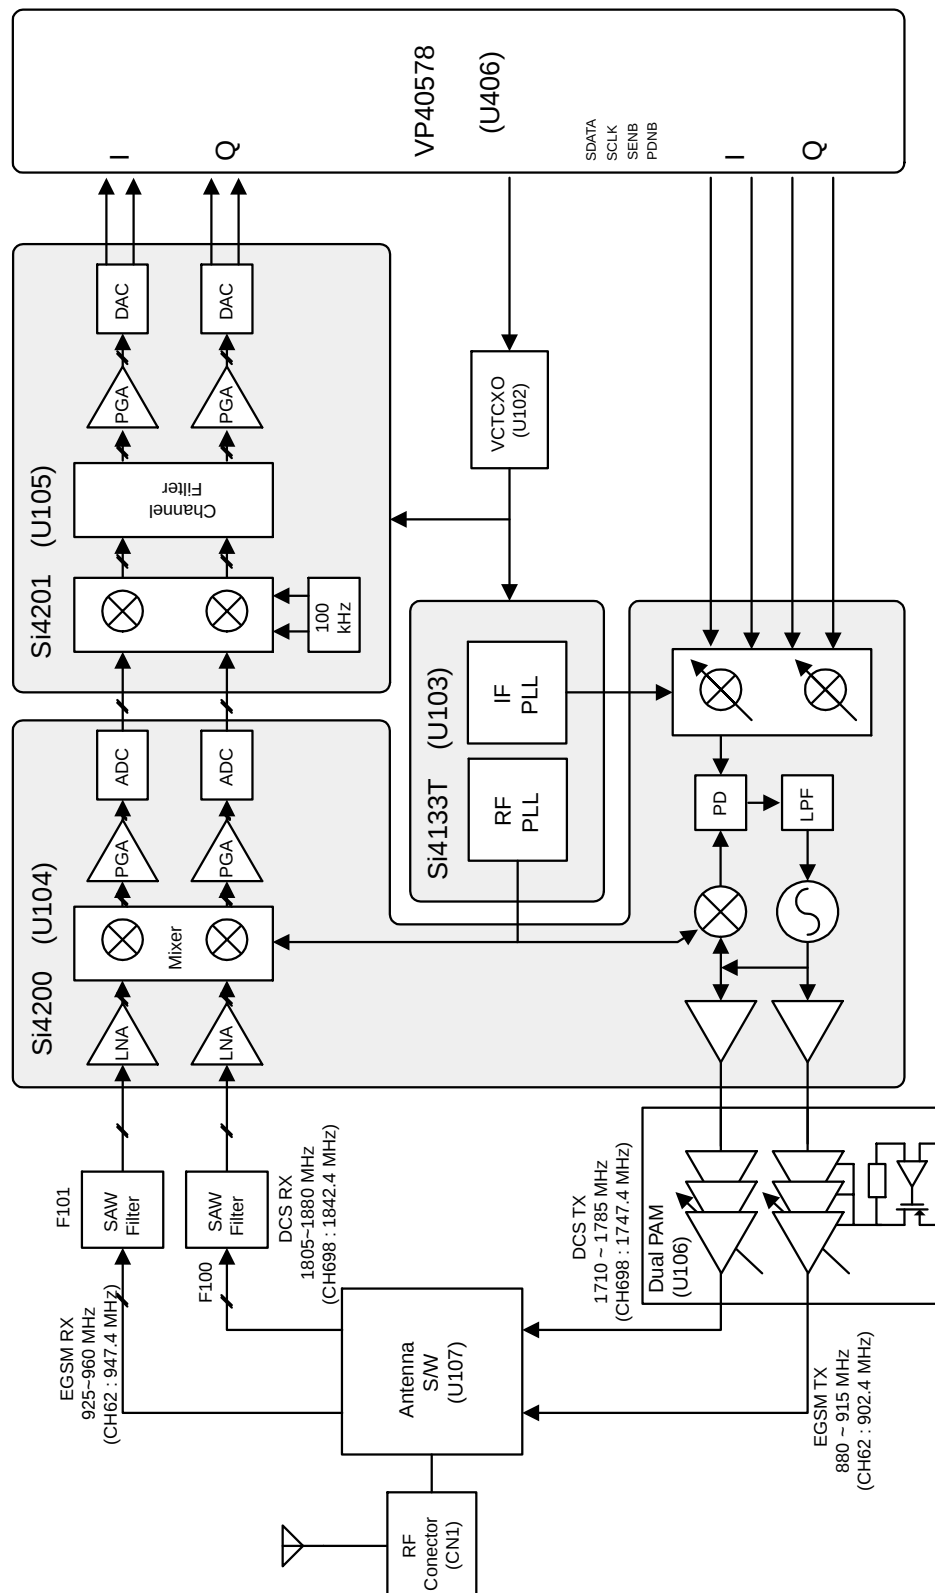

4-2-1 RF Transmit Part

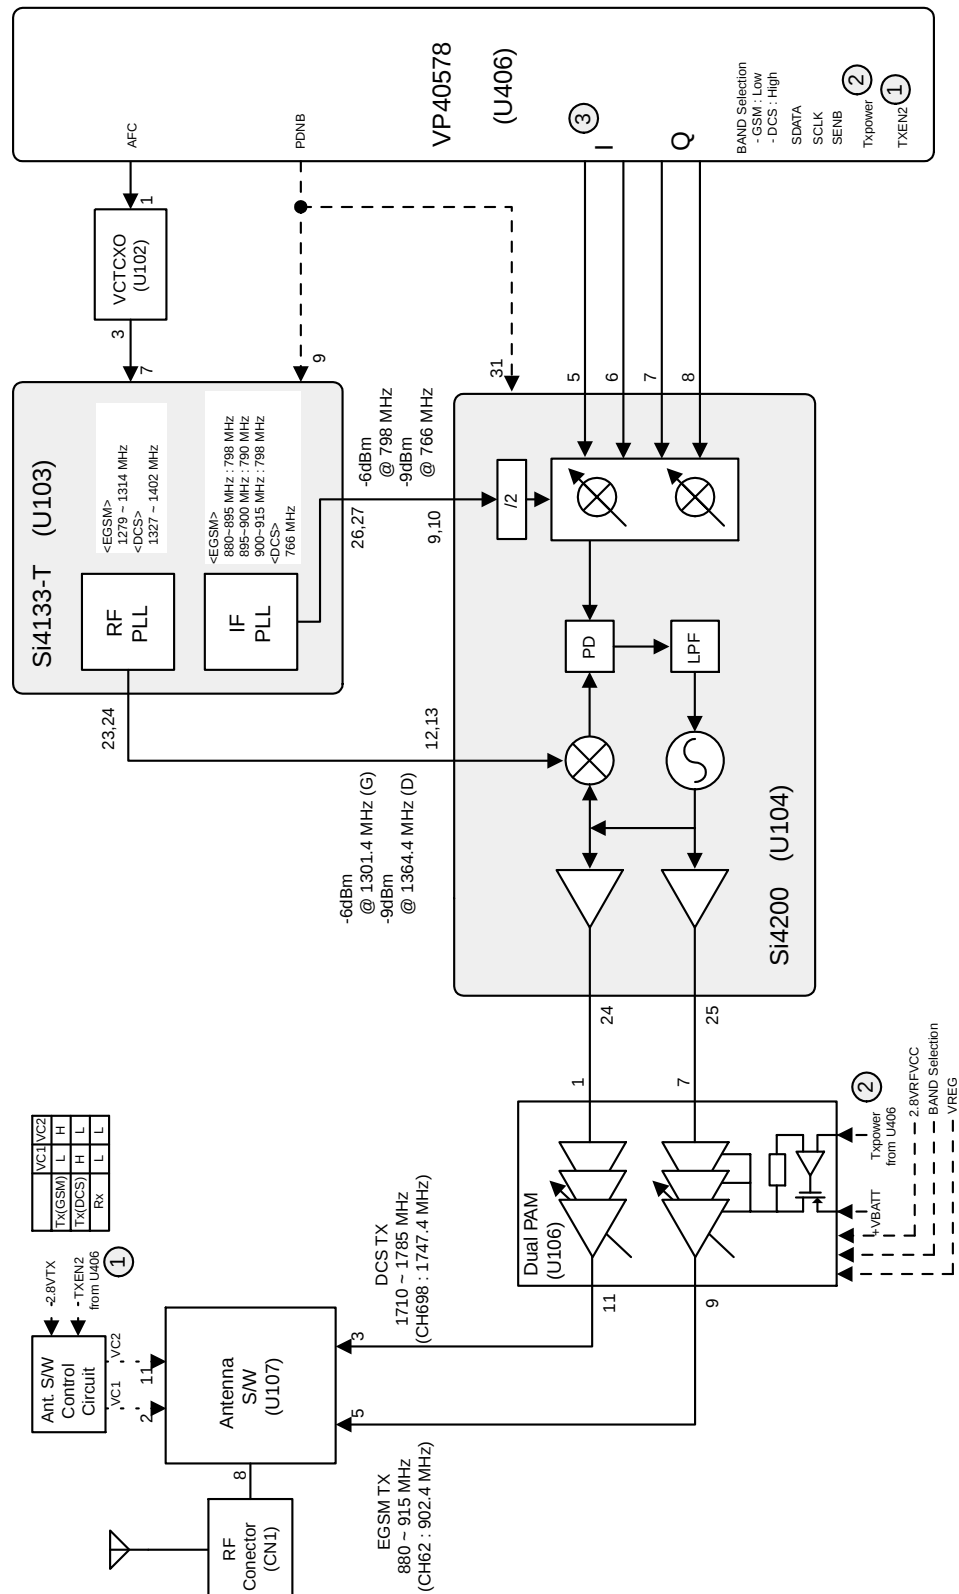


4-2-2 RF Receive Part

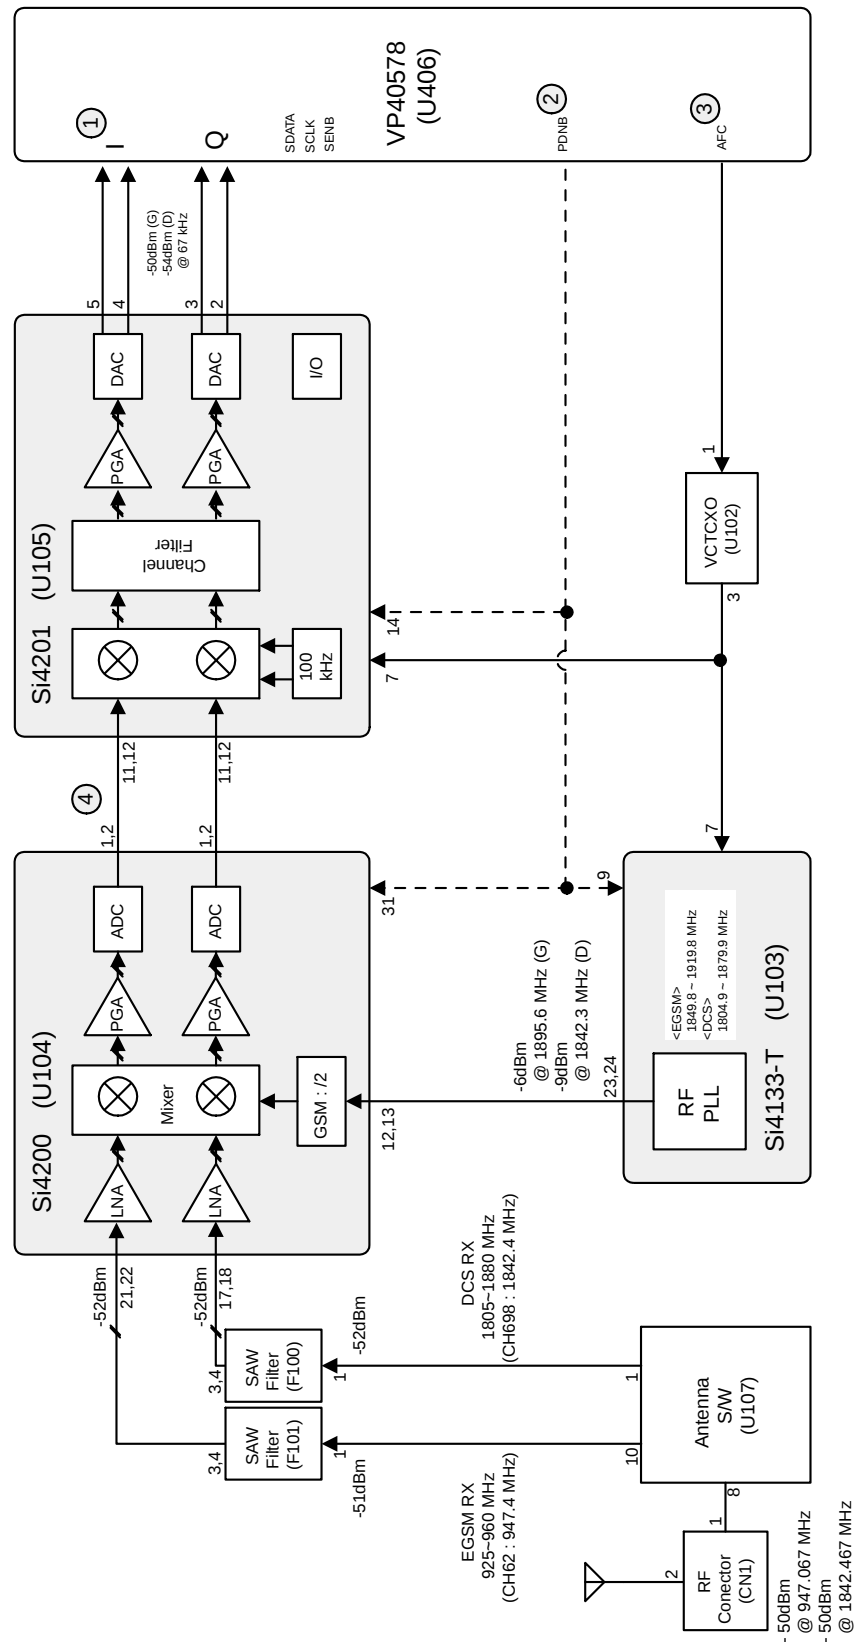



5. Flow Chart of Troubleshooting and Circuit Diagrams

5-1 Power ON

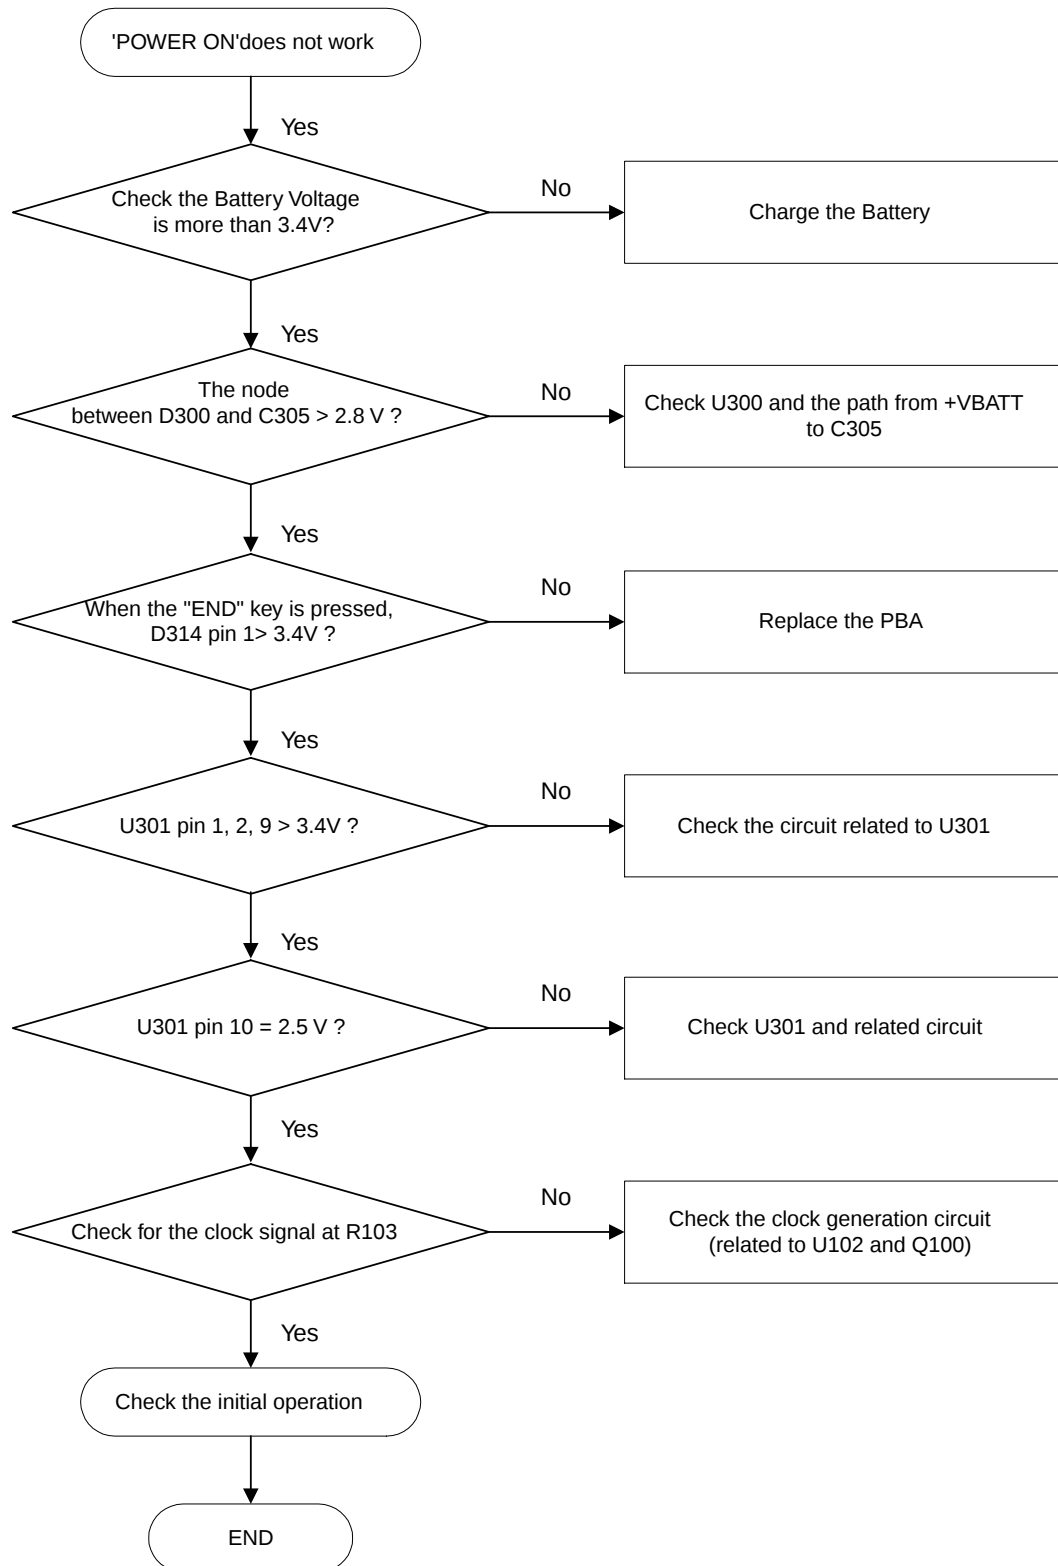


5-2 Initial

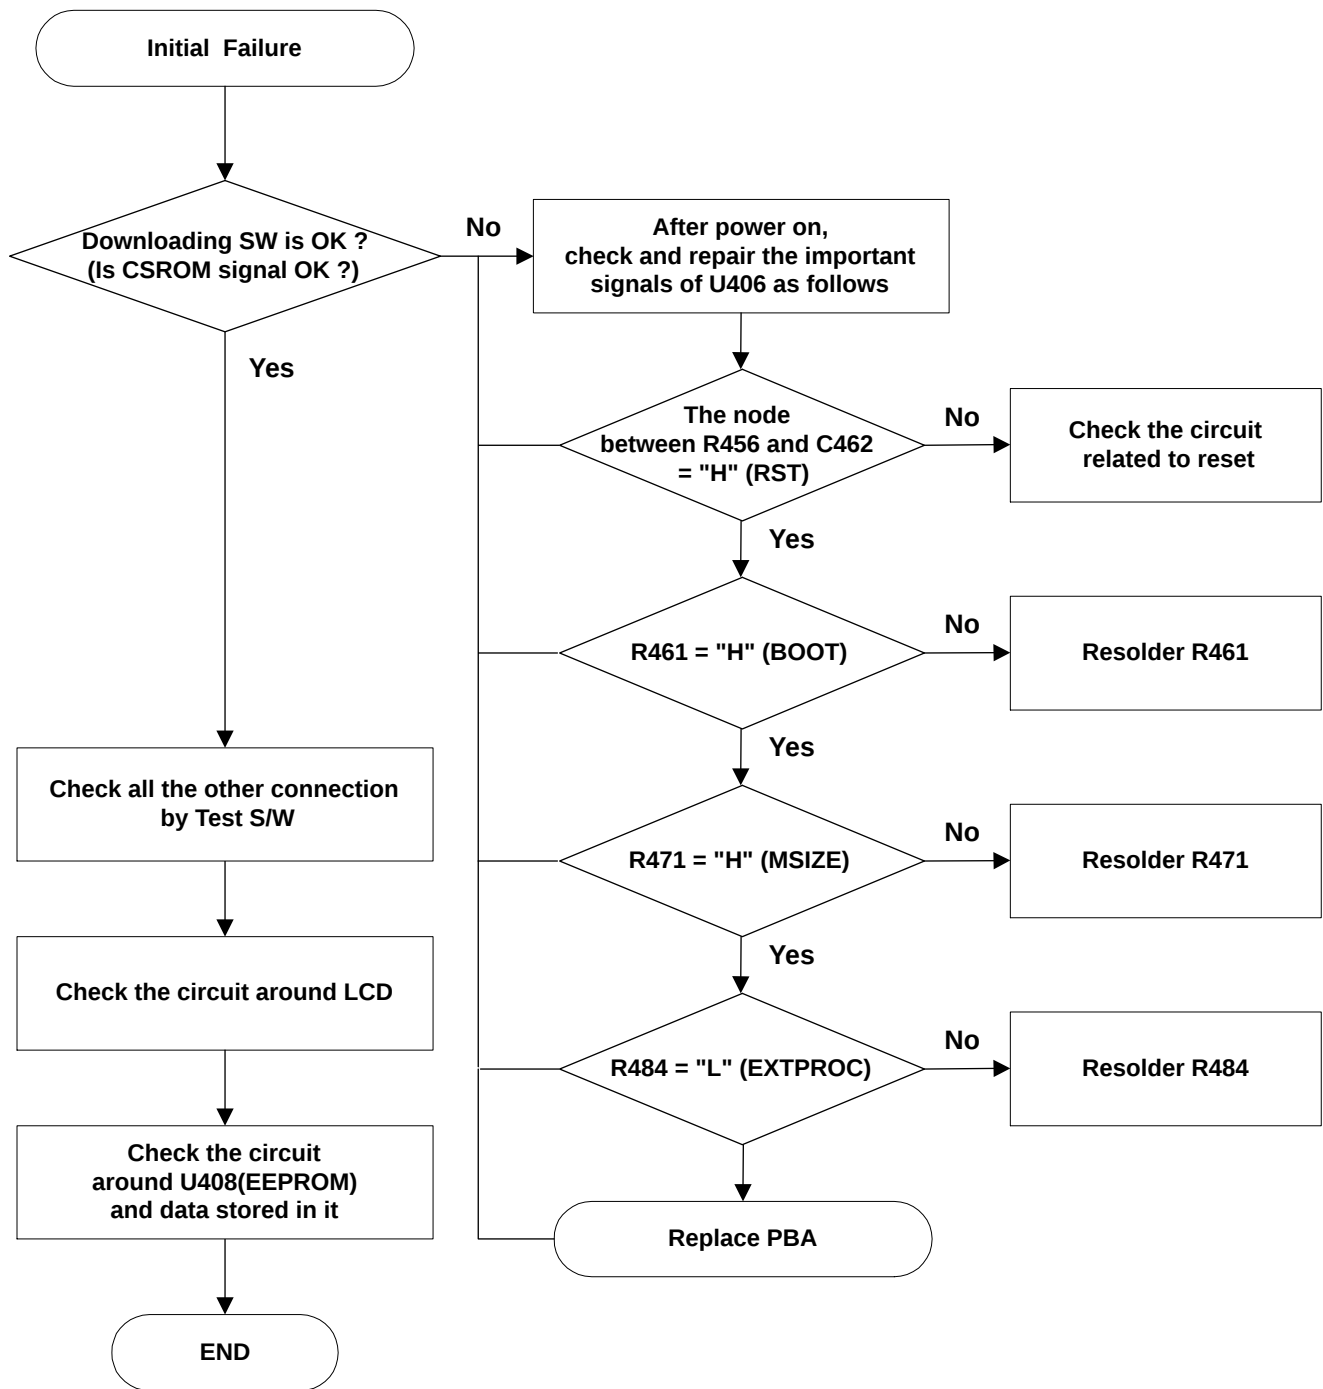


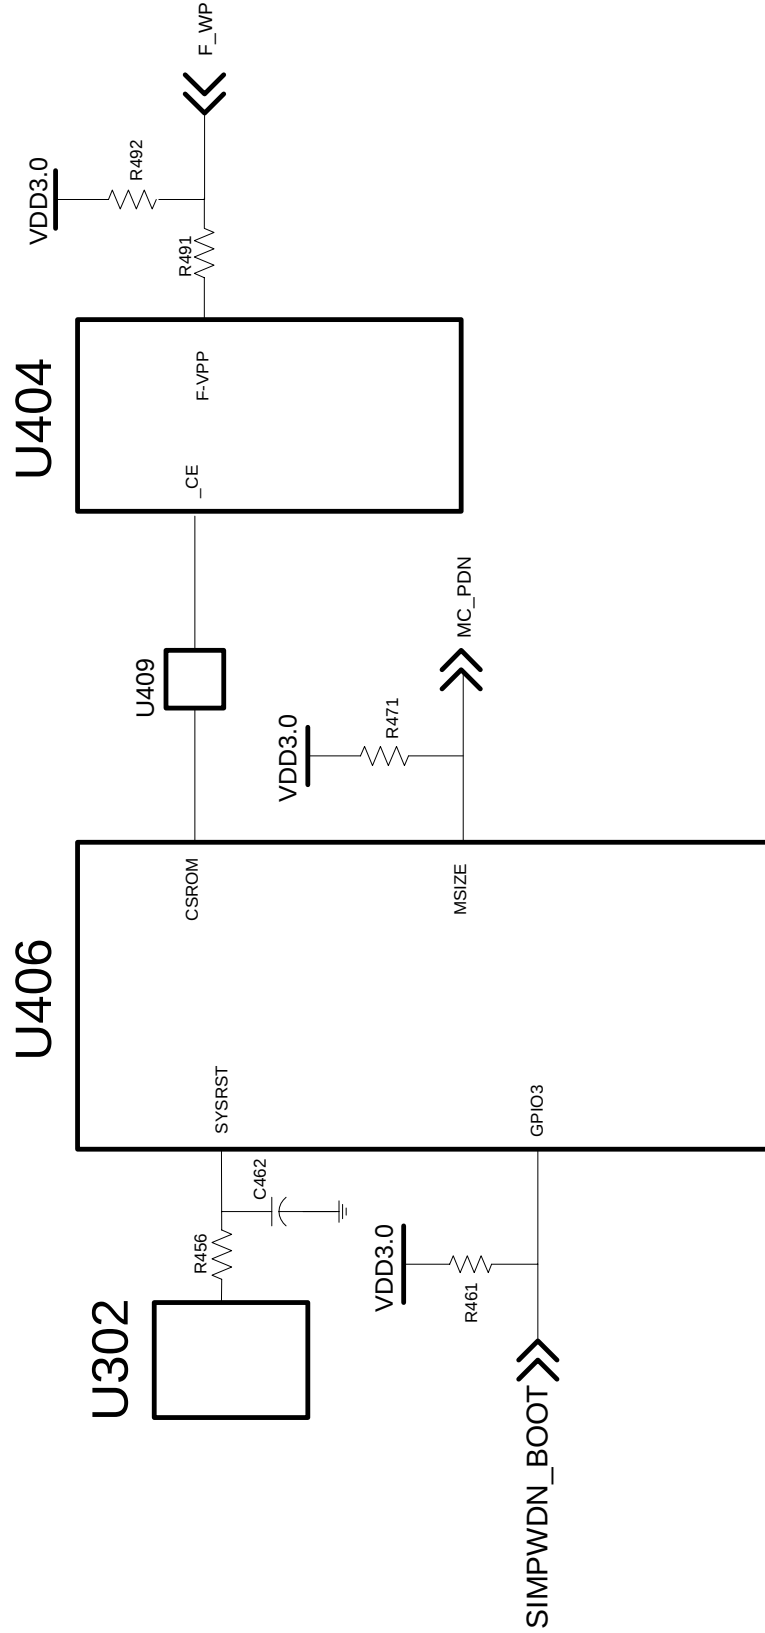


5-3 Charging Part

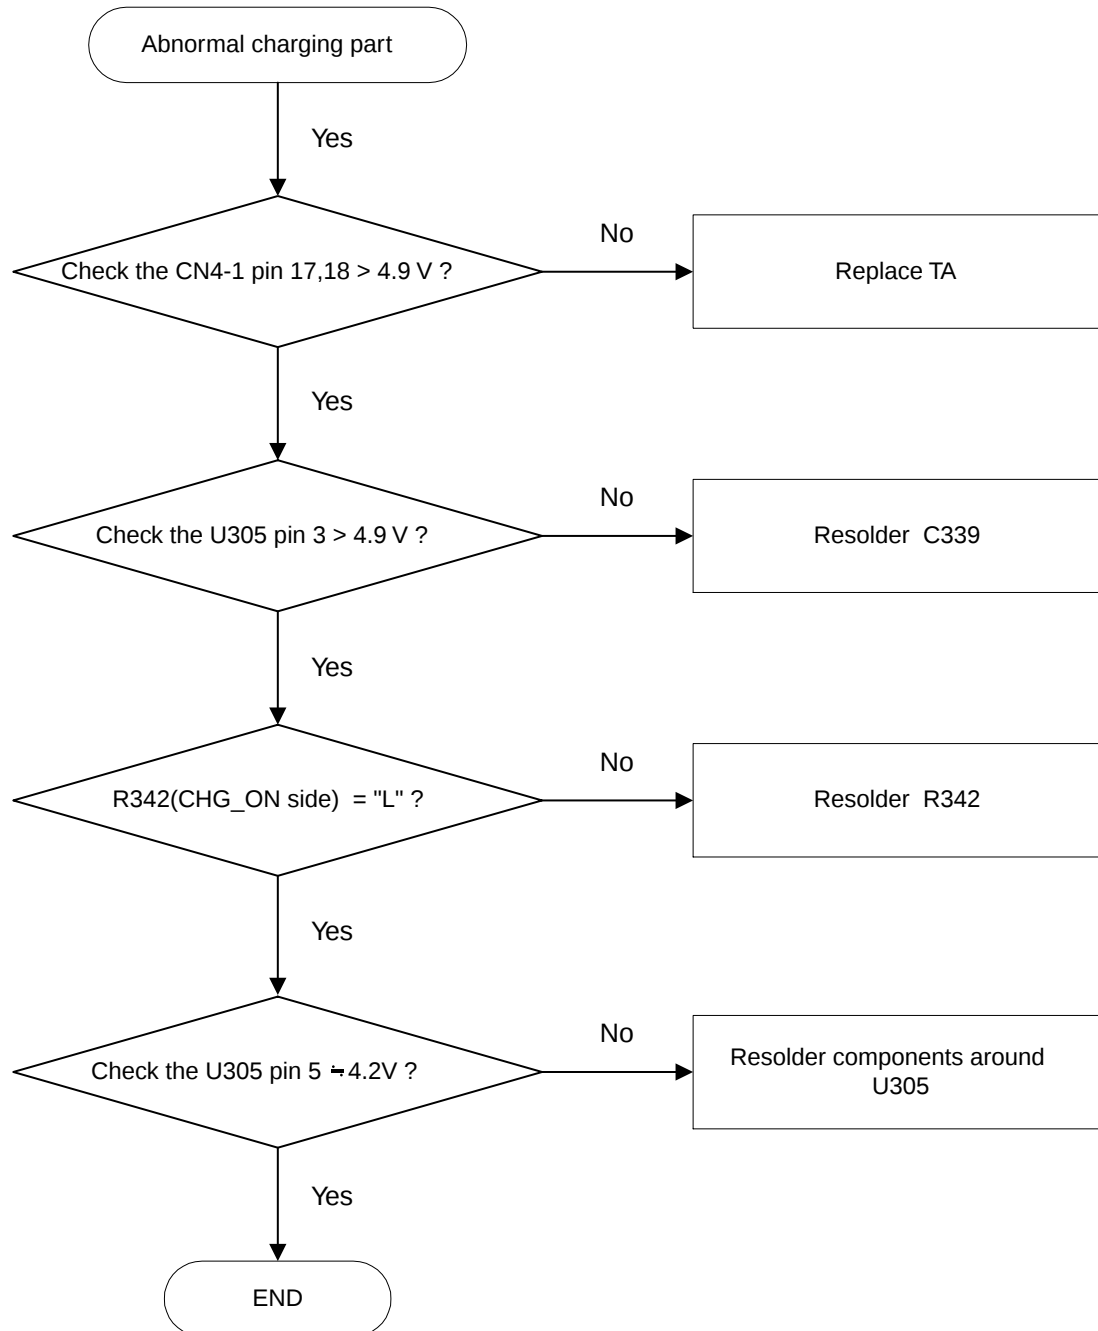



5-4 Sim Part

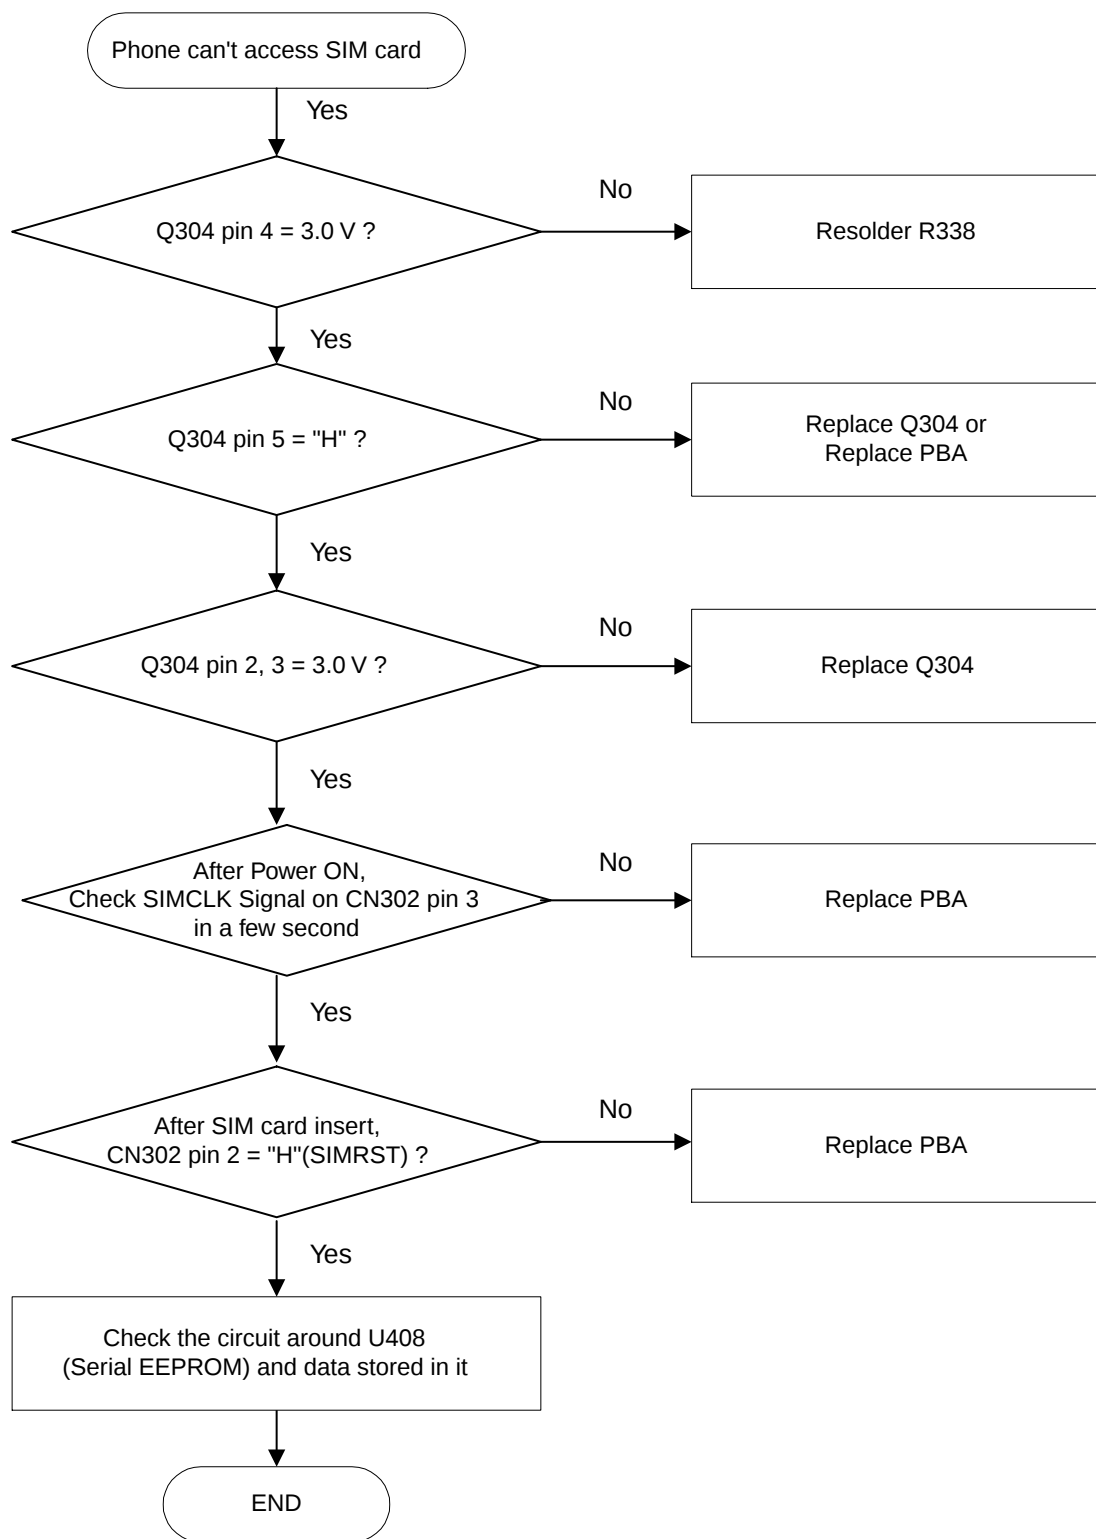

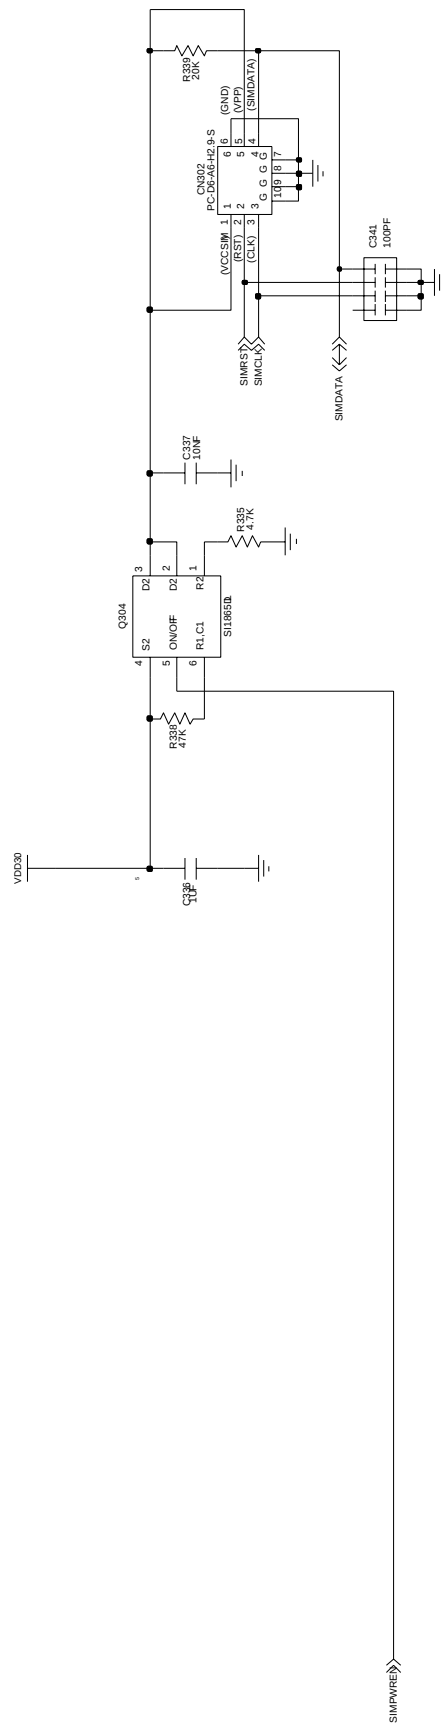



5-5 Microphone Part

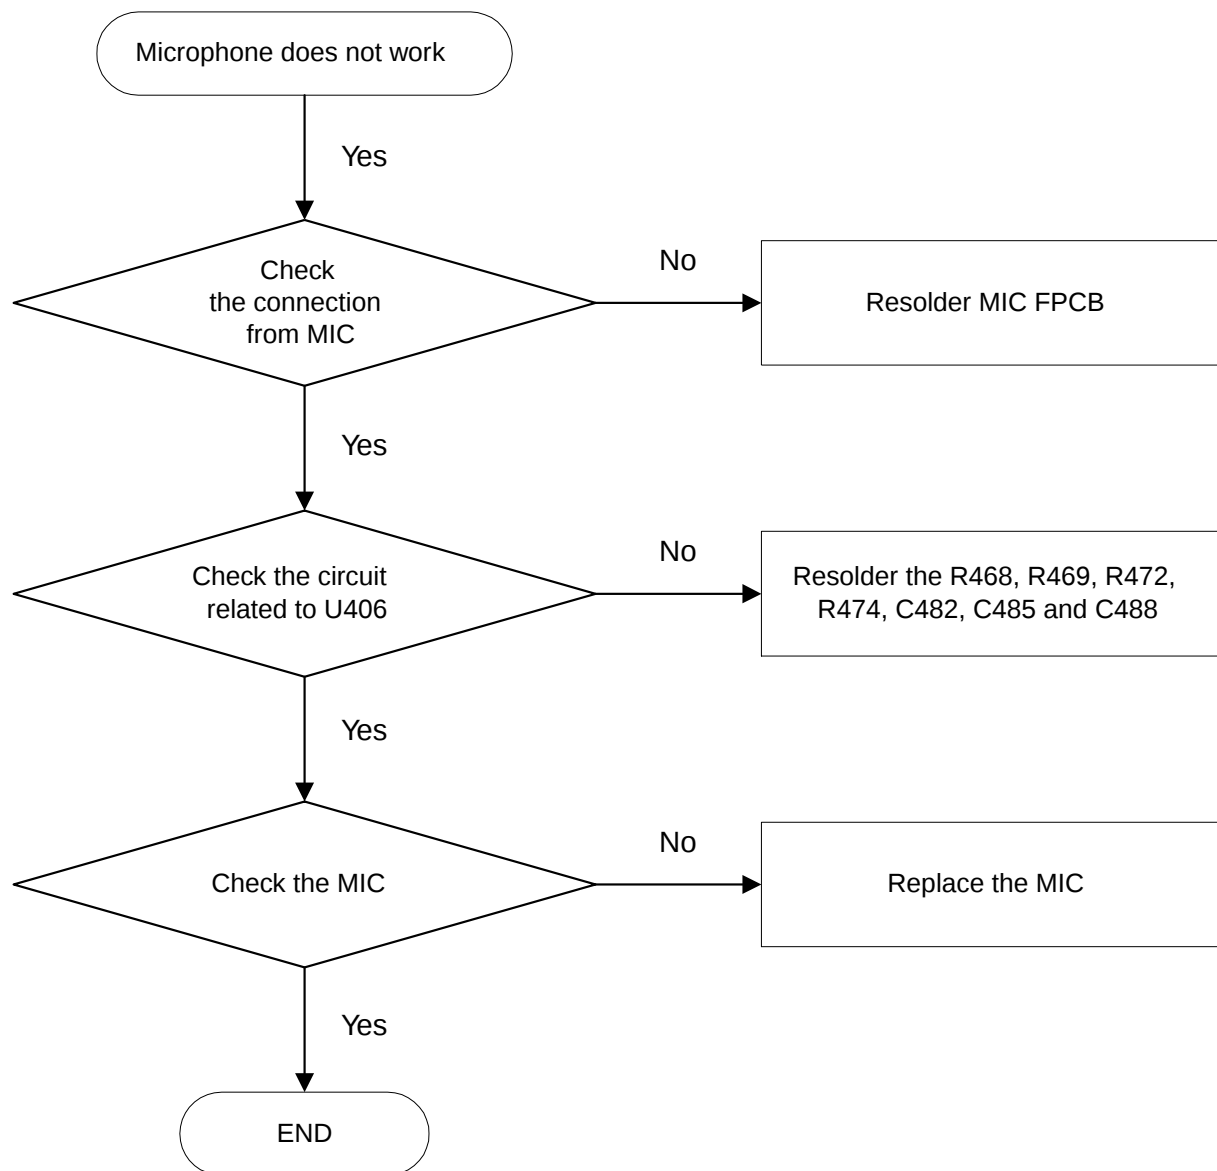

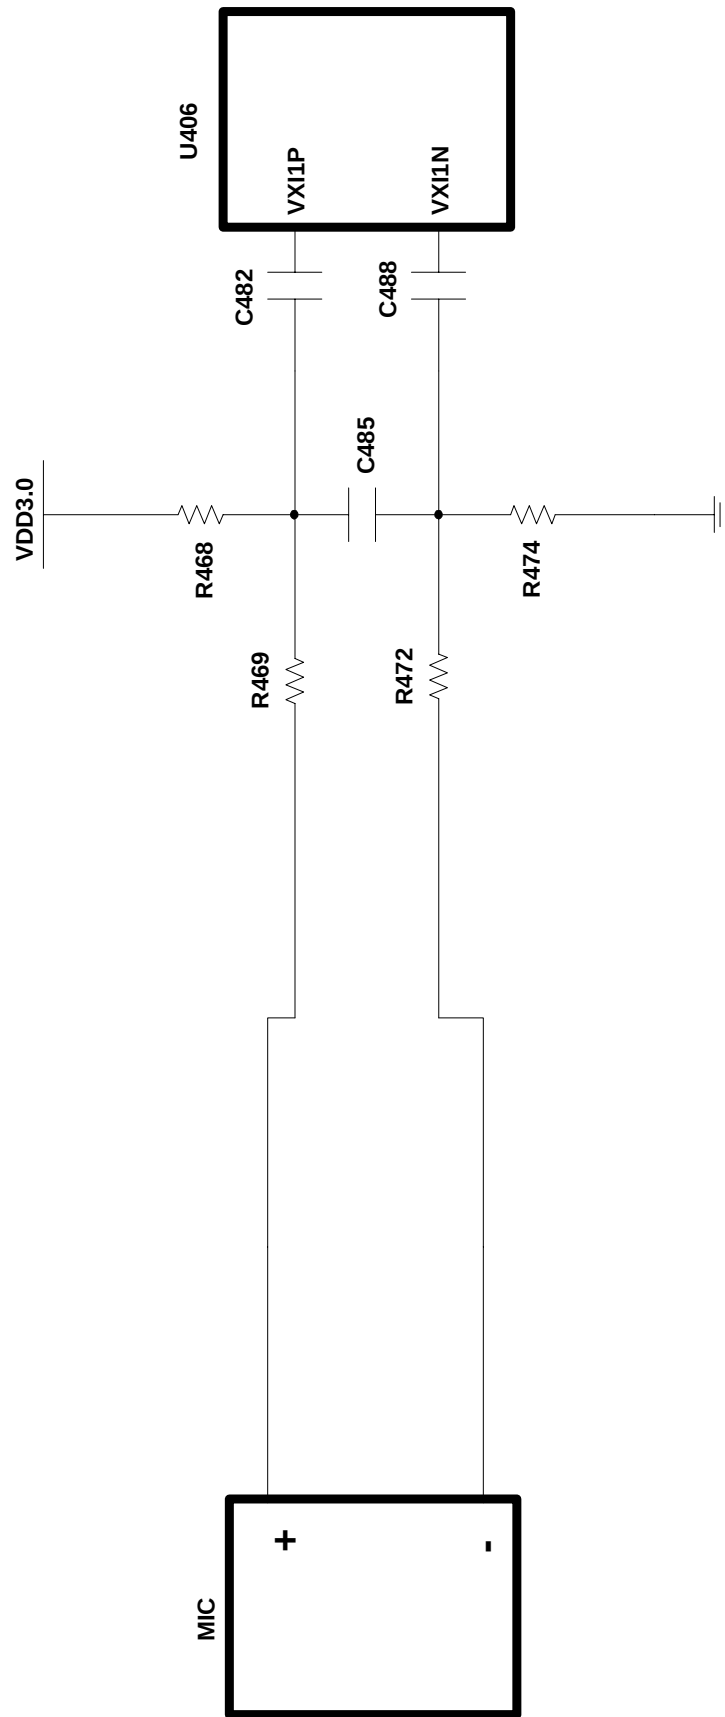


5-6 Speaker Part

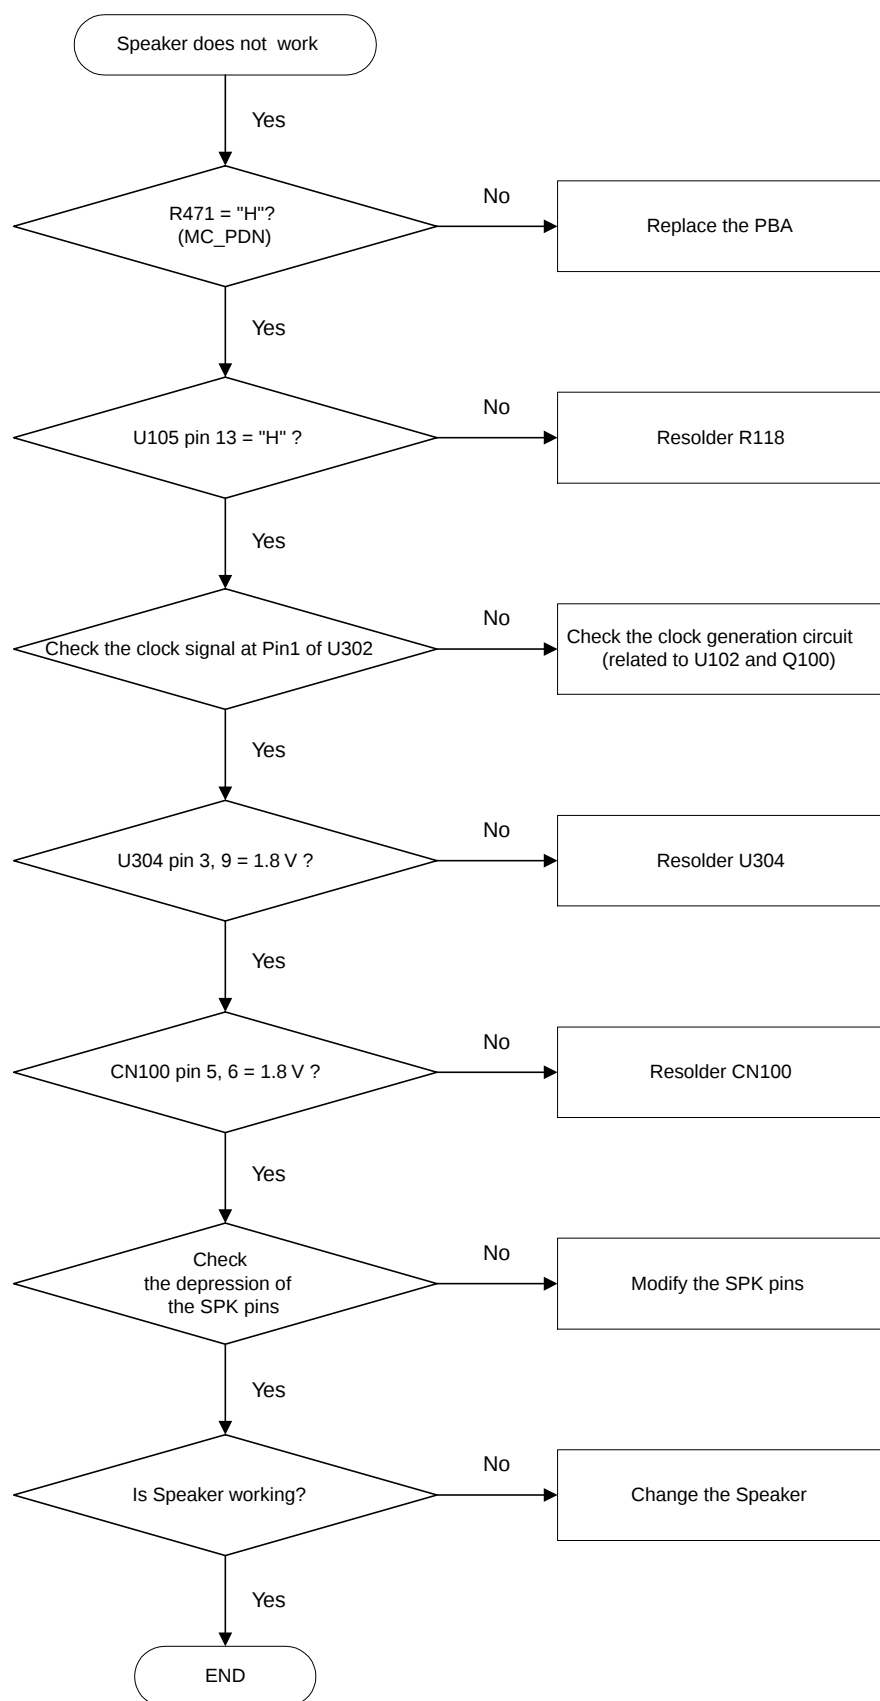


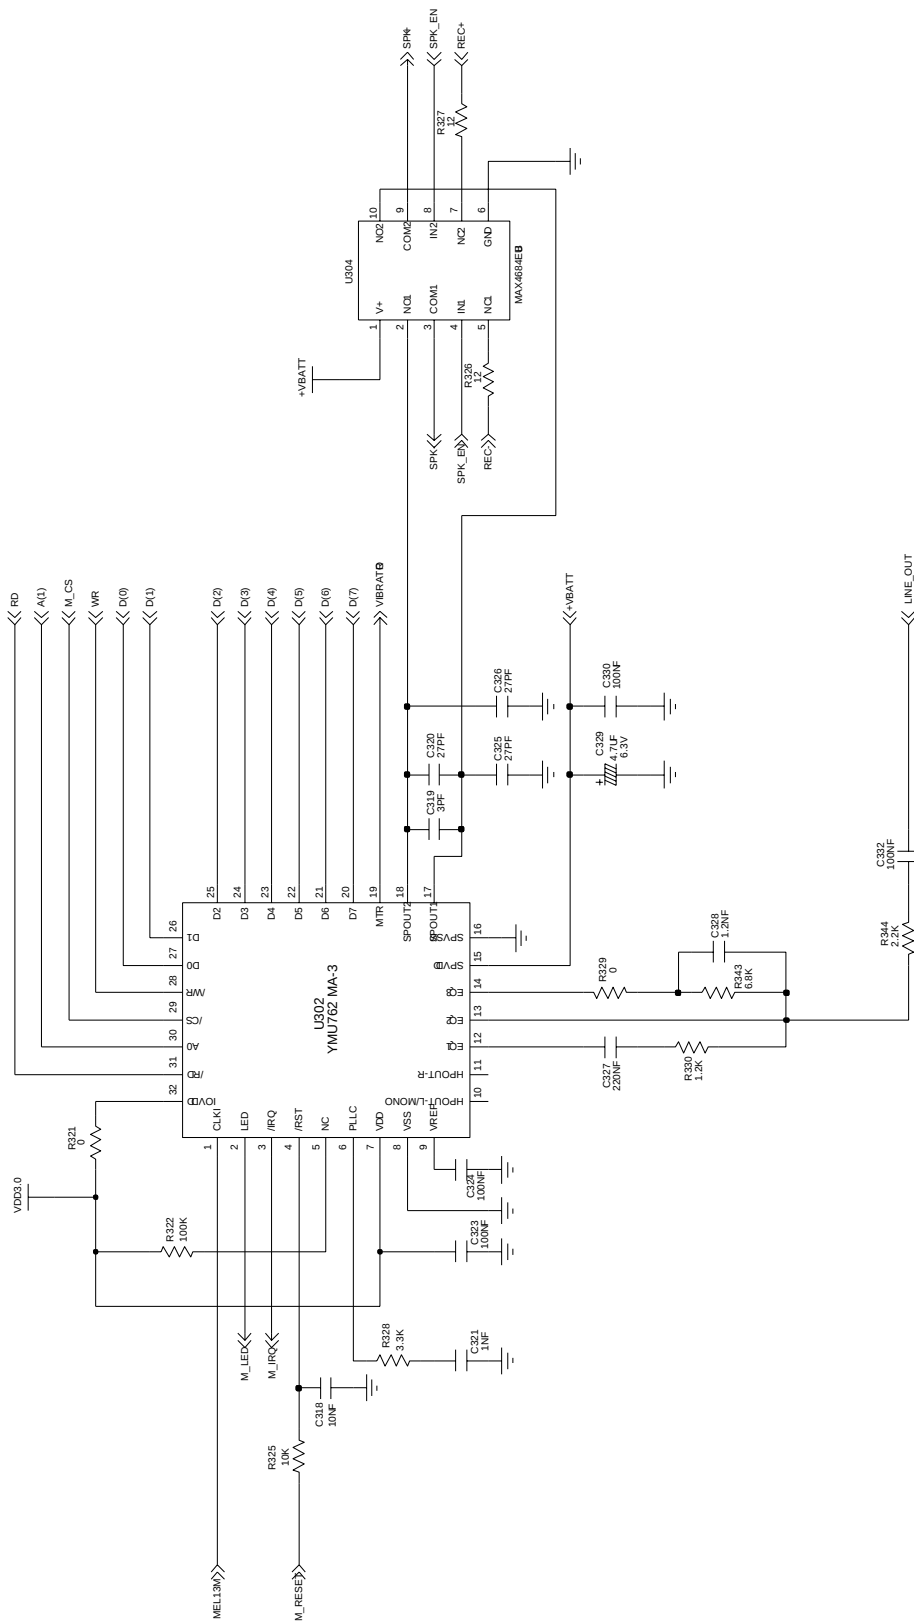


5-7 Key Data Input

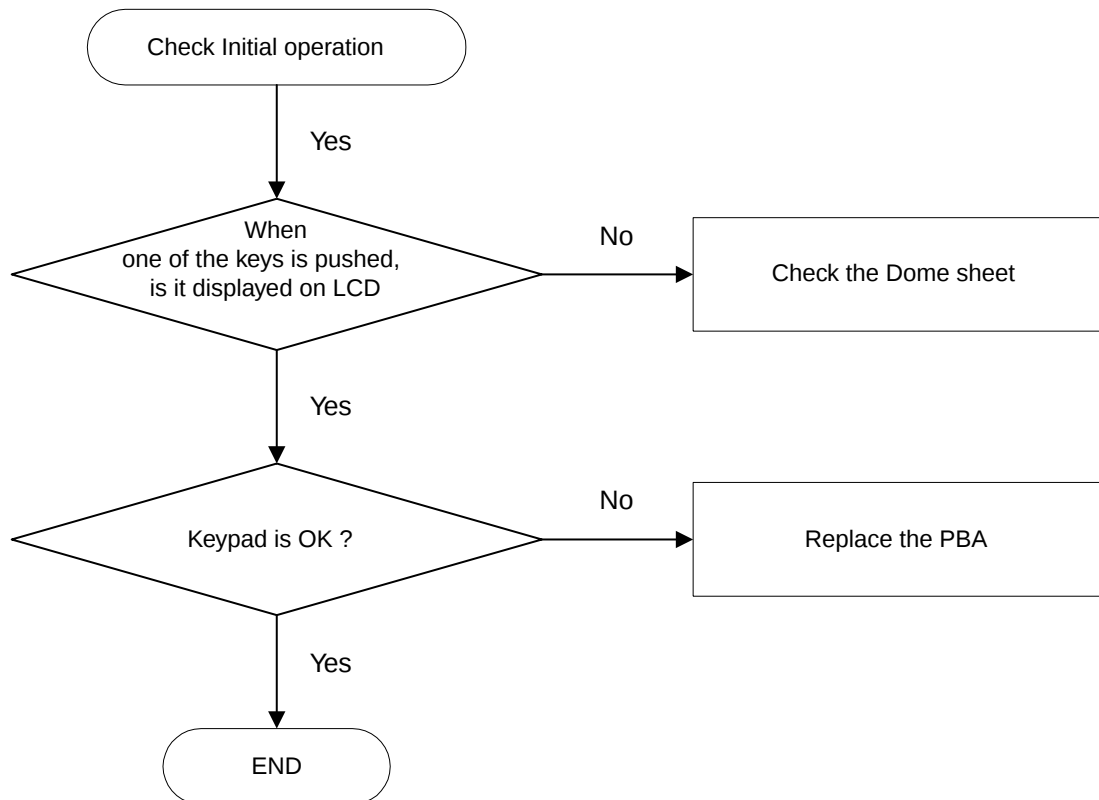


5-8 Receiver Part

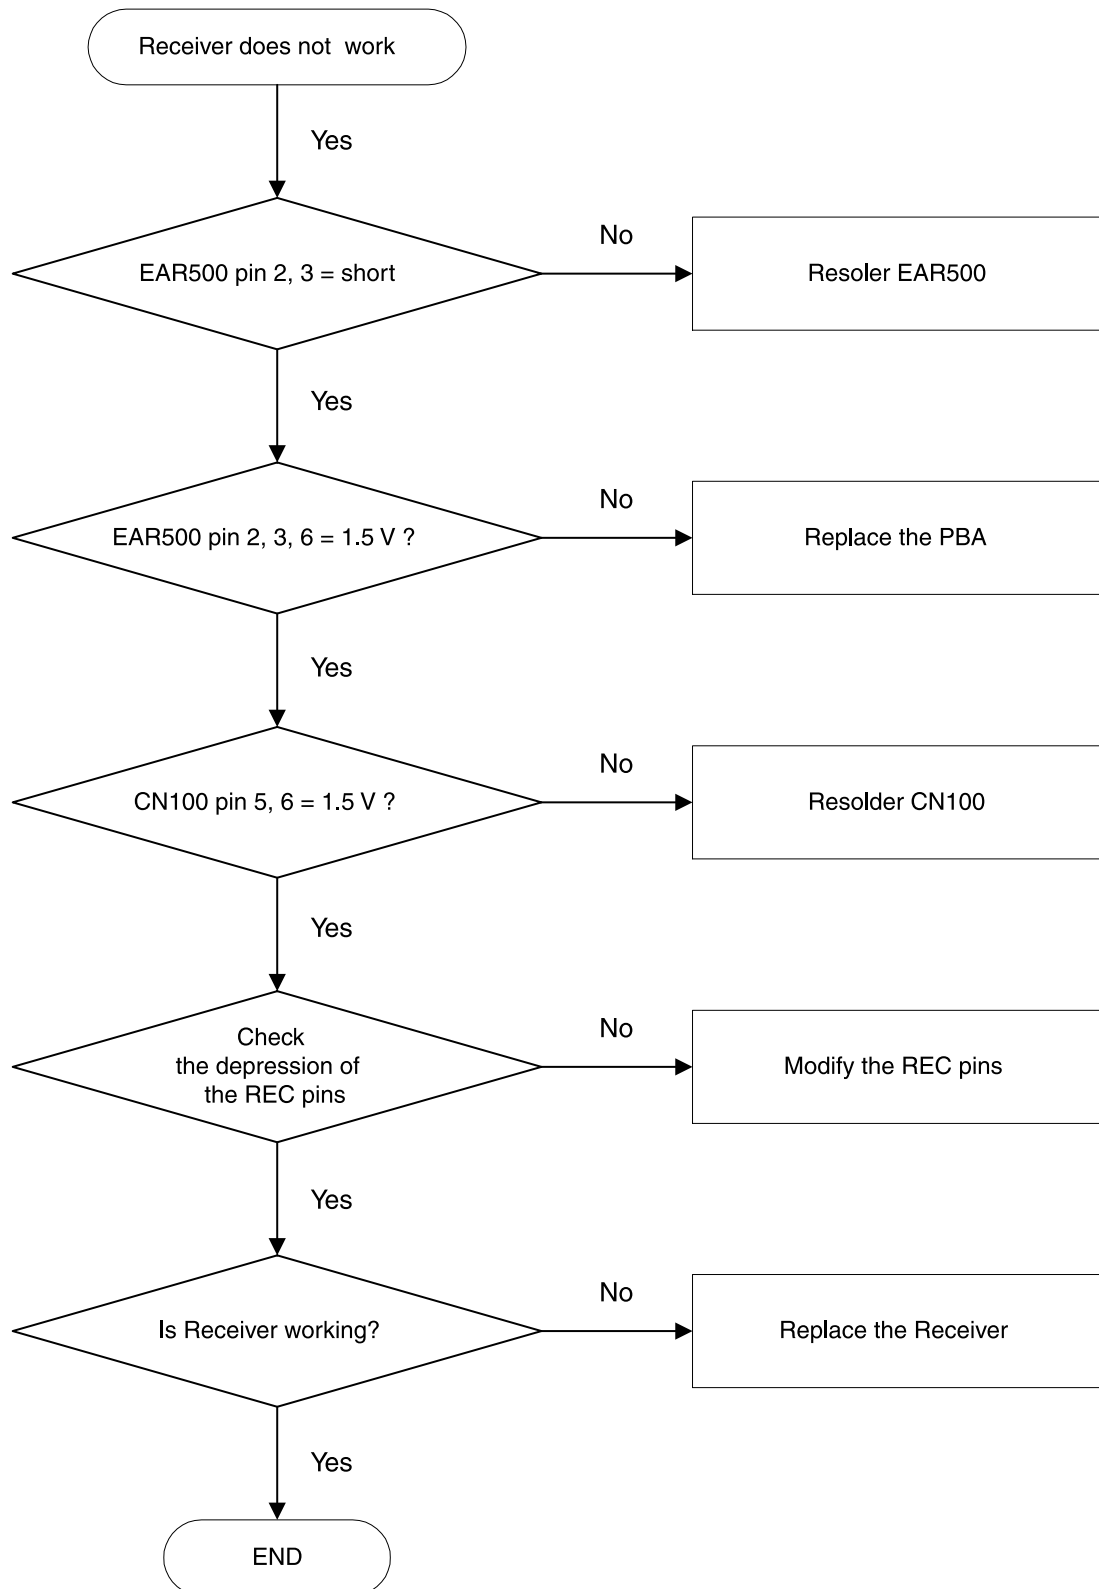


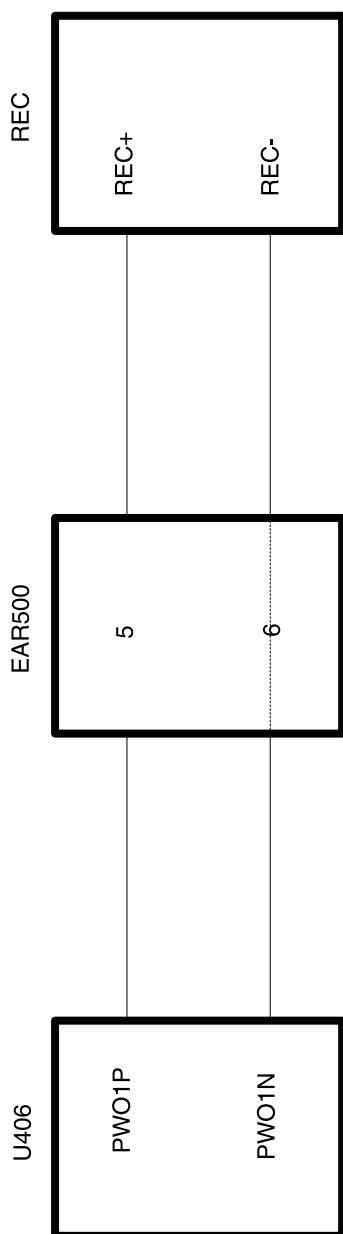


5-9 Ring Indicator

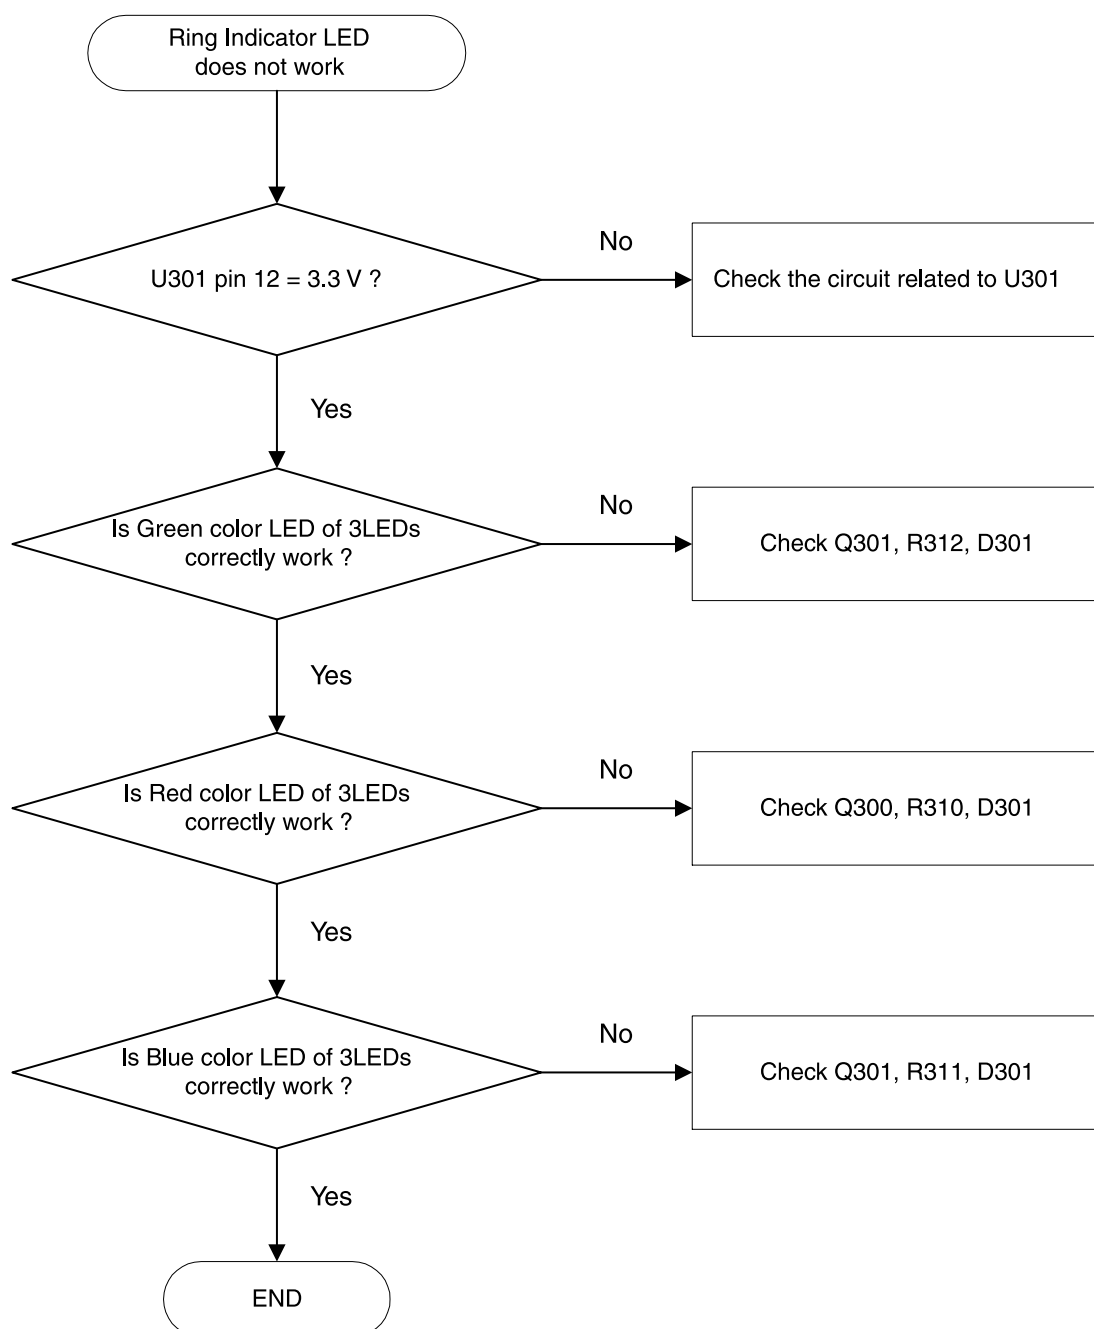


5-10 Back Light (for Color Main LCD)

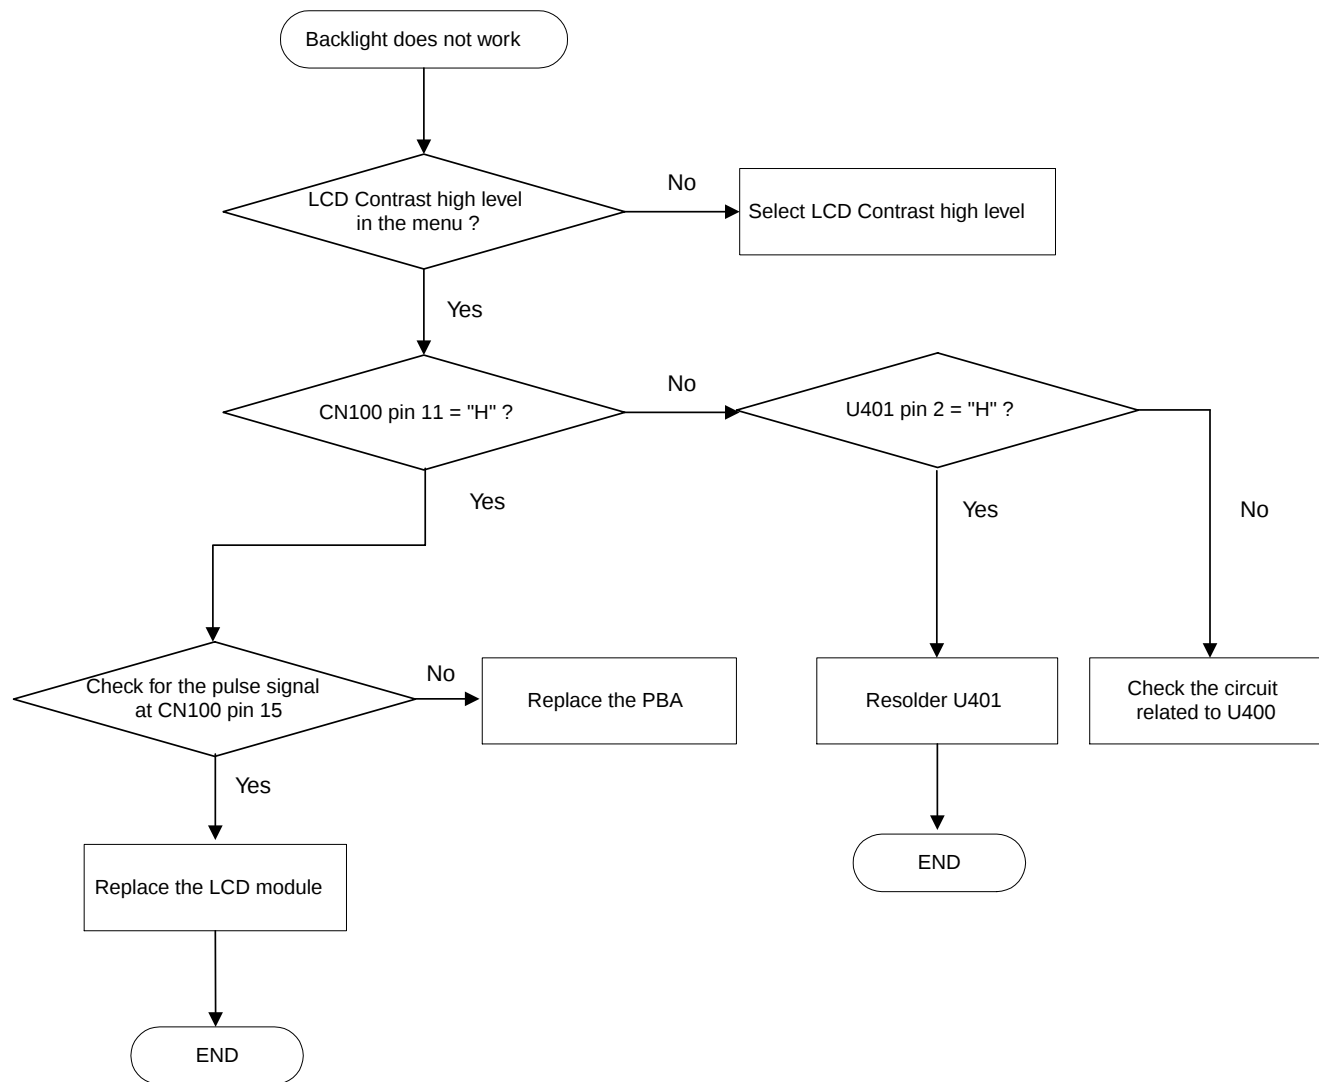


5-11 Back Light (for Sub LCD & Key)

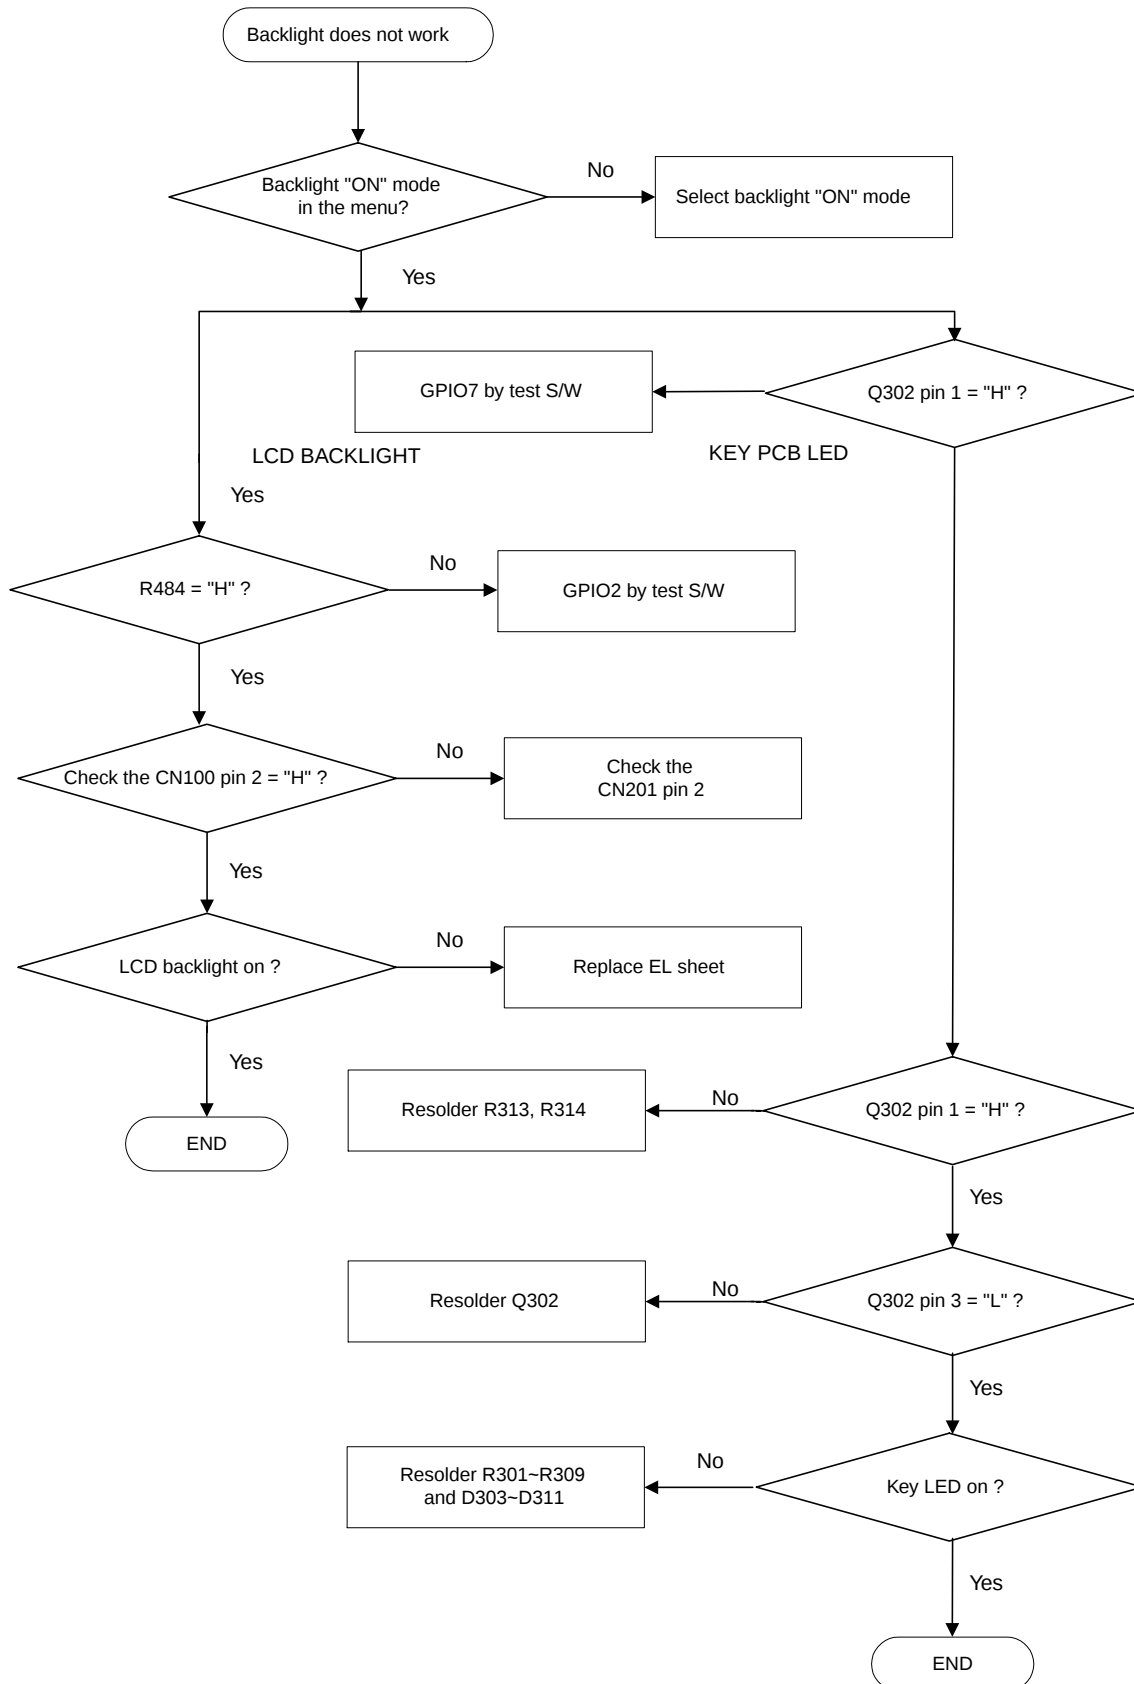


5-12 GSM Receiver

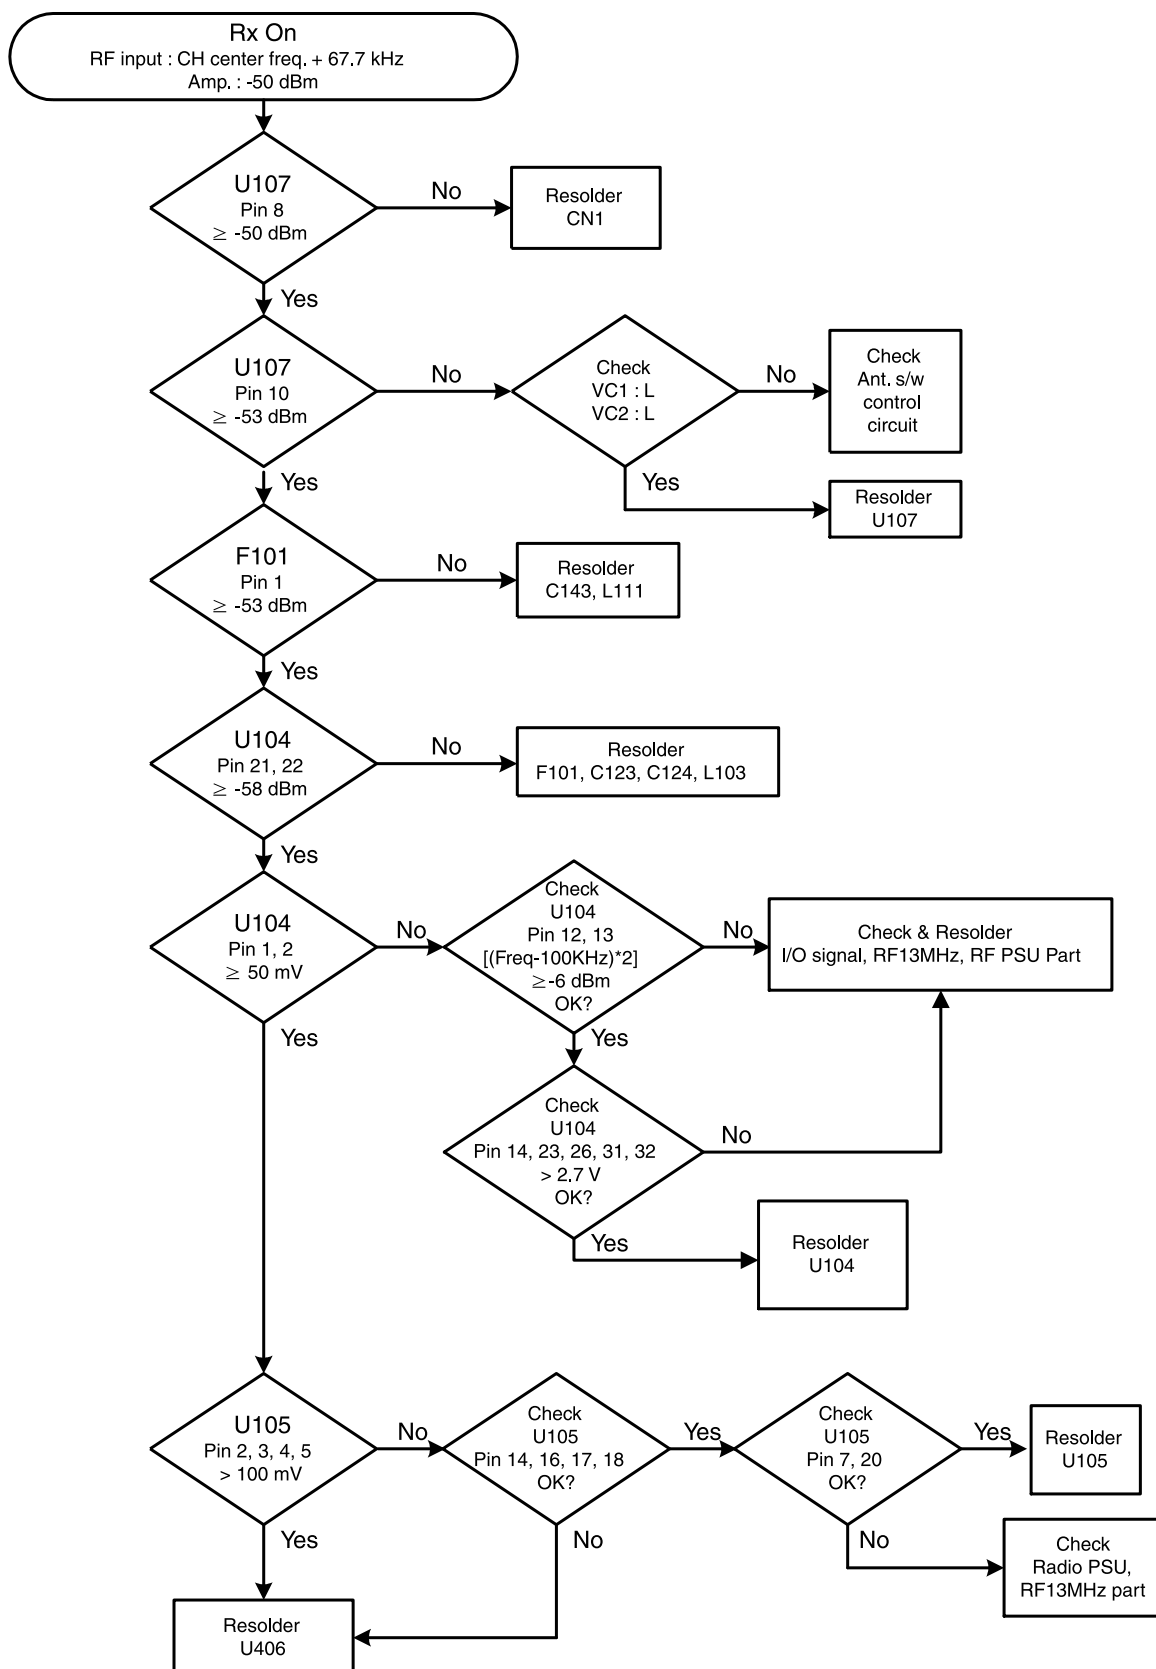

5-13 GSM Transmitter

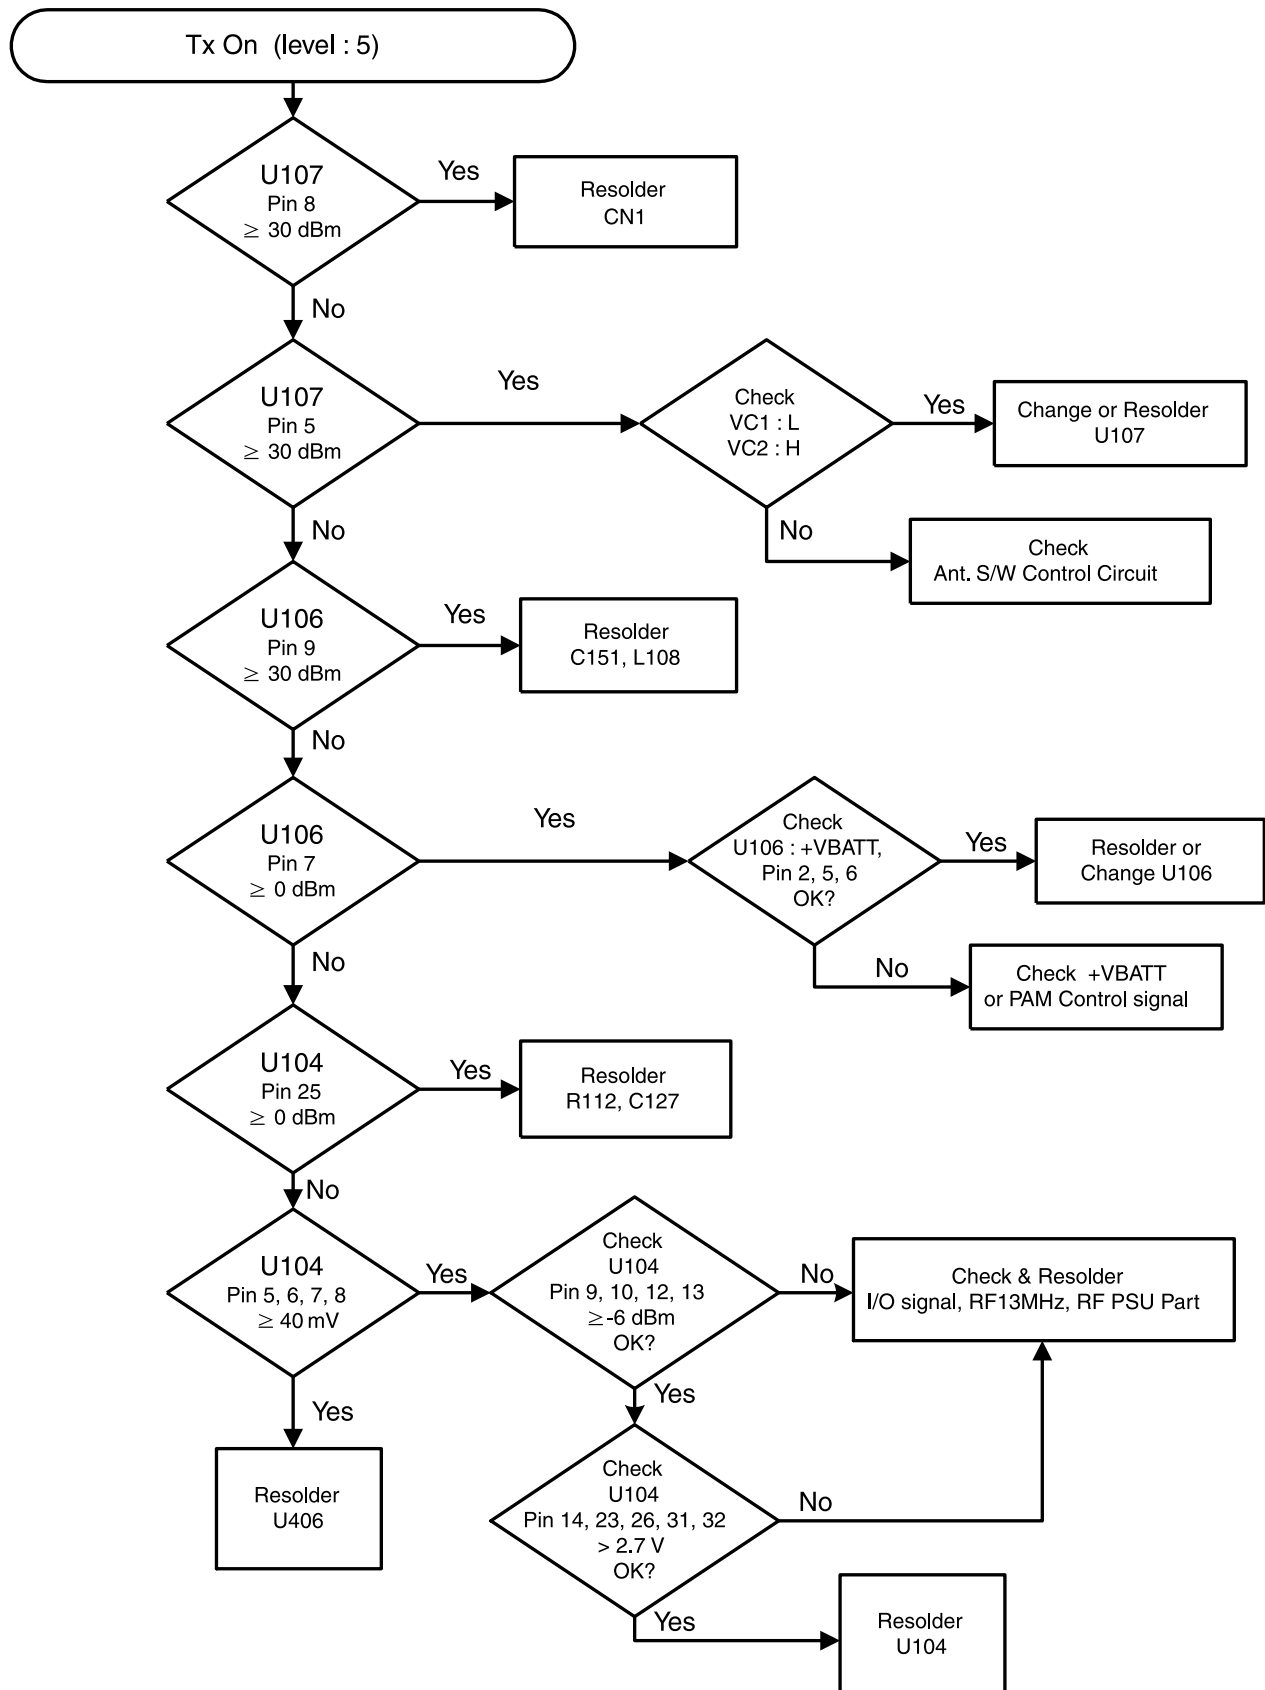

5-14 DCS Receiver

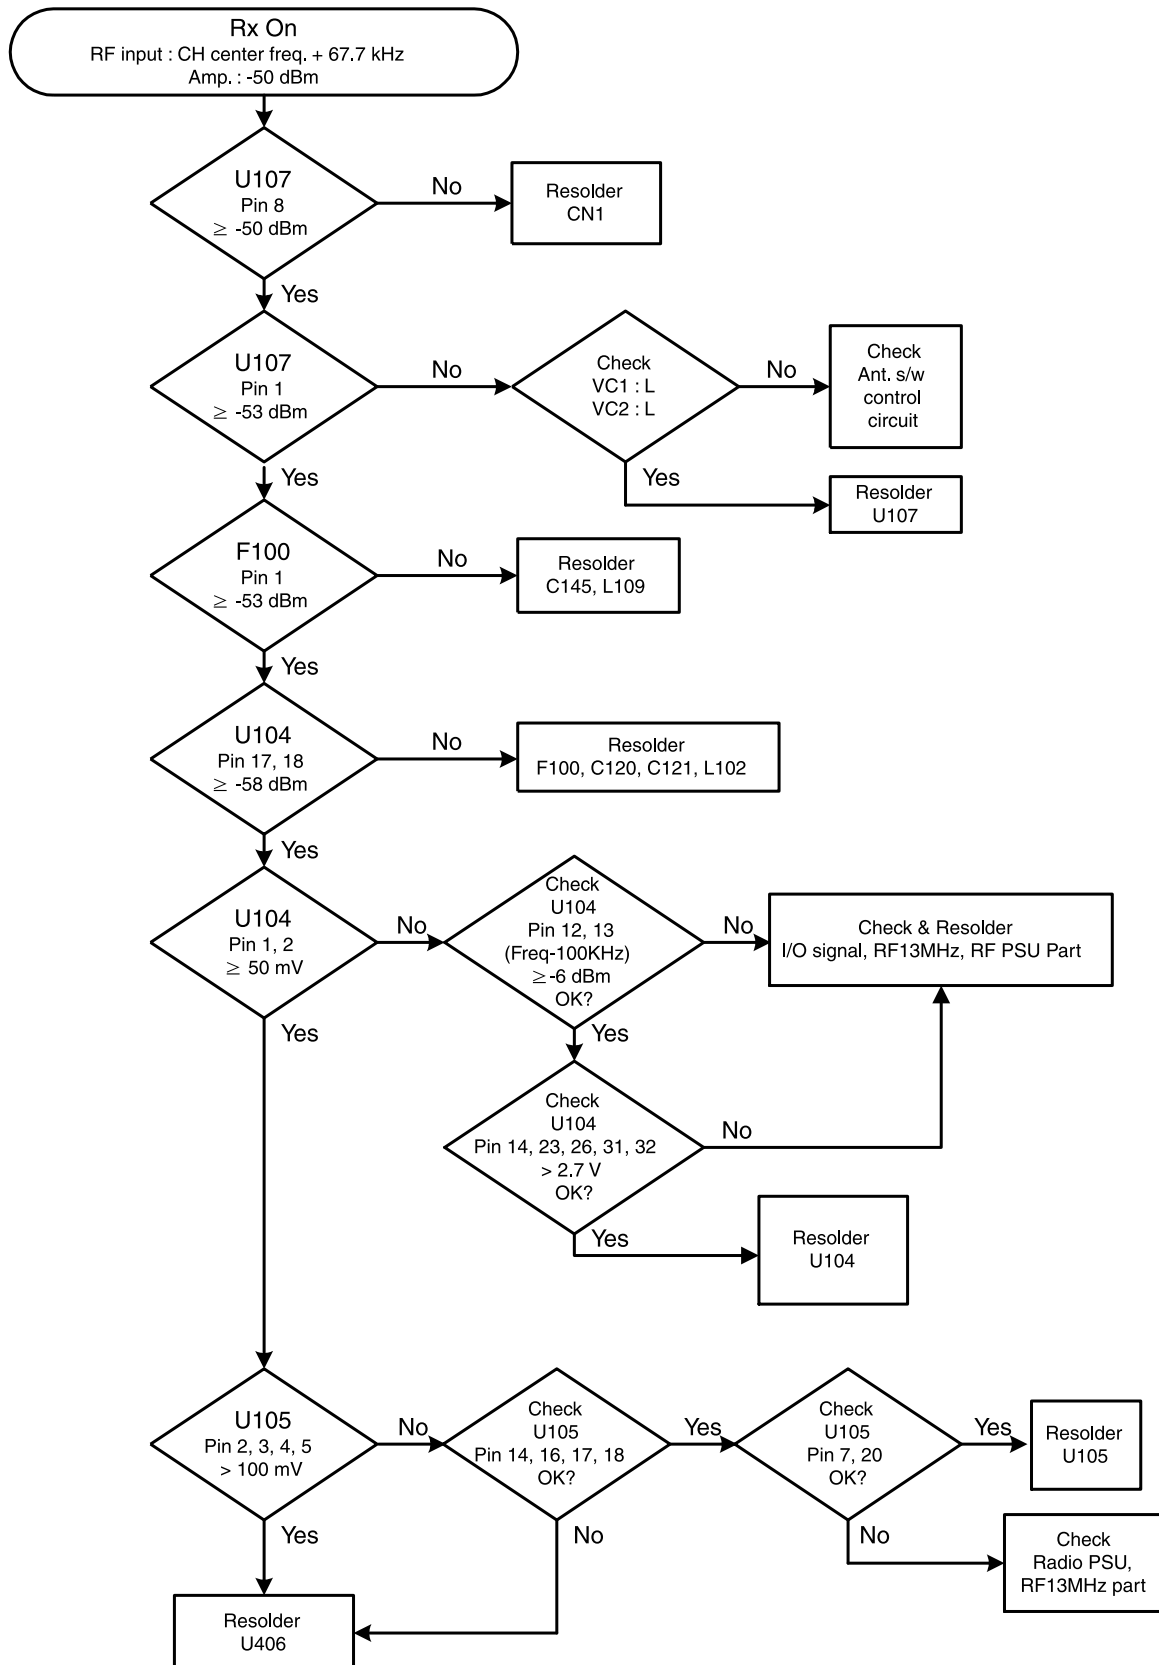

5-15 DCS Transmitter

