


**PRODUCT INFORMATION
OVERVIEW FOR A1018s/sc, A1028sc
by Toko (toko@gsm-free.org)**

1	Repair overview.....	2
1.1	General information.....	2
1.2	Revision overview	3
1.2.1	A1018s and A1018s Asian	3
1.2.2	A1018sc	5
1.2.3	GM518 (Panda)	6
1.2.4	A1028sc	7
1.2.5	Spare-part information.....	7
1.2.6	Service information overview.....	7
	Software SI	7
	Technical SI.....	8
2	Additional information	9
2.1	How to make a SIM-lock test on the A1018s-series	9
2.2	Description of Variant	9
2.3	Document information.....	13

1 Repair overview

1.1 General information

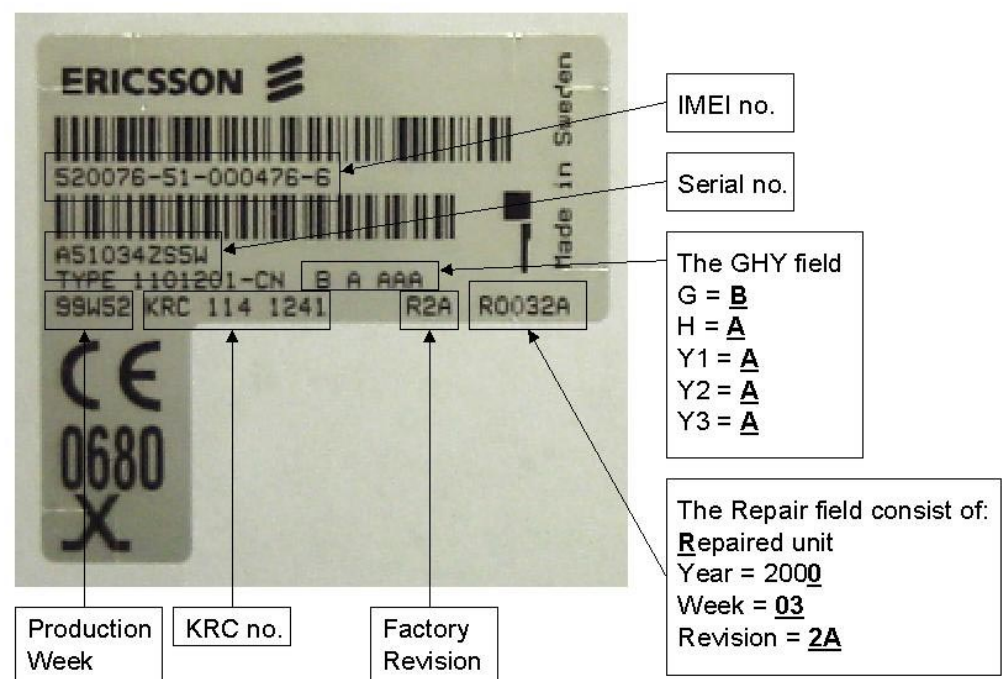

General KRC's (including all "/xx" variants except those mentioned in Exceptions).

GHY-fields are only used by GCS in special cases; this information is for factory mainly.

G-field = R-state of the CXC module (SW).

H-field = R-state of the hardware (Mechanics).

Y₁-field = R-state of the 1/KRC (everything except ROA antenna flip etc.).

Y₂-field = Variant of the ROA (different components/values due to many suppliers)

Y₃-field = R-state of the ROA (different upgrades or changes)

GHY₁Y₂Y₃ -fields are found after the TYPE no. on the label.

The Repair Revision is a mandatory repair upgrade or check that need to be performed at every repair apart from fixing the actual problem.

If your Repair Centre has the label process don't change the factory revision on the label after a repair. Use instead the "Repair Rev. Out" in the table for input to Labelmake's Repair revision field.

The SI ref. is the original document; if you search on the first four digits in SI ref. you'll find your version of it on CSPN.

1.2 Revision overview

1.2.1 A1018s and A1018s Asian

CXC 125 119 (Europe 1). TAC numbers 520020, 520045

CXC 125 121 (Europe 2). TAC numbers 520020, 520046, 520062, 520113

CXC 125 144 (Europe 3) TAC numbers 520020, 520047, 520050, 520082, 520061, 520063, 520114, 520115

CXC 125 238 (Europe 4) TAC numbers 520049

CXC 125 219 (Bouygues, Europe 3) TAC numbers 520029

CXC 125 144 (Telstra, Business AU, Europe 3) TAC numbers 520026, 520048

CXC 125 145 (Asia 1) TAC numbers 520030

Table of KRC number and region

KRC 114 followed by	Region
1007	E1
1013	E2
1014	E3
1041	E1
1042	E1
1043	E1
1044	E1
1045	E2
1046	E2
1047	E2
1048	E2
1049	E3
1050	E3
1051	E3
1052	E3
1053	AP1
1054	AP1

1055	AP1
1056	AP1
1057	AP1
1069	E3
1155	E3
1177	E3
1244	E4
1245	E4
1246	E4
1247	E4
1248	E4
1249	E3
1254	E4
1255	E4
1256	E4
1257	E4
1258	E4
1259	E4
1279	E2
1274	E4
1319	E3
1330	E3
1331	E3
1332	E3
1333	E3
1334	E3
1335	E3
1336	E3
1337	E3
1340	AP1
1341	AP1
1342	AP1
1343	AP1
1344	AP1
1345	AP1

1348	AP1
------	-----

KRC rev in	Description of KRC revision	Mandatory Repair Actions	Repair rev out
R1A	First revision for these KRC's was never sold.	1A,2A,3A	3A
R1B	Release version	1A,2A,3A	3A
R2A	New SW R2A 990823_1030	1A,2A,3A	3A
R3A	New SW R3A 991105_1519	3A	3A
R5A	New SW R5A 000114_1514	3A	3A
R7A	New SW R7A 000601_1513	3A	3A
R8A	New SW R8A 000925_1144	none	3A

Repair Rev.	Description	SI ref.
1A	R2A Software A1018s	3747-7436
2A	R3A Software A1018s EU1 R3A Software A1018s EU2 R3A Software A1018s EU3 R3A Software A1018s EU4 R3A Software A1018s Asia1 R3A Software A1018 / A1028 SC R3A Software A1018s Bouygues	4561-9700 4564-9704 4565-9705 4566-9706 4567-9707 4569-9712 4567-9710
3A	A1018s Eu1 SW CXC 125 119R5A,R1 A1018s Eu2 SW CXC 125 121R5A,R1 A1018s Eu3 SW CXC 125 144R5A,R1 A1018/28SC SW CXC 125 122 000114R5A,R1 A1018 CXC 125112 000601 R7A R1 A1018 00925 R8A R1	5199-1227 5201-12229 5121-11828 5105-11761 5883-15336 7604-19139

1.2.2 A1018sc

CXC 125122 TAC numbers, 520042, 520054

KRC 114 followed by	Region
1015	AP2
1179	AP2
1192	AP2
1193	AP2
1194	AP2
1195	AP2

1239	AP2
1320	AP2
1322	AP2
1323	AP2
1324	AP2

KRC rev in	Description of KRC revision	Mandatory Repair Actions	Repair rev out
R1A	First revision for these KRC's was never sold.	1A,2A,3A	3A
R1B	Release version	1A,2A,3A	3A
R2A	New SW R2A 990823_1030	1A,2A,3A	3A
R3A	New SW R3A 991105_1519	3A	3A
R5A	New SW R5A 000114_1514	3A	3A
R7A	New SW R7A 000601_1513	3A	3A
R8A	New SW R8A 000925_1144	none	3A

Repair Rev.	Description	SI ref.
1A	R2A Software A1018s	3747-7436
2A	R3A Software A1018s EU1 R3A Software A1018s EU2 R3A Software A1018s EU3 R3A Software A1018s EU4 R3A Software A1018s Asia1 R3A Software A1018 / A1028 SC R3A Software A1018s Bouygues	4561-9700 4564-9704 4565-9705 4566-9706 4567-9707 4569-9712 4567-9710
3A	A1018s Eu1 SW CXC 125 119R5A,R1 A1018s Eu2 SW CXC 125 121R5A,R1 A1018s Eu3 SW CXC 125 144R5A,R1 A1018/28SC SW CXC 125 122 000114R5A,R1 A1018 CXC 125112 000601 R7A R1 A1018 00925 R8A R1	5199-1227 5201-12229 5121-11828 5105-11761 5883-15336 7604-19139

1.2.3 GM518 (Panda)

CXC 125 122, TAC number 520093

KRC 114 1067

KRC rev in	Description of KRC revision	Mandatory Repair Actions	Repair rev out
R5A	New SW R5A 000114_1514	1A	1A
R7A	New SW R7A 000601_1513	1A	1A
R8A	New SW R8A 000925_1144	None	1A

1.2.4 A1028sc

CXC 125 122, TAC numbers 520054

KRC 114 1124, KRC 114 1325

KRC rev in	Description of KRC revision	Mandatory Repair Actions	Repair rev out
R5A	New SW R5A 000114_1514	1A	1A
R7A	New SW R7A 000601_1513	1A	1A
R8A	New SW R8A 000925_1144	None	1A

1.2.5 Spare-part information

Description	Handling Instructions	Part No. (before change)	Part No. (after change)	S.C. Level	SI ref.
Top screws	Scrap old	SXA 104 3990	SXA 104 3990/2	SP	5703-14392
Battery screws	Scrap old	SXA 1205164/3	SXA 1205 164/4	SP	6664-19010
Flash stock	Scrap particular type	'B3TA110' version of the RYT 118 6096/1 component	-	Adv an St	6830-19846

1.2.6 Service information overview

Software SI

SI Ref.	Date	Header
3747-7436	990923	SI- R2A Software A1018s
4561-9700	991210	SI- R3A Software A1018s EU1
4564-9704	991210	SI- R3A Software A1018s EU2
4565-9705	991210	SI- R3A Software A1018s EU3
4566-9706	991210	SI- R3A Software A1018s EU4
4567-9707	991210	SI- R3A Software A1018s Asia1
4568-9710	991210	SI- R3A Software A1018s Bouygues
4569-9712	991210	SI- R3A Software A1018 / A1028 SC
4846-10725	001028	SI-Test Program for A1018 / A1028 Release 3
4870-10809	000128	SI-Reset software Generic for A1018s Release 2
4871-10810	000201	SI-Reset software Coca-Cola for A1018s Release 1
4872-10811	000201	SI-Reset software Orange for A1018s Release 1
5105-11761	000309	SI-A1018/28sc CXC 125 122 000114R5A,R1

SI Ref.	Date	Header
5121-11828	000313	SI-A1018s CXC 125 144R5A,R1
5136-11896	000315	SI-GM518 CXC 125 122 000114R5A,R1
5199-12227	000324	SI-A1018s CXC 125 119R5A,R1
5201-12229	000324	SI-A1018s CXC 125 121R5A,R1
5583-13885	000526	SI -Efra 1.1.0.2 Service Pack 1
5876-15331	000711	SI A1018 SW, CXC 125119. 000601 R7A R1
5877-15332	000601	SI-A1018 CXC 125145, 000601 R7A R1
5878-15334	000711	SI-A1018 CXC 125219, 000601 R7A R1
5879-15335	000601	SI-A1018 SW CXC 125121 000601 R7A R1
5880-15336	000601	SI-A1018 SW CXC 125114, 000601 R7A R1
5883-15339	000601	SI-A1018scA1028sc SW CXC125112 000601 R7A R1
5897-15379	000713	SI-Efra1.1.0.2 Service Pack 3
5945-15654	000720	SI A1018 CXC 125 119 R7A R1
5946-15655	000720	SI A1018 CXC 125 219 R7A R1
5947-15656	000720	SI A1018 CXC 125 145 R7A R1
5949-15663	000720	SI A1018 CXC 125 121 R7A R1
5950-15664	000720	SI A1018 CXC 125 144 R7A R1
5954-15668	000720	SI A1018 CXC 125 238 R7A R1
5955-15669	000720	SI A1018 CXC 125112 R7A R1
6058-16092	000802	SI A1018A1028 TST, 13860R4 R4
6162-16441	000820	SI A1018 Note on R7A software
6165-16482	000821	SI A1018A1028 TP flash 13286R4 R5
6176-16540	000822	SI Efra 1.1.0.2 Service Pack 4
6214-16798	000829	SI The EMMA I software shell will be phased out
6284-17289	000908	SI Efra advanced 1.2.0.1
6481-18049	001004	SI Efra 1.2.0.1 Service Pack 2
6519-18259	001011	Efra advanced 1.2.0.1 SP 3
6701-19136	001109	SI A1018s 00925 R8A R1
6702-19137	001109	SI A1018s Asian 00925 R8A R1
6703-19138	001109	SI A1018sc (Panda) 00925 R8A R1
6704-19139	001109	SI A1018sc 00925 R8A R1
6705-19140	001109	SI A1028s 00925 R8A R1

Technical SI

SI Ref.	Date	Header
3147-5878	000624	A1018s Change value for tightening 20Ncm
3450-6713	990816	SI Personality swap software for A1018s Release 2
3463-6738	990817	SI-S868 R3A
3558-7078	990817	SI-Service software for A1018s Release 3
4247-8510	990902	SI-How to avoid dead phones after flashing! Rev 2
4447-9076	991026	SI-LCD A1018S,SC / A1028SC
4798-10564	991119	SI-A1018/A1028 Language Information
4845-10724	000119	SI-ON/OFF Problem A1018/A1028
4843-10721	000128	SI-New Label For A1018 / A1028
5194-12211	000128	SI-A1018/A1028 Changes in PnP/web shop
6170-16491	000821	SI A1018 Display Problem
6399-17706	000920	SI A1018 flash stock

SI Ref.	Date	Header
5703-14392	000613	SI-New top PCB screw
6260-17064	000905	SI A2618s LED and shielding box information
6664-19010	001106	SI A1018 Battery screw
6830-19846	001201	SI Flash Stock Update
6933-20330	001214	A1018s/sc, A1028, GM518 Network Problem
7019-20757	000109	A1018, A1028, GM518 Noise during call

2 Additional information

2.1 How to make a SIM-lock test on the A1018s-series

1. Insert the phase 2 test SIM-card.
2. Attach the battery.
3. Turn on the phone by pressing the *NO* key.
4. Press the following sequence on the keyboard: ◀ ☆ ☆ ▶
The display shows "Lock to..."
5. Press *YES* on the keyboard or wait 5 seconds.
6. By pressing the ◀ -key you can glance trough the different types of SIM-lock.

2.2 Description of Variant

SIM-Lock 1 = LENC Network Lock

SIM-Lock 2 = LENS Network Subset Lock

SIM-Lock 3 = LESP Service Provider Lock (GID1)

SIM-Lock 4 = LECC Corporate Control Lock (GID2)

SIM-Lock 5 = LCNL Co-operative Network Lock (multi SIM-lock)

Variant	Co-Brand / Ericsson	SIM-LOCK	Operator	Market
KRC				
KRC / 2	Ericsson	SIM-Lock 1	Airtel	Spain (ES)
KRC / 3	Ericsson	SIM-Lock 1	Telefonica	Spain (ES)
KRC / 4	Ericsson		TIM	Italy (IT)
KRC / 5	Co-Branded	none	Omnitel	Italy (IT)
KRC / 6	Ericsson	SIM-Lock 1	Orange	United Kingdom (UK)
KRC / 7	Ericsson	SIM-Lock 3	SFR	France (FR)
KRC / 8	Ericsson	none	OPTUS	Australia (AU)
KRC / 9	Ericsson	none	Telstra	Australia (AU)
KRC / 10	Ericsson	none		Poland (PL)
KRC / 11	Ericsson	SIM-Lock 1	STET	Greece (GR)
KRC / 12	Ericsson	SIM-Lock 2	Panafon	Greece (GR)

KRC / 13	Ericsson	none		India (IN)
KRC / 14	Ericsson	SIM-Lock 1	Mobilkom A1	Austria (AT)
KRC / 15	Ericsson	none		Hungary (HU)
KRC / 16	Ericsson	SIM-Lock 1	Westel 900	Hungary (HU)
KRC / 17	Ericsson	SIM-Lock 1	IAM	Morocco (MA)
KRC / 18	Ericsson	SIM-Lock 1	Max Mobile	Austria (AT)
KRC / 19	Co-Branded	none	TIM	Italy (IT)
KRC / 20	Ericsson	SIM-Lock 2	Stet 2 Hellas	Greece (GR)
KRC / 21	Ericsson	SIM-Lock 1	Eircell	Ireland (IE)
KRC / 22	Ericsson	SIM-Lock 2	Airtel 2	Spain (ES)
KRC / 23	Ericsson	SIM-Lock 1	Mikro Visata	Lithuania (LT)
KRC / 24	Ericsson	none		Indonesia (ID)
KRC / 25	Ericsson	SIM-Lock 2	Telecell	Portugal (PT)
KRC / 26	Ericsson	SIM-Lock 1	Vodacom	South Africa (ZA)
KRC / 27	Ericsson	SIM-Lock 1	Paegas Bratislava	Slovakia (SK)
KRC / 28	Ericsson	SIM-Lock 1	PTC	Poland (PL)
KRC / 29	Ericsson	none		Australia (AU)
KRC / 30	Ericsson	SIM-Lock 2	FNAC	France (FR)
KRC / 31	Ericsson	none		Taiwan (TW)
KRC / 32	Ericsson	SIM-Lock 1	Celcom	Malaysia(MY)
KRC / 33	Ericsson	SIM-Lock 2	Telefonica 2	Spain (ES)
KRC / 34	Ericsson	SIM-Lock 1	Telecom	France (FR)
KRC / 35	Co-Branded	SIM-Lock 1	Vodafone	U-Kingdom (UK) / (GB)
KRC / 36	Ericsson	SIM-Lock 1	MTN	South Africa (ZA)
KRC / 37	Ericsson	SIM-Lock 1	KVK & GENPA	Turkey (TR)
KRC / 38	Ericsson	SIM-Lock 1	Bite GSM	(LV) eller (LT)
KRC / 39	Ericsson	SIM-Lock 1	OPTIMUS	Portugal (PT)
KRC / 40	Ericsson	SIM-Lock 1	SVEMA	Slovenian (SI)
KRC / 41	Ericsson	SIM-Lock 1	Globtel	Slovakia (SK)
KRC / 42	Ericsson	SIM-Lock 1	Connect	Austria (AT)
KRC / 43	Co-Branded		Mobilkom	Austria (AT)
KRC / 44	Ericsson	SIM-Lock 1	PH Globe	Philippines (PH)
KRC / 45	Ericsson	SIM-Lock 1	Tele Danmark	Denmark (DK)
KRC / 46	Ericsson	SIM-Lock 2	Vodafone	Australia (AU)
KRC / 47	Ericsson	SIM-Lock 1	Orange / Partner Com.	(GB) eller Israel
KRC / 48	Ericsson	SIM-Lock 1	COMVIQ	Sweden (SE)
KRC / 49	Ericsson	SIM-Lock 2	One 2 One	(GB) eller (UK)
KRC / 50	Ericsson	SIM-Lock 1	TMN	Portugal (PT)
KRC / 51	Ericsson	SIM-Lock 2	Cosmote	Greece (GR)
KRC / 52	Ericsson	SIM-Lock 1	Cellnil	Egypt (EG)
KRC / 53	Ericsson	SIM-Lock 1	KPN Telecom	Holland (NL)
KRC / 54	Co-Branded	none	Tele Danmark	Denmark (DK)
KRC / 55	Co-Branded	SIM-Lock 1	Orange	United Kingdom (UK)
KRC / 56	Ericsson	SIM-Lock 1	Vista	Botswana (BW)
KRC / 57	Ericsson	SIM-Lock 1	Sonofon	Denmark (DK)
KRC / 58	Ericsson	SIM-Lock 1	Econet	Zimbabe (ZW)
KRC / 59	Co-Branded	SIM-Lock 3	Vodafone 2	(UK) eller (GB)
KRC / 60	Ericsson	SIM-Lock 1	Bell South	USA (US)
KRC / 61	Ericsson	SIM-Lock 5	Western Wireless	USA (US)
KRC / 62	Ericsson	SIM-Lock 5	Omnipoint	USA (US)
KRC / 63	Ericsson	SIM-Lock 5	Telefonica 5	Spain (ES)

KRC / 64	Co-Branded		WIND	Italy (IT)
KRC / 65	Ericsson	SIM-Lock 1	Eurotel	Slovakia (SK)
KRC / 66	Ericsson	SIM-Lock 1	Mascom	Botswana (BW)
KRC / 67	Ericsson	SIM-Lock 3	Telafonica 3	Spain (ES)
KRC / 68	Ericsson	SIM-Lock 1	Netcom 20:20	Norway (NO)
KRC / 69	Co-Branded	SIM-Lock 1	Connect	Austria (AT)
KRC / 70	Ericsson	SIM-Lock 2	Cosmote	Greece (GR)
KRC / 71	Ericsson	none		China (CN)
KRC / 72	Ericsson	SIM-Lock 5	Telefonica 4	Spain (ES)
KRC / 73	Ericsson	SIM-Lock 1	Mobilix	Denmark (DK)
KRC / 74	Ericsson	SIM-Lock 5	3 oprat.	Poland (PL)
KRC / 75	Ericsson	SIM-Lock 1	Telecom Carrefour	France (FR)
KRC / 76	Ericsson	SIM-Lock 1	SFR	France (FR)
KRC / 77	Ericsson	SIM-Lock 1	AMENA	Spain (ES)
KRC / 78	Ericsson	SIM-Lock 1	Telfort	Holland (NL)
KRC / 79	Ericsson	SIM-Lock 3	Mobilkom A1 , 2	Austria (AT)
KRC / 80	Ericsson	SIM-Lock 1	FNAC	France (FR)
KRC / 81	Ericsson	SIM-Lock 2	VMS	Vietnam (VN)
KRC / 82	Ericsson	SIM-Lock	(Besingstoke)	Hong Kong (HK)
KRC / 83	Ericsson	SIM-Lock 5	Pacific Bell	USA (US)
KRC / 84	Ericsson	SIM-Lock 1	Esat Digiphone	Ireland (IE)
KRC / 85	Ericsson	SIM-Lock 1	Telia Danmark	Denmark (DK)
KRC / 86	Ericsson	SIM-Lock 1	Mobitel	Slovenian (SI)
KRC / 87	Ericsson	SIM-Lock 1	Omnitel	Lithuania (LT)
KRC / 88	Ericsson	SIM-Lock 1	Pannon GSM	Hungary (HU)
KRC / 89	Co-Branded	SIM-Lock 1	Bouygues	France (FR)
KRC / 90	Ericsson	SIM-Lock 1	PH SMART	Philippines (PH)
KRC / 91	Ericsson	SIM-Lock 1	Centertel	Poland (PL)
KRC / 92	Ericsson	SIM-Lock 1	Polkomtel	Poland (PL)
KRC / 93	Co-Branded		Omnitel	Italy (IT)
KRC / 94	Ericsson	SIM-Lock 1	Madacom	Madagascar (MG)
KRC / 95	Ericsson		Vodafone (costumis)	Australia (AU)
KRC / 96	Ericsson		Telstra (custumis)	Australia (AU)
KRC / 97	Ericsson		Optus	Australia (AU)
KRC / 98	Ericsson	SIM-Lock 2	Vimpelcom	Russia (RU)
KRC / 99	Ericsson	Sim-lock 1	Eurotel	Czech Republic
KRC /100	Ericsson	Sim-lock 1	Telecel 2	Portugal (PT)
KRC /101	Ericsson	Sim-lock 1	Ben	Netherlands (NL)
KRC /102	Ericsson			Indonesia (ID)
KRC /103	Ericsson			Malaysia (MY)
KRC /104	Ericsson	Sim-lock 1	Vodafone	United Kingdom (UK)
KRC /105	Ericsson	Sim-lock 1	Mobifon	Romania (RO)
KRC /106	Ericsson	Sim-lock 3	KPN Telecom	Netherlands (NL)
KRC /107	Ericsson	Sim-lock 1	Telenor Mobil	Norway (NO)
KRC /108	Ericsson		Proximus (Belgacom Mobile)	Belgium (BE)
KRC /109	Ericsson		VIAG	Germany (DE)
KRC /110	Ericsson	SIM-Lock 1	Telstra	Australia (AU)
KRC /111	Ericsson	SIM-Lock 1	AIS	Thailand (TH)
KRC /112	Ericsson	SIM-Lock 1	Mobil-Rom	Romania (RO)
KRC /113	Ericsson			Israel (IL)
KRC /114	Ericsson	SIM-Lock 1	TAC	Thailand (TH)

KRC /115	Ericsson	SIM-Lock 1	Mobinil	Kenya / Egypt (KE / EG)
KRC /116	Ericsson			China/ Hong-Kong
KRC /117	Co-Branded	SIM-Lock 2	One 2 One (Coca Cola)	United Kingdom (UK)
KRC /118	Ericsson	SIM-Lock 2	Optus	Australia (AU)
KRC /119	Co-Branded	SIM-Lock 3	SFR	France (FR)
KRC /120	Ericsson	SIM-Lock 1	Medi Telecom	Morocco (MA)
KRC /121	Ericsson	SIM-Lock 2	Ben	Netherlands (NL)
KRC /122	Ericsson	SIM-Lock 2	Vodafone	New Zealand
KRC /123	Ericsson	SIM-Lock 1	Dutchtone	Netherlands (NL)
KRC /124	Ericsson			Worde-wide
KRC /125	Ericsson	SIM Lock 1	Tele.ring "1012 privat"	Austria (AT)
KRC /126	Ericsson	SIM-Lock 1	BT Cellnet	United Kingdom (UK)
KRC /127	Ericsson	SIM-Lock 1	Telcom Iceland	Denmark (DK)
KRC /128	Ericsson	SIM-Lock 3	E-Plus	Germany (DE)
KRC /129	Ericsson	SIM-Lock 1	Radio Mobil	Czech Republic (CZ)
KRC /130	Ericsson	SIM-Lock 1	Elektromagic	Croatia (HR)
KRC /131	Ericsson			World wide
KRC /132	Ericsson	SIM-Lock 5	Entel	Chile (CL)
KRC /133	Ericsson		Powertel	USA (US)
KRC /134	Ericsson		Microcell	USA (US)
KRC /135	Ericsson		SOL	USA (US)
KRC /136	Co-Branded	SIM-Lock 5	Western Wireless	USA (US)
KRC /137	Co-Branded	SIM-Lock 5	Pacific Bell	USA (US)
KRC /138	Co-Branded	SIM-Lock 1	SFR	France (FR)
KRC /139	Ericsson	SIM-Lock 1	Telecel Zimbabwe Networks	Zimbabwe (ZW)
KRC /140	Ericsson	SIM-Lock 1	Mobilink	Pakistan (PK)
KRC /141	Ericsson	SIM-Lock 1	MTS	Russia (RU)
KRC /142	Ericsson	SIM-Lock 1	Orange	Israel
KRC /143	Ericsson	SIM-Lock 1	Maroc Telecom	Marocko
KRC /144	Ericsson	SIM-Lock 1	GrameenPhone	Bangladesh (BD)
KRC /145	Ericsson	SIM-Lock 1	Vodafone	Hungary (HU)
KRC /146	Ericsson	SIM-Lock 1	M-Tel GSM	Bulgaria (BG)
KRC /147	Ericsson	SIM-Lock 3	France Telecom	France (FR)
KRC /148	Ericsson	EU4	COB+SIM Orange	
KRC /149	Ericsson			
KRC /150	Ericsson			
KRC /151	Ericsson			
KRC /152	Ericsson			
KRC /153	Ericsson			
KRC /154	Ericsson	AP1	AIS&DPC	
KRC /155	Ericsson			
KRC /156	Ericsson	EU4	Siml. Faslink	Jordan
KRC /157	Ericsson		Cellplus	(ZA)
KRC /158	Ericsson	EU3	Siml. Optus	(A)
KRC /159	Ericsson	AP2	CN-Tr	
KRC /160	Ericsson	Eu2	Vodacom	(ZA)
KRC /161	Ericsson			
KRC /162	Ericsson	EU3	KVK +Gempa	Turkey
KRC /163	Ericsson			
KRC /164	Ericsson			
KRC /165	Ericsson			

KRC /166	Ericsson	Eu2	Telefona	(D)
KRC /167	Ericsson	EU3	Own mel.Phone house	(BE)
KRC /168	Ericsson	EU3	Siml.Intercall	France (FR)

2.3 Document information

Rev.	Date	Product information documents changes / Comments
A	001108	
B	001123	Change repair revisions
C	010115	Added SIs