

CPU CORE
Page:23

3.3V/5V/12V
5VPCU/3V_ALWAYS
3V_S5/5V_S5
3VSUS/5VSUS
Page:24

2.5VSUS/+2.5VTT
MVREF_DM
SMDDR_VTERM
Page:25

+1.8V/1.8V_S5
Page:25

BATTERY CHARGER
Page:26

VCC_CORE
+12V
5VPCU
3VPCU
+3.3V
+5V
3V_S5
5V_S5
3VSUS
5VSUS

2.5VSUS
+2.5V
VTT
MVREF_DM
SMDDR_VTERM

1.8V_S5
+1.8V

CLOCK GEN
ICS
952023CG
+3.3V Page:13

DDR CLOCK
BUFFER
ICS97322
+2.5V Page:13

DDR-SODIMM1
Page:11,12

DDR-SODIMM2
Page:11,12

+2.5V
+1.25V

IDE-HDD
+5V Page:18

IDE-ODD
+5V Page:18

Reltek
+5V Page:19
+3.3V

AMP
MAX9755
+5V Page:20

MODEM
MDC 1.5
+3.3V Page:19

MIC IN
SPEAKER
LINE OUT
RJ11

ZL6
CPU
CELERON-M
INTEL Mobile_479 CPU
VCC_CORE
VTT Page:2,3

NB
SIS M661MX
Page:4,5,6,7

SB
SiS 963L
Page:8,9,10

NS
KBC(97551)
+3.3V Page:21

Touchpad
+5V
Keyboard
FLASH
+3.3V
FAN
+5V

PCI ROUTING TABLE	IDSEL	INTERUPT	DEVICE
REQ0# / GNT0#	AD22	INTB# , INTC#	MINI-PCI
REQ1# / GNT1#	AD17	INTD#	TI 1410A

HOST BUS 400MHZ

CLK_SDRAM0~5,
CLK_SDRAM0~5#

266/333MHZ DDR

SiS 302ELV
Page:14

LVDS

LVDS
Page:14

RGB

CRT
Page:6

ENE
PCMCIA
CB1410
+5V
+3.3V Page:16

MINI-PCI
Wireless LAN
+3.3V Page:17

HUB I/F 66(266)MHZ

ATA 66/100

ATA 66/100

AC97

PCI BUS 33MHZ

MII PHY

USB 2.0

LPC 33MHZ

REALTEK
10/100 LAN
RTL8201CP
+3.3V Page:15

TRANSFORMER
NS0013
Page:15

RJ45


SYSTEM 3
USB PORT
5VSUS
Page:17
USB1, 2, 3


MINI-USB
3VSUS
Page:17
USB4



PROJECT : ZL6
Quanta Computer Inc.

Size	Document Number	Rev
	BLOCK DIAGRAM	2A
Date:	Friday, January 13, 2006	Sheet 1 of 26

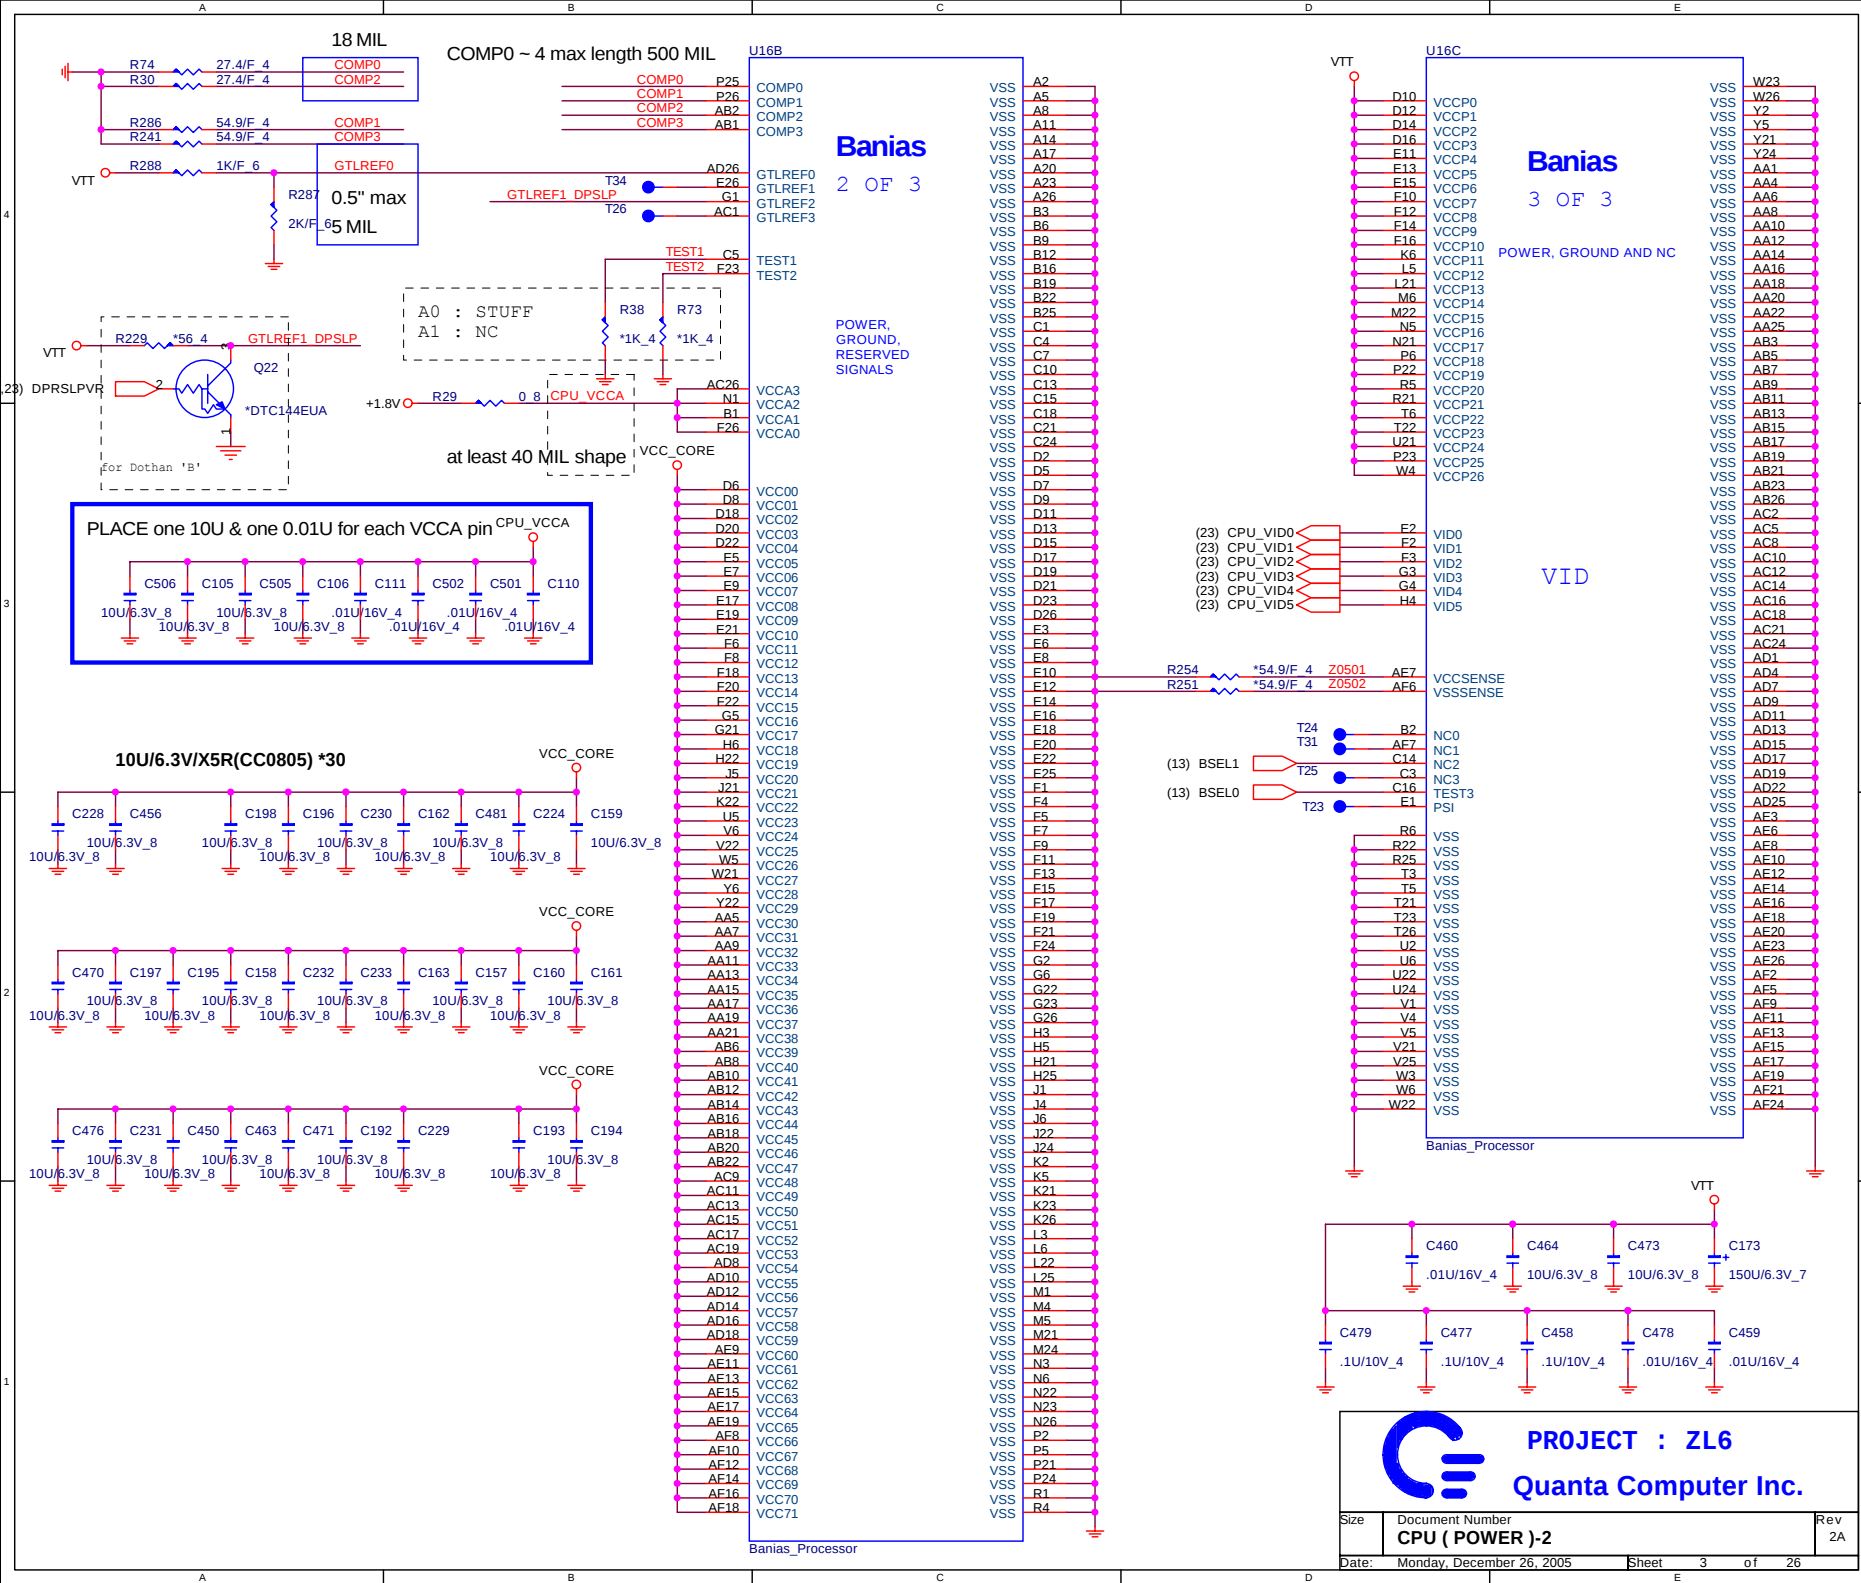

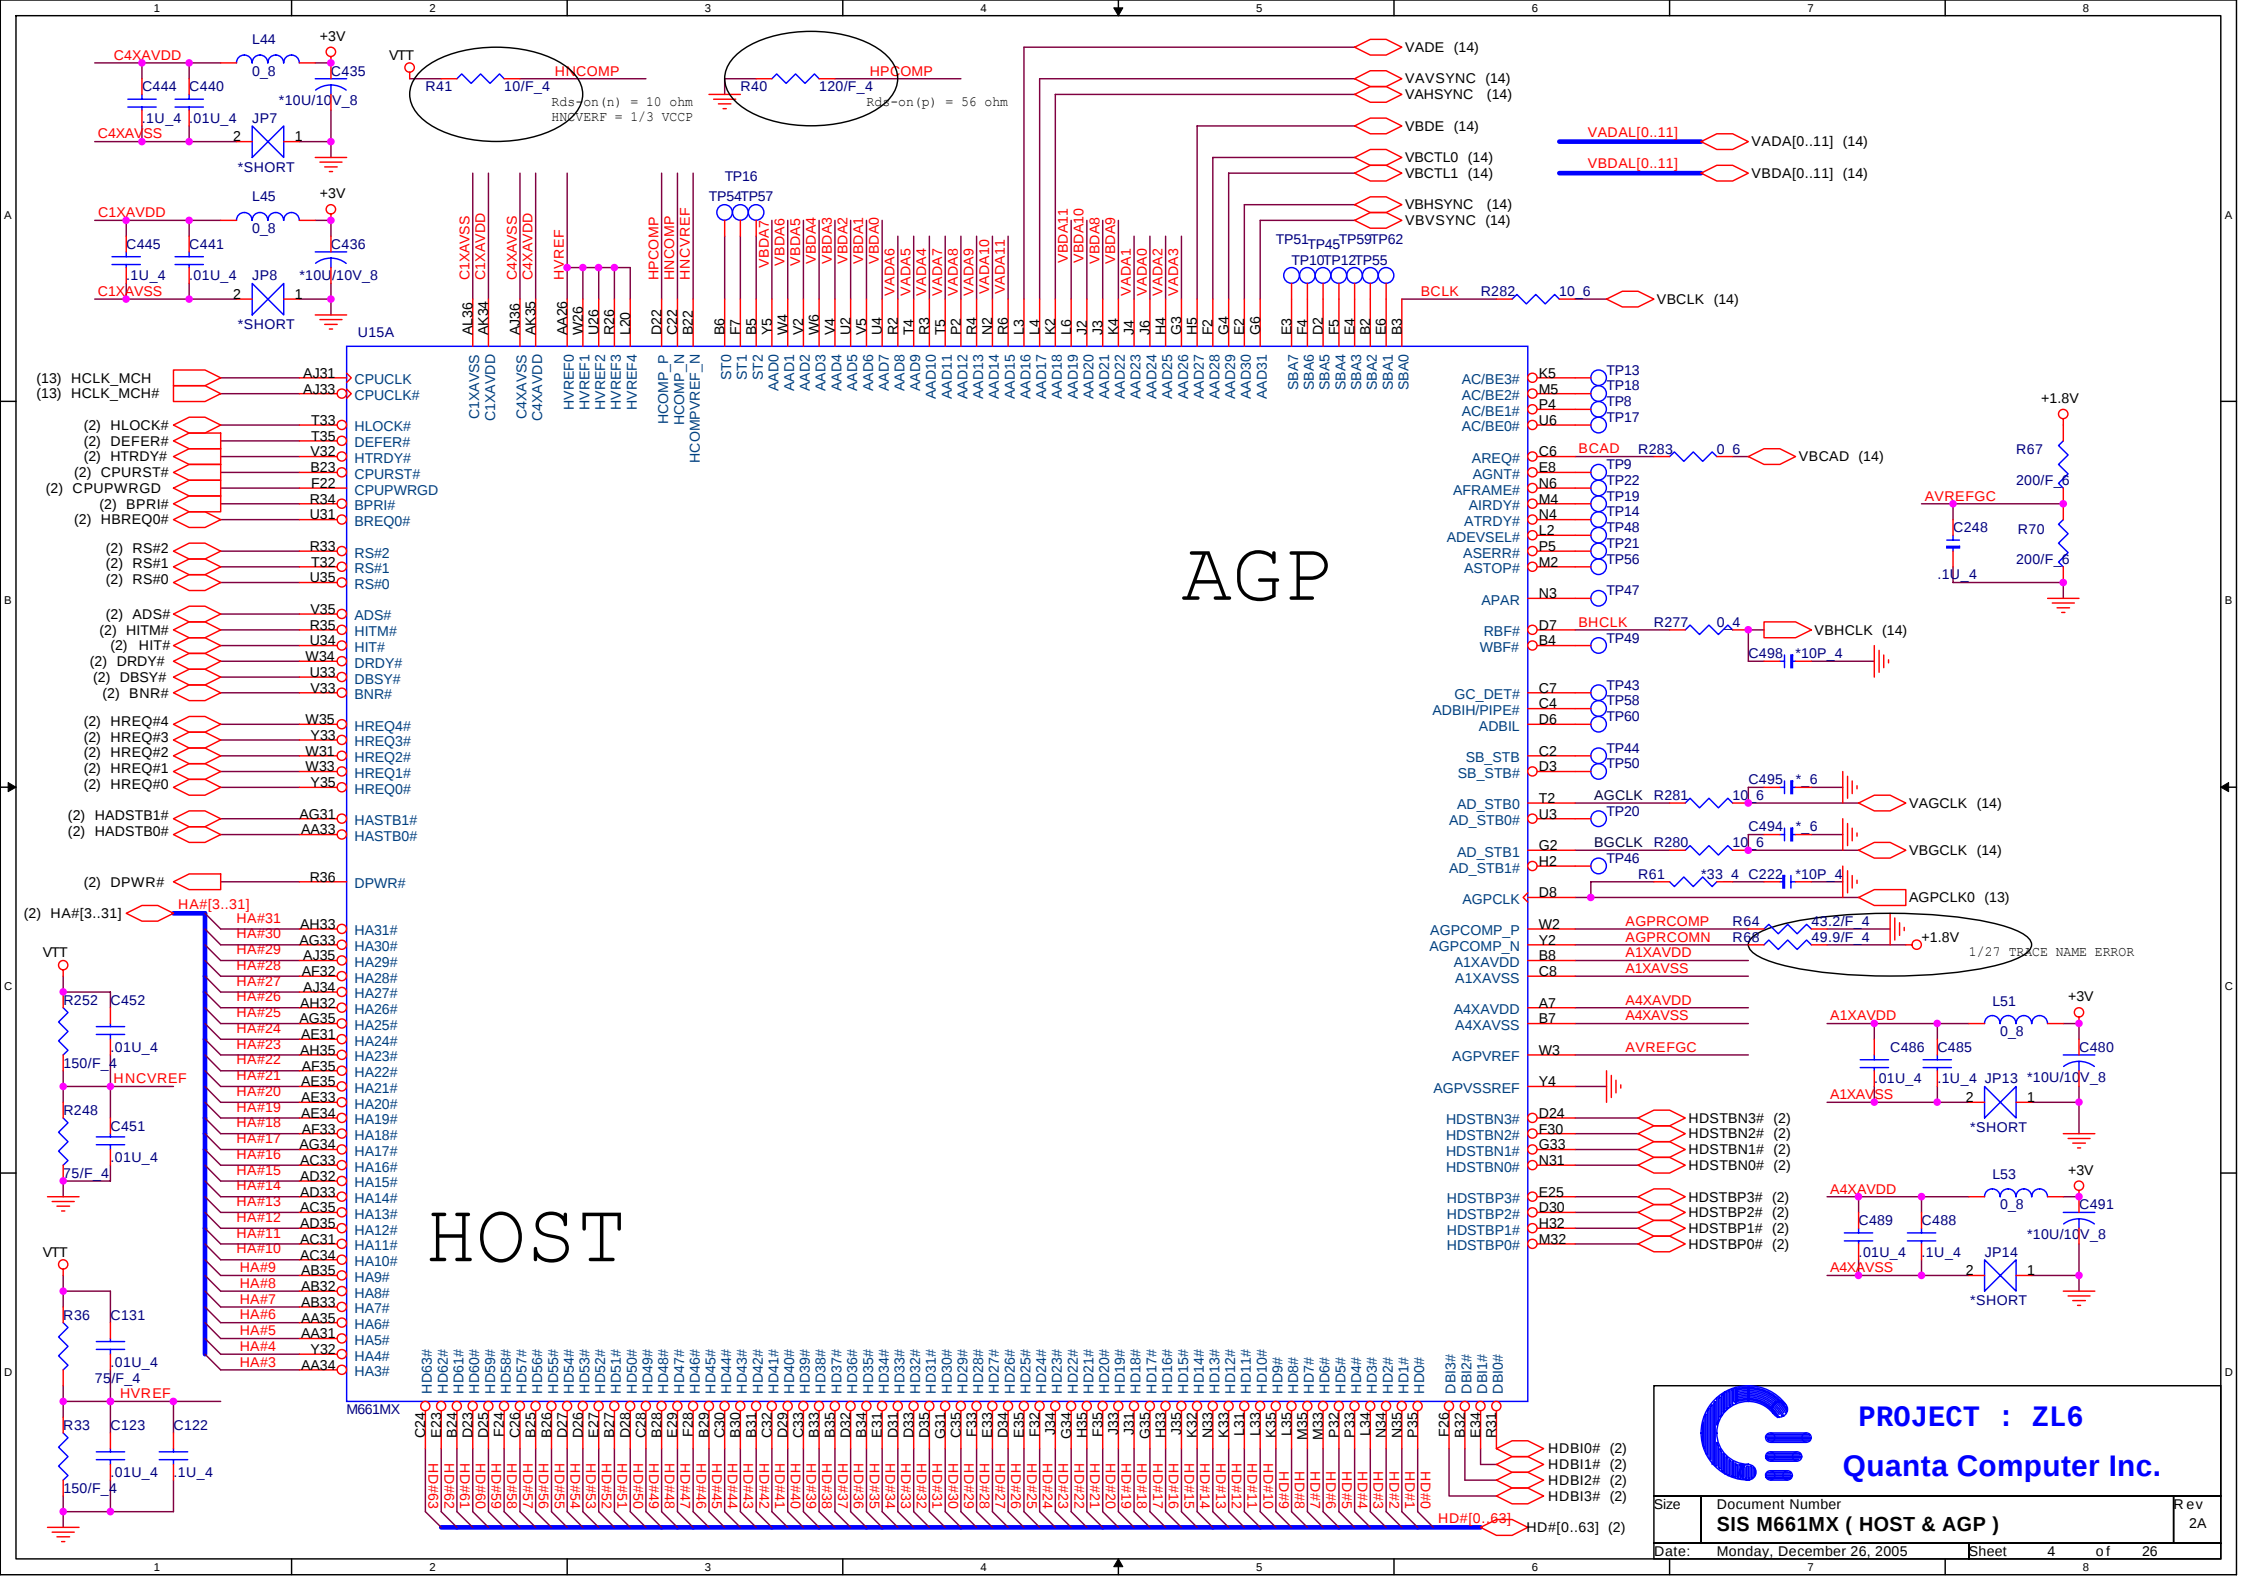

AGP


HOST





PROJECT : ZL6

Quanta Computer Inc.











Size	Document Number	Rev
	SIS M661MX (HOST & AGP)	2A
Date:	Monday, December 26, 2005	Sheet 4 of 26

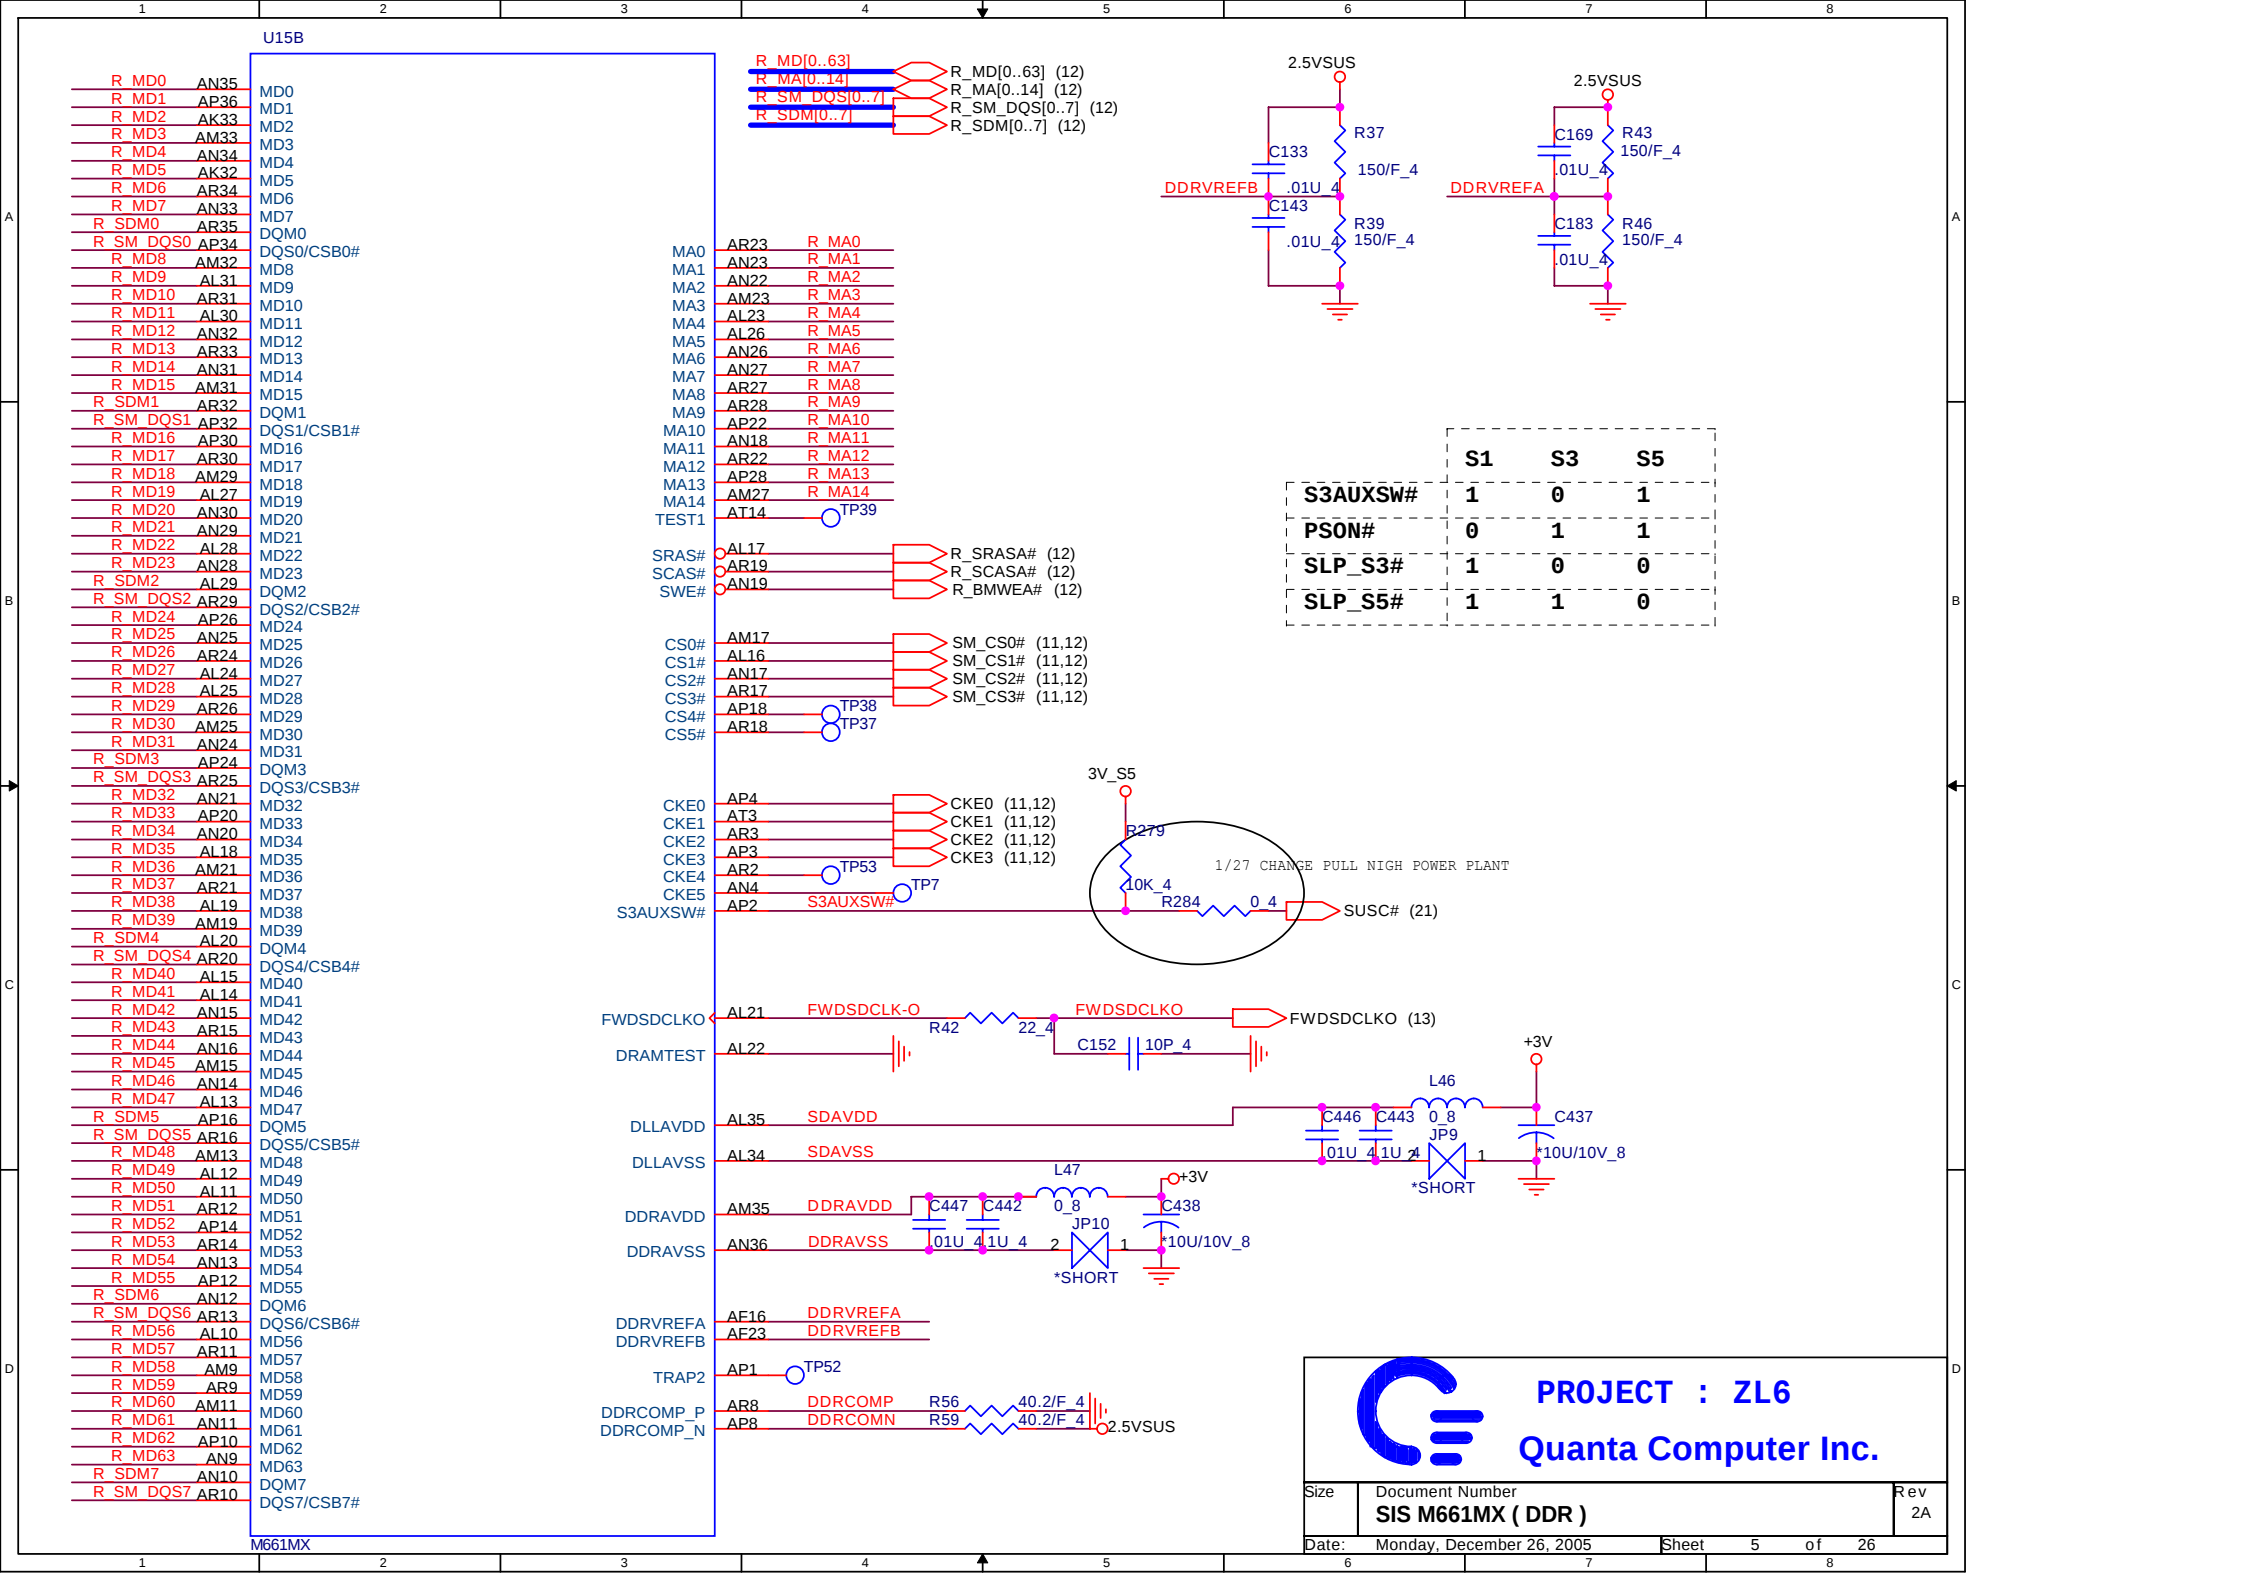

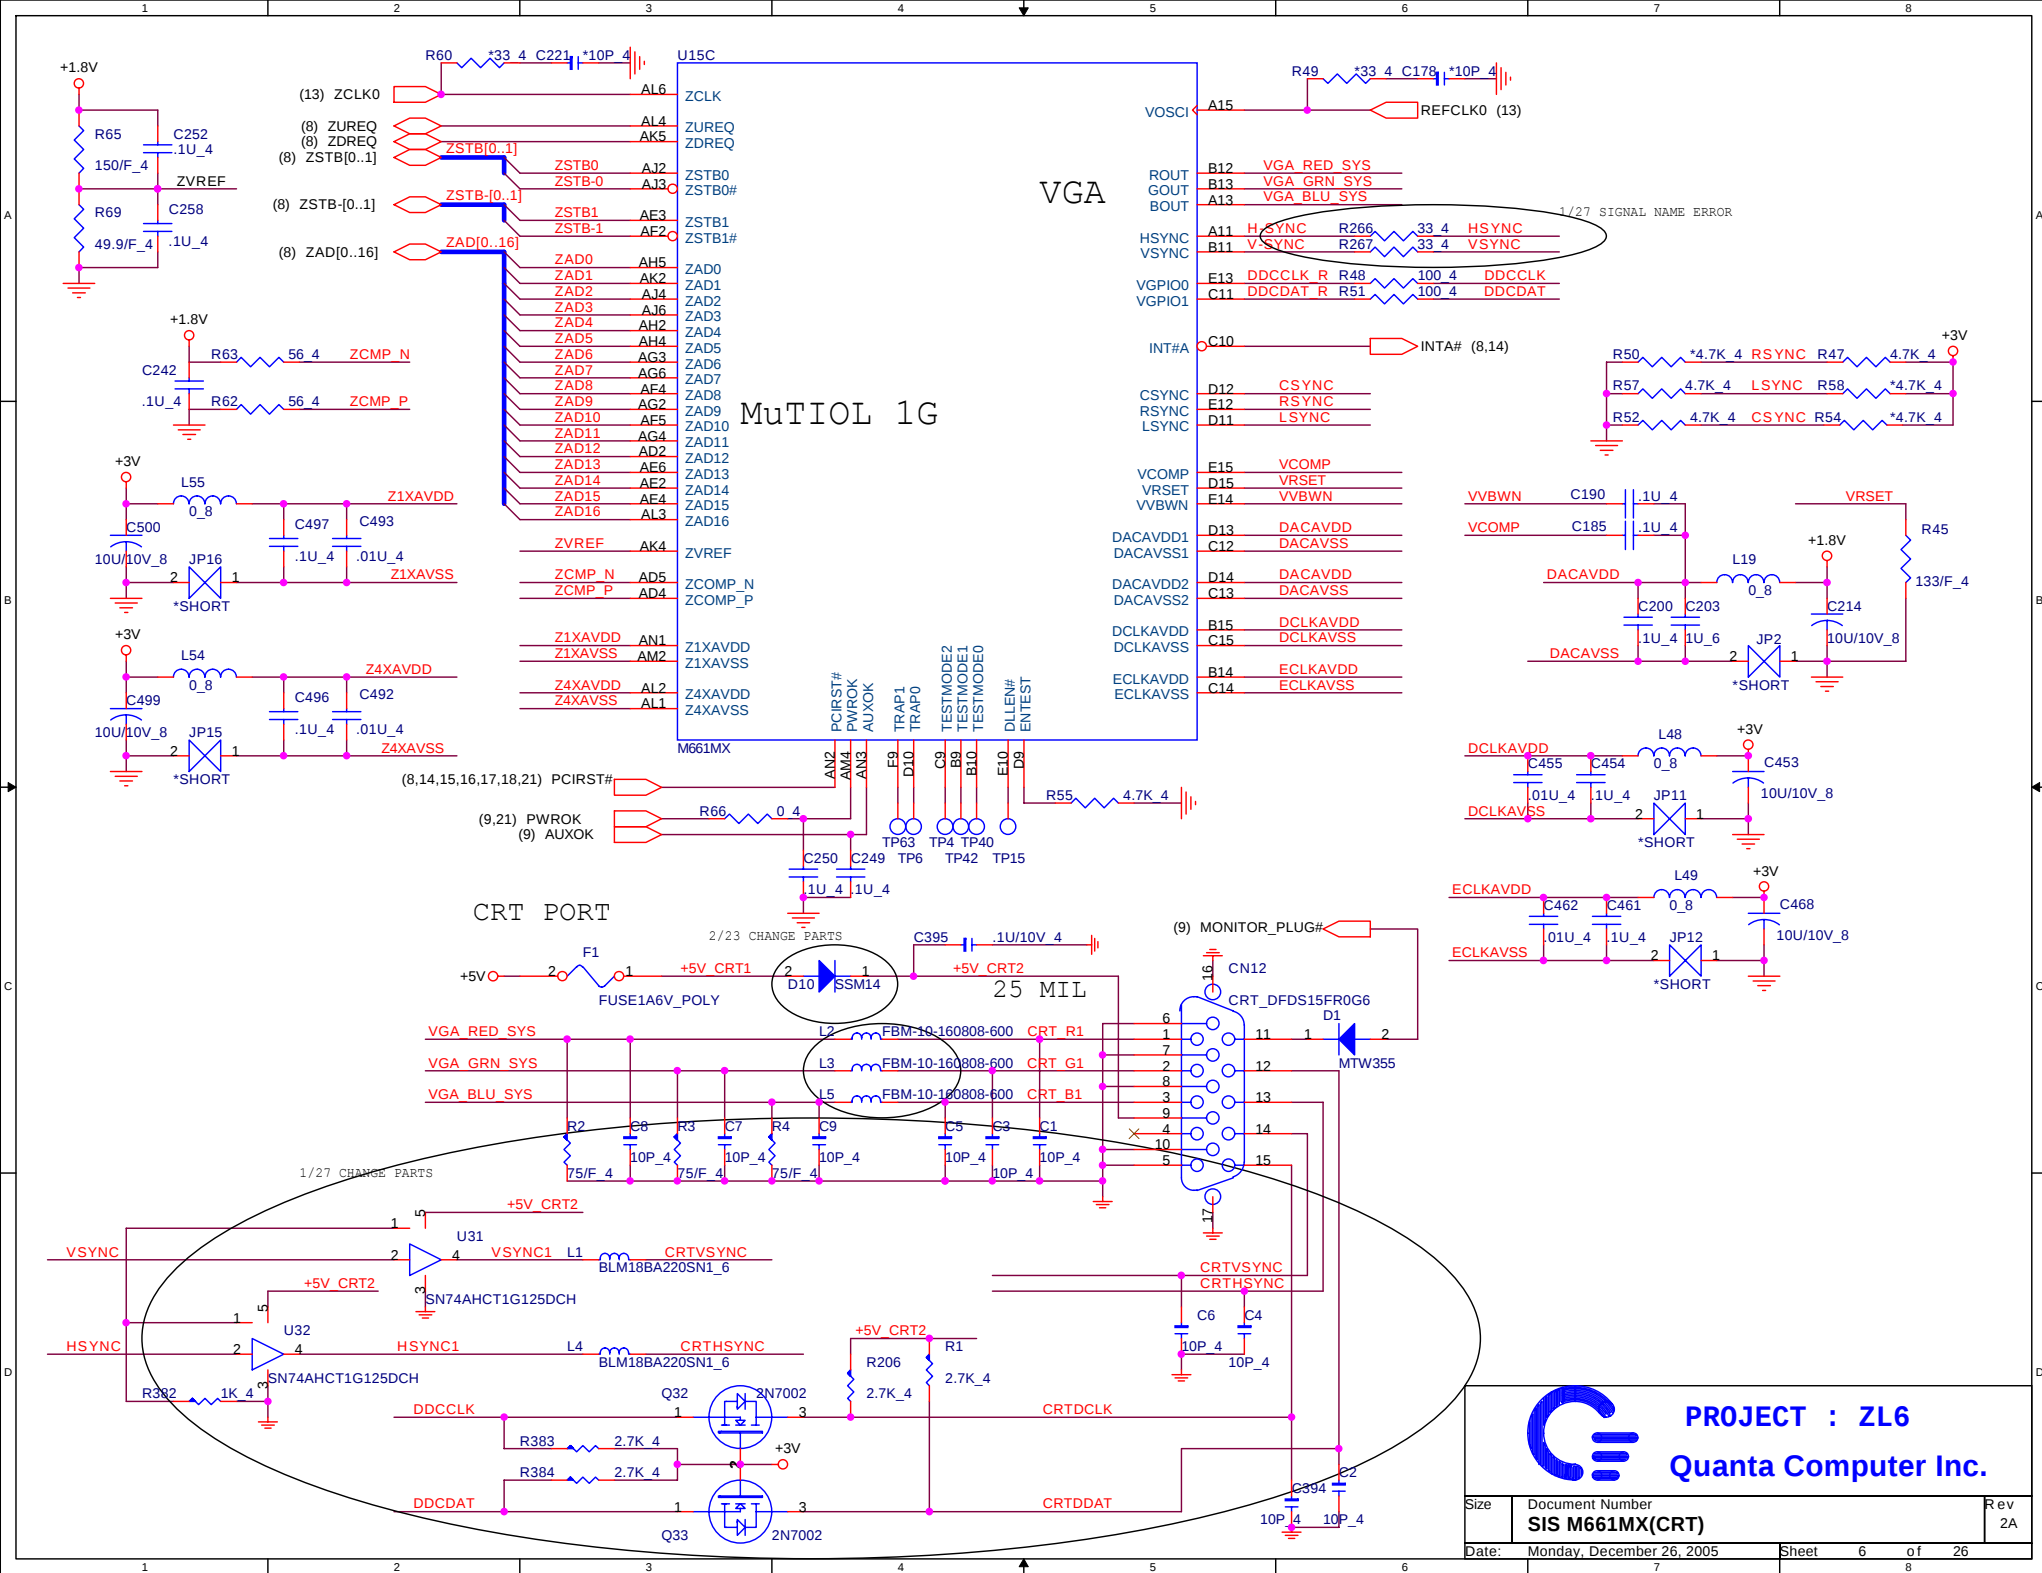

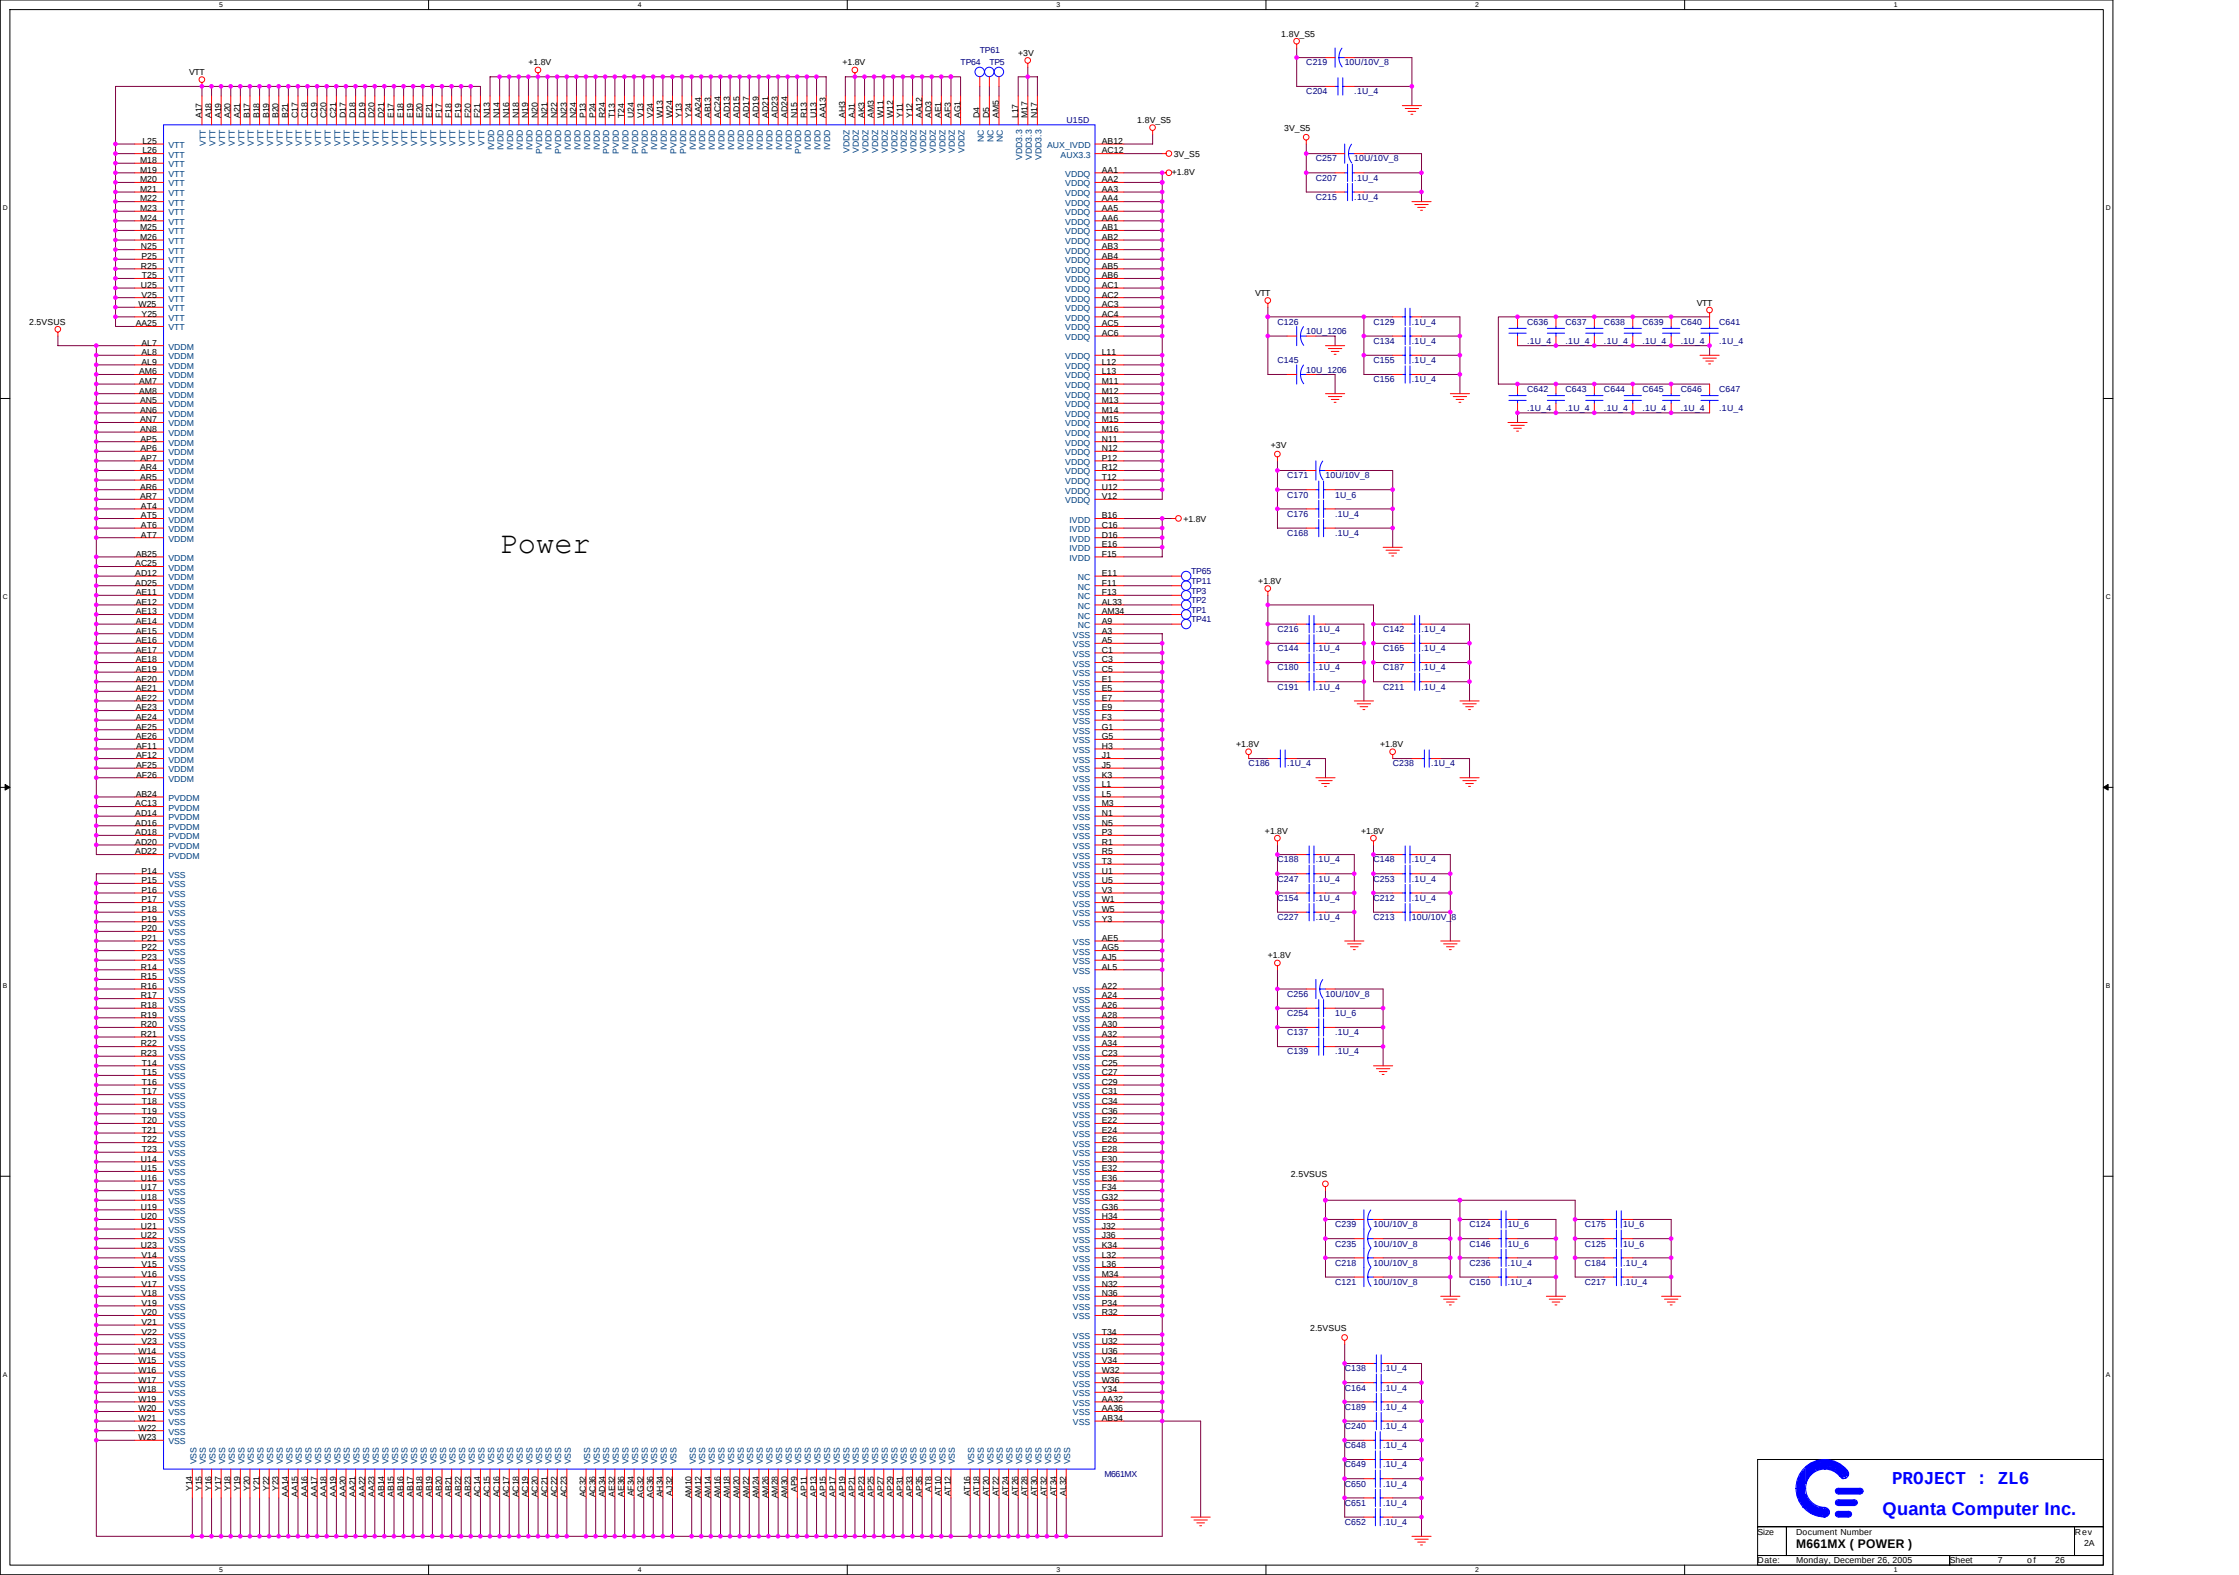

PCI PULL UP







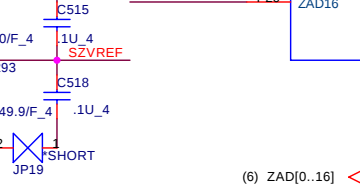





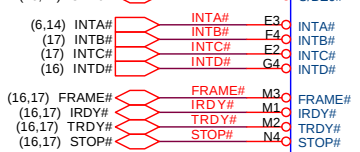
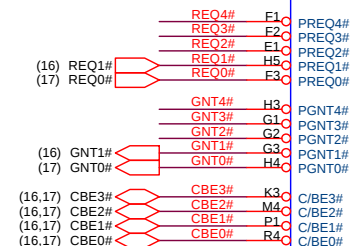
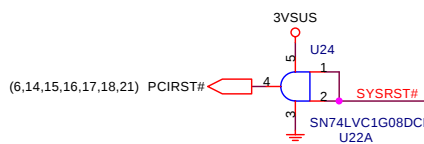



PCI

IDE

963-1





HyperZip

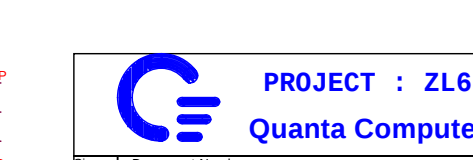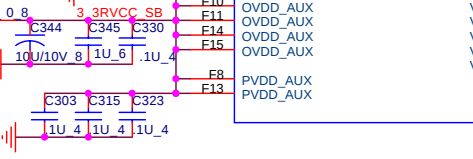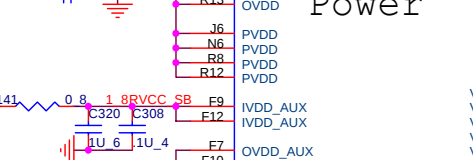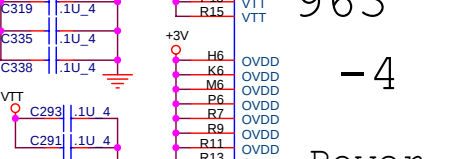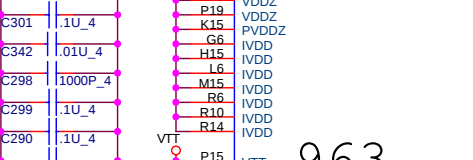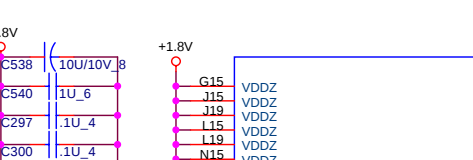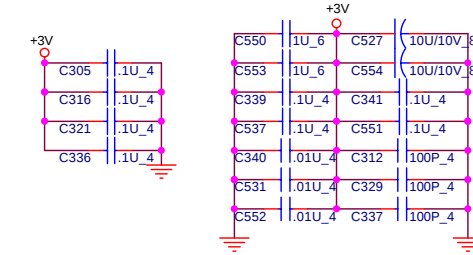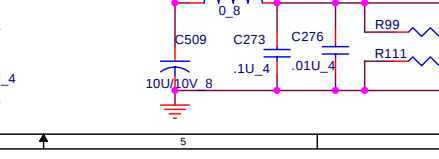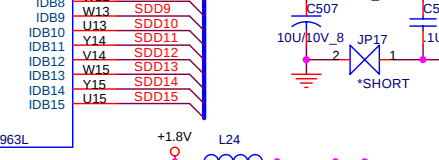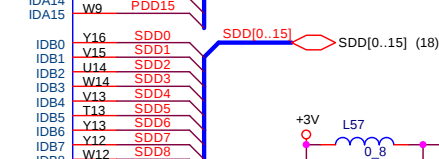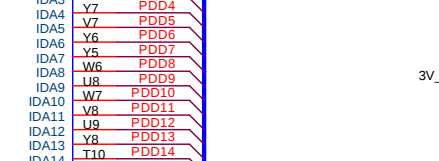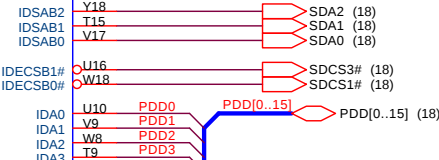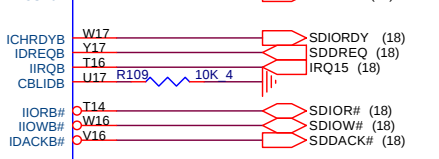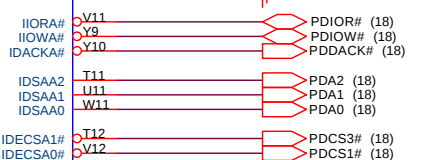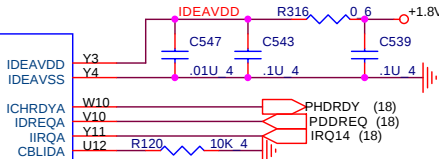

963

-4


Power



PROJECT : ZL6

Quanta Computer Inc.

Size	Document Number	Rev
	963L (CPU,PCI,IDE,PWR)	2A
Date:	Monday, December 26, 2005	Sheet 8 of 26

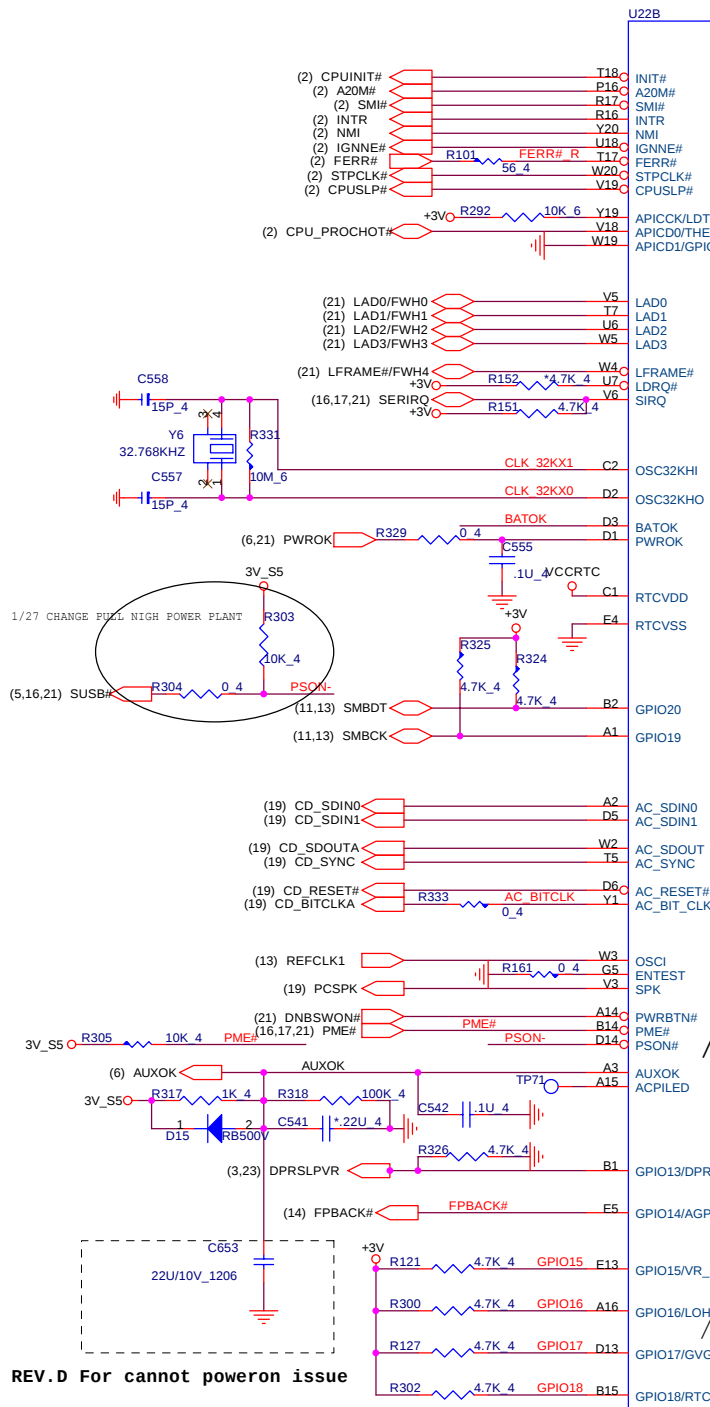

CPU_S
APIC

LPC
RTC


963-2
GPIO

AC97
ACPI
/others

KBC
/geyserville

MII

GPIO

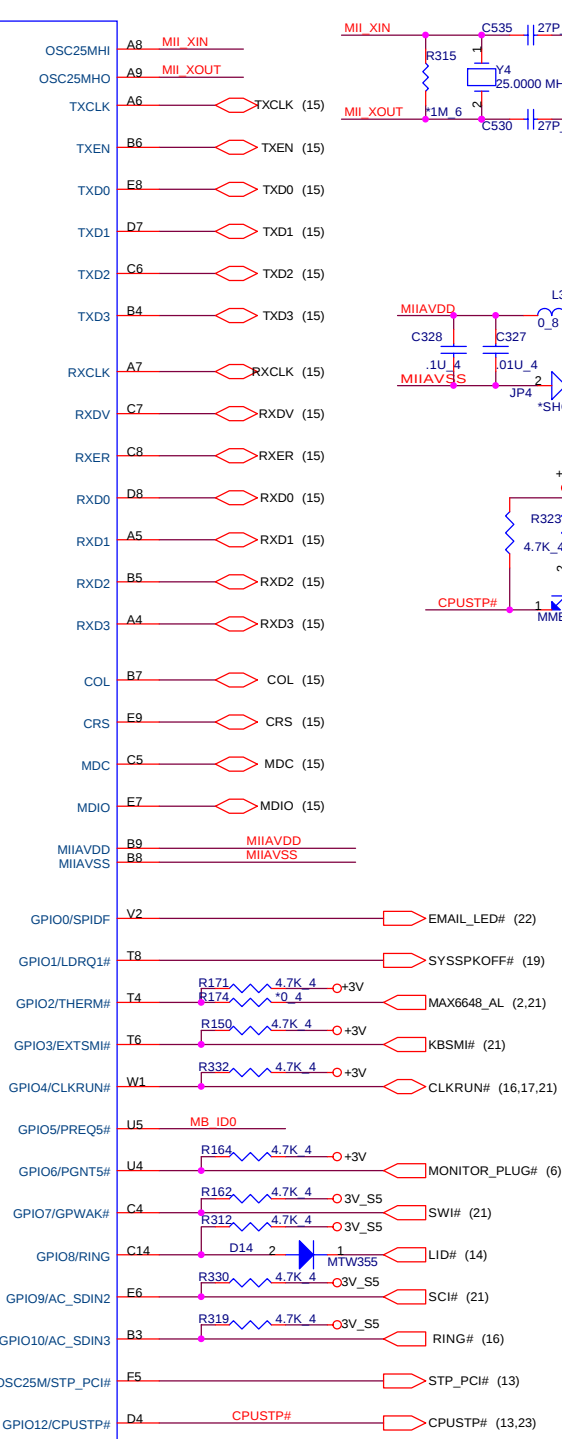



PROJECT : ZL6
Quanta Computer Inc.

Size	Document Number	Rev
	963L (HOST,LPC,MII,GPIO,RTC)	2A
Date:	Monday, December 26, 2005	Sheet 9 of 26

C354*10P 4 R165 *33_4
(13) CLK48_USB


TP70 B18 UV0+
TP24 C18 UV0-
TP23 D18 UV1+
TP67 D19 UV1-
E14 UV2+
D15 UV2-
E18 UV3+
F18 UV3-
E16 UV4+
E15 UV4-
G18 UV5+
G19 UV5-

USBOC0# G20 OC0#
USBOC1# G17 OC1#
USBOC2# J16 OC2#
USBOC3# H16 OC3#
USBOC4# H17 OC4#
USBOC5# G16 OC5#

3VSUS L25 USBVDD
0_8
C277 10U/10V_8
C284 1U_6
C285 .1U_4
D16 USBVDD
D17 USBVDD
E17 USBVDD
F17 USBVDD
F19 USBVSS
E19 USBVSS
B19 USBVSS
B17 USBVSS

3VSUS
USBOC0# R90 10K 4
USBOC1# R92 10K 4
USBOC2# R88 10K 4
USBOC3# R87 10K 4
USBOC4# R91 10K 4
USBOC5# R89 10K 4

TP74 A12 D0
TP75 B12 D1
TP30 C12 D2
TP26 D12 D3
TP27 E12 D4
TP72 A13 D5
TP73 B13 D6
TP25 C13 D7
TP29 D11 CTL0
TP28 C11 CTL1

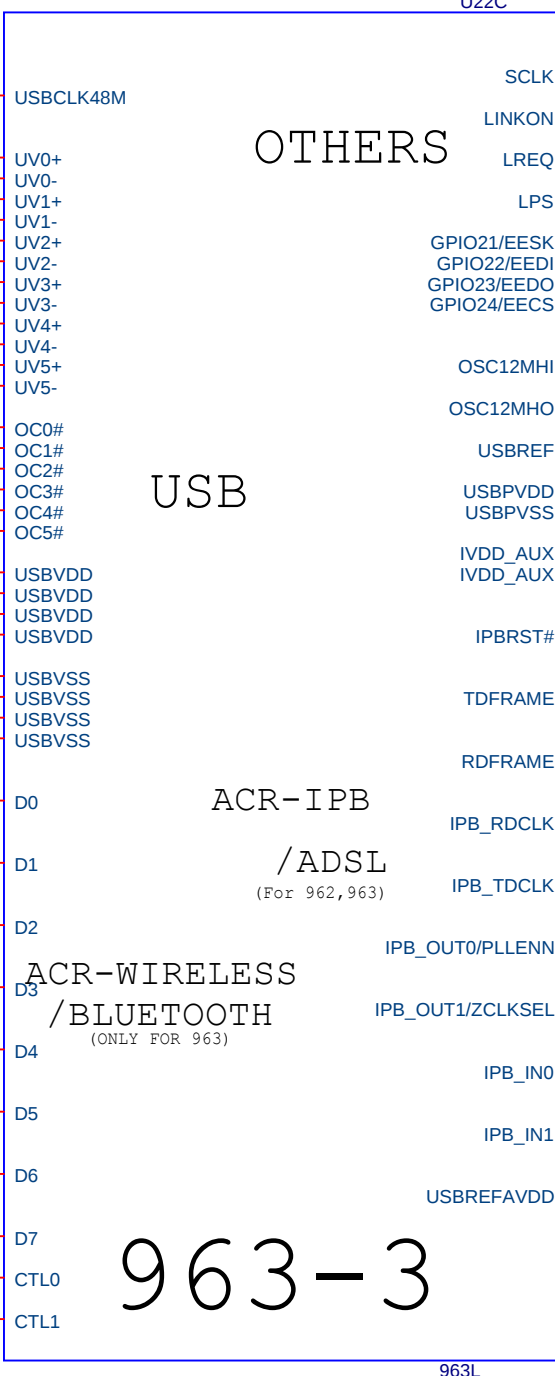

SCLK E11 TP31
L1NKON C19 TP66
LREQ A19 TP69
LPS A20 TP68

E20 EECLK
D20 BCM_DI
E20 BCM_DO
C20 EEDATA

B16 OSC12MHI R
A17 OSC12MHO

F16 R115 412/F 4

A18 USBPVDD
C15 USBPVSS

C16 IVDD_AUX
C17 IVDD_AUX

B11 TP76

D10 TP33

E10 TP34

D9 TP36






B10 TP78

A10 TP79

C10 TP32


C9 TP35

B20 USBPVDD

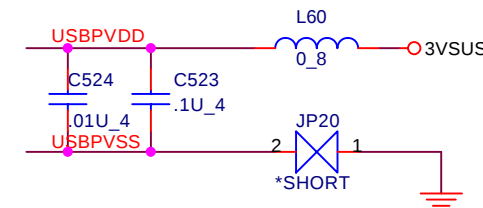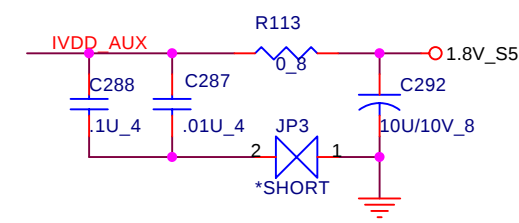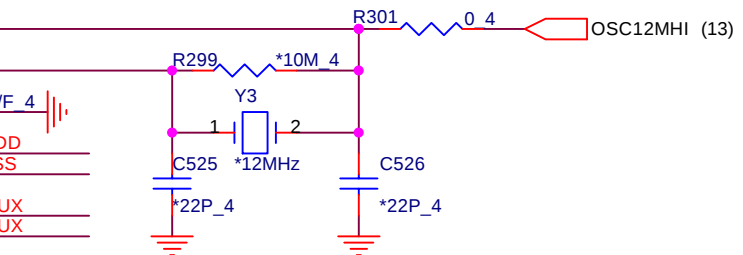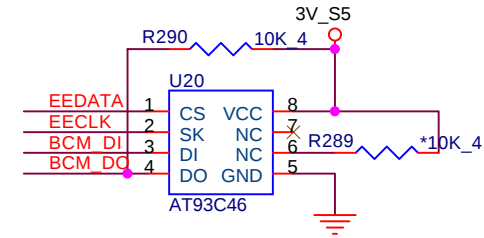

PROJECT : ZL6
Quanta Computer Inc.


Size	Document Number	Rev
	963L (USB)	2A
Date:	Monday, December 26, 2005	Sheet 10 of 26

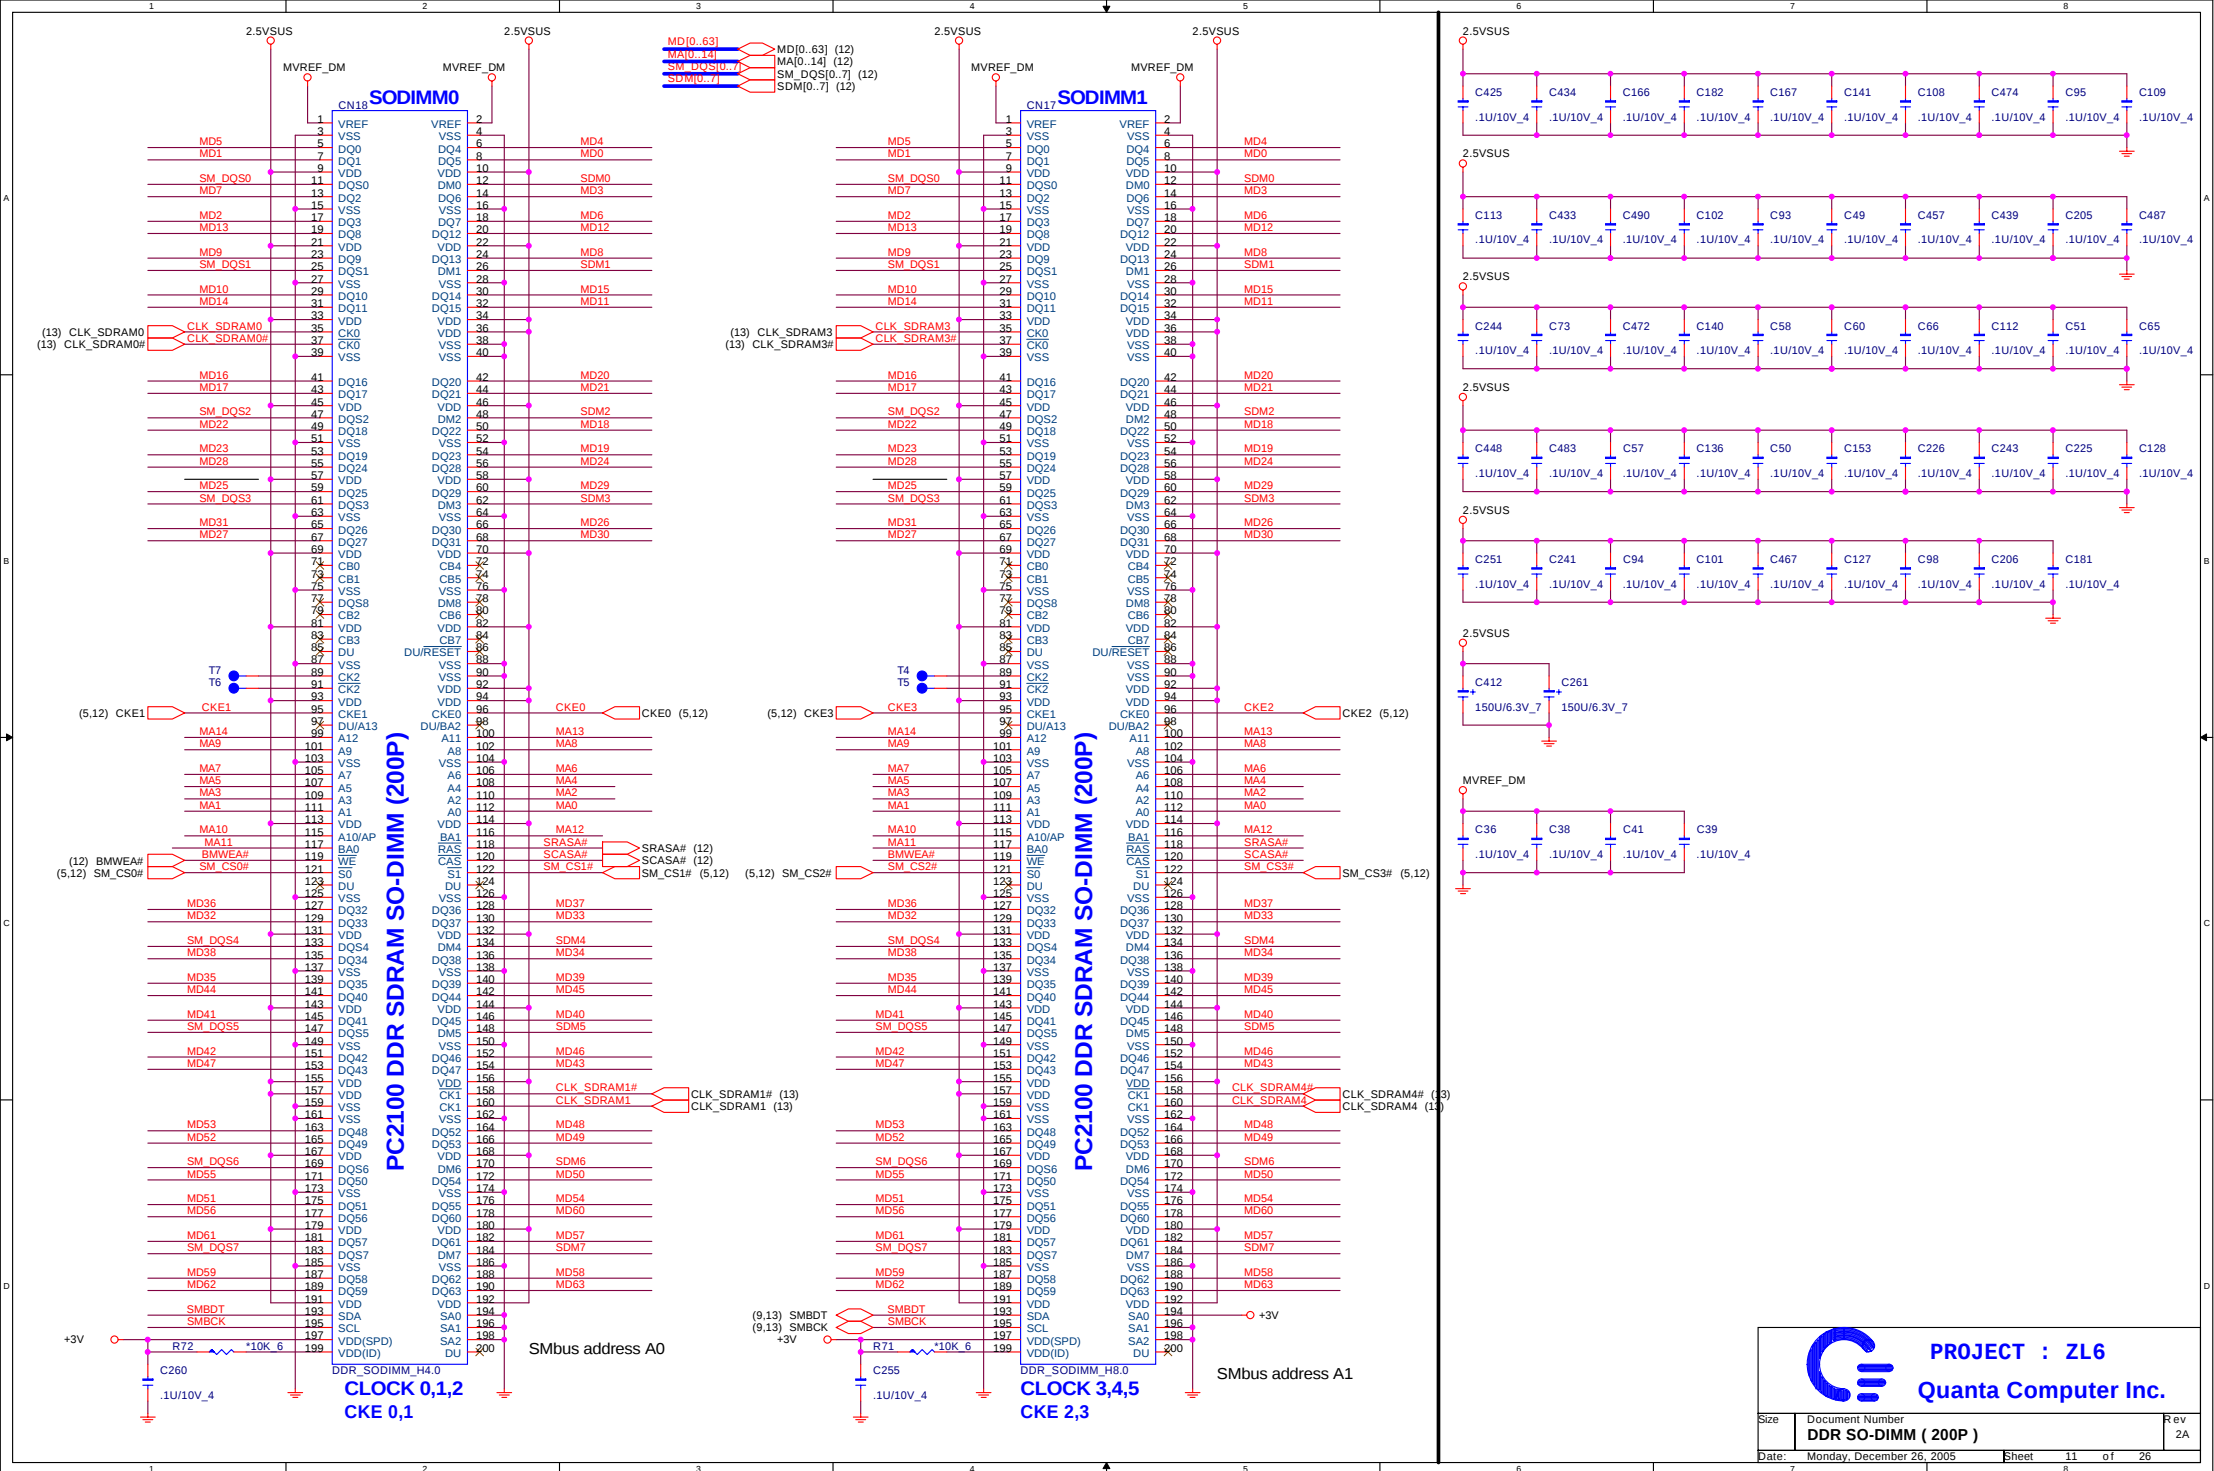



```


Default:  FS4    FS3    FS2    FS1    FS0
           0      0      0      1      1

```

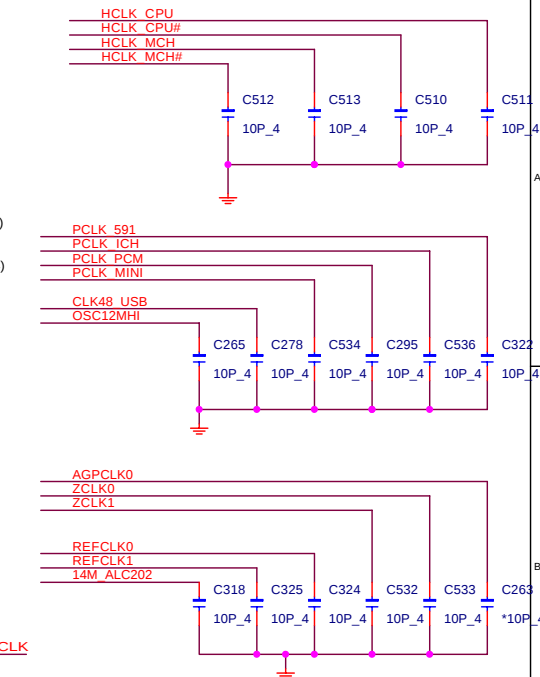


SIS648 CLOCK										SIS648 CLOCK									
FS4	FS3	FS2	FS1	FS0	CPU (MHz)	SDRAM (MHz)	ZCLK (MHz)	AGPCLK (MHz)		FS4	FS3	FS2	FS1	FS0	CPU (MHz)	SDRAM (MHz)	ZCLK (MHz)	AGPCLK (MHz)	
0	0	0	0	0	100.00	100.00	133.33	66.66		1	0	0	0	0	100.00	100.00	66.66	66.66	
0	0	0	0	1	100.00	133.33	133.33	66.66		1	0	0	0	1	100.00	133.33	66.66	66.66	
0	0	0	1	0	100.00	200.00	133.33	66.66		1	0	0	1	0	100.00	200.00	66.66	66.66	
0	0	0	1	1	100.00	160.00	133.33	66.66		1	0	0	1	1	100.00	166.66	66.66	66.66	
0	0	1	0	0	133.33	100.00	133.33	66.66		1	0	1	0	0	133.33	100.00	66.66	66.66	
0	0	1	0	1	133.33	133.33	133.33	66.66		1	0	1	0	1	133.33	133.33	66.66	66.66	
0	0	1	1	0	133.33	200.00	133.33	66.66		1	0	1	1	0	133.33	200.00	66.66	66.66	
0	0	1	1	1	133.33	166.66	133.33	66.66		1	0	1	1	1	133.33	166.66	66.66	66.66	
0	1	0	0	0	200.00	100.00	133.33	66.66		1	1	0	0	0	100.99	100.99	67.33	67.33	
0	1	0	0	1	200.00	133.33	133.33	66.66		1	1	0	0	1	100.99	134.65	67.33	67.33	
0	1	0	1	0	200.00	200.00	133.33	66.66		1	1	0	1	0	100.99	201.98	67.33	67.33	
0	1	0	1	1	200.00	160.00	133.33	66.66		1	1	0	1	1	100.99	168.31	67.33	67.33	
0	1	1	0	0	160.00	100.00	133.33	66.66		1	1	1	0	0	134.65	100.99	67.33	67.33	
0	1	1	0	1	166.66	133.33	133.33	66.66		1	1	1	0	1	134.65	134.65	67.33	67.33	
0	1	1	1	0	160.00	200.00	133.33	66.66		1	1	1	1	0	134.65	201.98	67.33	67.33	
0	1	1	1	1	166.66	166.66	133.33	66.66		1	1	1	1	1	134.65	168.31	67.33	67.33	





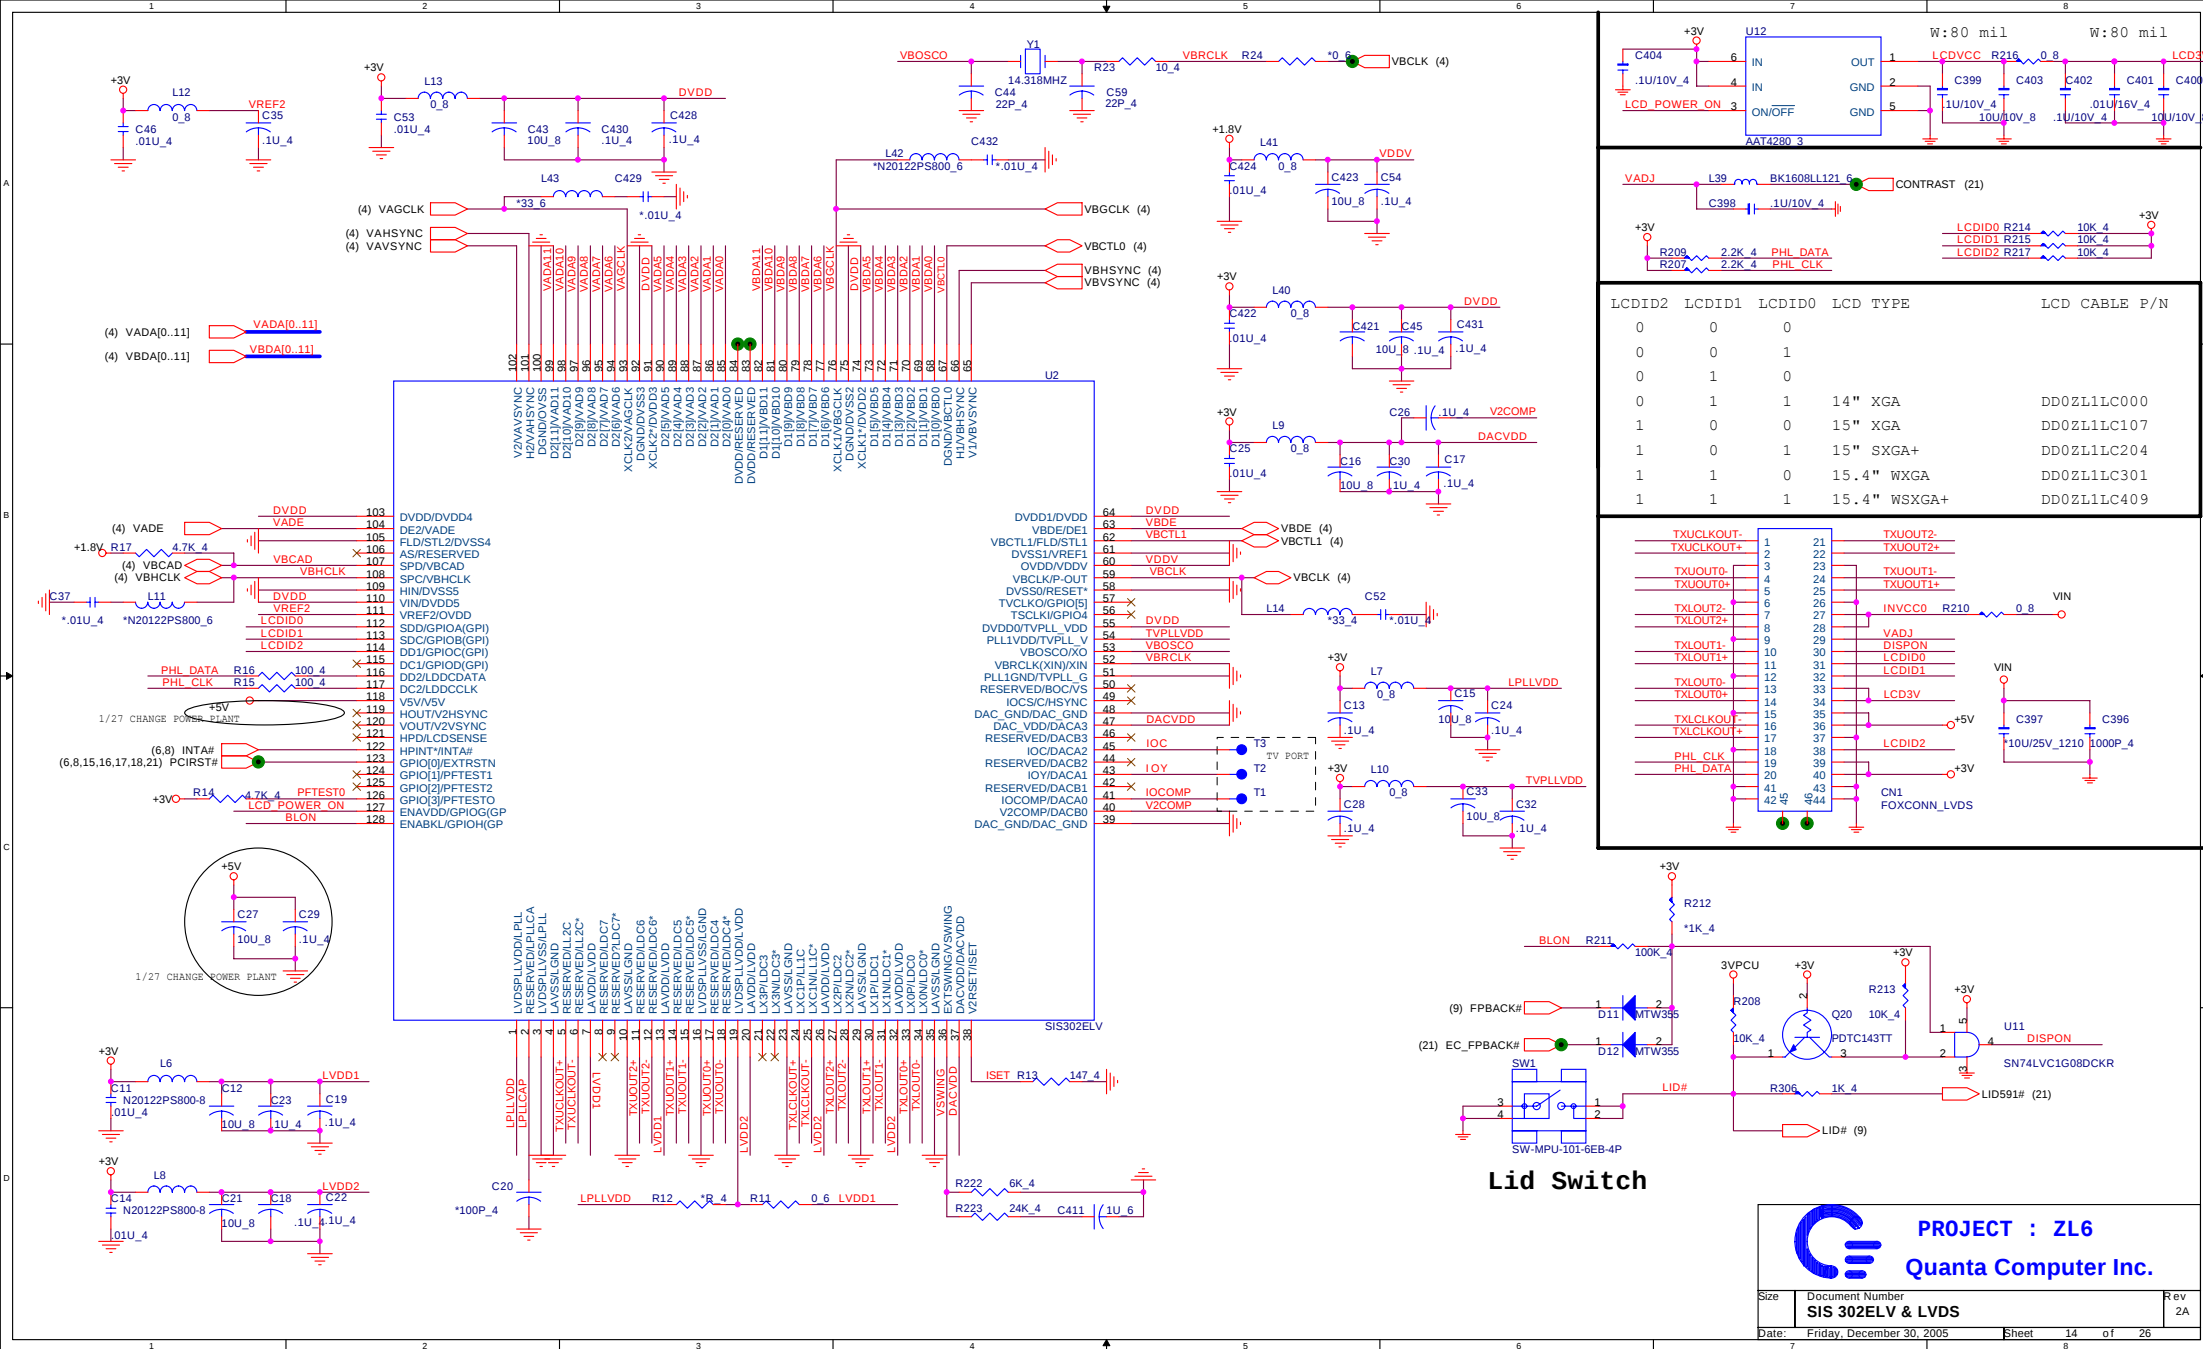

ID Select : AD17
Interrupt Pin : INTD#
Request Indicate : REQ1#
Grant Indicate : GNT1#



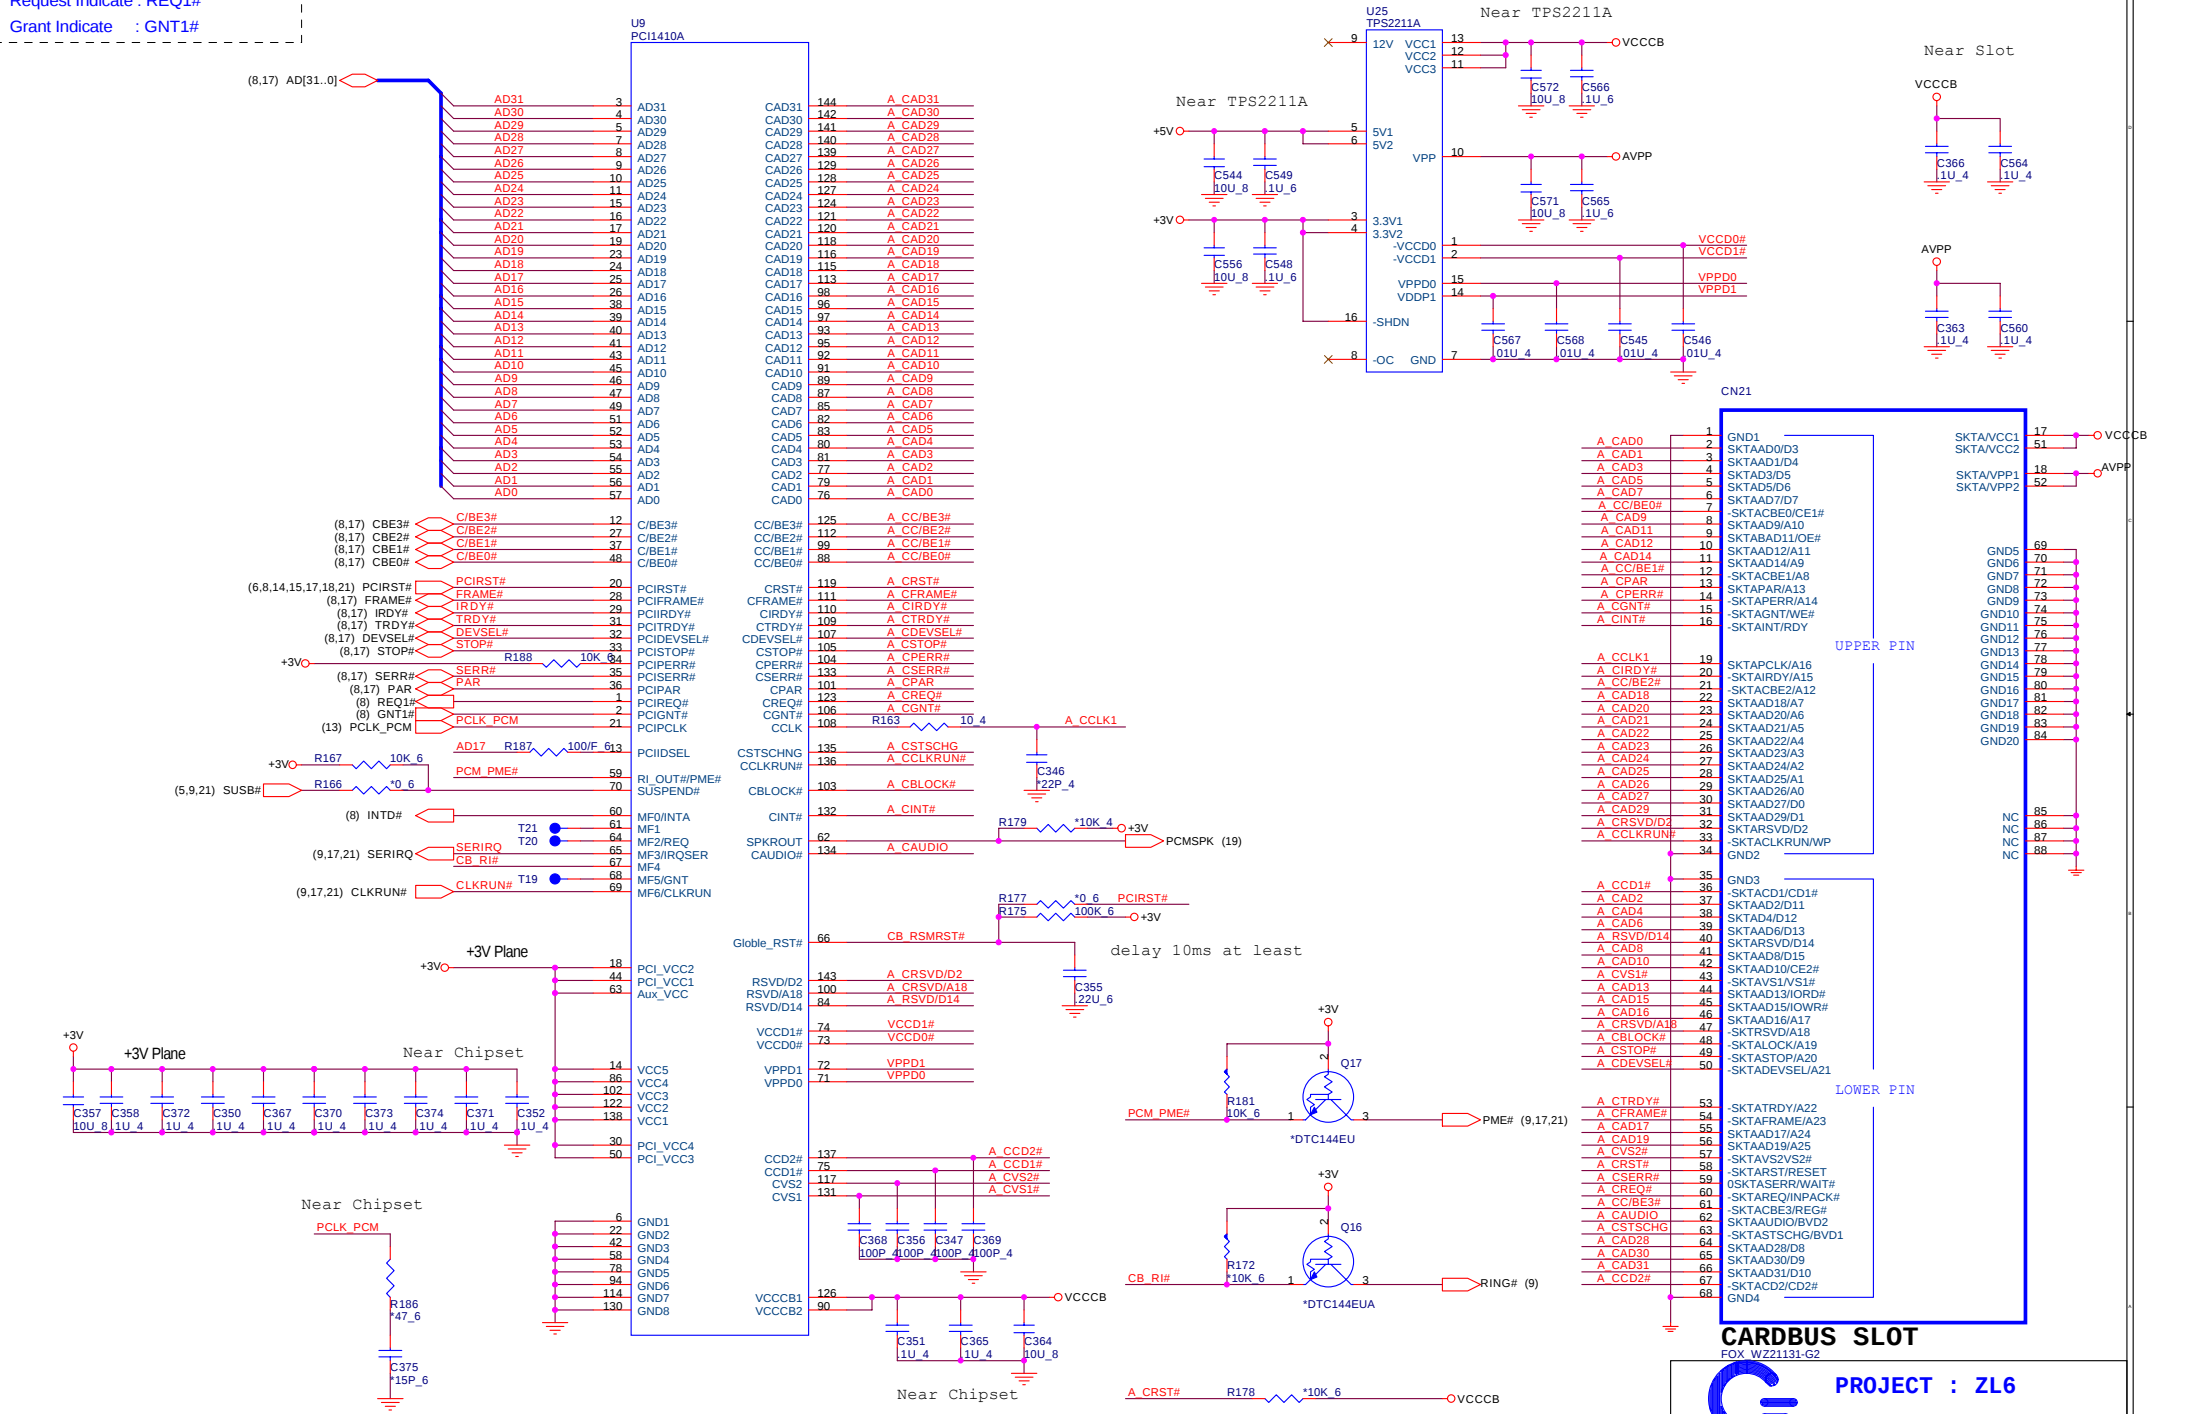



MINI-PCI

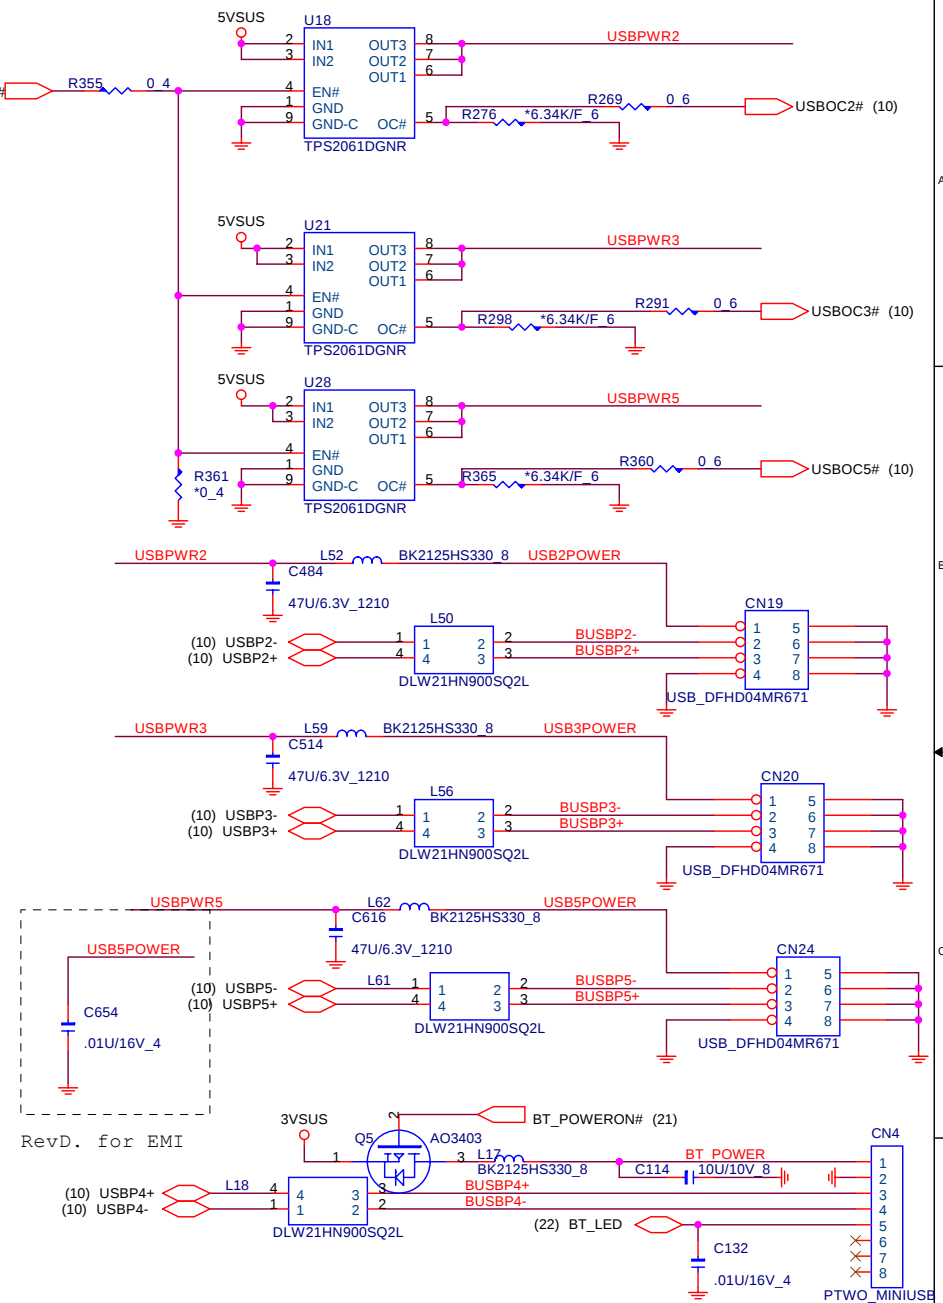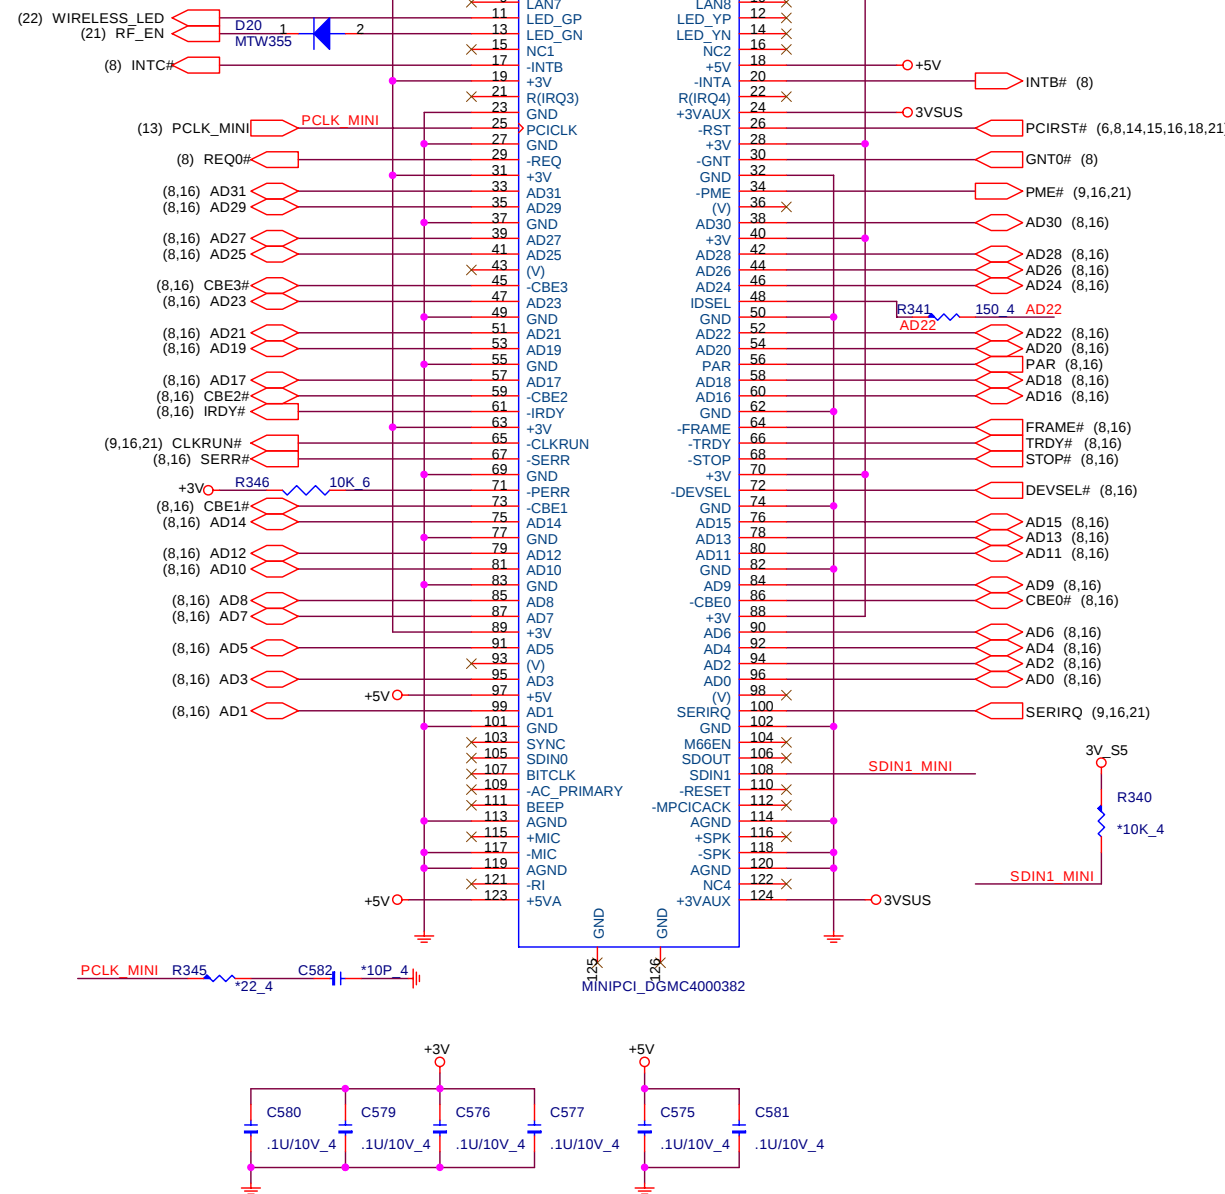


PROJECT : ZL6
Quanta Computer Inc.

Size	Document Number MINI PCI,USB	Rev 2A
Date:	Friday, December 30, 2005	Sheet 17 of 26

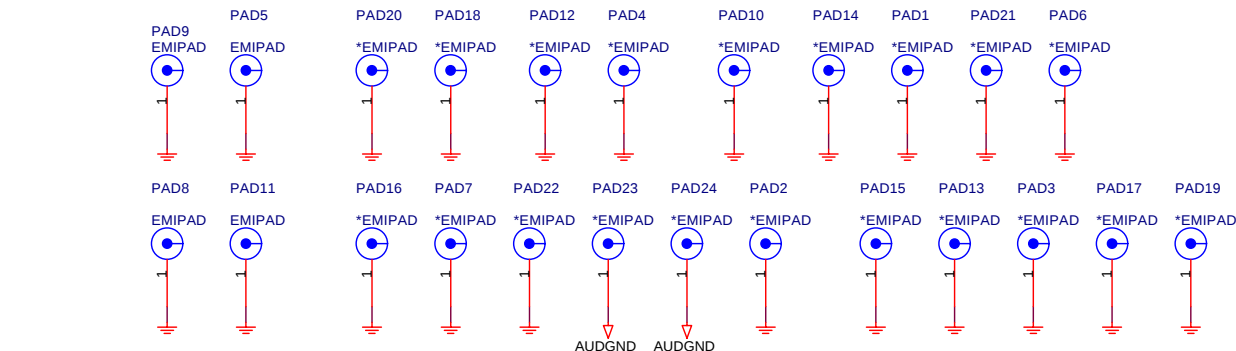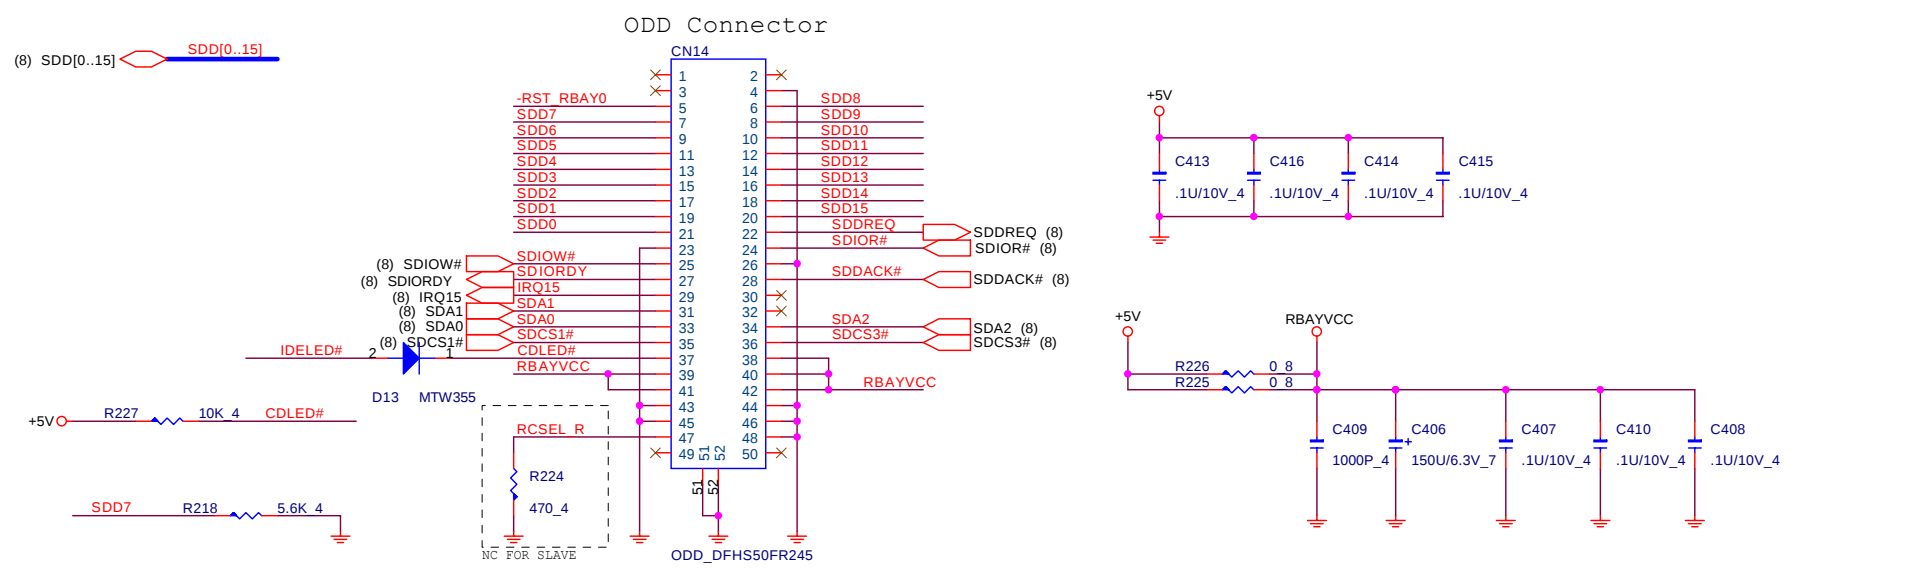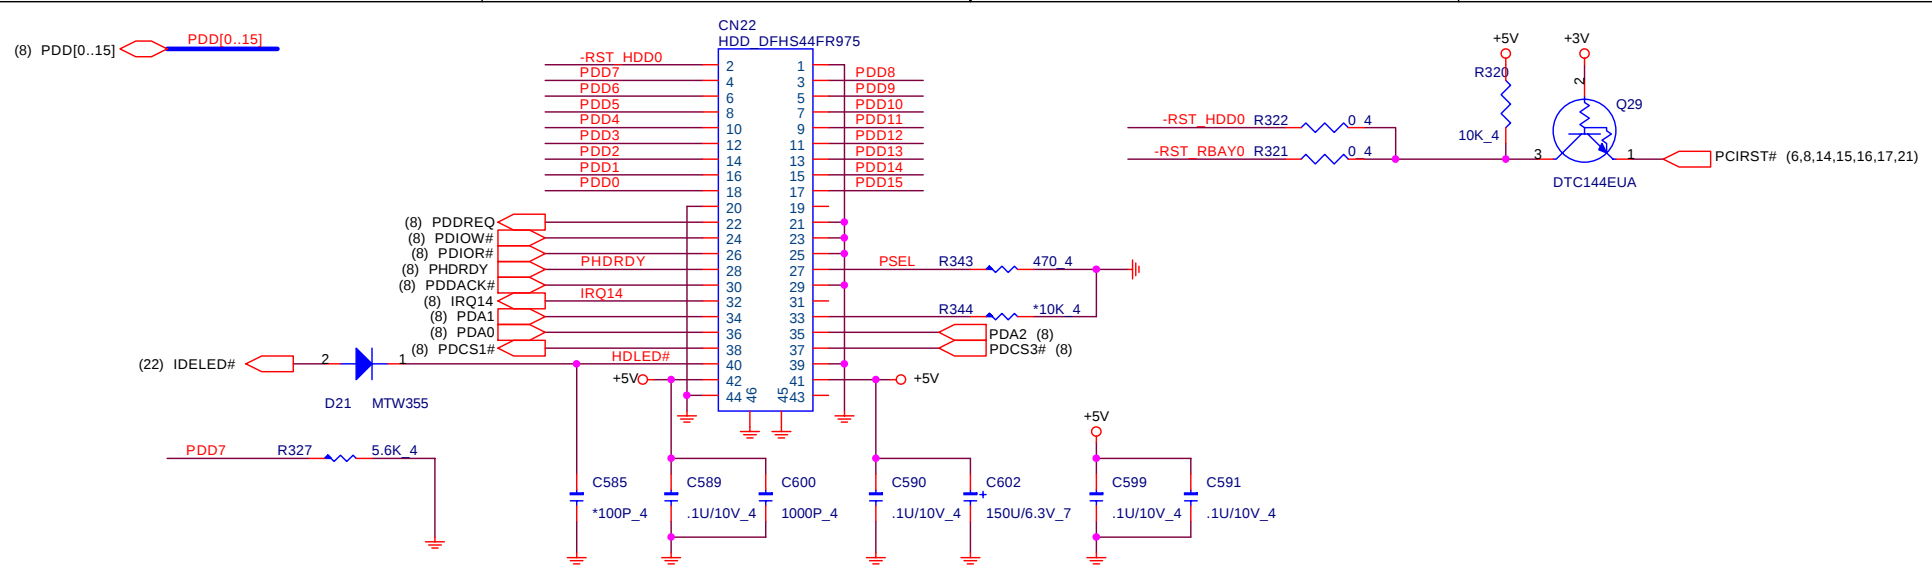

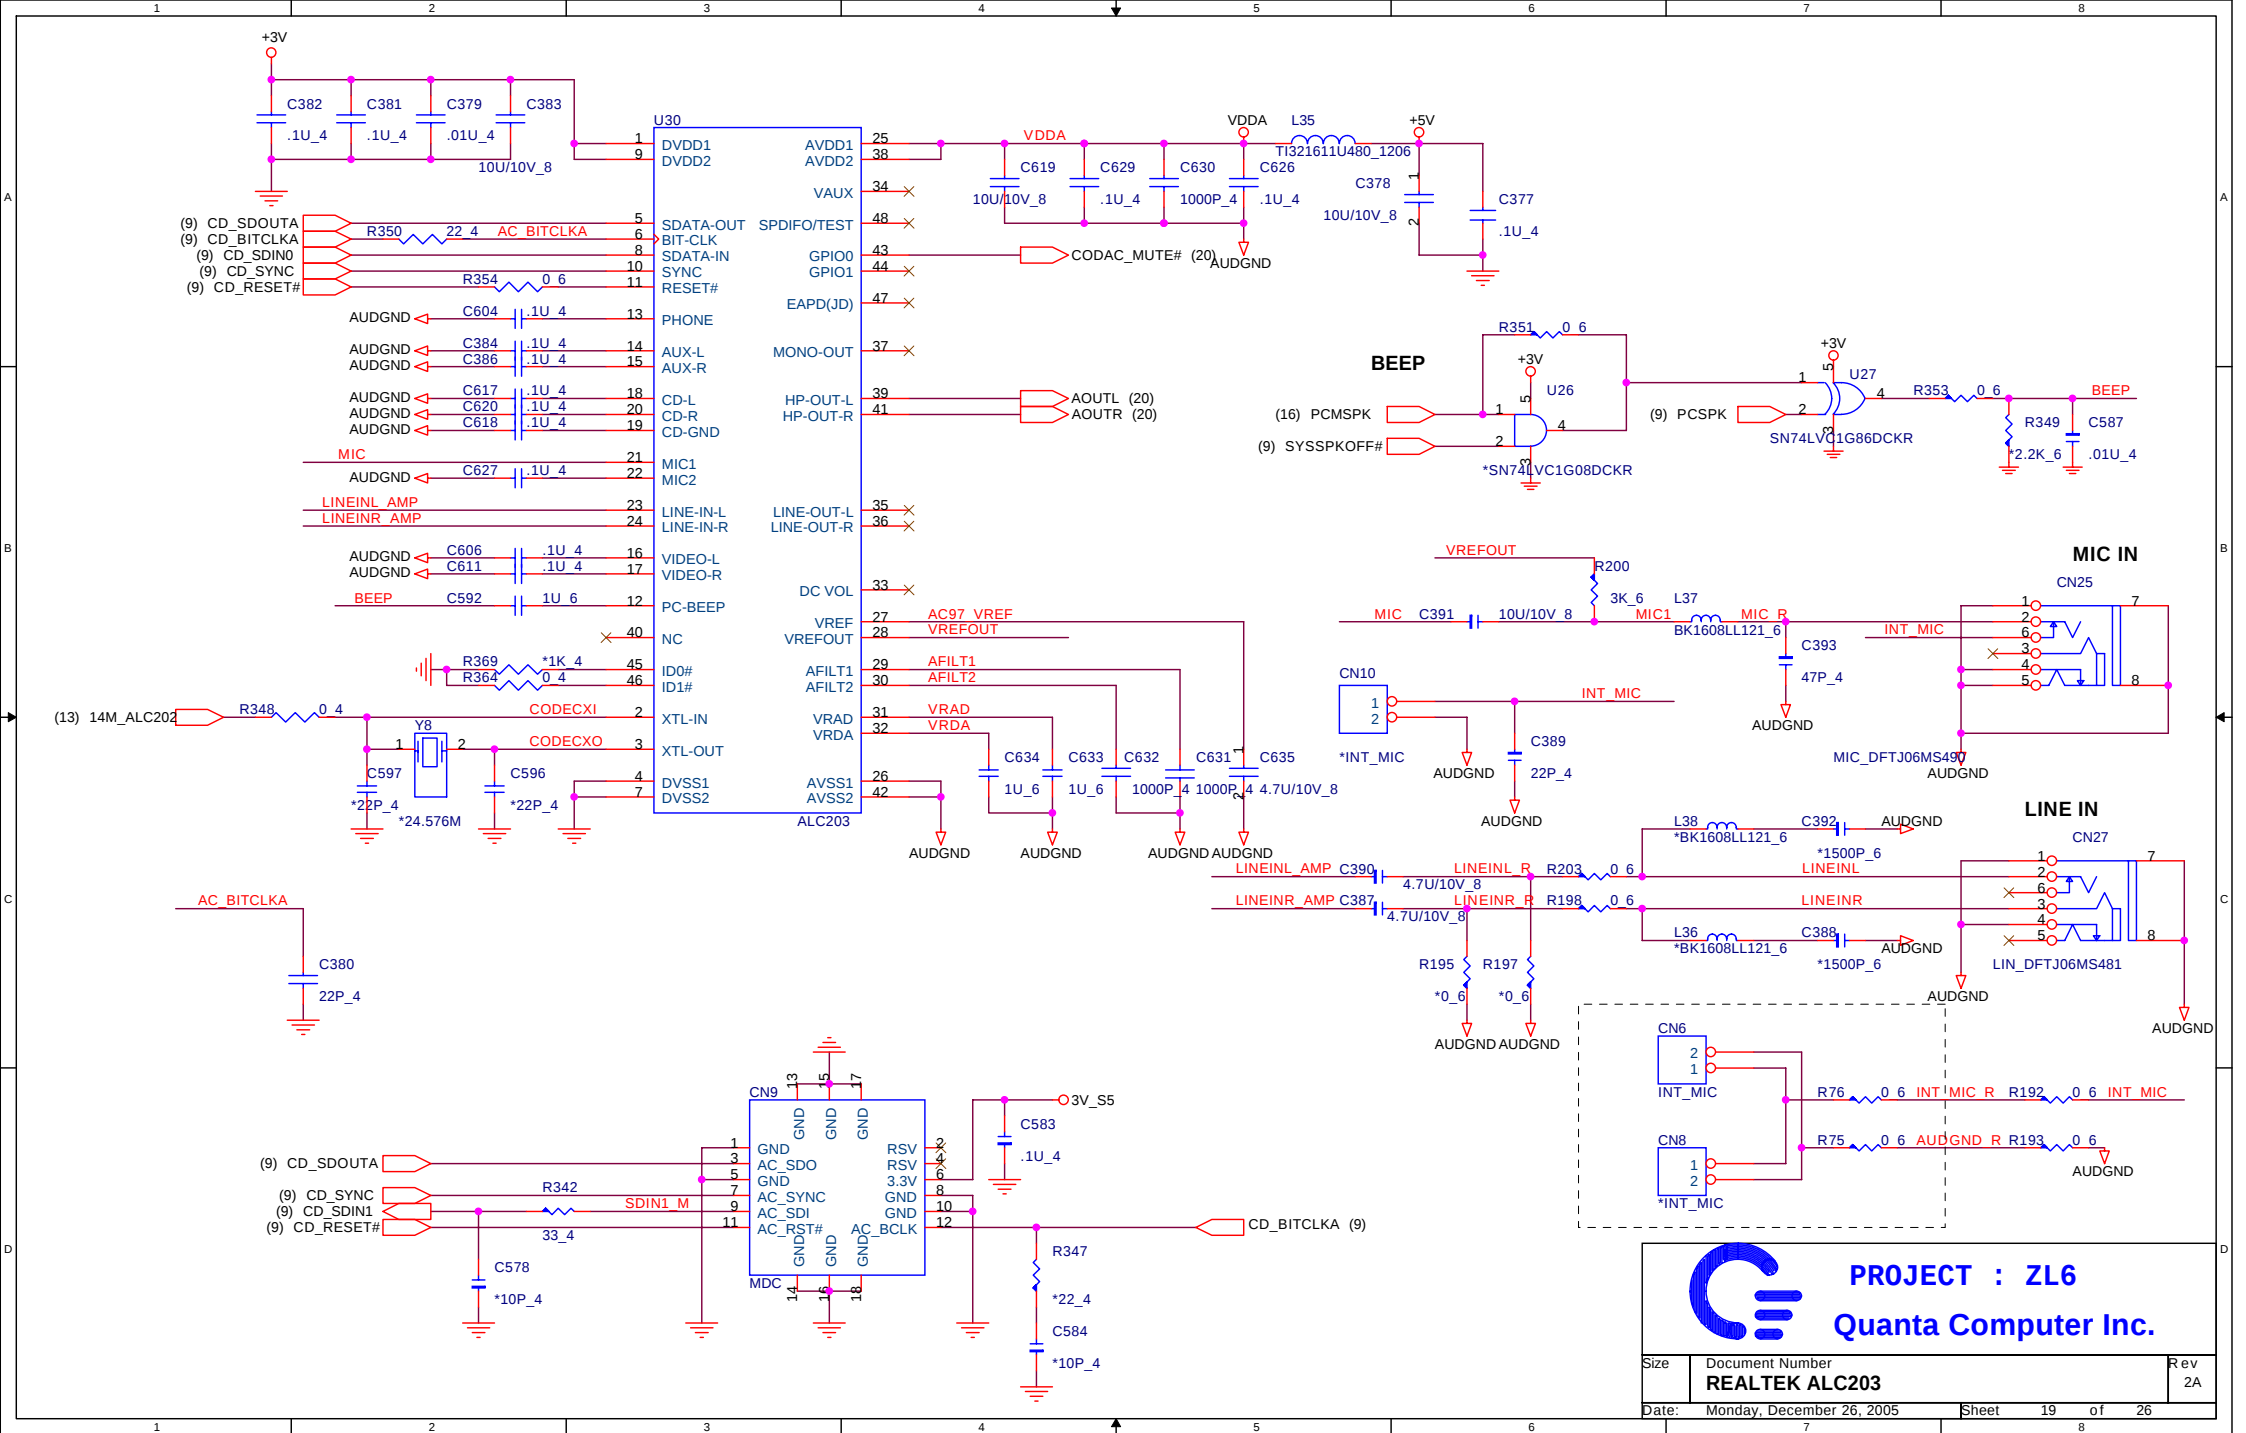

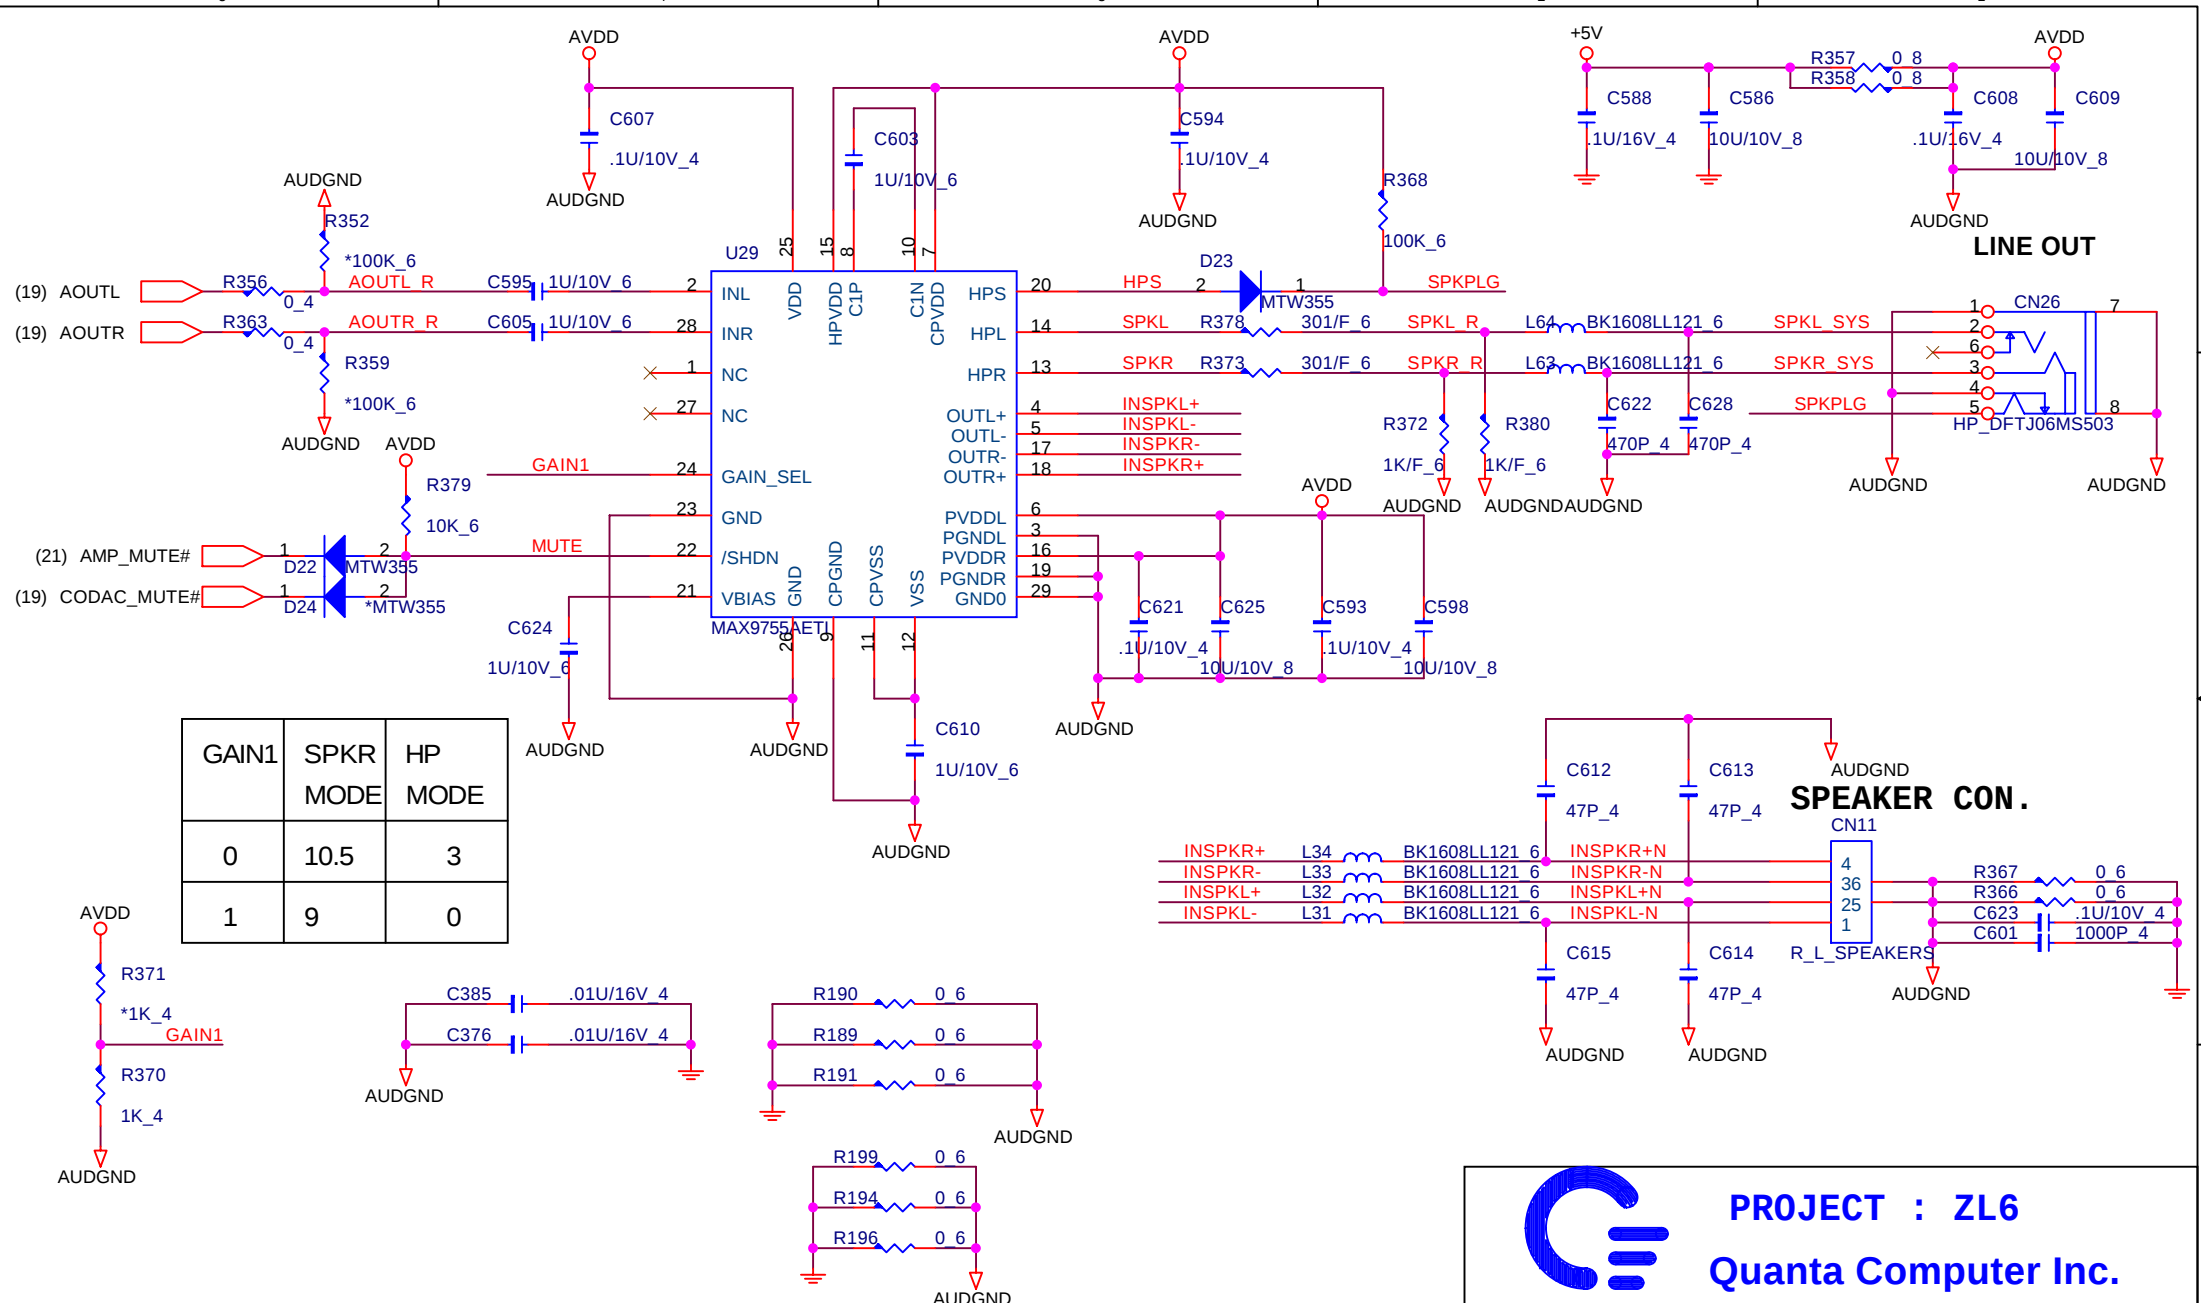

GAIN1	SPKR MODE	HP MODE
0	10.5	3
1	9	0





































PROJECT : ZL6

Quanta Computer Inc.






Size	Document Number	Rev
	AUDIO AMP(MAX 9755)	2A
Date:	Tuesday, February 07, 2006	Sheet 20 of 26

LDRQ#(pin 8) internal is no use

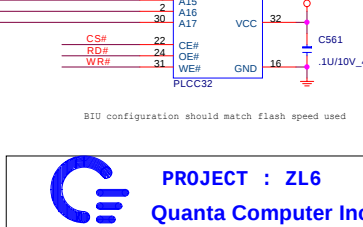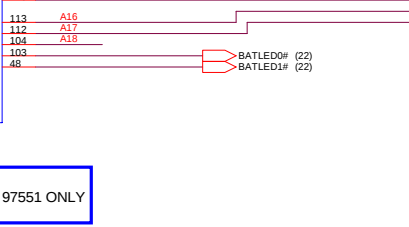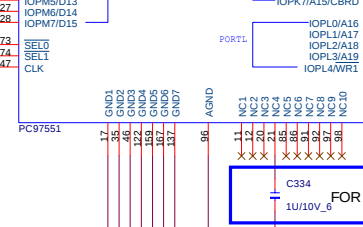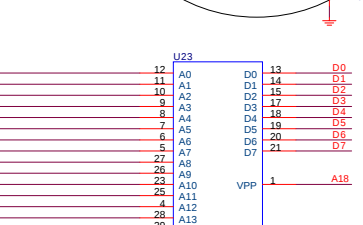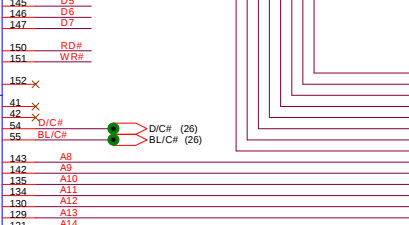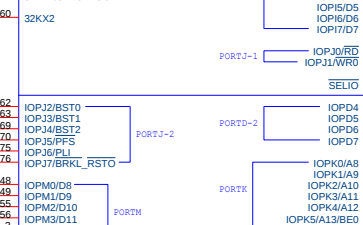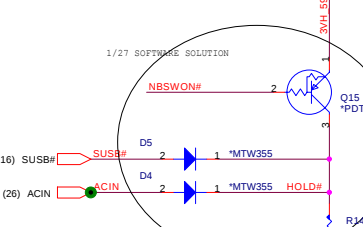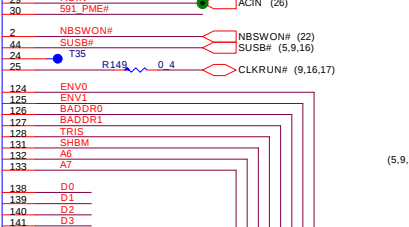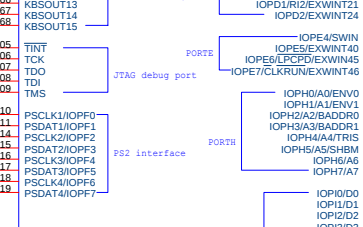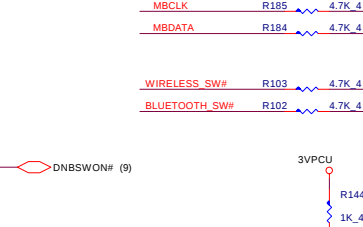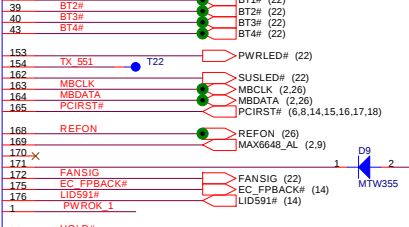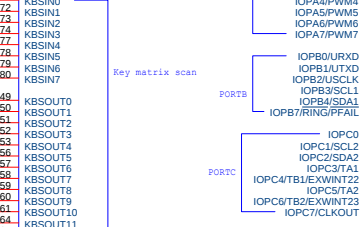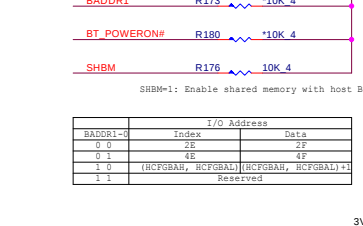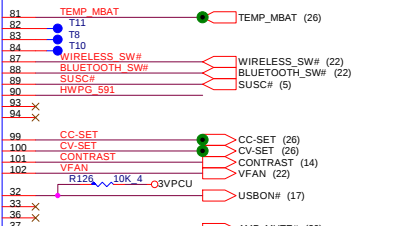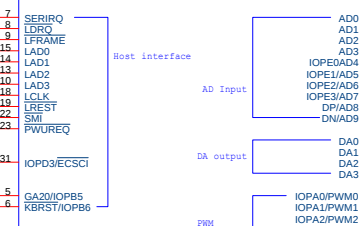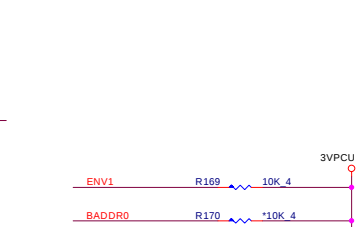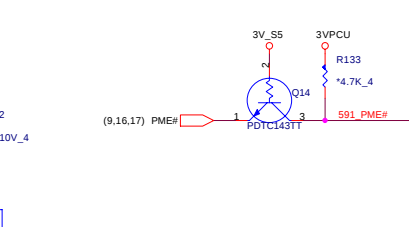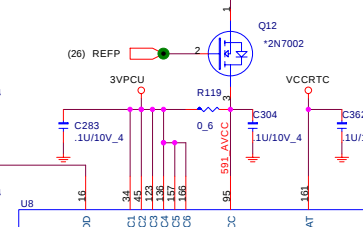


I/O Address		
Index	Index	Data
0 0	2F	2F
0 1	4E	4F
1 0	(HCFGBAH, HCFGBAL)(HCFGBAL, HCFGBAL)+1	
1 1	Reserved	


SRBM=1: Enable shared memory with host BIOS




INT K/B

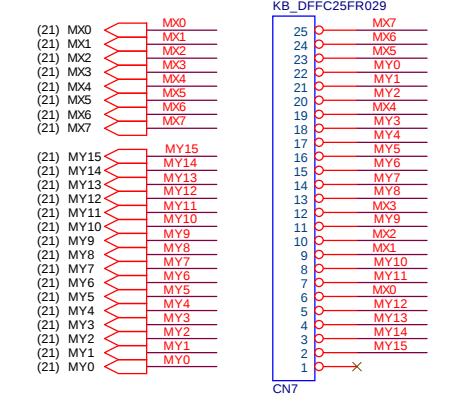




CONN

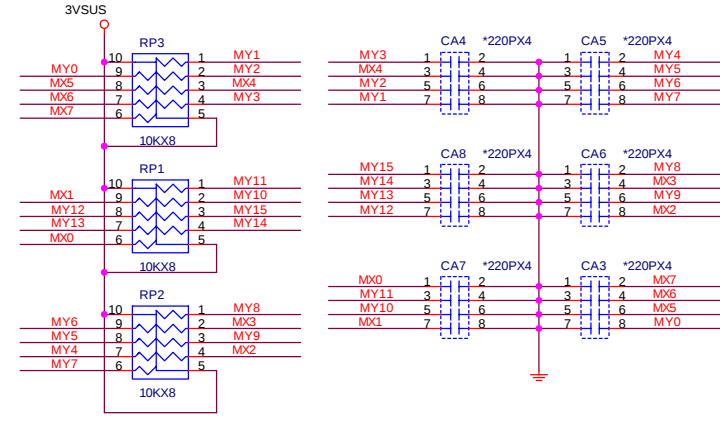

FAN CONTROL

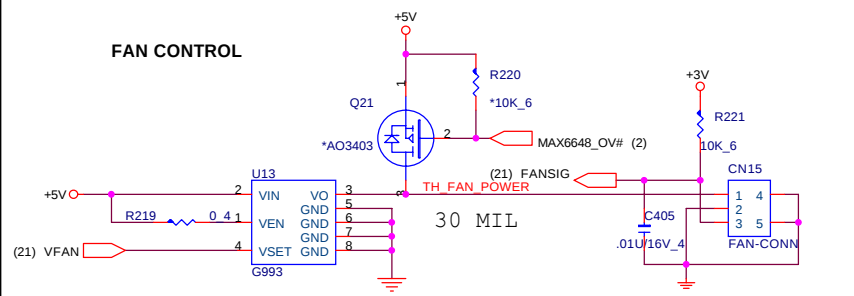


TOUCH PAD

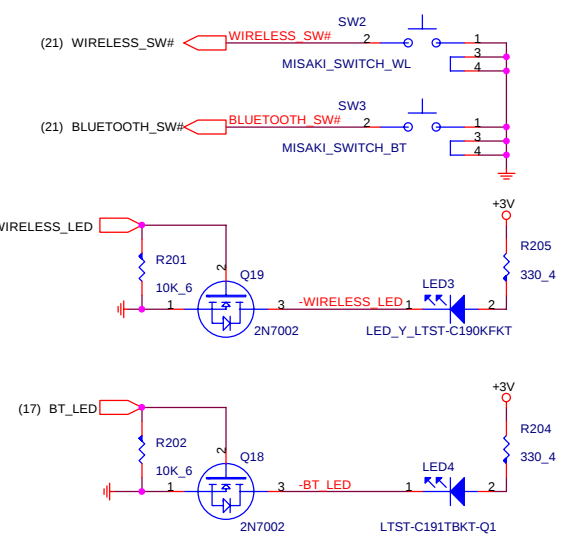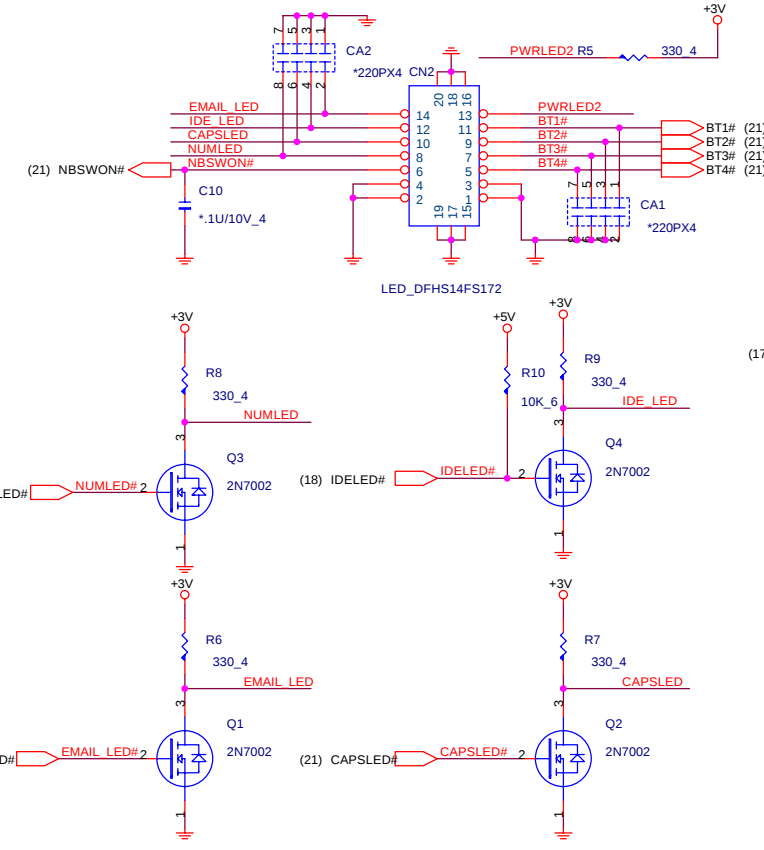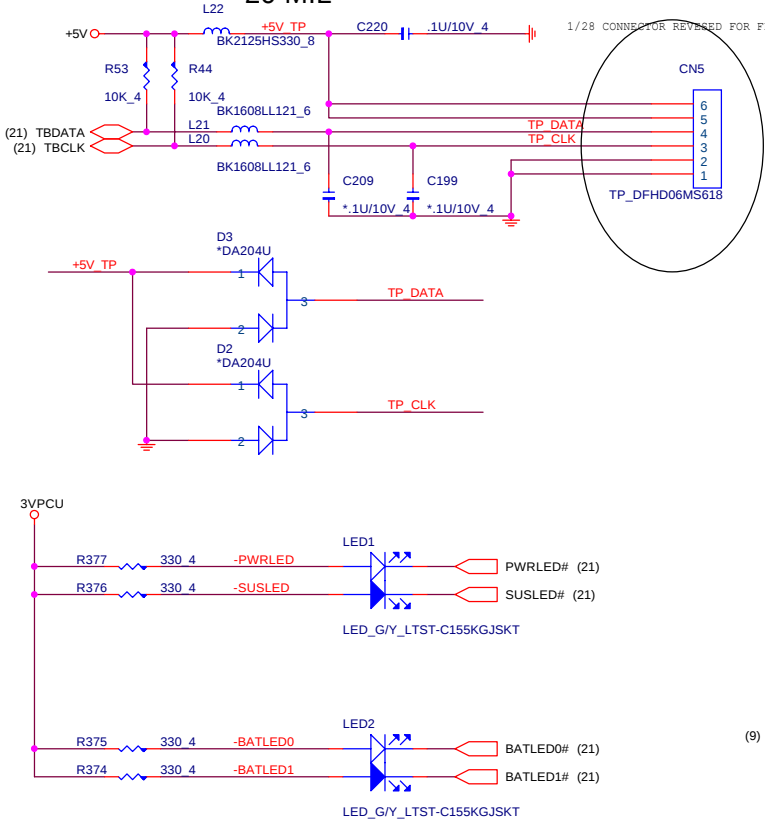



PROJECT : ZL6
Quanta Computer Inc.

Size	Document Number	Rev
	T/P,FAN,SWITCH,LED,K/B	2A
Date:	Monday, December 26, 2005	Sheet 22 of 26

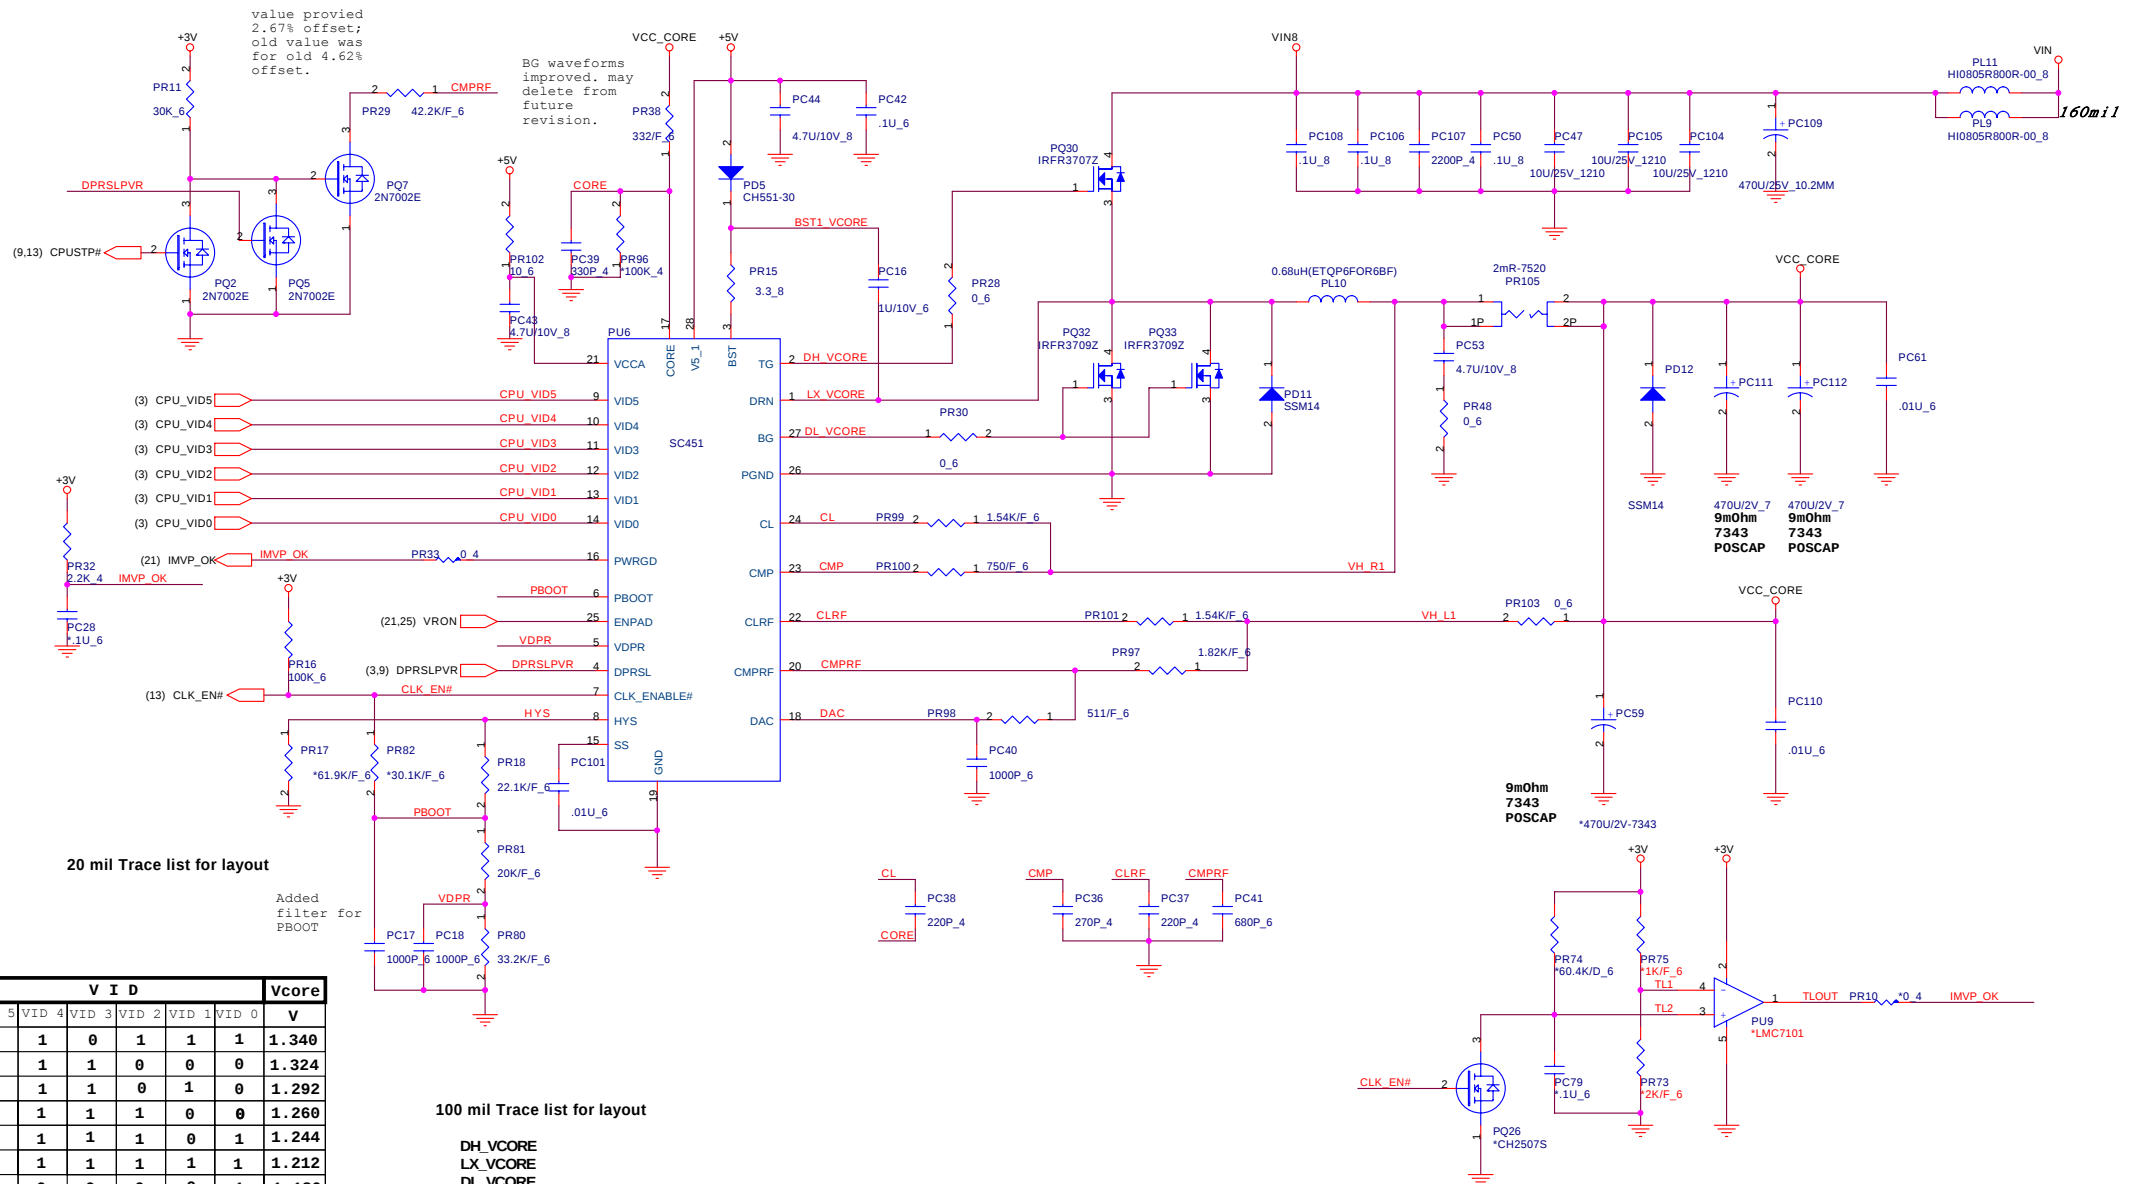

20 mil Trace list for layout

Added filter for PBOOT

V I D							Vcore
VID 5	VID 4	VID 3	VID 2	VID 1	VID 0	V	
0	1	0	1	1	1	1.340	
0	1	1	0	0	0	1.324	
0	1	1	0	1	0	1.292	
0	1	1	1	0	0	1.260	
0	1	1	1	1	0	1.244	
0	1	1	1	1	1	1.212	
1	0	0	0	0	1	1.180	
1	0	0	0	1	1	1.148	
1	0	0	1	1	0	1.100	
1	0	1	0	0	1	1.052	
1	0	1	0	1	1	1.020	
1	0	1	1	1	0	0.972	
1	1	0	0	0	0	0.940	

100 mil Trace list for layout

DH_VCORE
LX_VCORE
DL_VCORE
DH_VCORE2
LX_VCORE2
DL_VCORE2

10 mil Trace list for layout

SC1476
pin 4 pin
5 pin 7
pin 25
pin 30

A04916 Rds on = 27mOhm
 ILOAD * Rds on * 10 = ILIM
 ILIM5 = 1.485V Current limit 5.5A
 ILIM3 = 1.35V Current limit 5A

