



HM55_CP (ZRD) SYSTEM BLOCK DIAGRAM

BOM Option Table


Reference	Description
IV@	for UMA only SKU
SW@	for Switchable Graphic only SKU

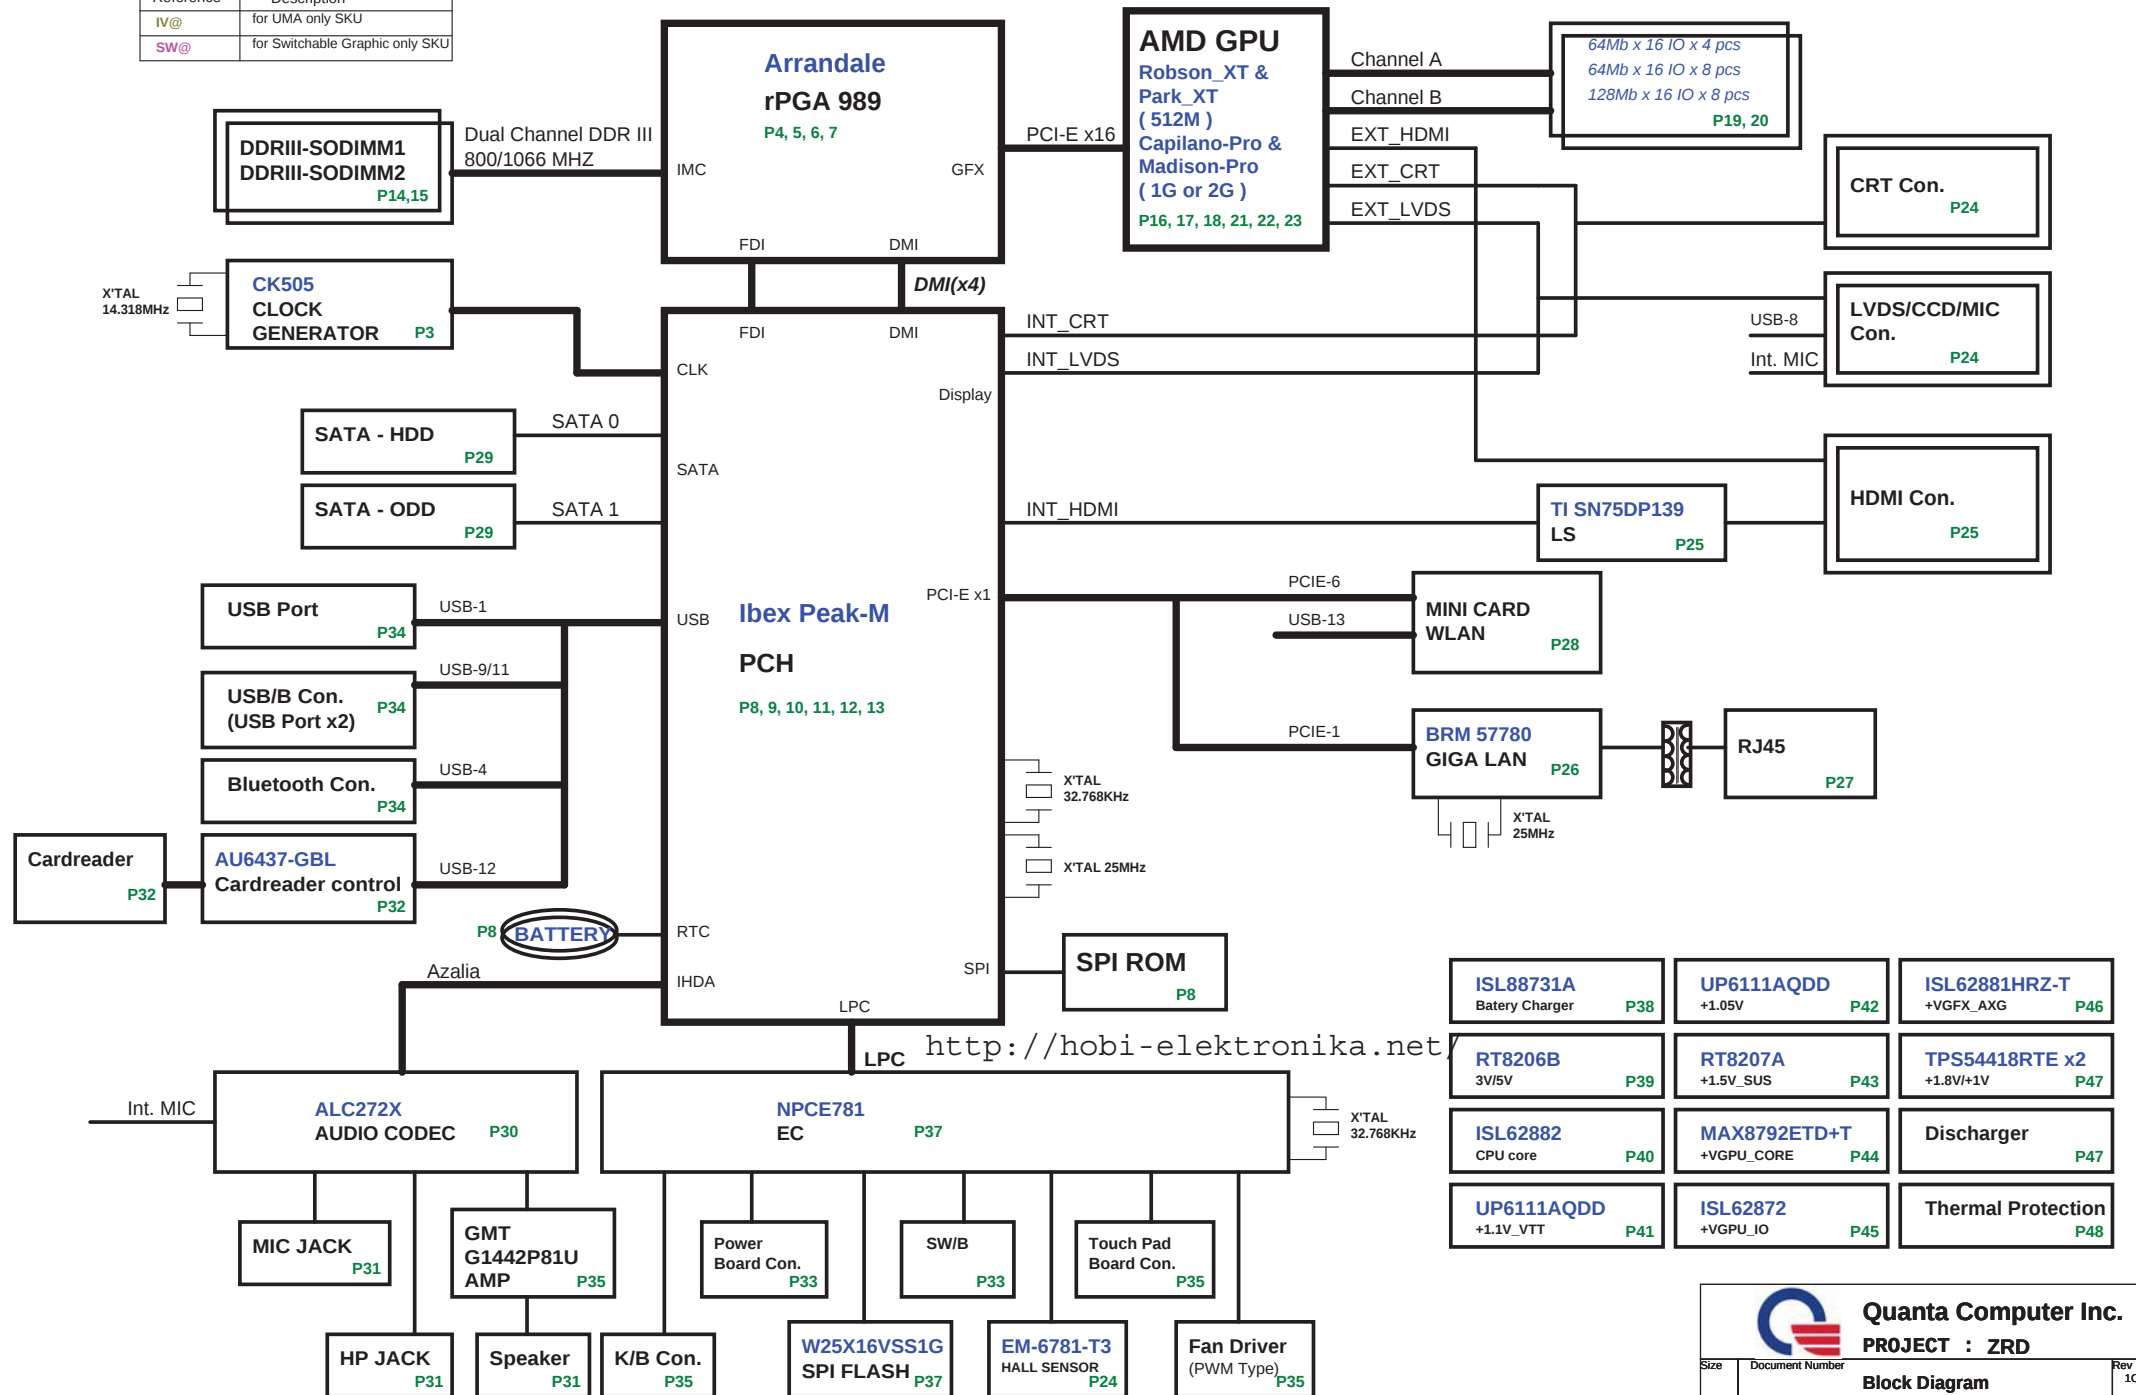

GPU PWR CTRL Option 1 (Default/ VDDR3 before VDDC)

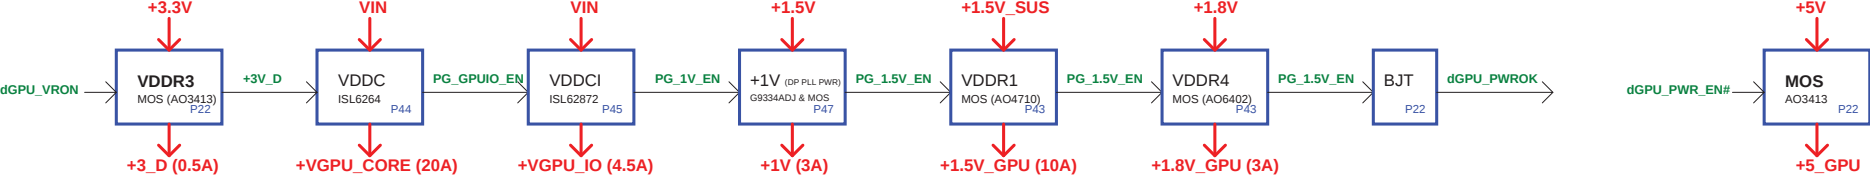


GPU PWR CTRL Option 2 (VDDR3 after VDDR1)

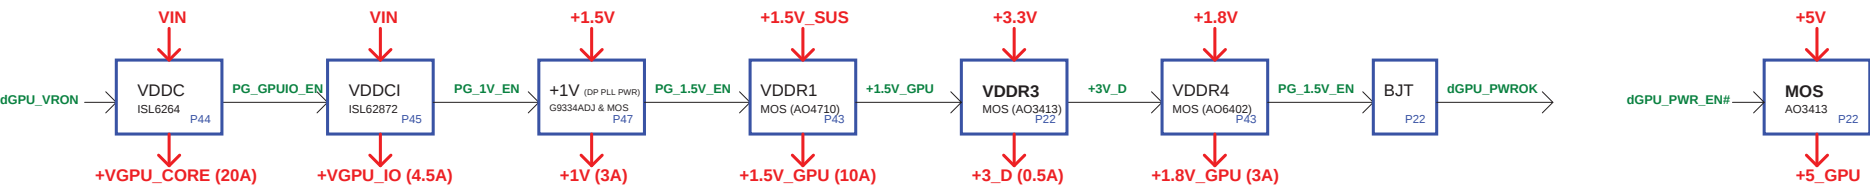


Power States

POWER PLANE	VOLTAGE	DESCRIPTION	CONTROL SIGNAL	ACTIVE IN
VIN	+10V~+19V	MAIN POWER	ALWAYS	ALWAYS
+VCCRTC	+3V~+3.3V	RTC POWER	ALWAYS	ALWAYS
+3VPCU	+3.3V	EC POWER	ALWAYS	ALWAYS
+5VPCU	+5V	CHARGE POWER	ALWAYS	ALWAYS
+15V	+15V	CHARGE PUMP POWER	ALWAYS	ALWAYS
+3V_S5	+3.3V	LAN/BT/CIR POWER	S5_ON	S0-S5
+5V_S5	+5V	USB POWER	S5_ON	S0-S5
+5V	+5V	HDD/ODD/Codec/TP/CRT/HDMI POWER	MAINON	S0
+3V	+3.3V	PCH/GPU/Peripheral component POWER	MAINON	S0
+1.5VSUS	+1.5V	CPU/SODIMM CORE POWER	SUSON	S0-S3
+0.75V_DDR_VTT	+0.75V	SODIMM Termination POWER	MAINON	S0
+VGFX_AXG	variation	Internal GPU POWER	GFX_ON	S0
+1.8V	+1.8V	CPU/PCH/Braidwood POWER	MAINON	S0
+1.5V	+1.5V	MINI CARD/NEW CARD POWER	MAINON	S0
+1.1V_VTT	+1.05V or +1.1V	CPU VTT POWER	MAINON	S0
+1.05V	+1.05V	PCH CORE POWER	MAINON	S0
+VCC_CORE	variation	CPU CORE POWER	VRON	S0
LCDVCC	+3.3V	LCD POWER	LVDS_VDDEN	S0
+5V_GPU	+5V	SWITCHABLE PWM IC POWER	dGPU_PWR_EN#	Discrete enable
+GPU_CORE	+0.9V~+1.1V	GPU CORE POWER	+3V_D	Discrete enable
+GPU_IO	+0.9V~+1.1V	GPU I/O POWER	PG_GPUIO_EN	Discrete enable
+1.5V_GPU	+1.5V	VRAM CORE POWER	PG_1.5V_EN	Discrete enable
+1.8V_GPU	+1.8V	GPU_CRE/LVDS/PLL POWER	+1.5V_GPU	Discrete enable
+1V	+1V	DP/PEG POWER	PG_1V_EN	Discrete enable


Thermal Follow Chart

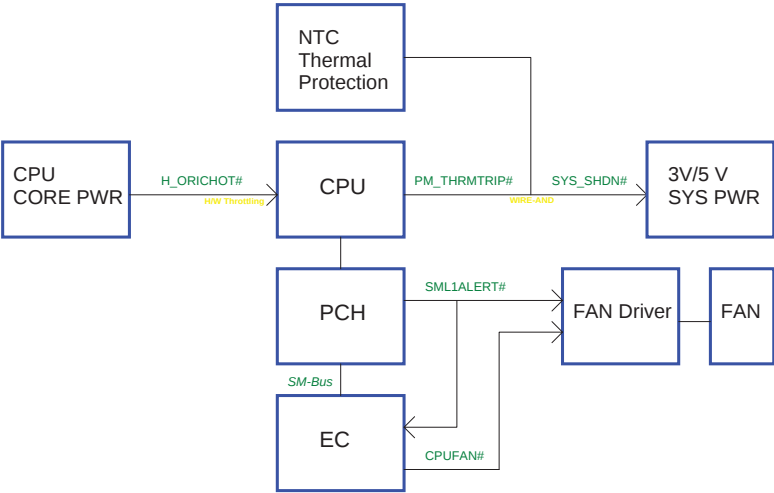

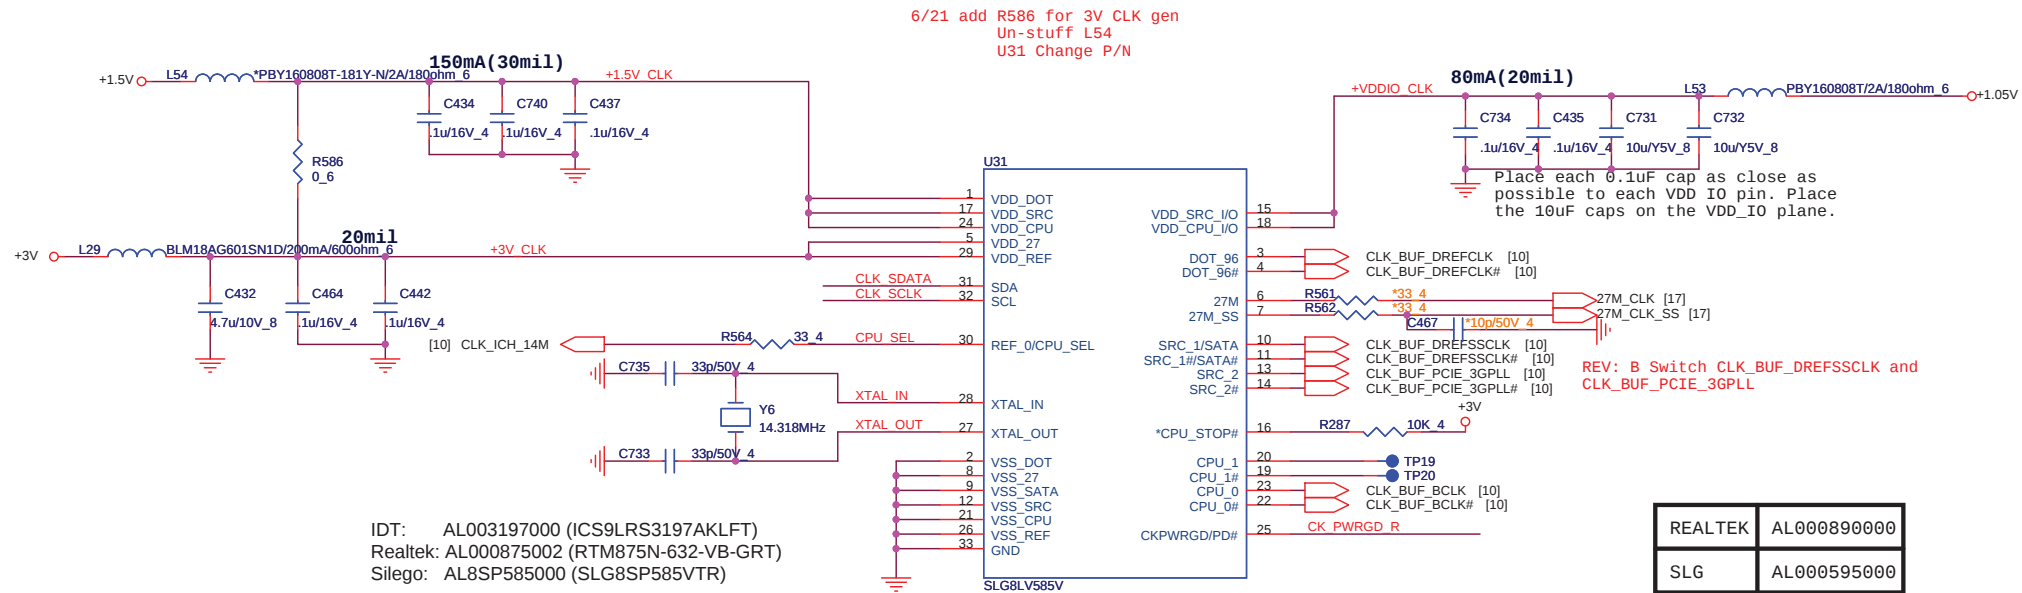


<http://hobi-elektronika.net/>

CPU_CLK select




	0	1
CPU_SEL	CPU0/1=133MHz (default)	CPU0/1=100MHz

SMBus

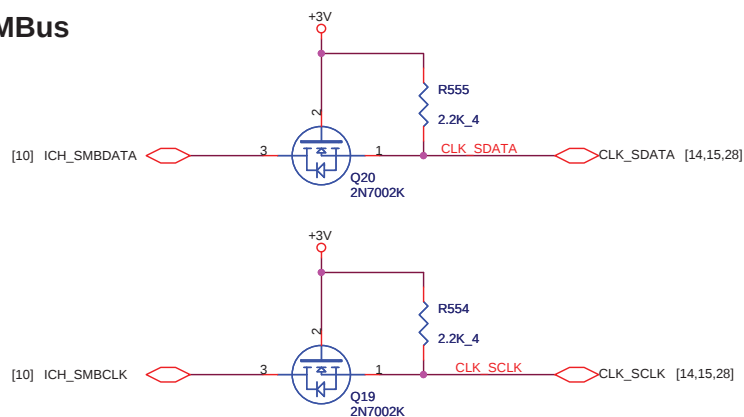


CLK Enable

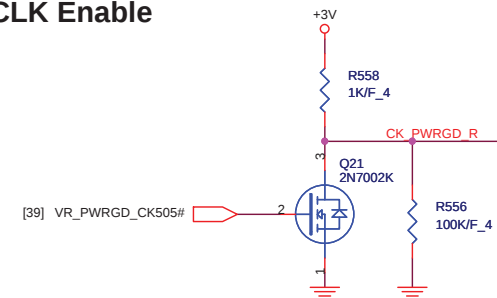


Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number	Rev
	Clock Generator	1C
Date:	Wednesday, July 21, 2010	Sheet 3 of 46

AUBURNDALE/CLARKSFIELD PROCESSOR (CLK,MISC,JTAG)




Use reverse type
(at GPU side)




REV : B R458 & R452

LTS	DGG^9000005
SUY	DGG^9000016
FOX	DGG^9000023


<The GFX_IMON, FDI_FSYN0[0], FDI_FSYN[1], FDI_LSYN0[0], FDI_LSYN[1], and FDI_INT>Note that if these signals are left as no connect, there are no functional impacts, but a small amount of power (~15 mw) maybe wasted.




Use a voltage divider with VDDQ (1.5V) rail (ON in S3) and resistor combination of 4.75K (to VDDQ)/12K (to GND) to generate the required voltage.
Note: CRB uses a 3.3V (always ON) rail with 2K and 1K combination.

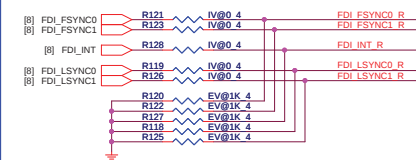

AUBURNDALE/CLARKSFIELD PROCESSOR (DDR3)

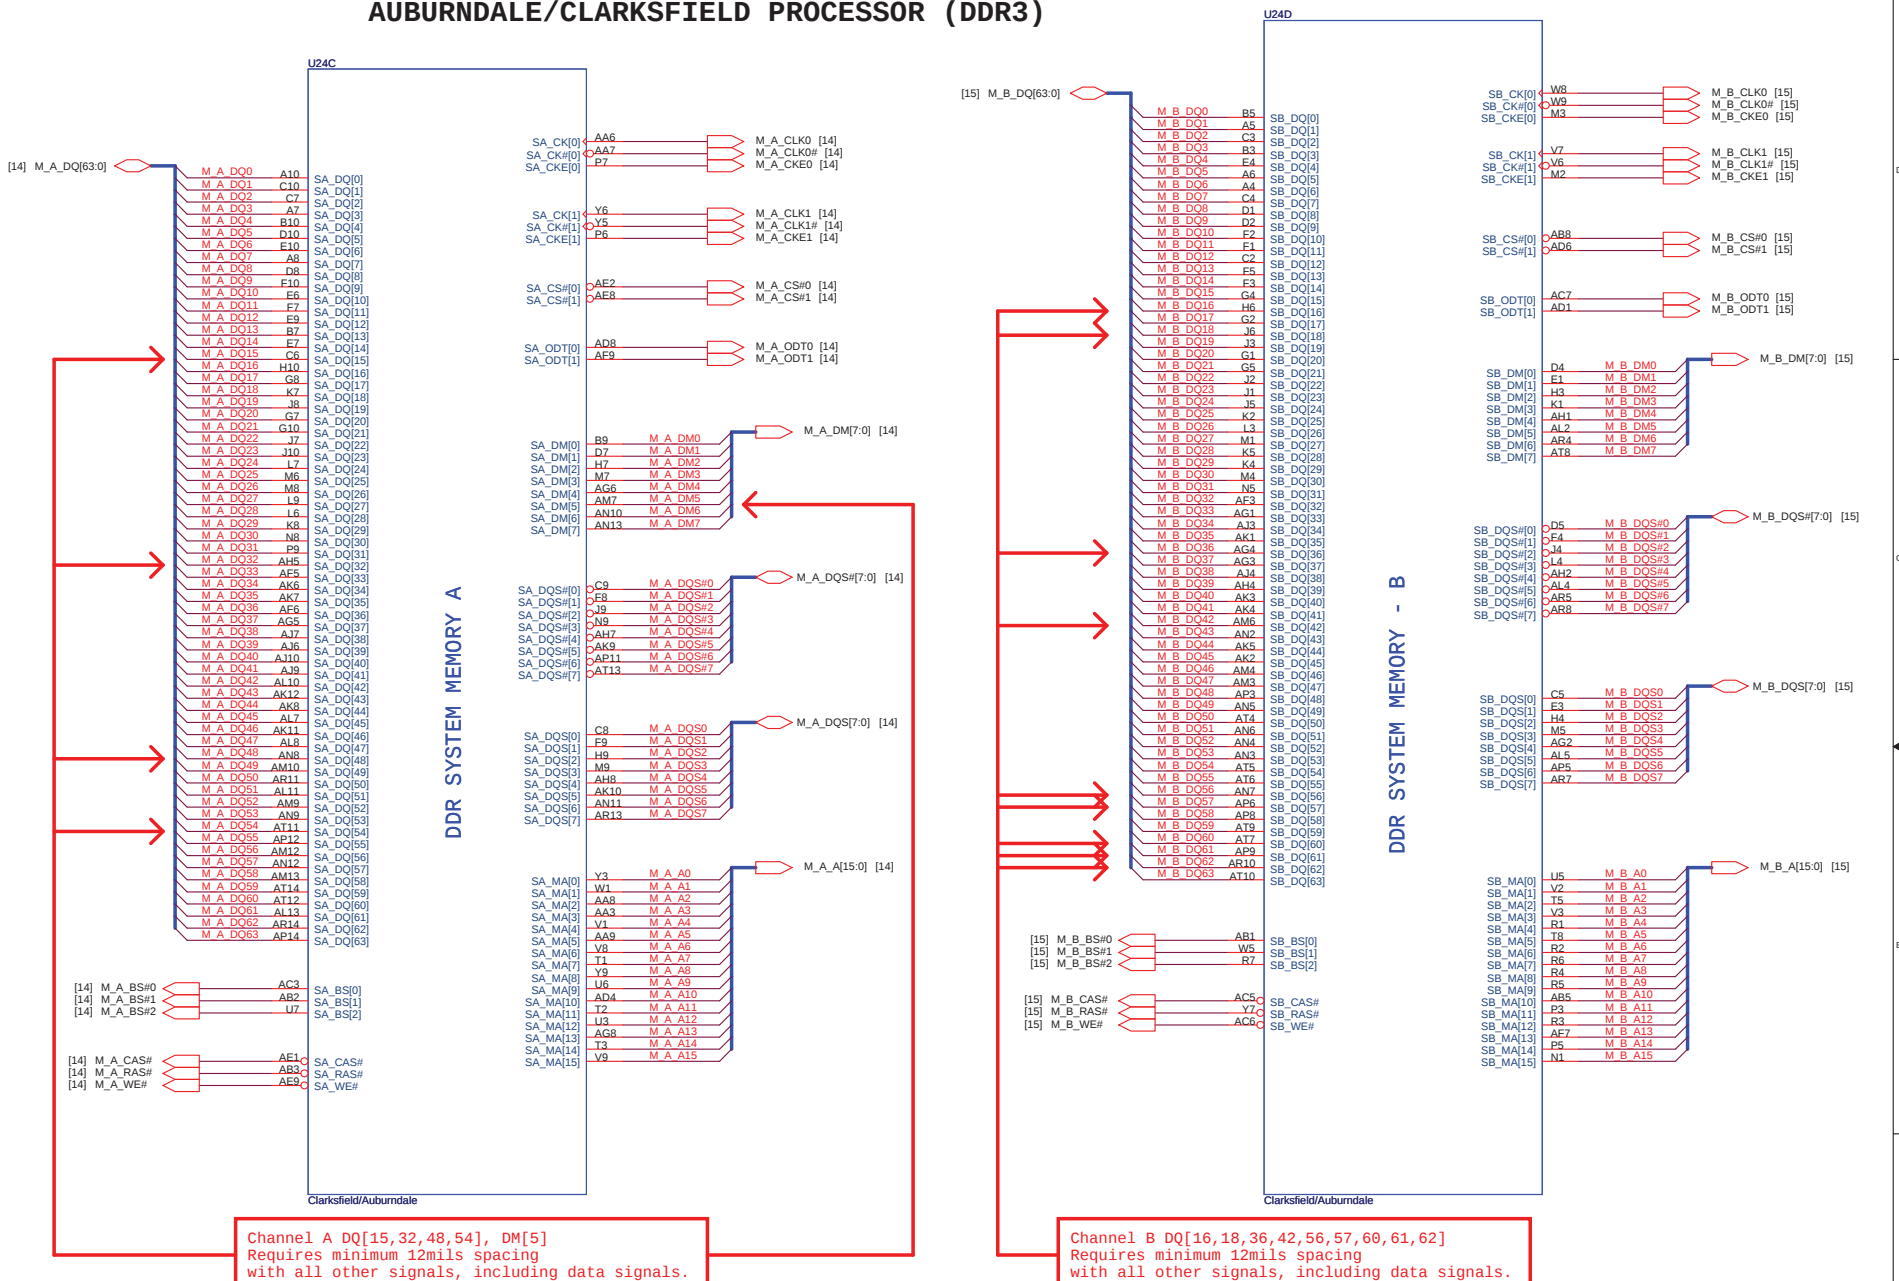

CPU Core Power

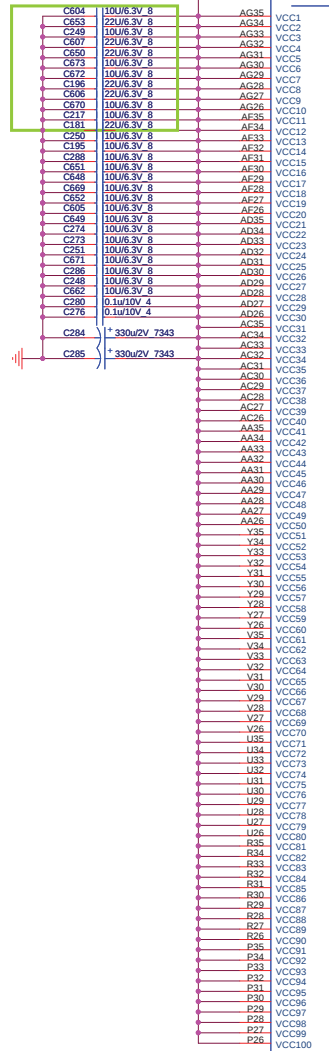ARD:48A
CFD:52A

Clarksfield/Auburndale


AUBURNDAL/CLARKSFIELD PROCESSOR (POWER)

VTT Rail Values are
Auburndale VTT=1.05V
Clarksfield VTT=1.1V


18A

+1.05V

AUBURNDAL/CLARKSFIELD PROCESSOR (GRAPHICS POWER)
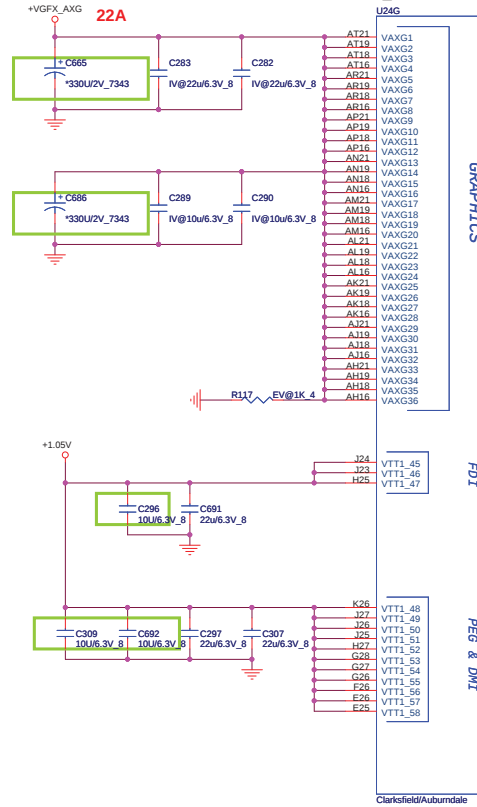
<http://hobi-elektronika.net/>

Clarksfield/Auburndale

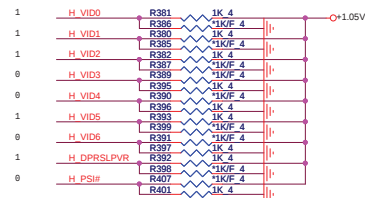NOTE:
For Validating DMP VR R6451 should be STUFF
and R2N1 NO_STUFFHFM_VID : Max 1.4V
LFM_VID : Min 0.65V

POWER

DDR3 - 1.5V RAILS

1.1V

1.8V

PEG & DMI

FBI

SENSE LINES

VTT SELECT

I MON

VCC SENSE

VSS SENSE

VTT SENSE

VSS SENSE VTT

VTT SENSE

VSS SENSE

VTT SENSE

VSS SENSE

VTT SENSE

VSS SENSE

VTT SENSE

VSS SENSE

VTT SENSE

VSS SENSE


VTT SENSE

VSS SENSE

VTT SENSE

VSS SENSE

AUBURNDALE/CLARKSFIELD PROCESSOR(RESERVED, CFG)

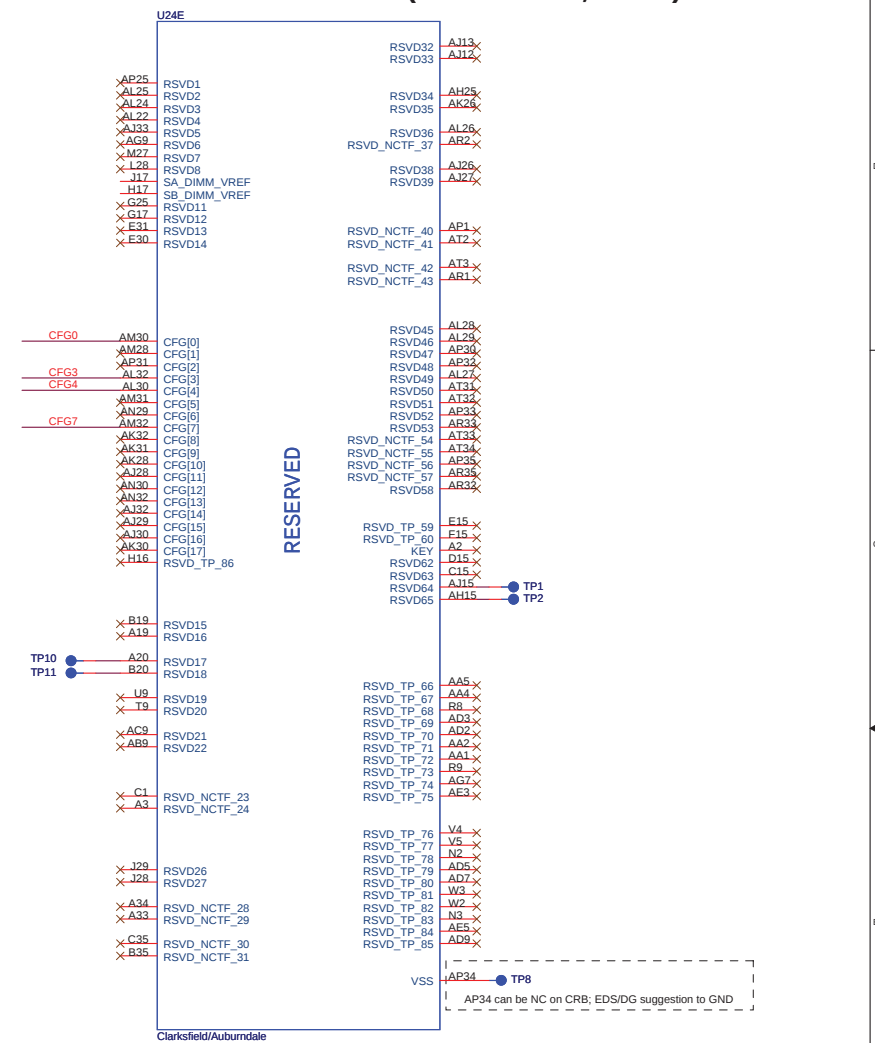


	1	0	DEFAULT	
CFG0 (PCI-Epress Configuration Select)	Single PEG	Bifurcation enabled	1	
CFG3 (PCI-Epress Static Lane Reversal)	Normal Operation	Lane Numbers Reversed	1	
CFG4 (Embedded Display Port Presence)	Disabled; No Physical Display Port attached to Embedded Display Port	Enabled; An external Display port device is connected to the Embedded Display port	1	
The Clarkfield processor's PCI Express interface may not meet PCI Express 2.0 jitter specifications. Intel recommends placing a 3.01K +/- 5% pull down resistor to VSS on CFG[7] pin for both rPGA				


 Quanta Computer Inc. PROJECT : ZRD			
Size	Document Number		Rev
	AUBURNA 4/4		1C
Date:	Wednesday, July 21, 2010	Sheet	7 of 46

AC-coupling CAP place close to PCH

IBEX PEAK-M (LVDS, DDI)

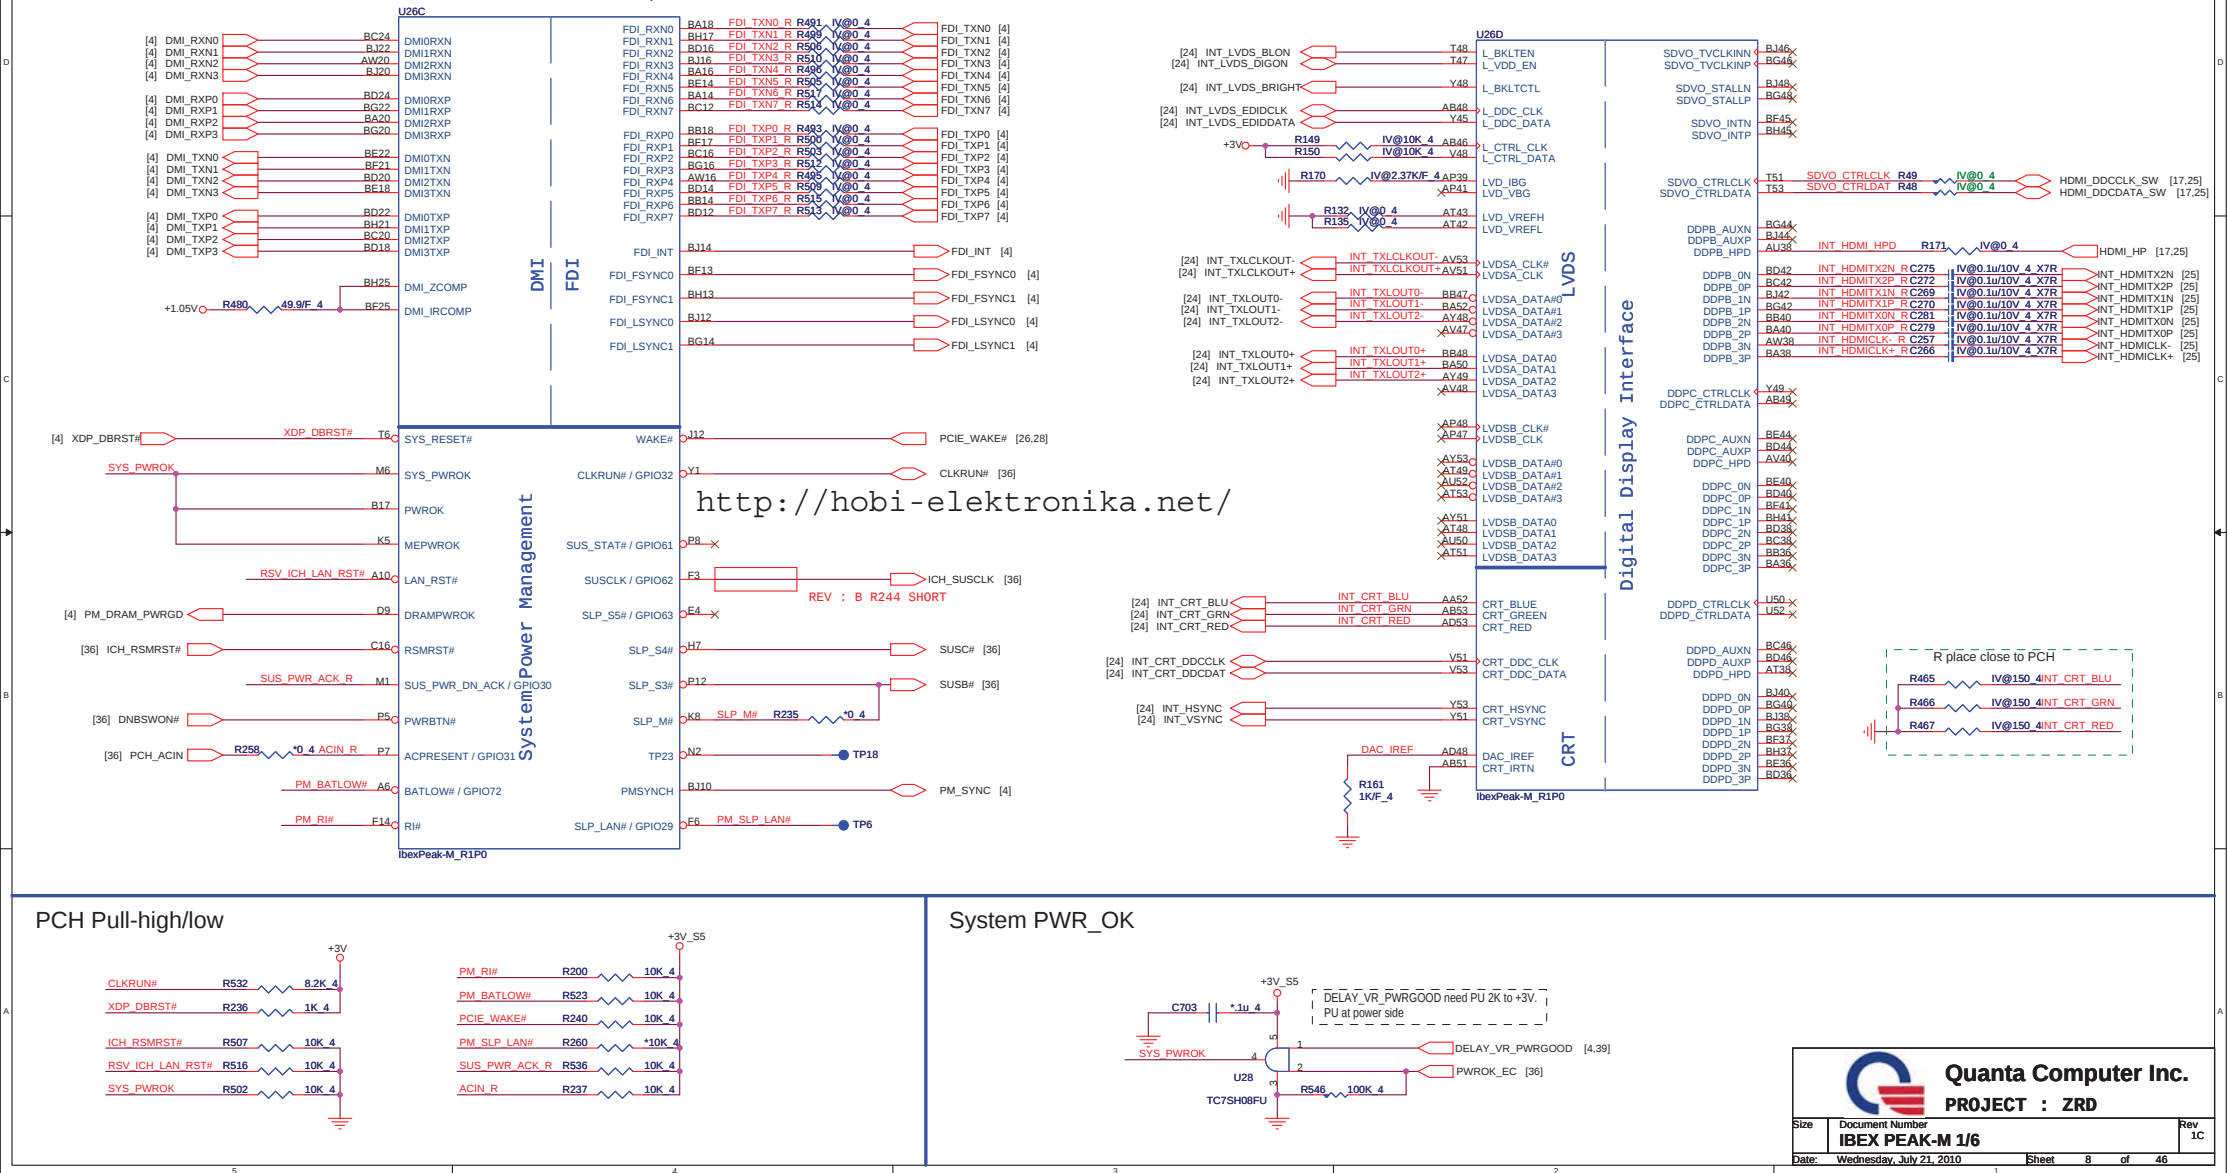


RTC Circuitry


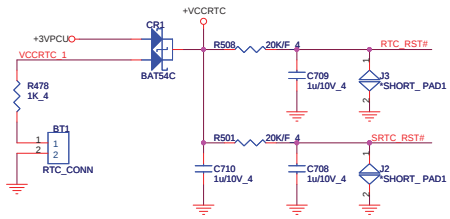


HDA_SYNC (PCH strap pin)
Internal weak pull-down
VCCVRM=>+1.8V (default)
external pull-up
VCCVRM=>+1.5V

HDA Bus

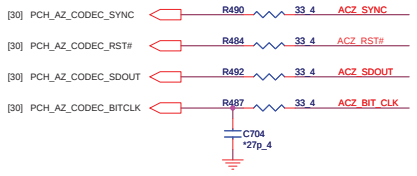

PCH SPI

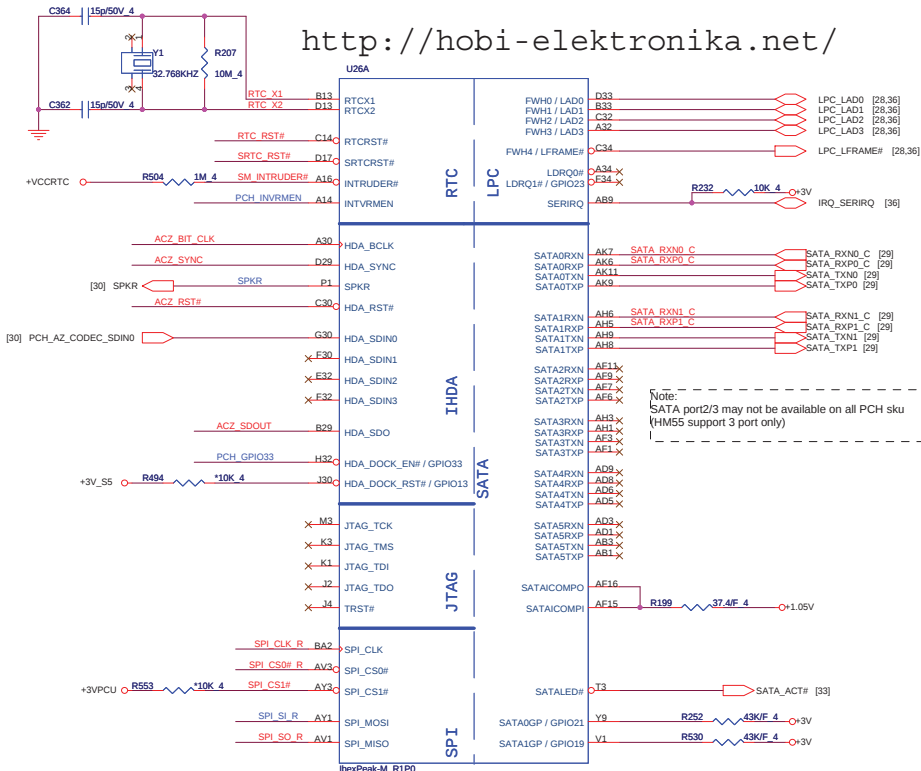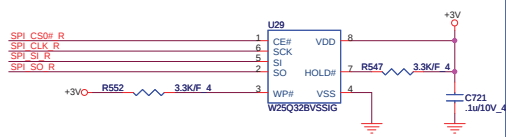


PCH Strap Pin Configuration Table-1

INTVRMEN	Integrated 1.05V VRM Enable / Disable	1 = Integrated VRM is enabled 0 = Integrated VRM is disabled	+VCCRTC R511 330K 6 PCH_INVRMEN
SPI_MOSI	TPM Functionality Disable	1 = Enabled 0 = Disable	+3V R551 1K 4 SPI_SI_R
SPKR	Reboot option at power-up	0 = Default Mode (Internal weak Pull-down) 1 = No Reboot Mode with TCO Disabled	+3V R538 1K1F 4 SPKR
HDA_DOCK_EN# / GPIO33	Flash Descriptor Security Override	0 = Flash Descriptor Security will be overridden 1 = Security measure defined in the Flash Descriptor will be enabled.	PCH_GPIO33 J1 1 2 *SHORT_PAD1
GNT0#, GNT1#	Boot BIOS Strap	(0,0) = LPC (0,1) = Reserved NAND (1,0) = PCI (1,1) = SPI	R158 1K 4 +3V R152 1K 4 R153 1K 4 R159 1K 4
GNT2# / GPIO53	ESI Strap (Server Only)	ESI compatible mode is for server platforms only	[10] PWM_SELECT# R182 1K1F 4
GNT3# / GPIO55	Top-Block Swap Override	0 = Top Block Swap Mode 1 = Default Mode (Internal pull-up)	[10] PCL_GNT3# R462 10K1F 4
NV_ALE	IntelR Anti-Theft Technology HDD Data Protection (Intel AT-d) Enable	1 = Enabled 0 = Disabled (Default)	[10] NV_ALE R213 1K1F 4 +1.8V
NV_CLE	DMI Termination Voltage	DMI termination voltage. Weak internal pull-up. Do not pull low.	[10] NV_CLE R216 1K1F 4 +1.8V
GPIO8	Reserved	This signal has a weak internal pull up. NOTE: This signal should not be pulled low	[11] RSV_GPIO8 R215 10K 4 +3V_S5 R214 1K 4
GPIO15	Reserved	0 = Intel ME Crypto Transport Layer Security (TLS) cipher suite with no confidentiality 1 = Intel ME Crypto Transport Layer Security (TLS) cipher suite with confidentiality	[11] CR_WAKE# R256 1K 4 +3V_S5
GPIO27	On-Die PLL Voltage Regulator <internal weak pull-up>	0 = Disables the VccVRM. 1 = Enables the internal VccVRM to have a clean supply for analog rails.	[11] PCH_GPIO27 R231 10K 4


IBEX PEAK-M (GPIO, VSS_NCTF, RSVD)




GPU RST#

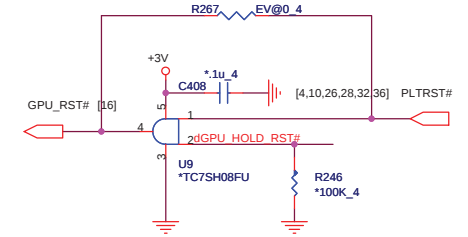

GPIO Pull-up/Pull-down

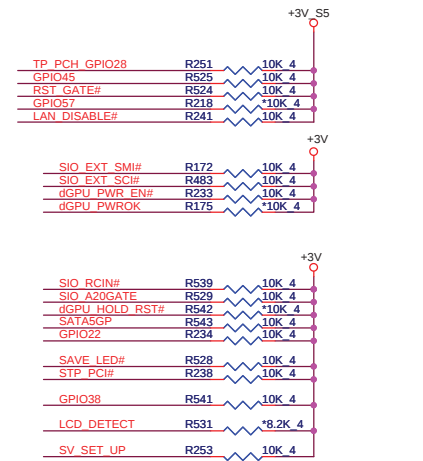

SV_SET_UP	1-X High = Strong (Default)
-----------	-----------------------------

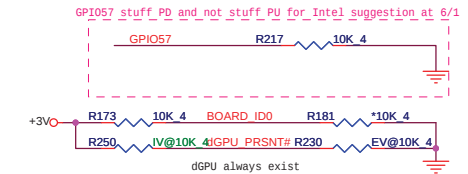


BOARD_ID#	High = 15"
	Low = 14"




Quanta Computer Inc.
PROJECT : ZRD

IBEX PEAK-M (POWER)


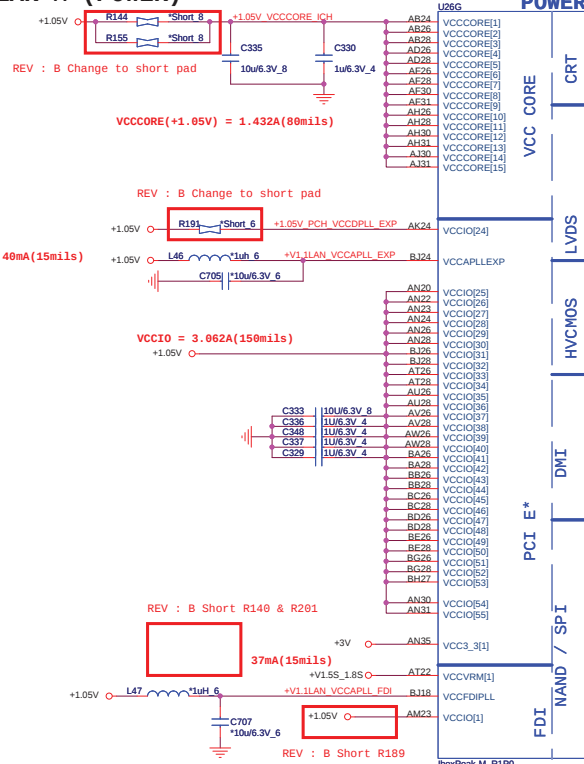


<http://hobi-elektronika.net/>

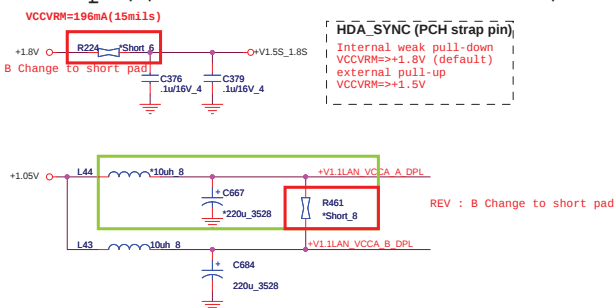


```
| VRM enable by strap pin GPIO27
| which supply clean 1.05V for
| [VCCACLK,VCCAPLLEXP,VCCFDIPLL,VCCSATAPLL]
```



HDA_SYNC (PCH strap pin)
Internal weak pull-down
VCCVRM=>+1.8V (default)
external pull-up
VCCVRM=>+1.5V

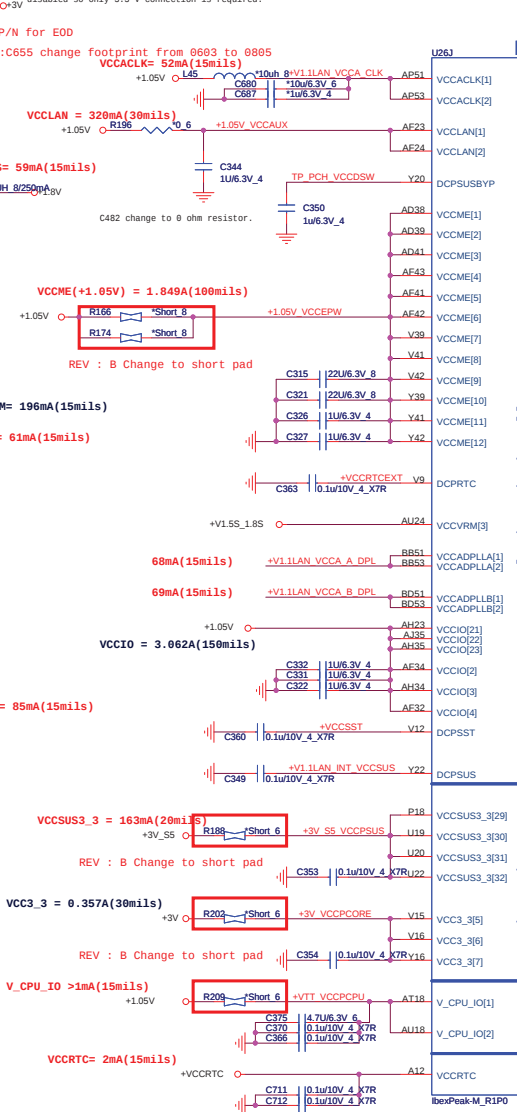


POWER

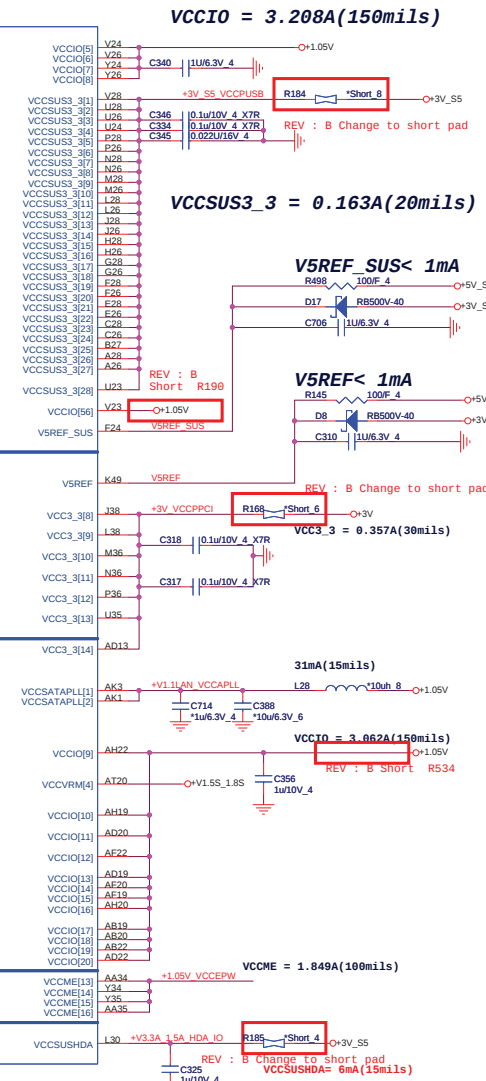



IBEX PEAK-M (GND)

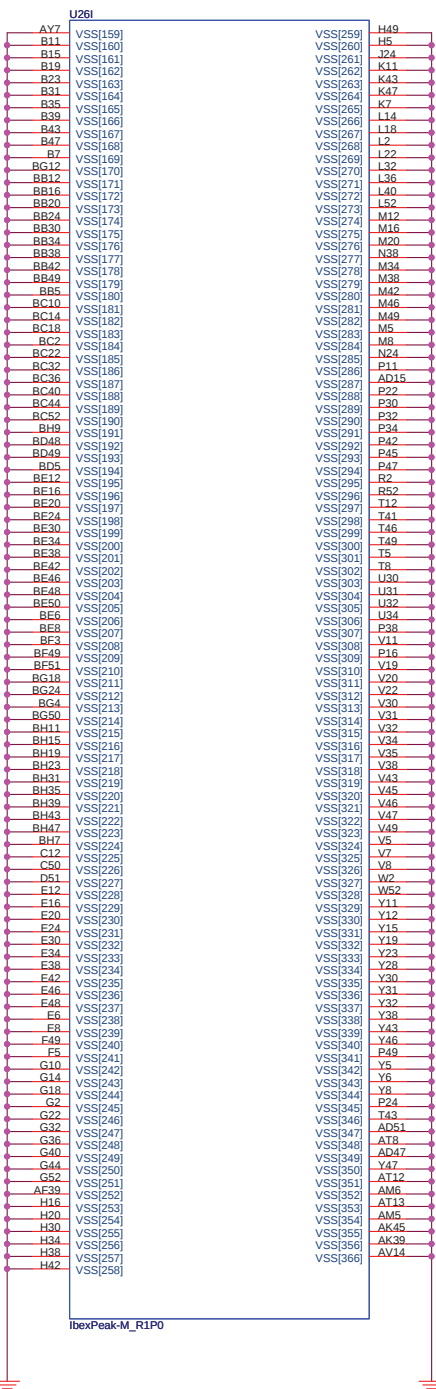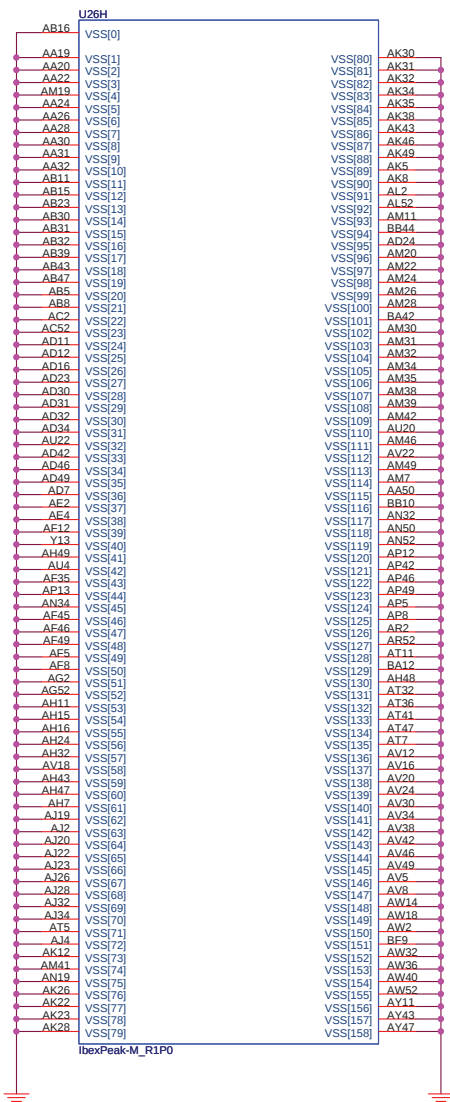



LTK	DGMK4000087
SUY	DGMK4000073

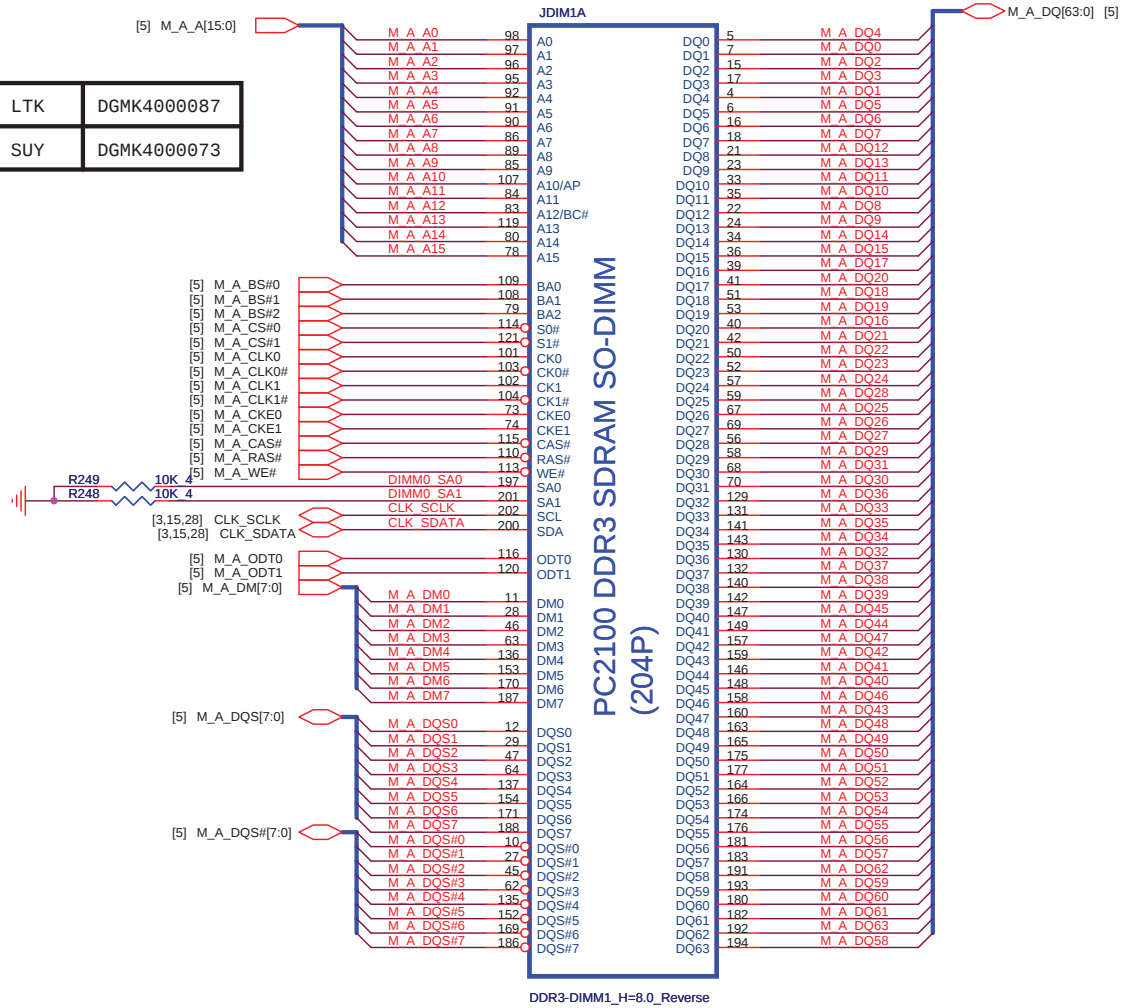


Place these Caps near So-Dimm0.

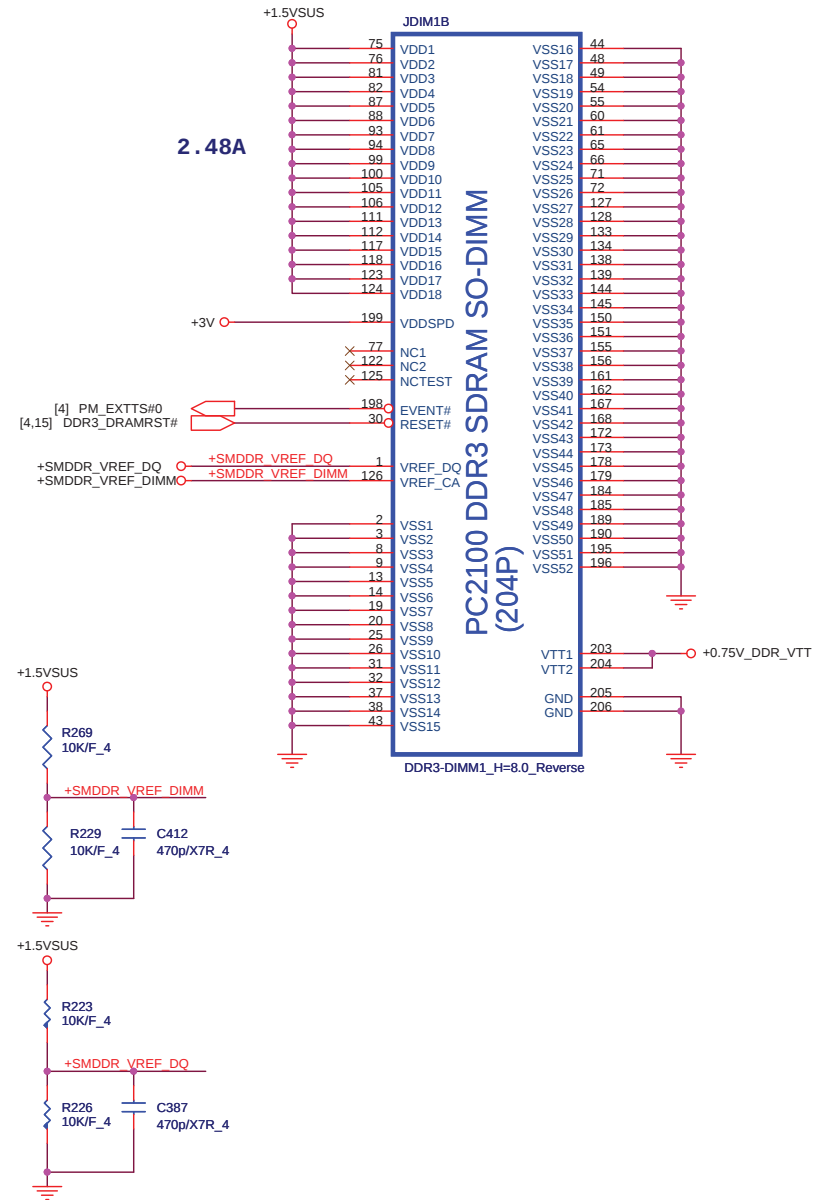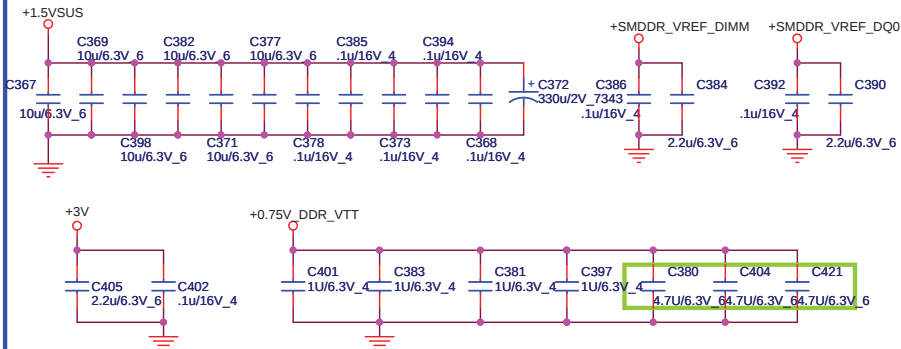


LTK	DGMK4000005
MOLEX	DGMK4000010

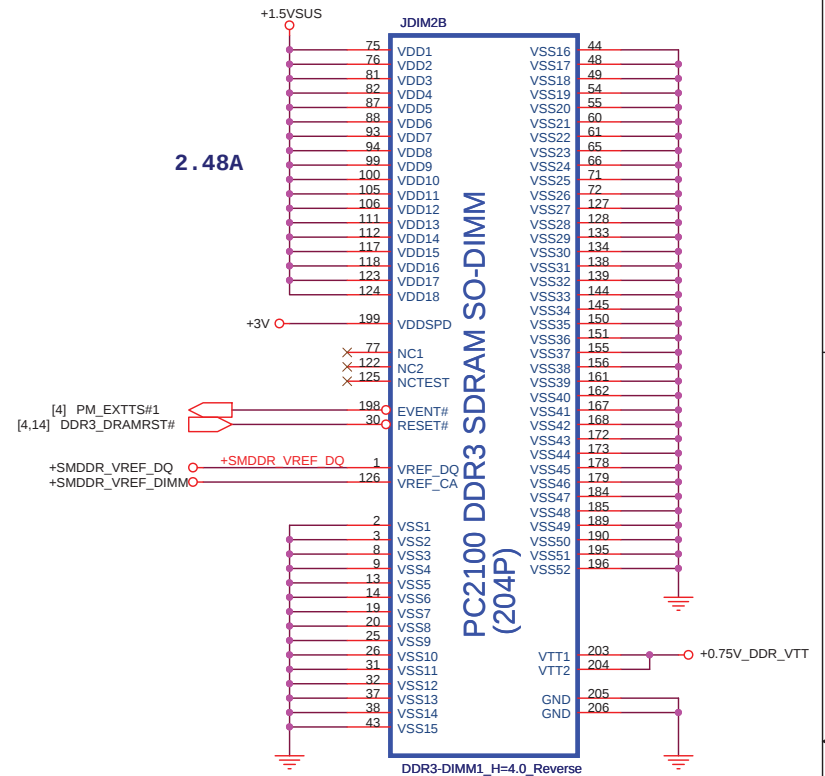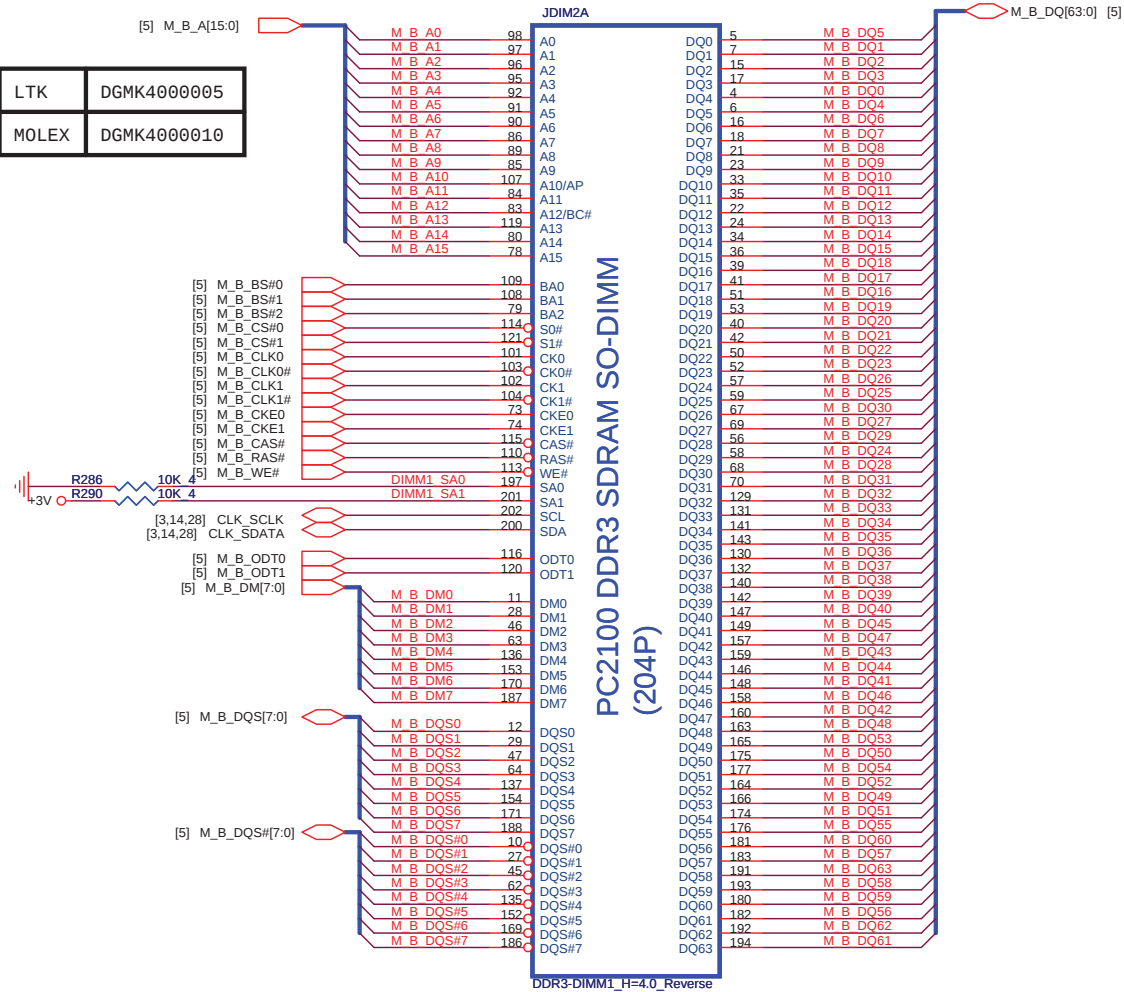


<http://hobi-elektronika.net/>
Place these Caps near So-Dimm1.

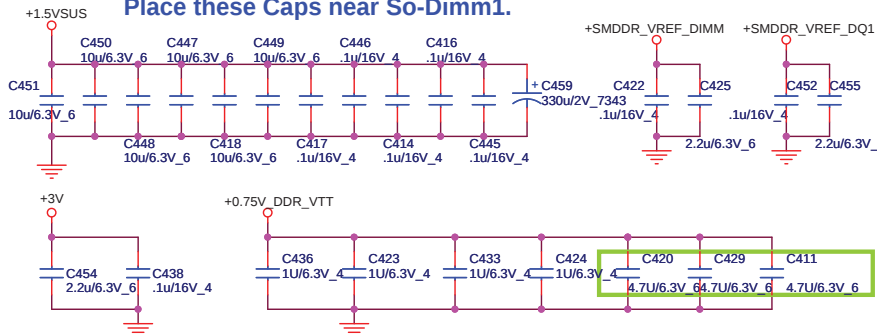

GPU_1(VGA)



0518 SWAP PCIE for VGA side

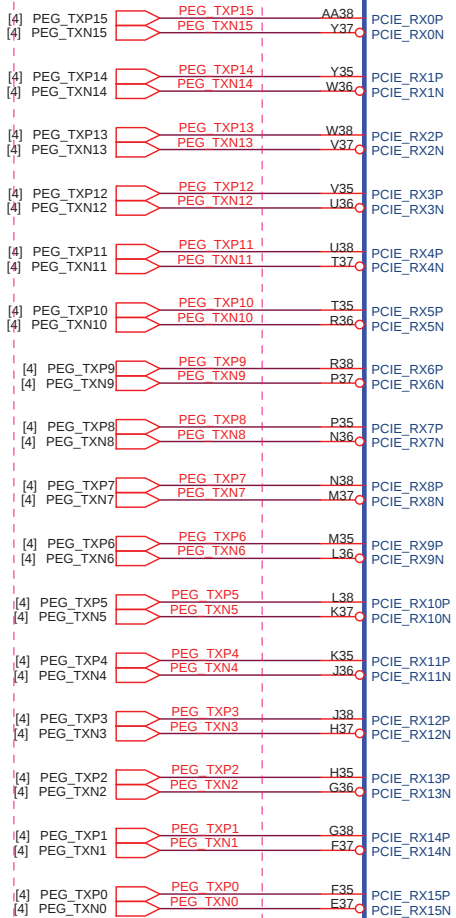

[10] CLK_PCIE_VGA AB35

[10] CLK_PCIE_VGA# AA36

For Broadway, Madison and Park
the PWRGOOD ball must be connected to ground

R67 EV@10K 4

[11] GPU_RST# AA30

U21A

CLOCK

PCIE_REFCLKP
PCIE_REFCLKN

NC#1
NC#2
PWRGOOD

PERSTB

SP@Capilano/Robson


PCI
EXPRESS
INTERFACE

CALIBRATION

PCIE_CALRP

PCIE_CALRN

0518 SWAP PCIE for VGA side

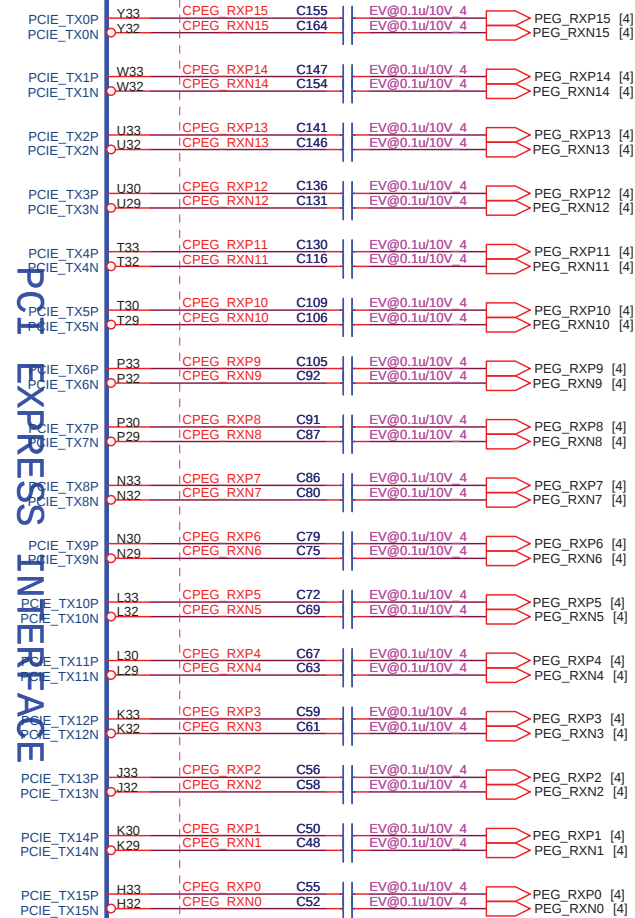

For M97, Broadway, Madison and Park PCIE_VDDC is 1.0V

Madison AJ007720T02

Park AJ077400T08



Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number	Rev
	Capilano/Robson -PCIE I/F	1C
Date:	Wednesday, July 21, 2010	Sheet 16 of 46

GPU Power-on sequence

1.8V GPIO

NC on Park

NC on Park

Channel D N.C for Park-M2

<http://hobi-elektronika.net/>

Conclusion on future ASIC

REV C: C188 change footprint from 0603 to 0805


DDC AUX4 NC for Park_M2

LVDS


7 CRT

DDC AUX7 NC for Park_M2

GPU_4(VGA)

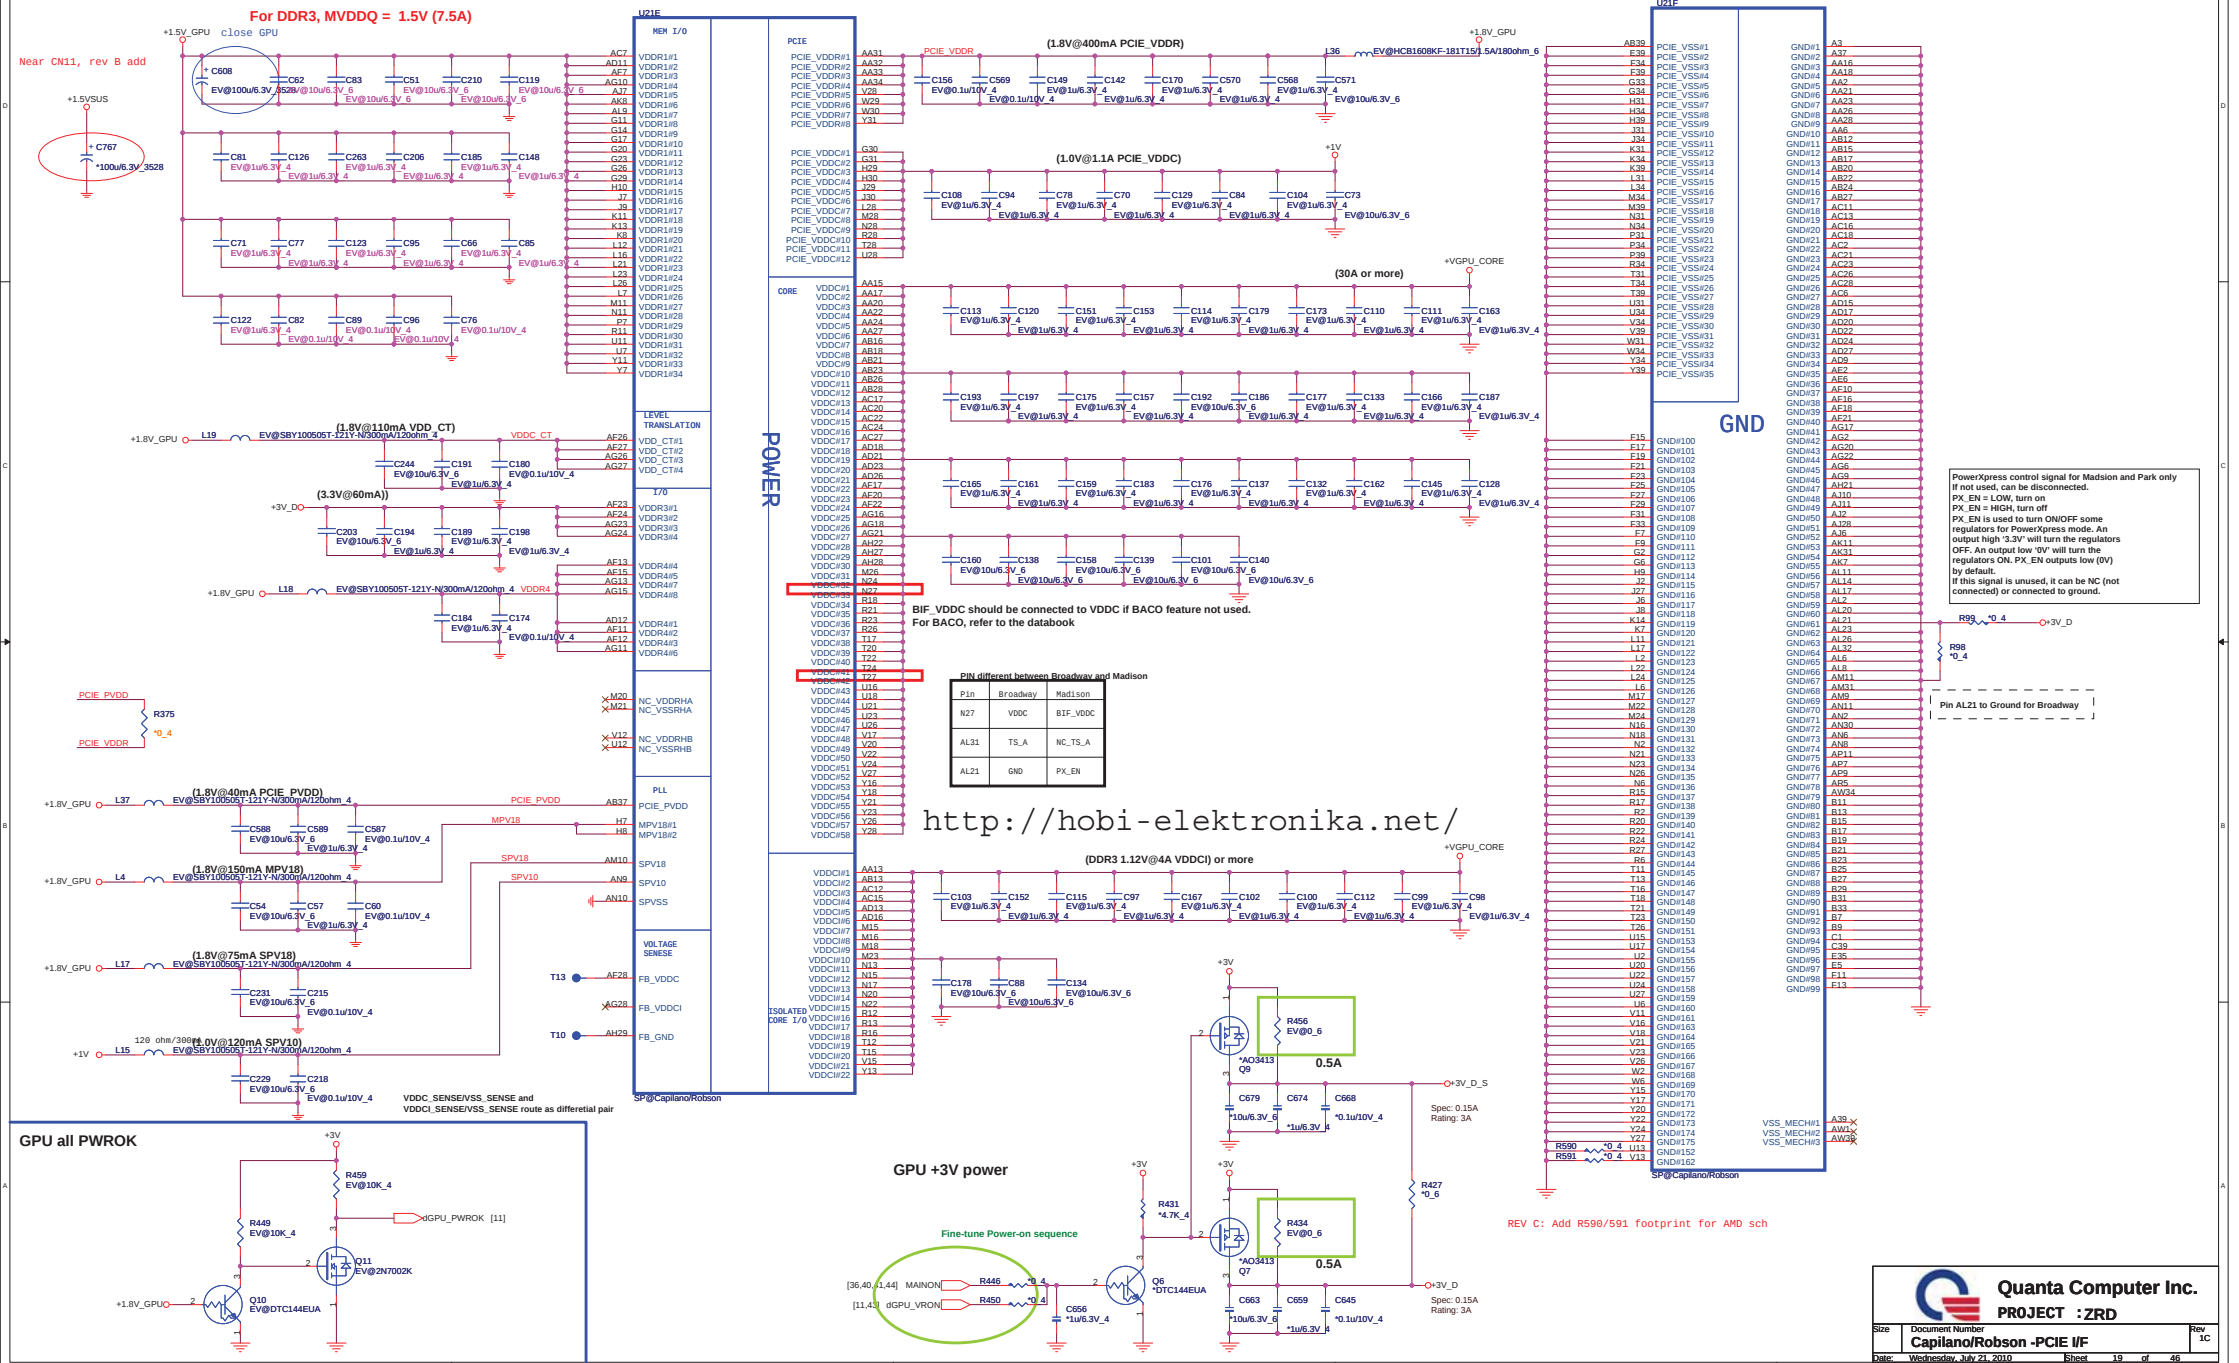


GPU_5(VGA)

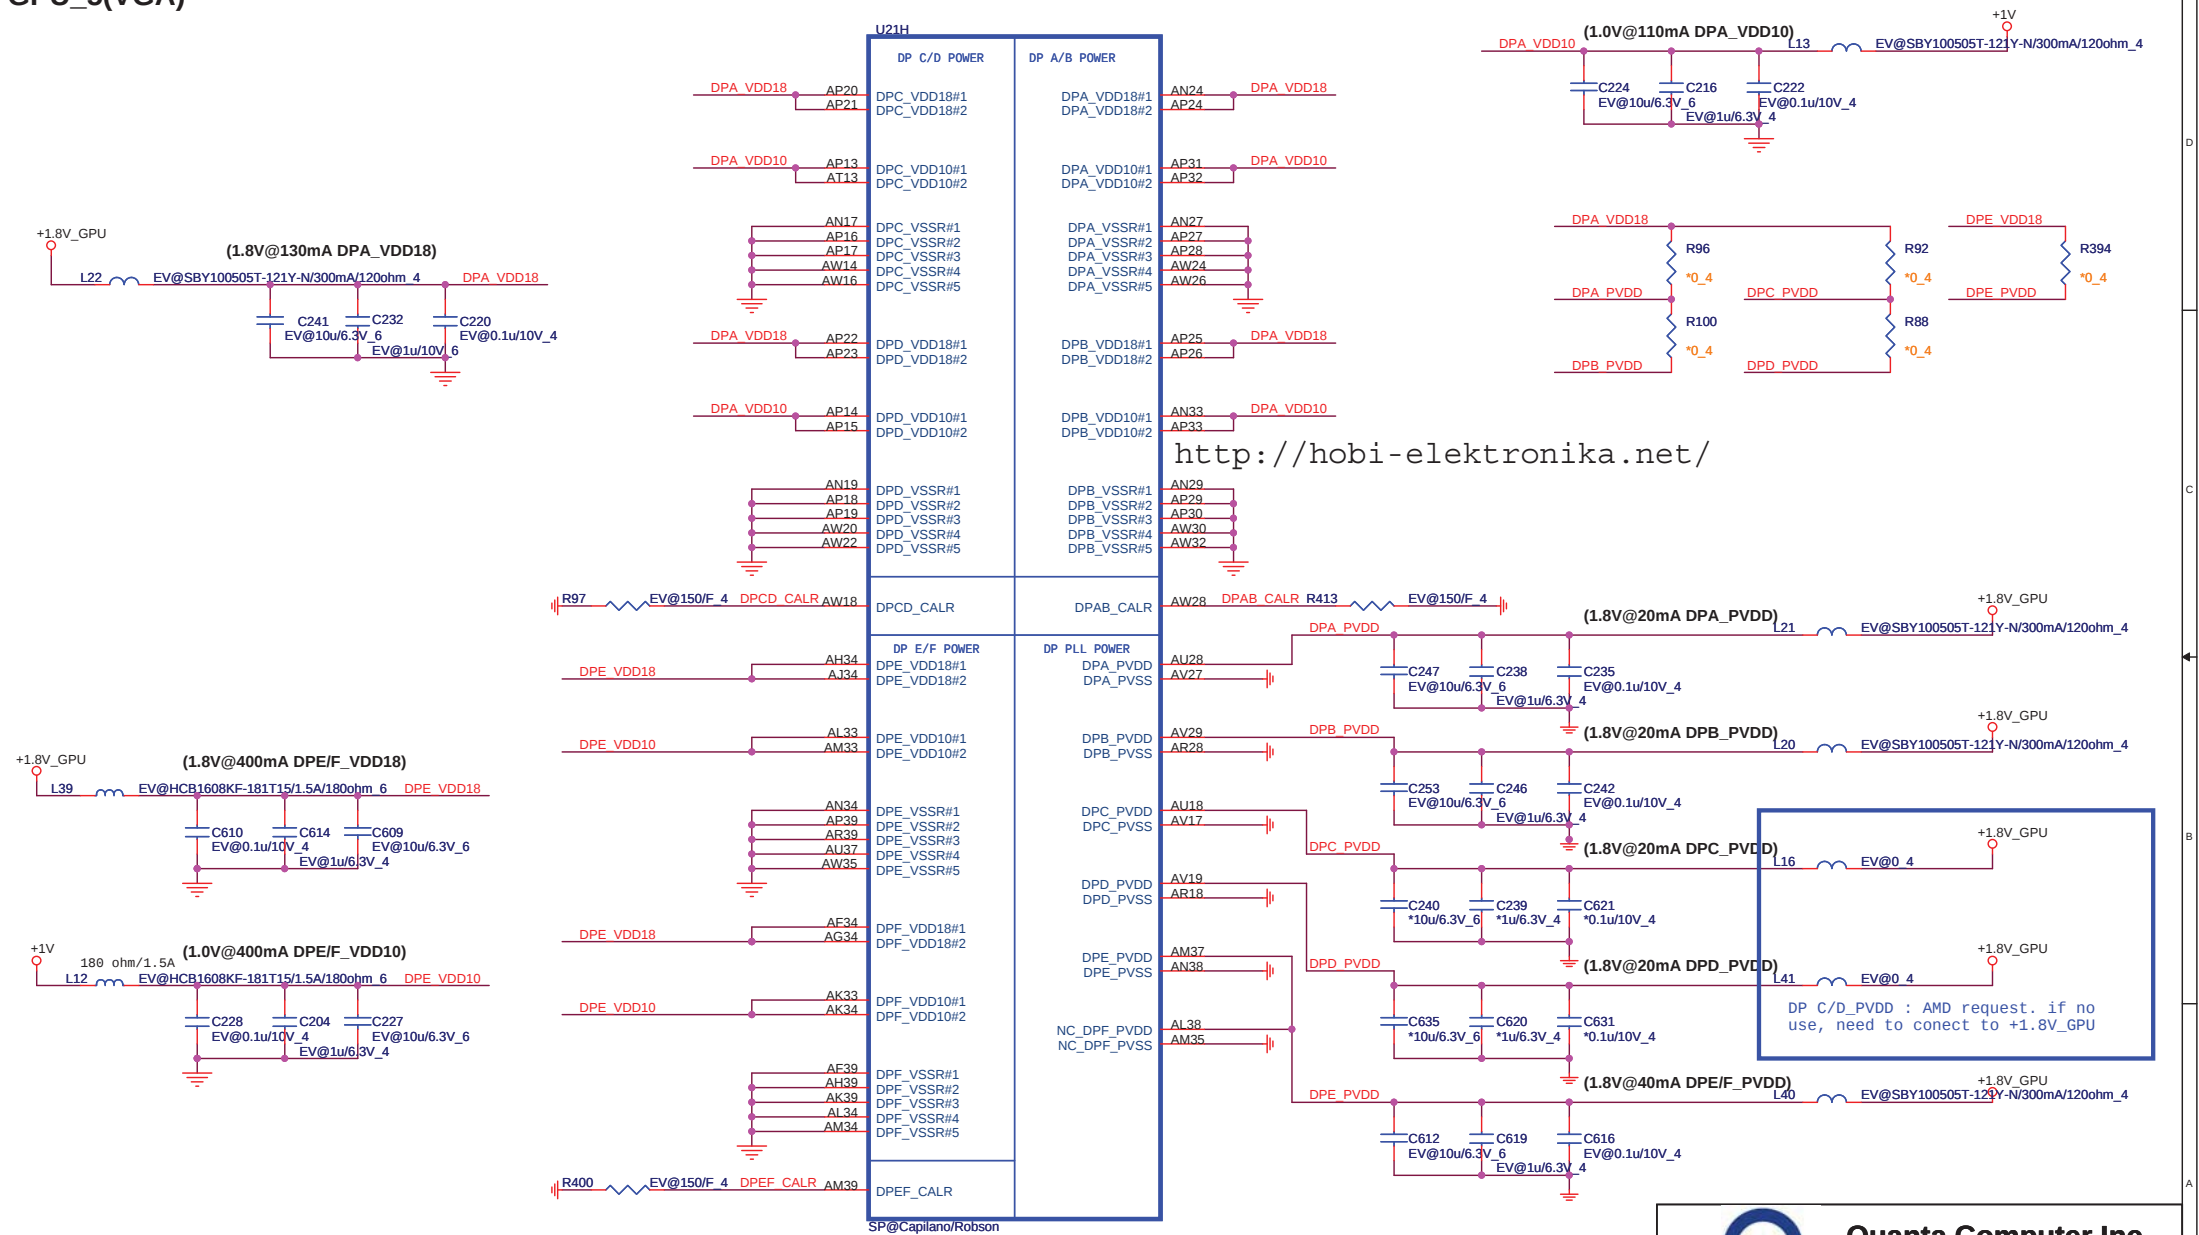

Quanta Computer Inc.
PROJECT :ZRD

Size	Document Number Capilano/Robson -PCIE I/F	Rev 1C
Date:	Wednesday, July 21, 2010	Sheet 20 of 46

PIN STRAPS(VGA)

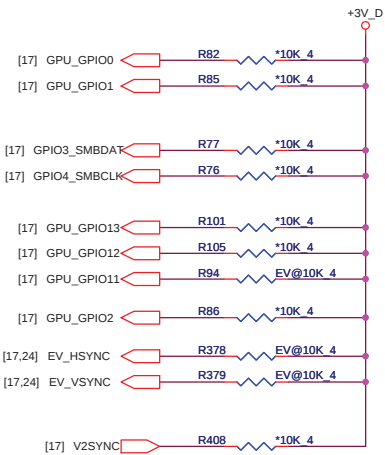

Size of the primary memory apertures	GPIO[13:11]
128 MB	000
256MB	001
64 MB	010
32 MB	011
More than 512 MB	Not Supported

CONFIGURATION STRAPS


ALLOW FOR PULLUP PADS FOR THESE STRAPS AND IF THESE GPIOs ARE USED, THEY MUST NOT CONFLICT DURING RESET

STRAPS	PIN	DESCRIPTION OF DEFAULT SETTINGS	DEFAULT	REMARK
TX_PWRS_ENB	GPIO0	0 = 50% TX OUTPUT SWING 1 = FULL TX OUTPUT SWING	0	
TX_DEEMPH_EN	GPIO1	PCIE TRANSMITTER DE-EMPHASIS ENABLED 0 = TX DE-EMPHASIS DISABLED 1 = TX DE-EMPHASIS ENABLED	0	
BIOS_ROM_EN	GPIO_22_ROMCSB	Enable external BIOS ROM device 0 - Disable external BIOS ROM device 1 - Enable external BIOS ROM device	0	
ROMIDCFG[2:0]	GPIO[13:11]	SERIAL ROM TYPE OR MEMORY APERTURE SIZE SELECT	001	See ROM table
BIF_GEN2_EN_A	GPIO2	0 = PCIE DEVICE AS 2.5GT/S CAPABLE 1 = PCIE DEVICE AS 5GT/S CAPABLE	0	
GPIO_8_ROMSO H2SYNC GPIO_21_BB_EN	GPIO8 H2SYNC GPIO21	Reserved Only	0	
AUD[1] AUD[0]	HSYNC VSYNC	AUD[1:0] 00: NO AUDIO FUNCTION. 01: AUDIO FOR DISPLAYPORT AND HDMI IF ADAPTER IS DETECTED. 10: AUDIO FOR DISPLAYPORT ONLY. 11: AUDIO FOR BOTH DISPLAYPORT AND HDMI.	11	See Audio table
GPIO_9_ROMSI	GPIO9	0 = VGA controller capacity enable	0	
VIP_DEVICE_STRAP_ENA	V2SYNC	0 = DRIVER would ignore the value sample on VHAD_0 during RESET.	0	

Thermal Sensor(VGA)

Vendor	P/N
WINDBOND	AL83L771K01
GMT	AL000780000


USD0.16

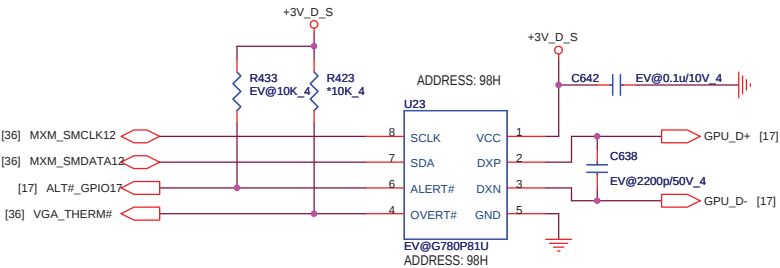

DDR3 Memory Aperture size(GPU)








DDR3 Memory size

Vendor	Vendor P/N	STN B/S P/N	RAM_STRAP2 DVPDATA_2	RAM_STRAP1 DVPDATA_1	RAM_STRAP0 DVPDATA_0
Hynix			1	1	0
	H5TQ1G63BFR-12C	AKD5LZGTW04 (64M*16)	1	0	0
	H5TQ2G63BFR-12C	AKD5MGGTW03 (128M*16)	1	0	1
Samsung					
	K4W1G1646E-HC12	AKD5LGGT506 (64M*16)	0	0	0
	K4W2G1646B-HC12	AKD5MGGT500 (128m*16)	0	0	1
AMD					
	23EY2387MA12-SZ	AKD5LGGT700	0	1	0


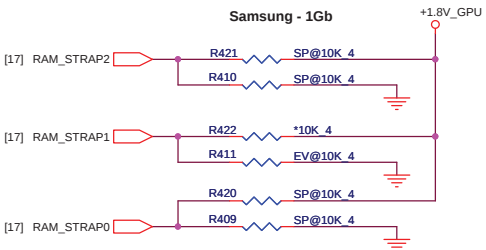


RAM_STRAP2 SET DDR3 Vendor
RAM_STRAP[1:0] SET SIZE.

[18] VMA_DQ[63..0]		<u>VMA_DQ[63..0]</u>	
[18] VMA_DM[7..0]		<u>VMA_DM[7..0]</u>	
[18] VMA_RDQS[7..0]		<u>VMA_RDQS[7..0]</u>	QSA[7..0]
[18] VMA_WDQS[7..0]		<u>VMA_WDQS[7..0]</u>	QSA#[7..0]

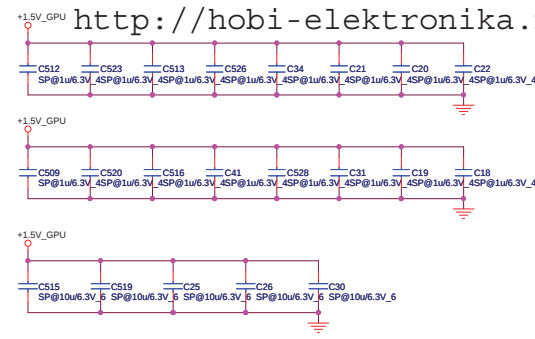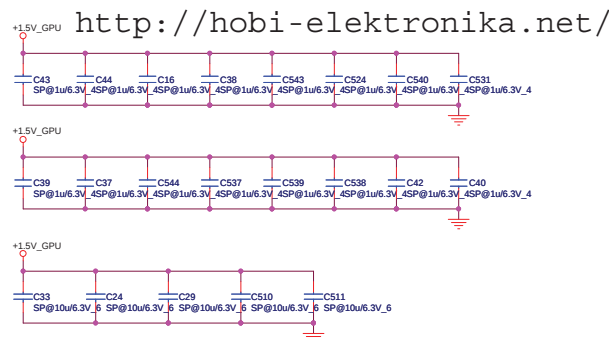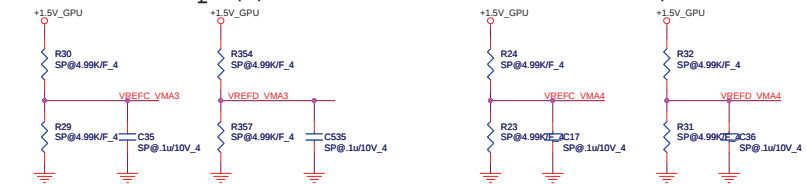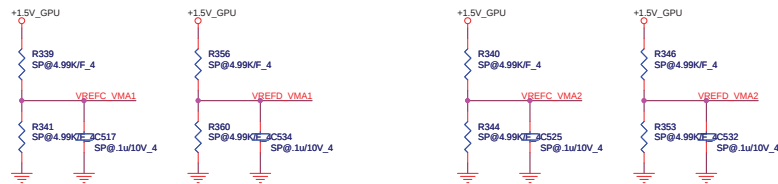


Park, M92M Use Channel B Memory Interface Only




CRT Switch

0_ohm Resistor place close to Joint-Point

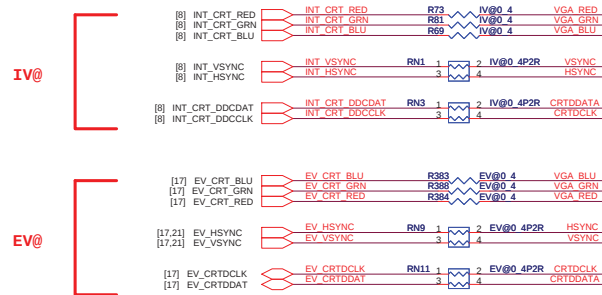


CRT

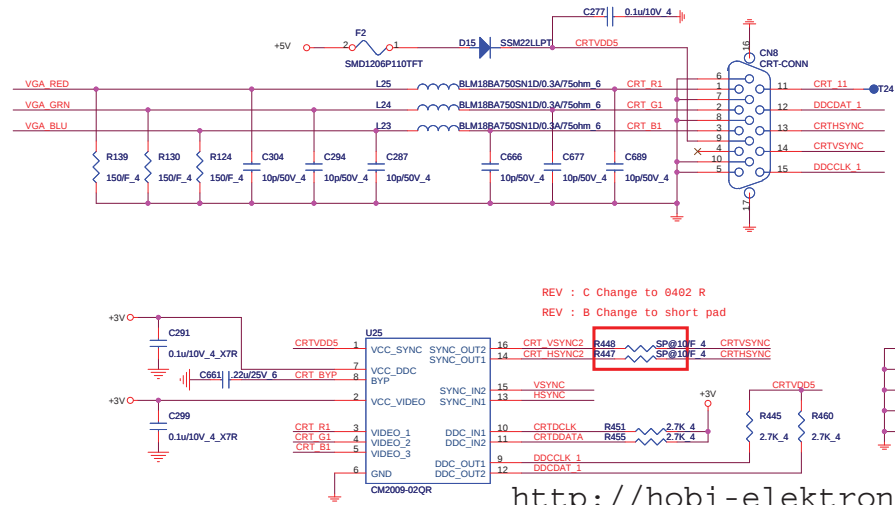


<http://hobi-elektronika.net/>

LVDS

0_ohm Resistor place close to Joint-Point

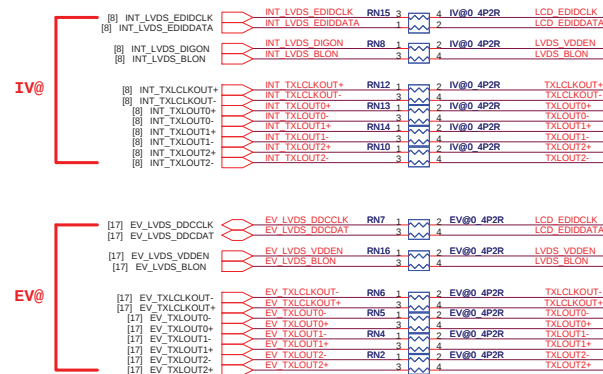


LVDS

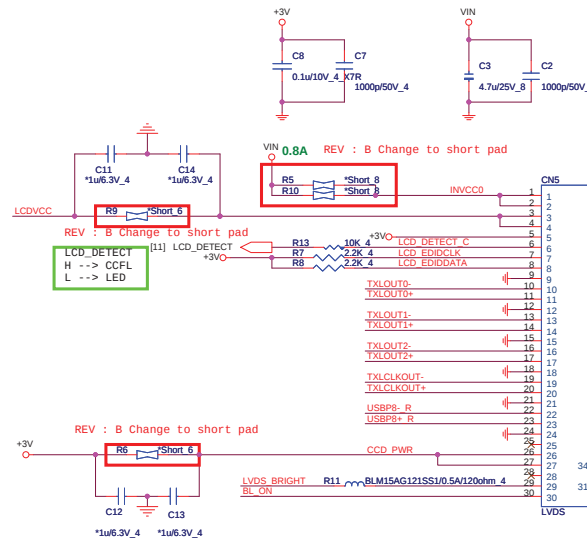


<http://hobi-elektronika.net/>

Lid Switch (Hall sensor)

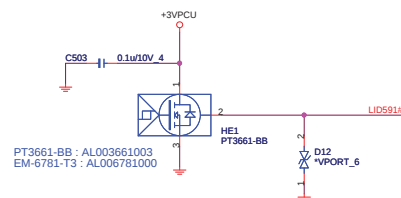


LCD Power

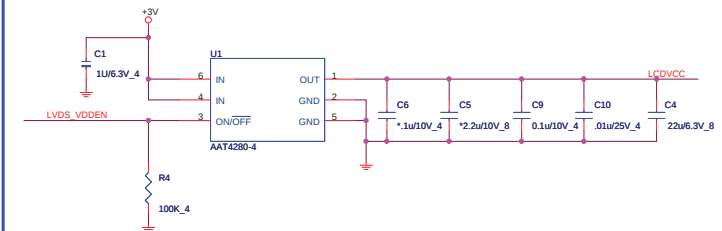


Backlight Control

<http://hobi-elektronika.net/>

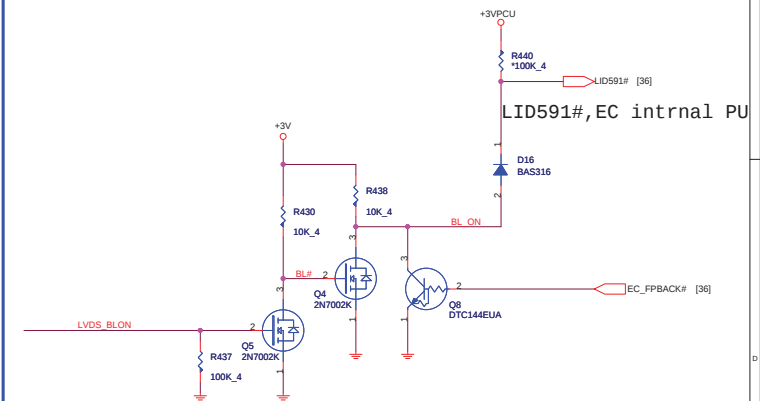


HDMI LEVEL SHIFTER

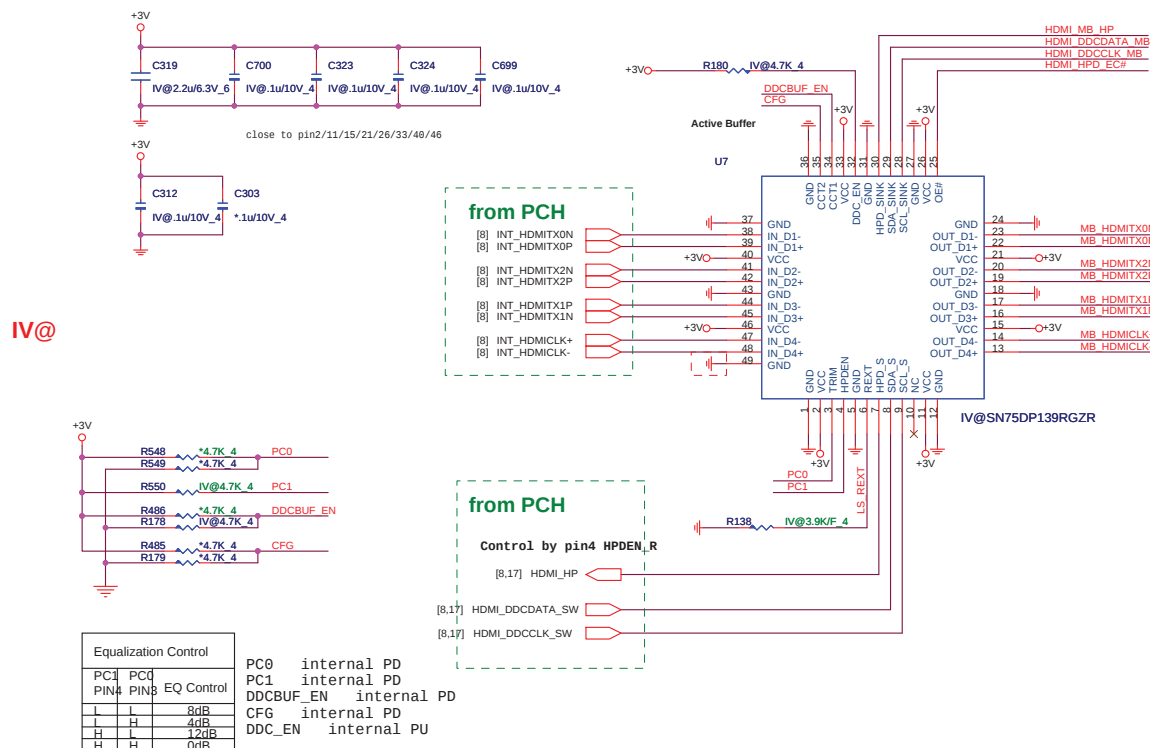

HDMI-detect


EV@

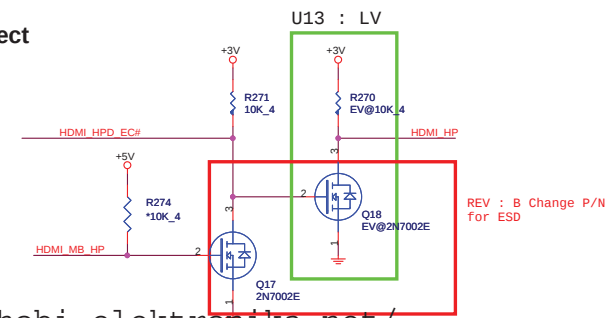

<http://hobi-elektronika.net/>

I2C

EV@

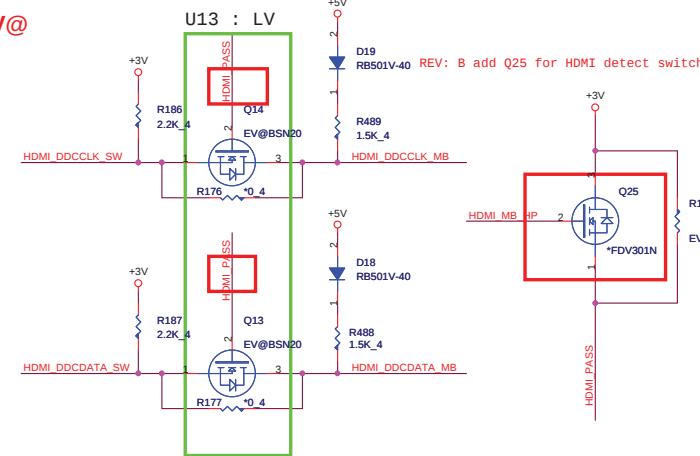


<http://hobi-elektronika.net/>

Switchable Graphic HDMI source


<http://hobi-elektronika.net/>

EV@

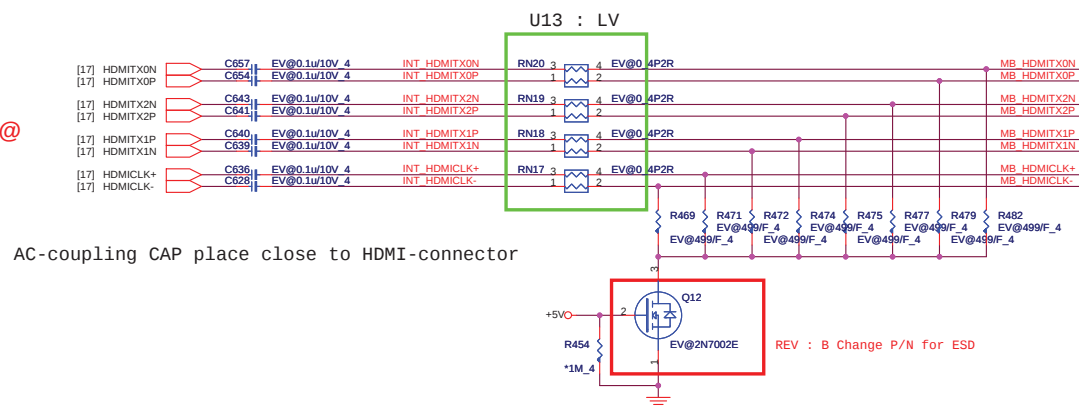


AC-coupling CAP place close to HDMI-connector

EMI



HDMI connector

REV : C Location : D20 Change Footprint & P/N

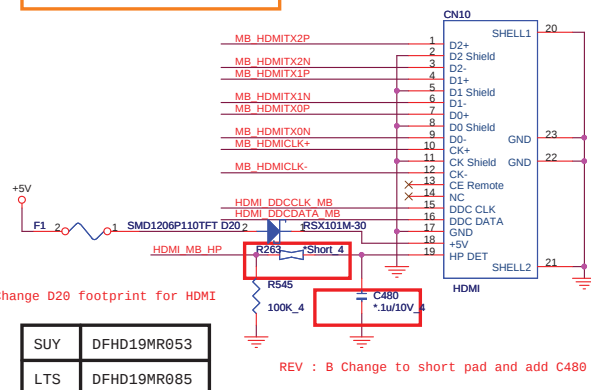

Giga-LAN BCM57780




LAN POWER

EEPROM

EEPROM Strapping

EEPROM Type	EECLK	EEDATA
24LC02	1	1
Internal	1	0


Quanta Computer Inc.
PROJECT : ZRD
GLAN BCM57780
 Size Document Number Rev 1C
 Date: Wednesday, July 21, 2010 Sheet 26 of 46

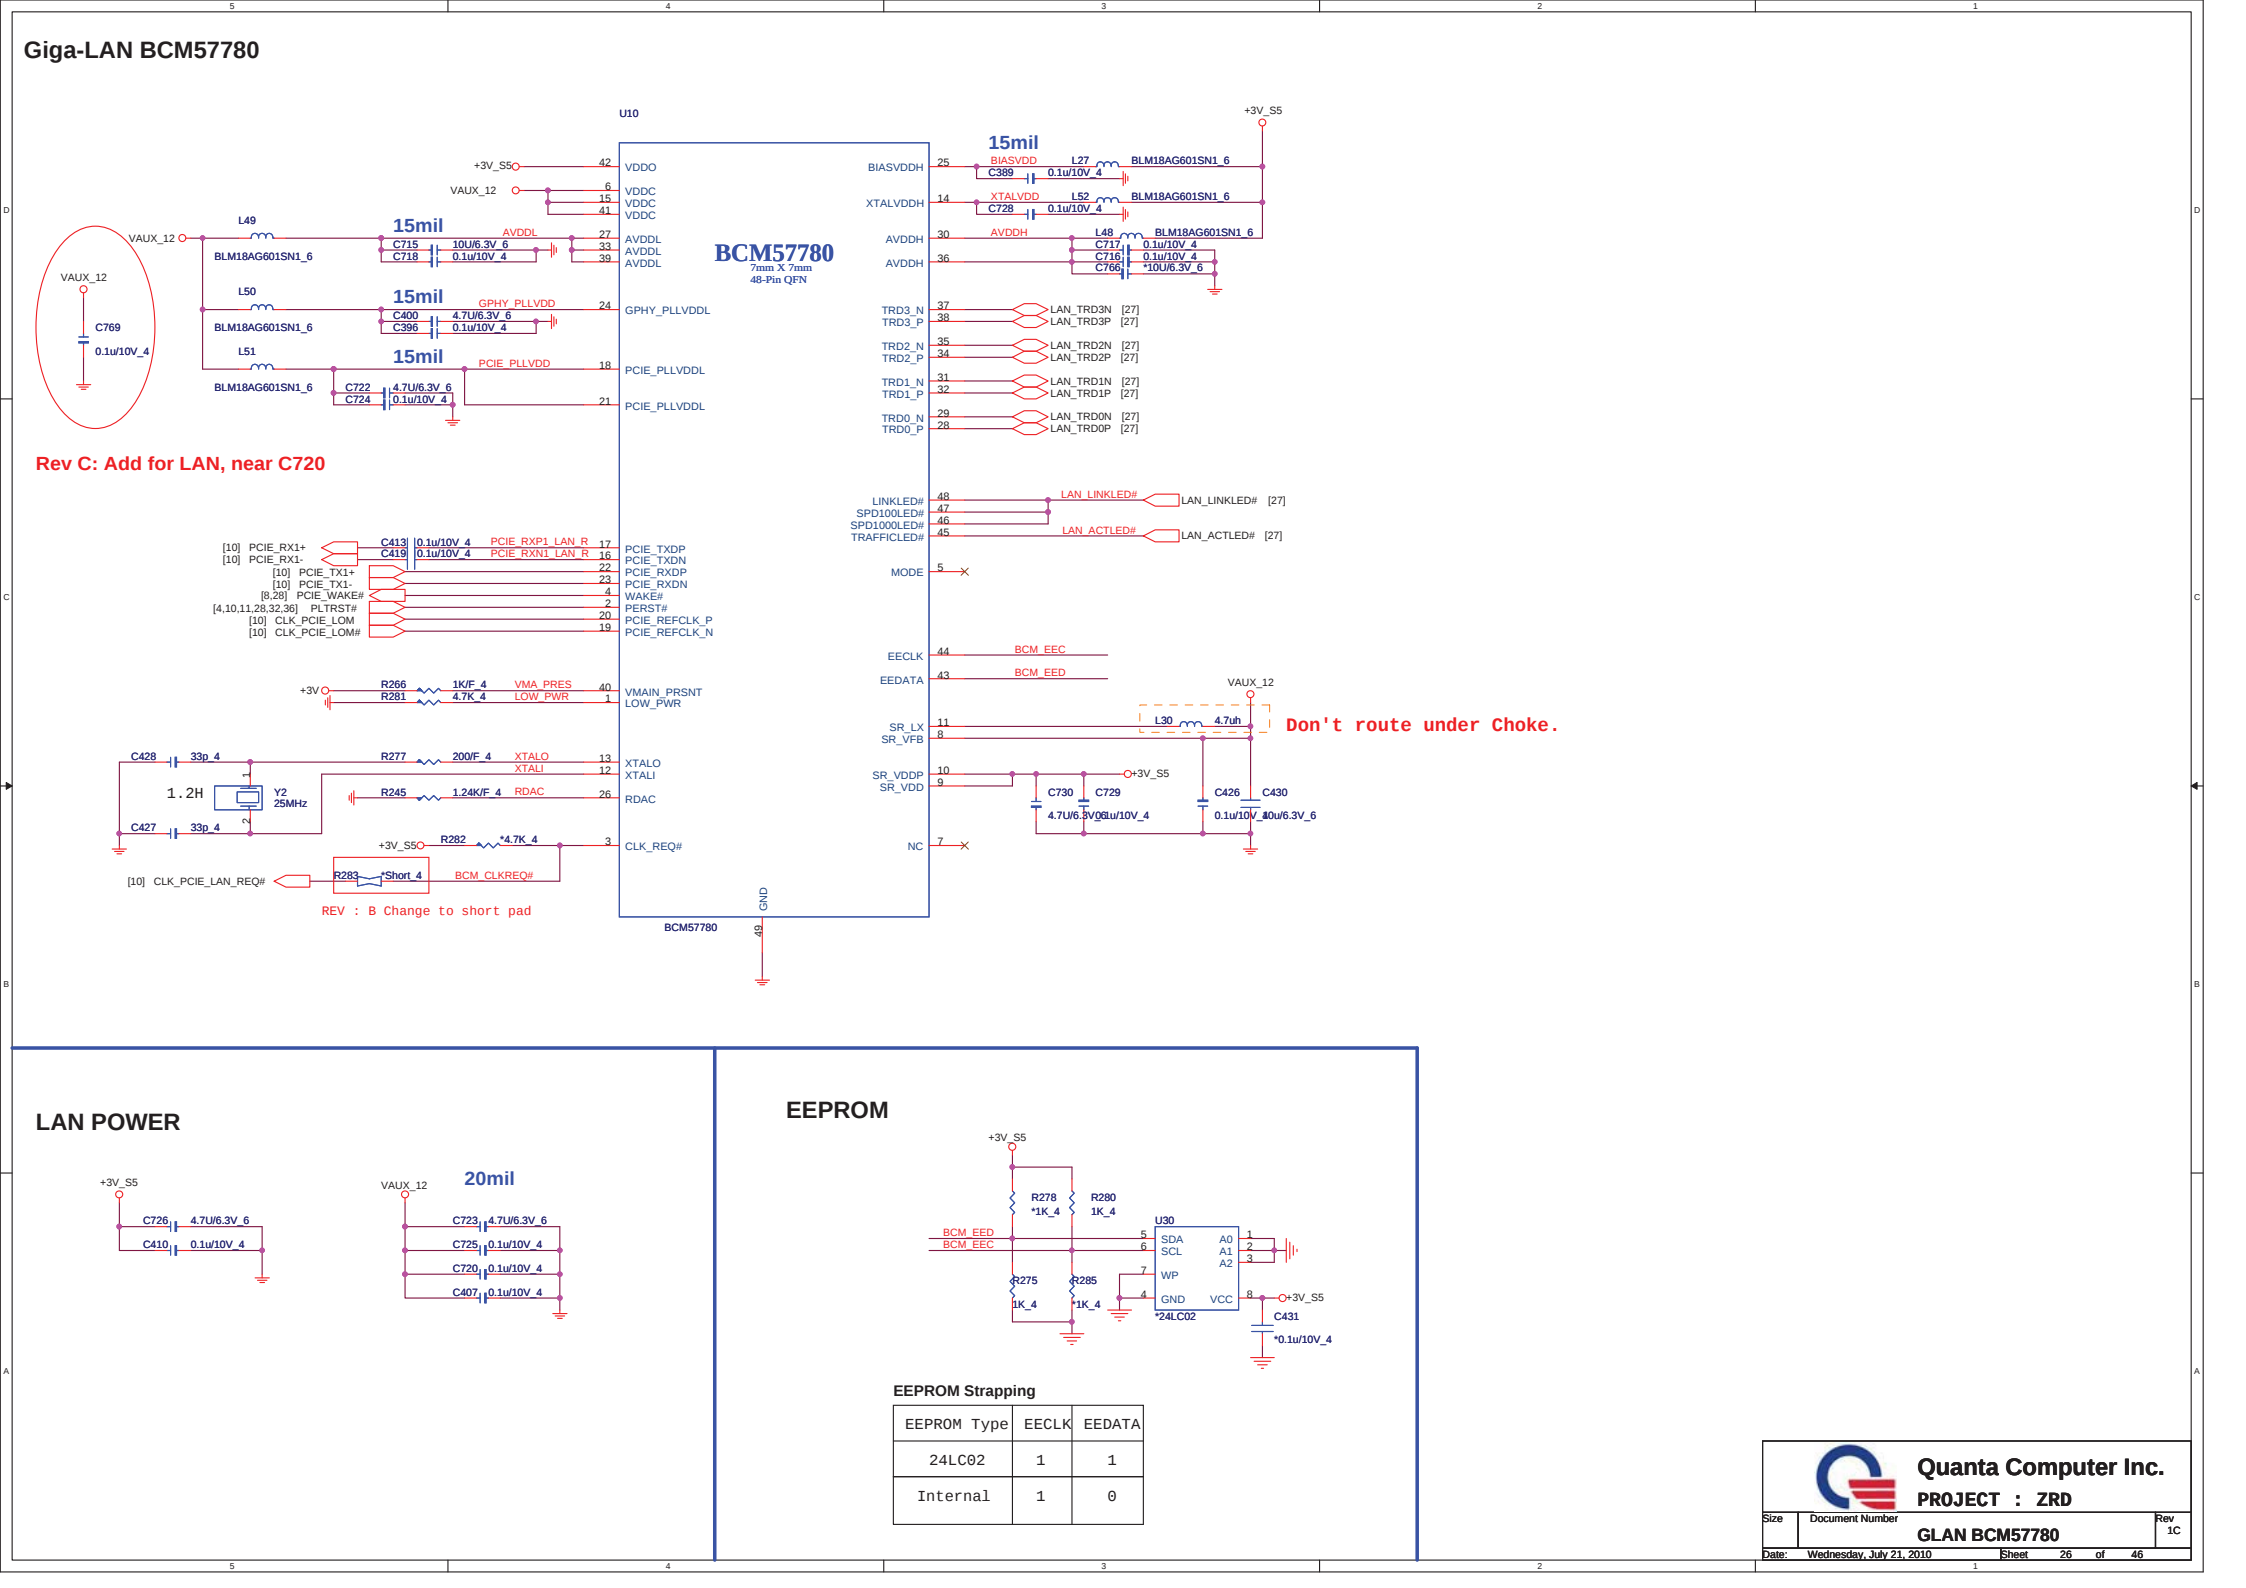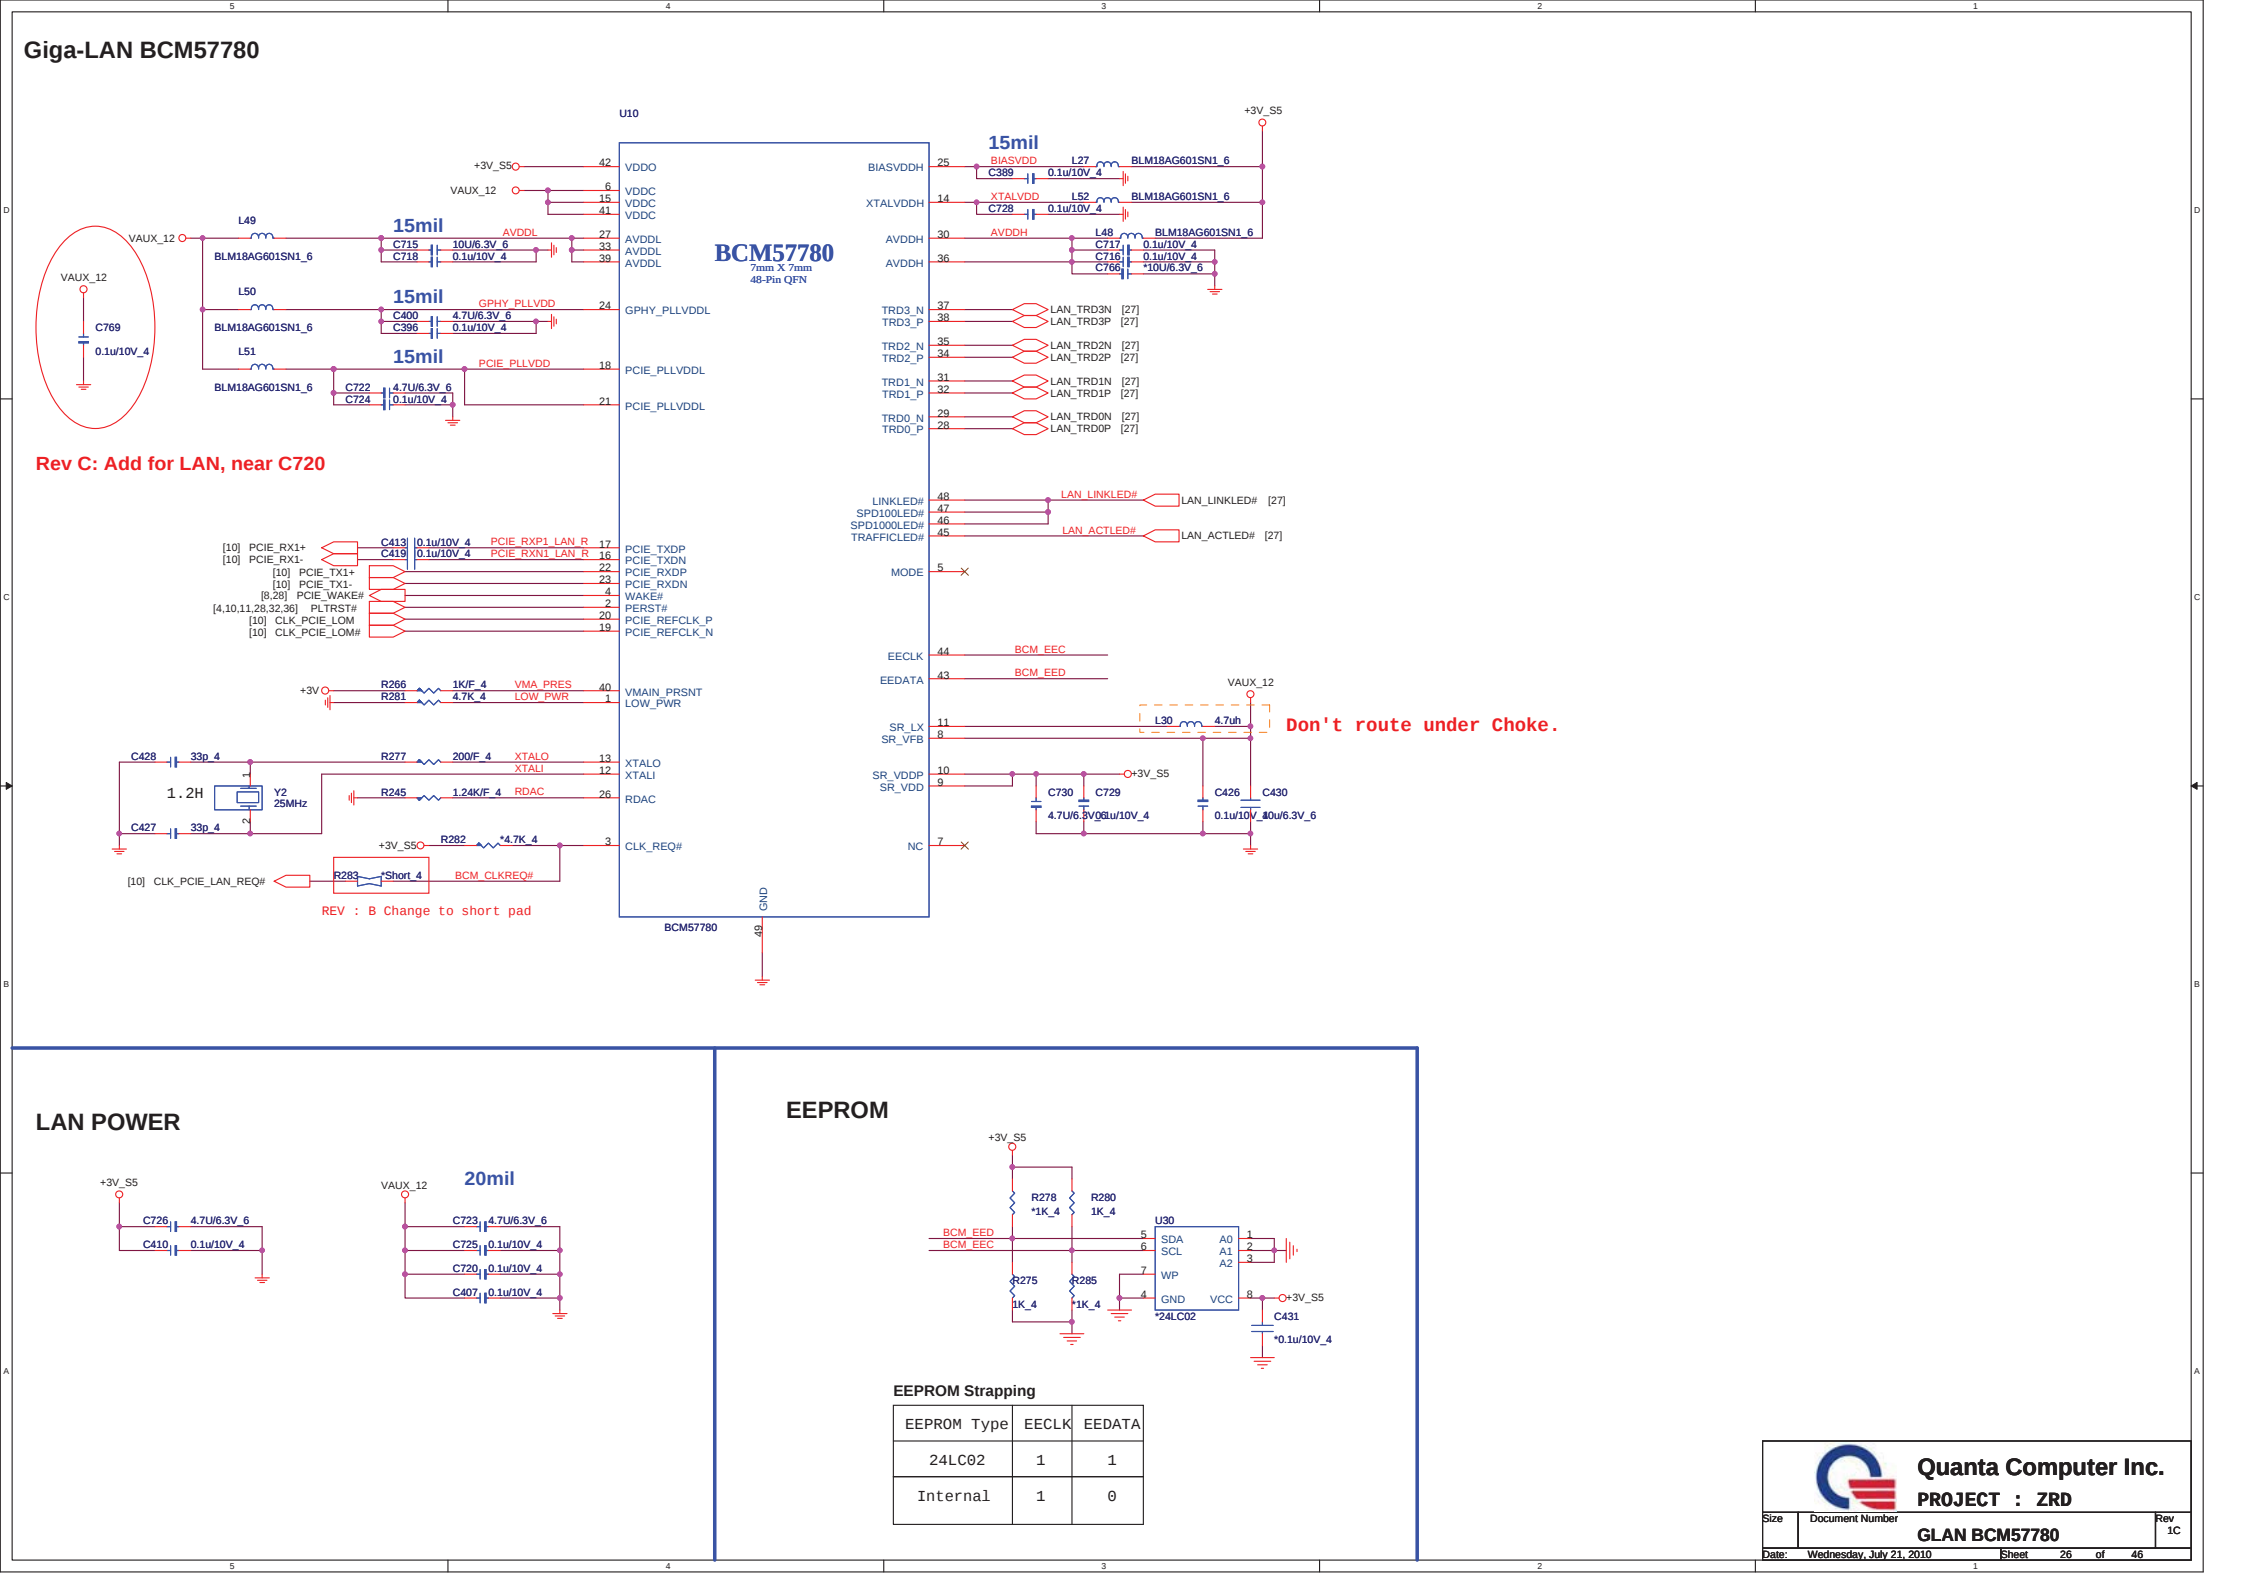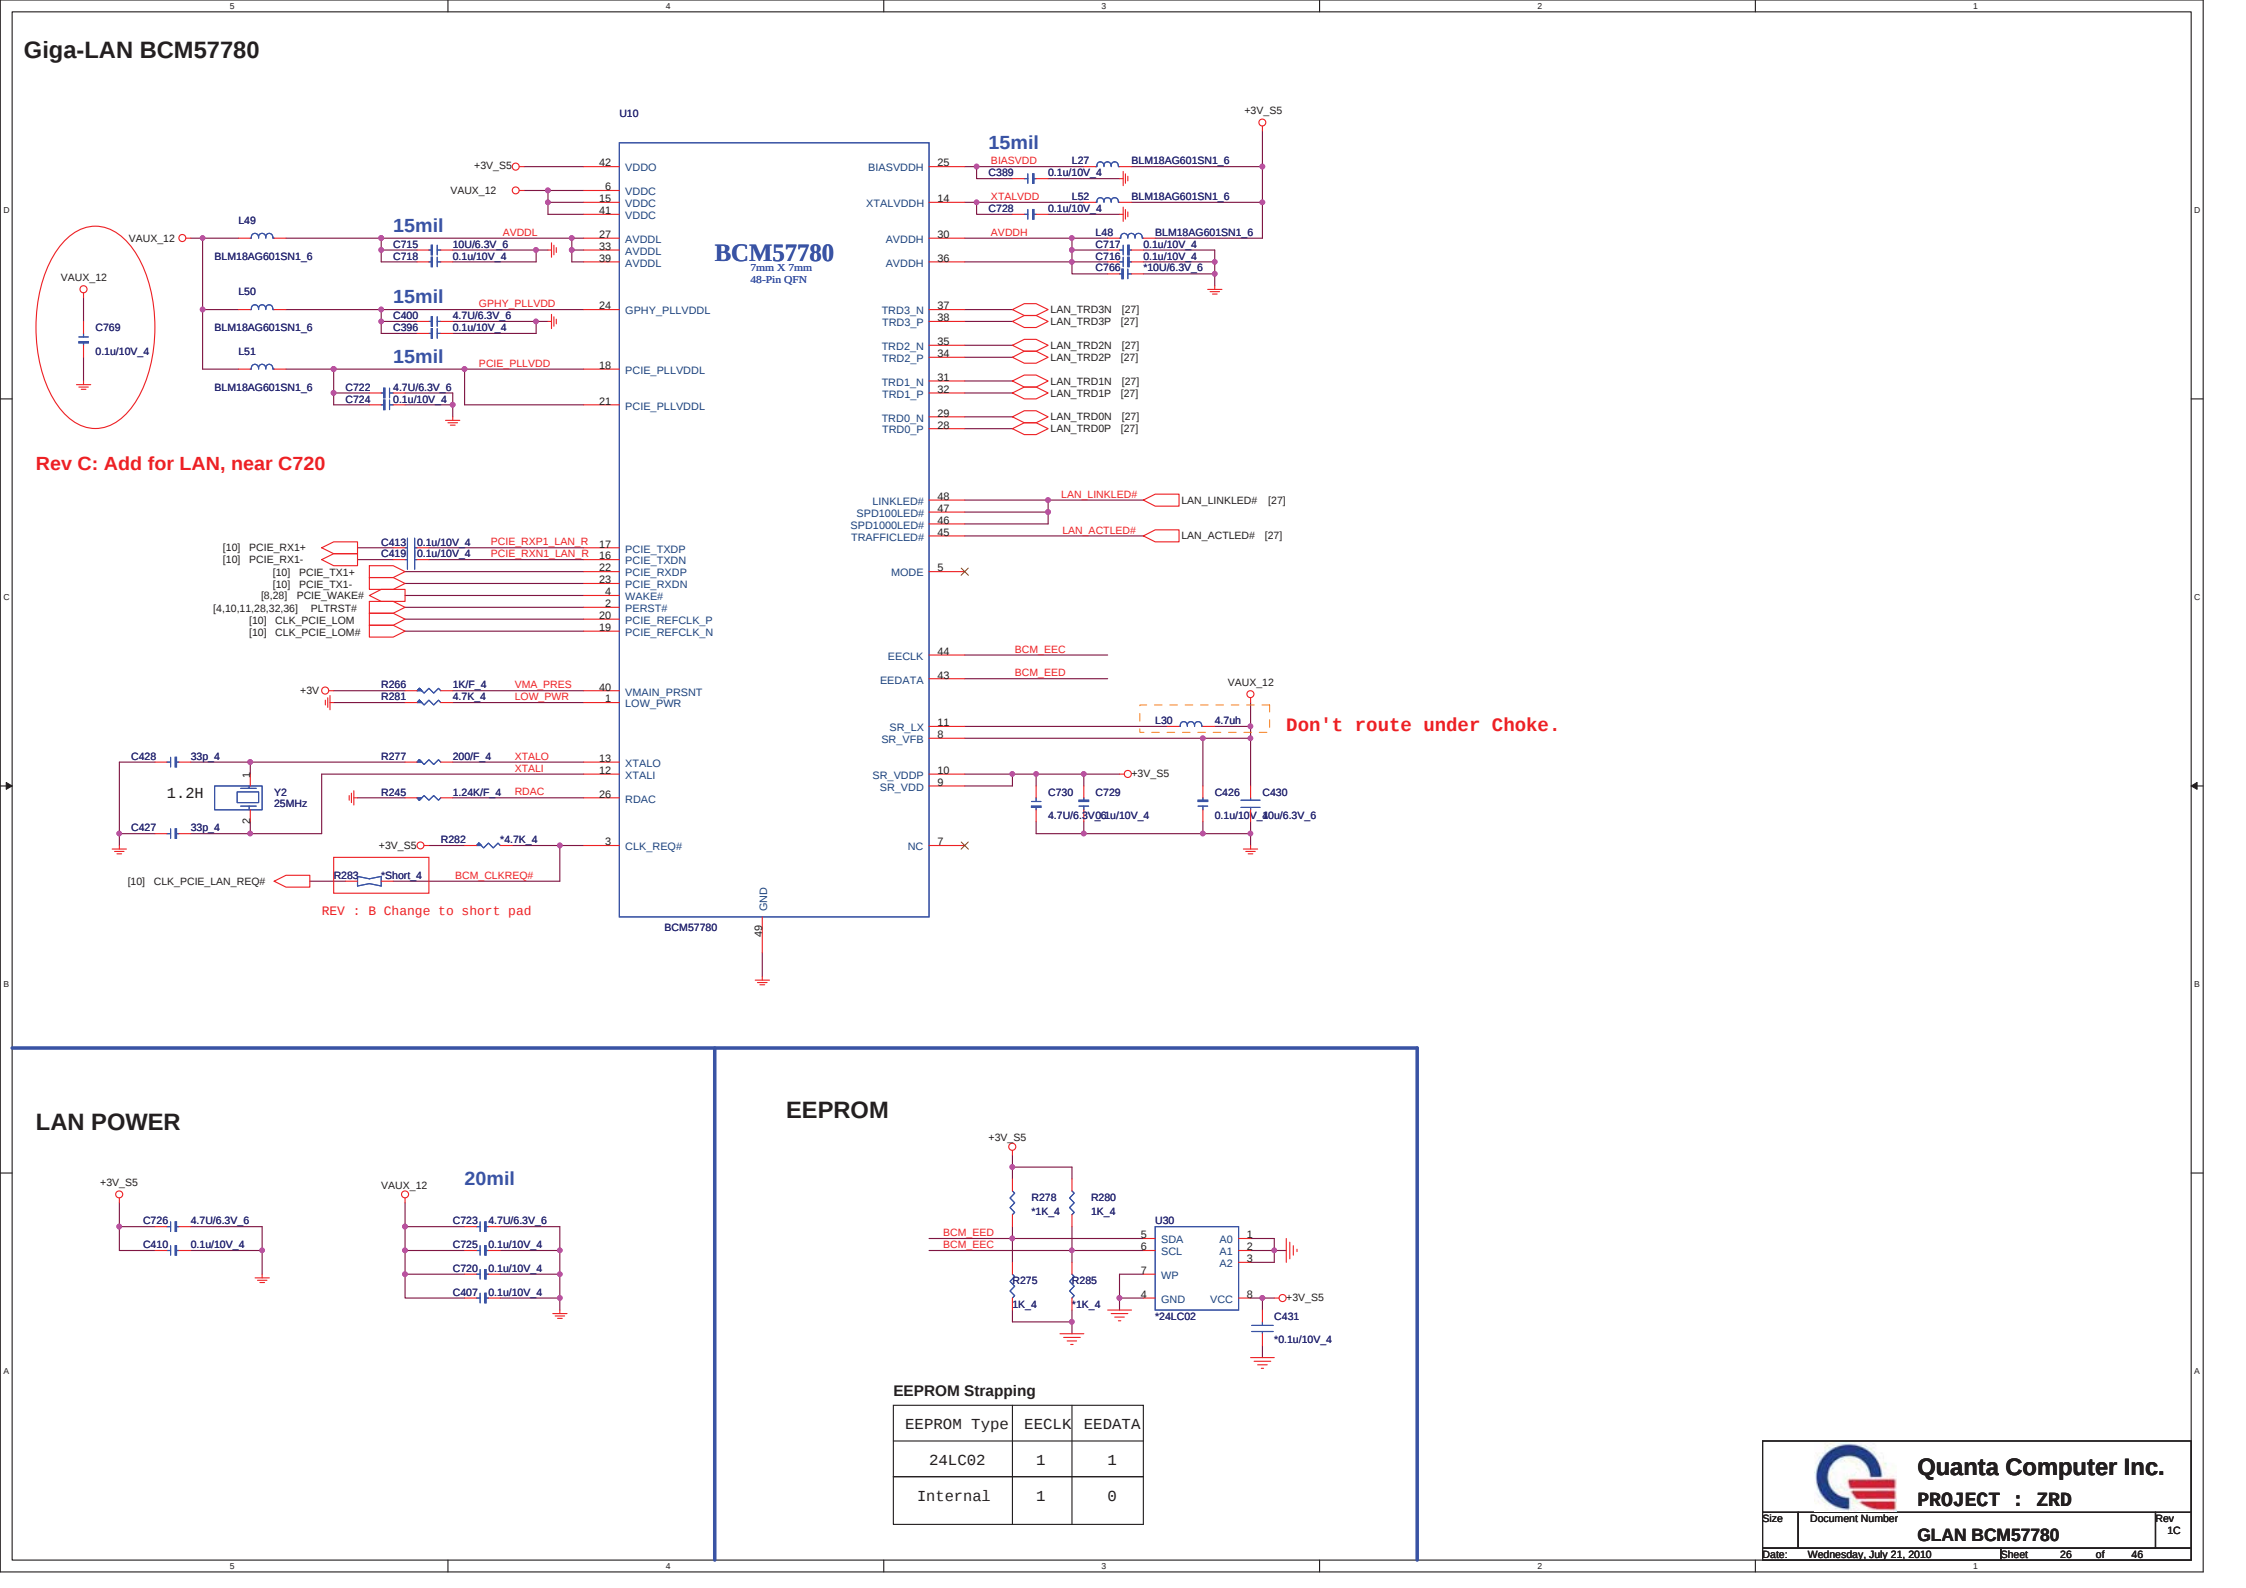[illegible]

Giga-LAN BCM57780

LAN POWER

EEPROM

EEPROM Strapping		
EEPROM Type	EECLK	EEDATA
24LC02	1	1
Internal	1	0


Quanta Computer Inc.
PROJECT : ZRD
GLAN BCM57780
 Size: Document Number: Rev 1C
 Date: Wednesday, July 21, 2010 Sheet 26 of 46


Giga-LAN BCM57780

LAN POWER

EEPROM

EEPROM Strapping		
EEPROM Type	EECLK	EEDATA
24LC02	1	1
Internal	1	0


Quanta Computer Inc.
PROJECT : ZRD
GLAN BCM57780
 Size: Document Number: Rev 1C
 Date: Wednesday, July 21, 2010 Sheet 26 of 46

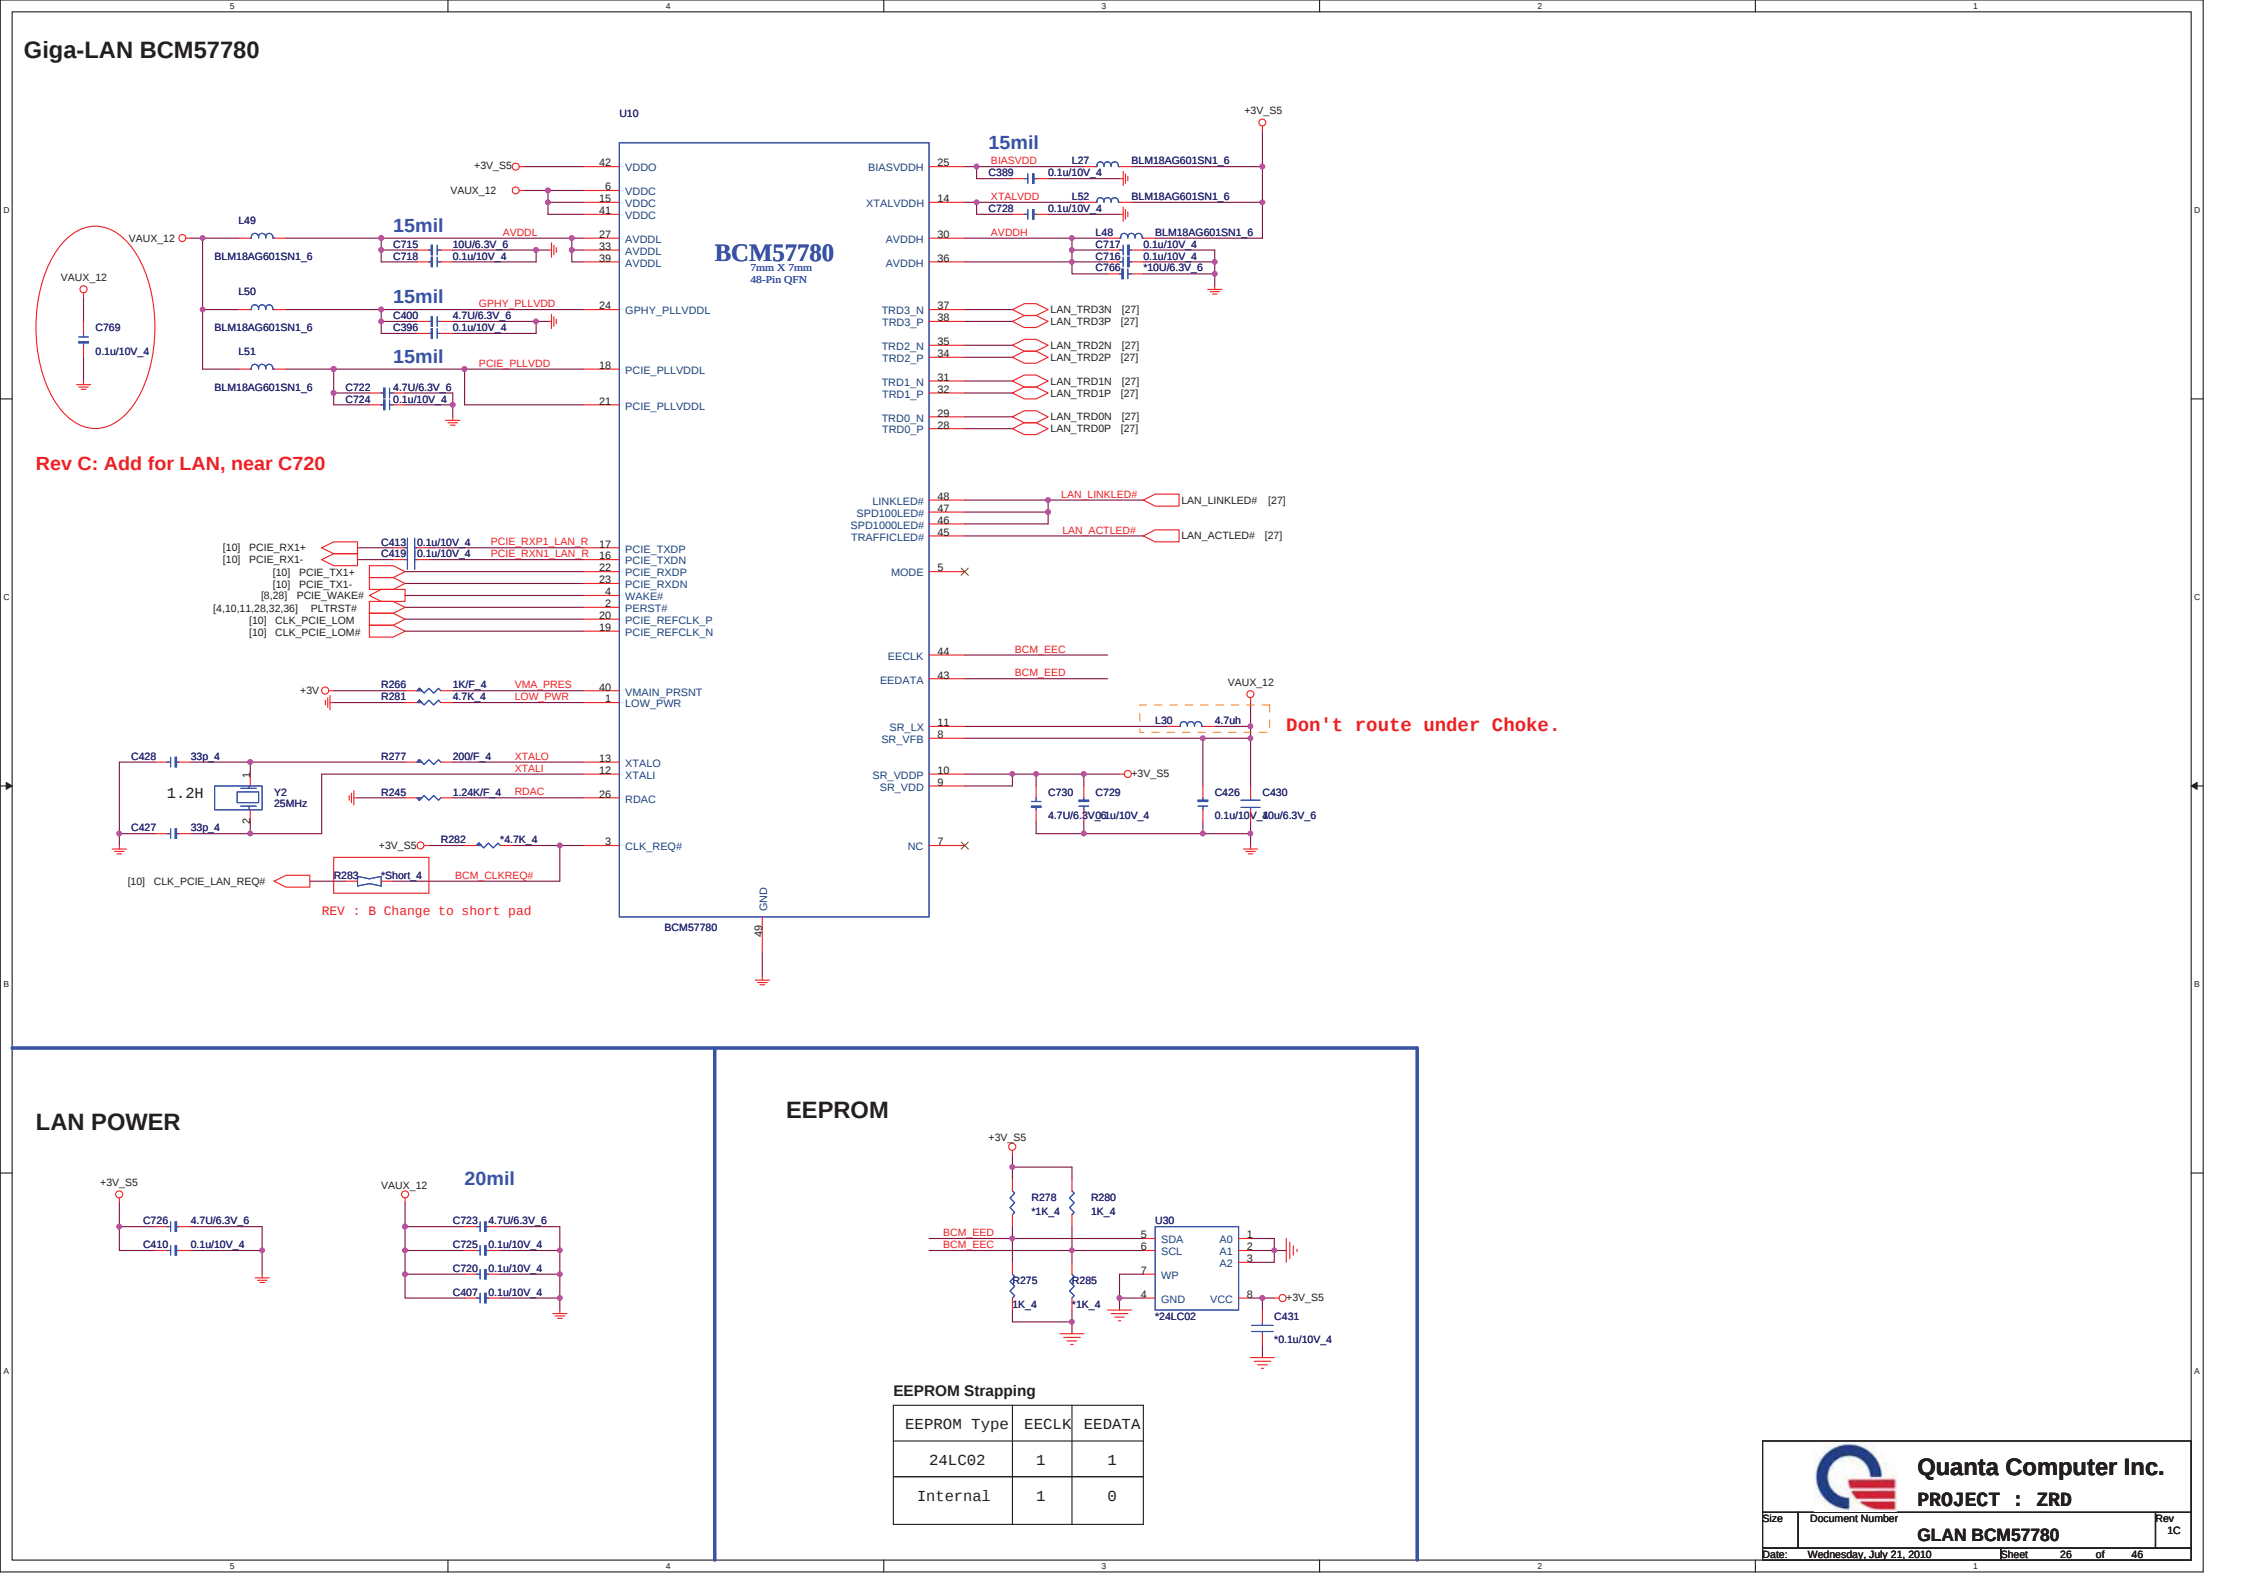

Giga-LAN BCM57780

Rev C: Add for LAN, near C720

Don't route under Choke.


REV : B Change to short pad

LAN POWER

EEPROM

EEPROM Strapping		
EEPROM Type	EECLK	EEDATA
24LC02	1	1
Internal	1	0


Quanta Computer Inc.
PROJECT : ZRD
GLAN BCM57780
 Size: Document Number: Rev 1C
 Date: Wednesday, July 21, 2010 Sheet 26 of 46

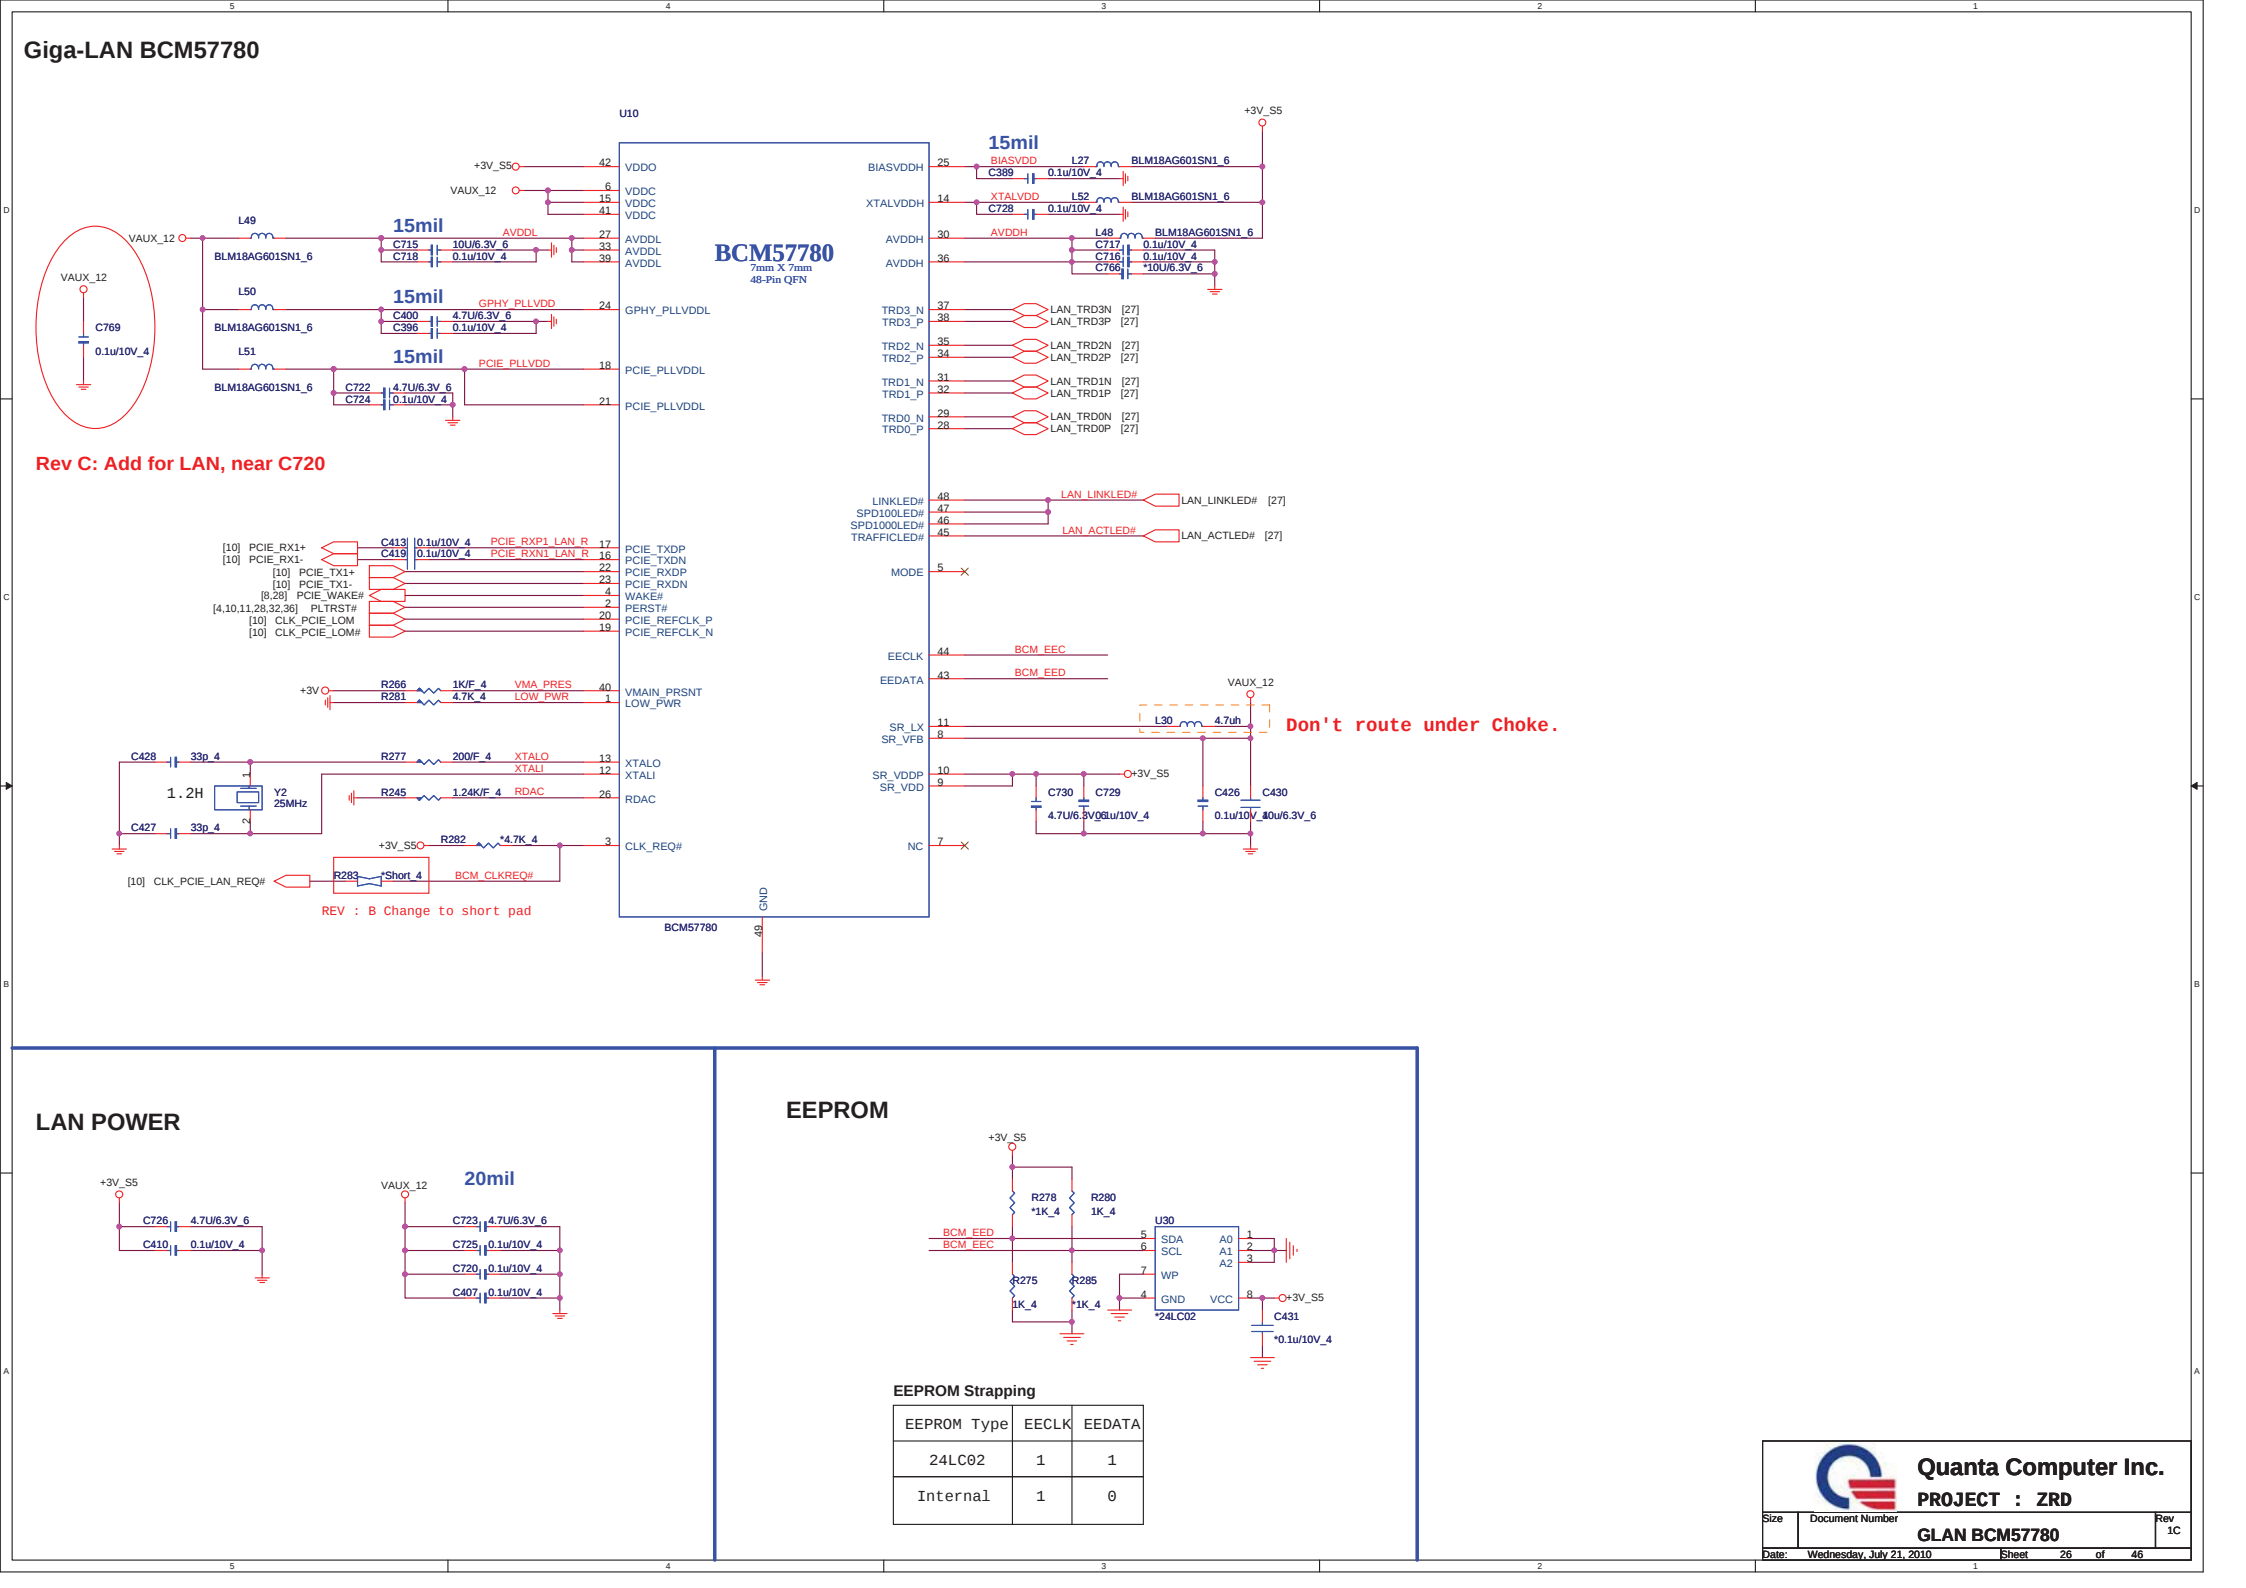

Giga-LAN BCM57780

Rev C: Add for LAN, near C720

Don't route under Choke.

REV : B Change to short pad

LAN POWER

EEPROM

EEPROM Strapping

EEPROM Type	EECLK	EEDATA
24LC02	1	1
Internal	1	0


Quanta Computer Inc.
PROJECT : ZRD
GLAN BCM57780
 Size: Document Number: Rev 1C
 Date: Wednesday, July 21, 2010 Sheet 26 of 46

Giga-LAN BCM57780

Rev C: Add for LAN, near C720

Don't route under Choke.

REV : B Change to short pad


LAN POWER

EEPROM



EEPROM Strapping		
EEPROM Type	EECLK	EEDATA
24LC02	1	1
Internal	1	0

Quanta Computer Inc. PROJECT : ZRD		Rev 1C
Size	Document Number	Date: Wednesday, July 21, 2010
Sheet 26 of 46		

TRANSFORMER

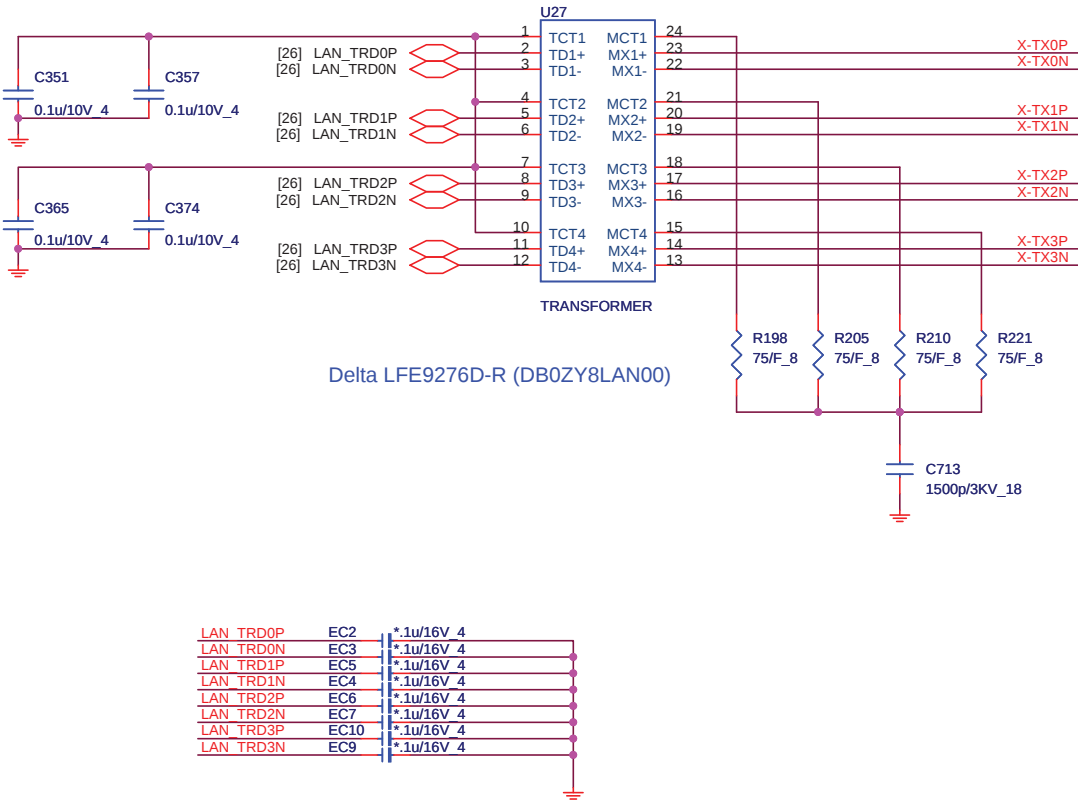

SUY	DFTJ12FR109
AEC	DFTJ12FR135

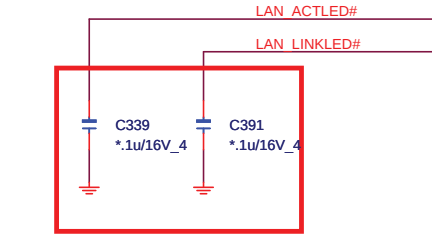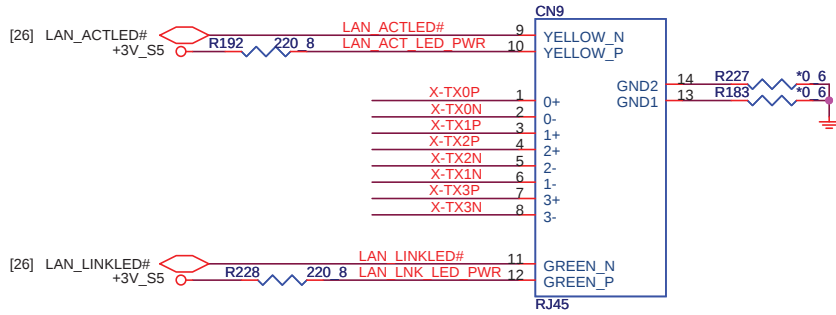

REV : B Change to 0402 for ESD




Quanta Computer Inc.
PROJECT : ZRD


Size	Document Number	Rev
	LAN Transformer and RJ45	1C
Date:	Wednesday, July 21, 2010	Sheet 27 of 46

MAIN SATA HDD

REV : B Change footprint

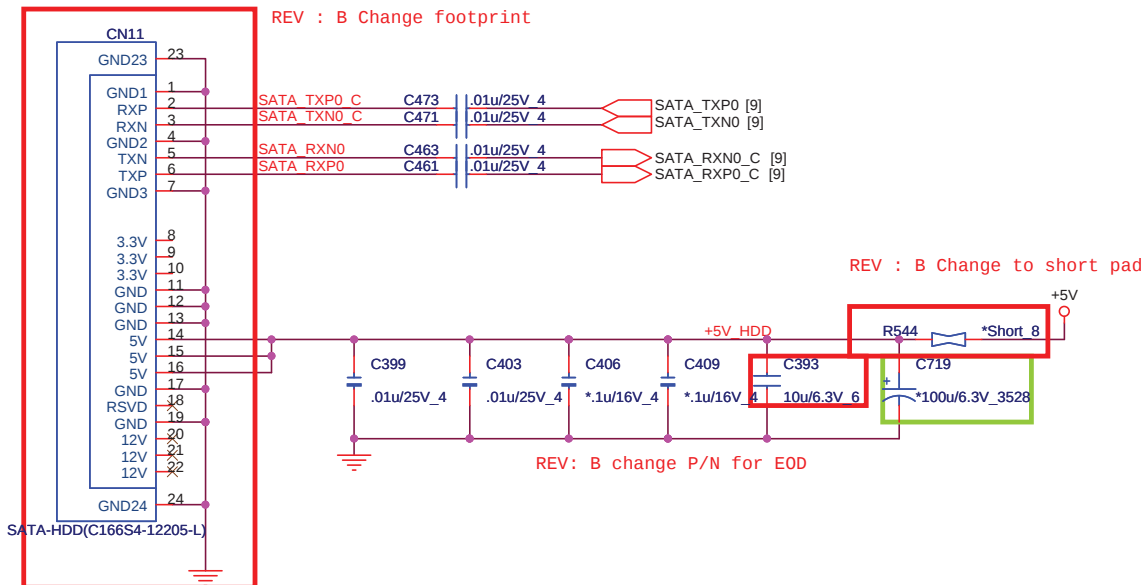


EE RETURN-PATH CAPACITORS

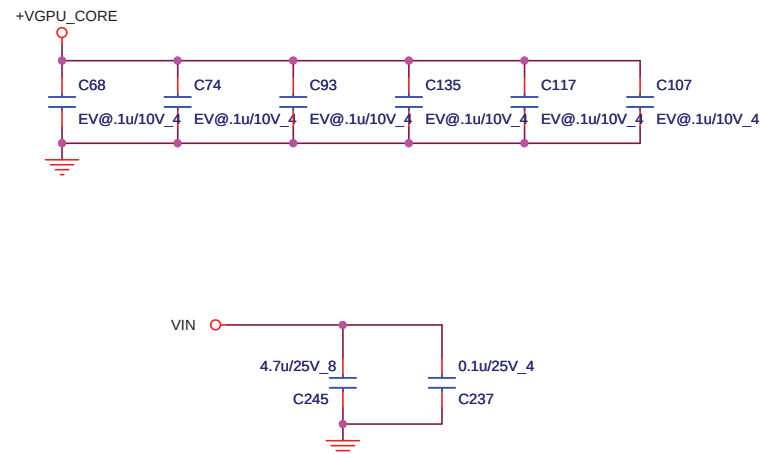

ODD (SATA)

<http://hobi-elektronika.net/>

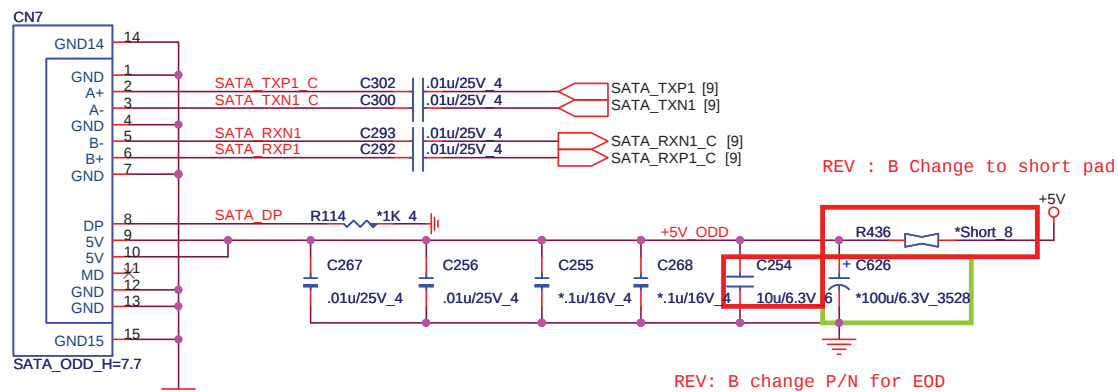

REV: B change P/N for EOD

SUY	DFHS22FR214
AOP	DFHS22FR232
AEC	DFHS22FR216


AOP	DFHS13FR011
OTK	DFHS13FR010





Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number	Rev
	SATA-HDD/ODD/RETURN-PATH	1C
Date:	Wednesday, July 21, 2010	Sheet 29 of 46


MUTE(AMP)

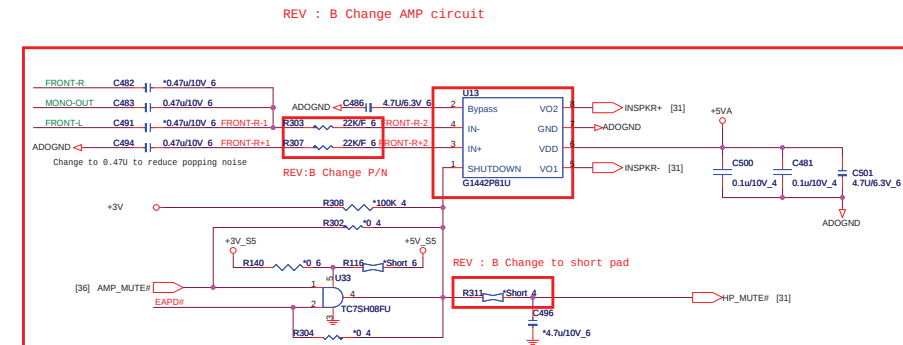


```
http://hobi-elektronika.net/  
http://hobi-elektronika.net/  
http://hobi-elektronika.net/  
http://hobi-elektronika.net/  
http://hobi-elektronika.net/  
http://hobi-elektronika.net/
```

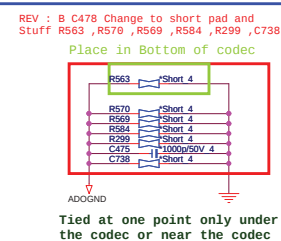


MIC

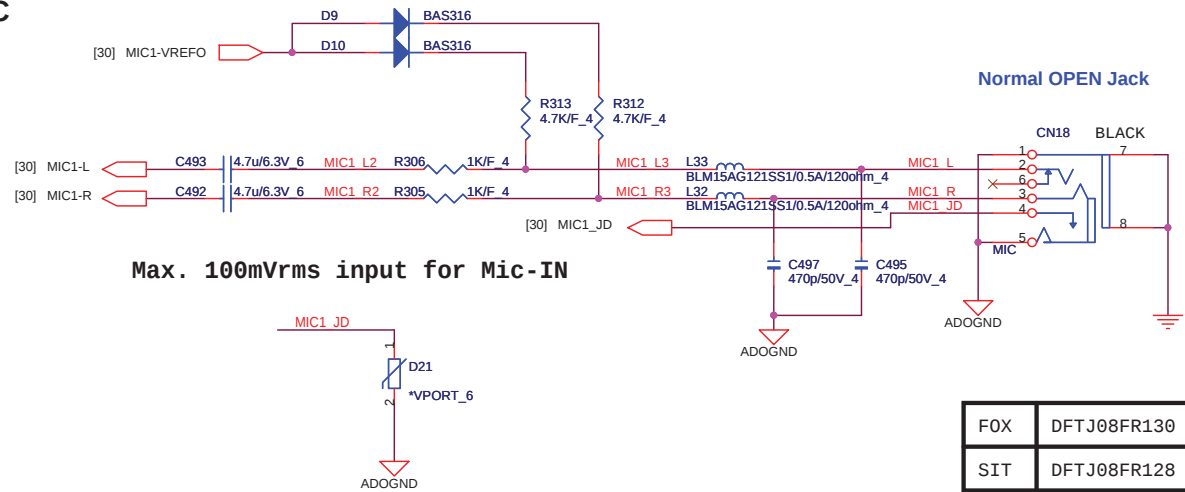


Internal Speaker

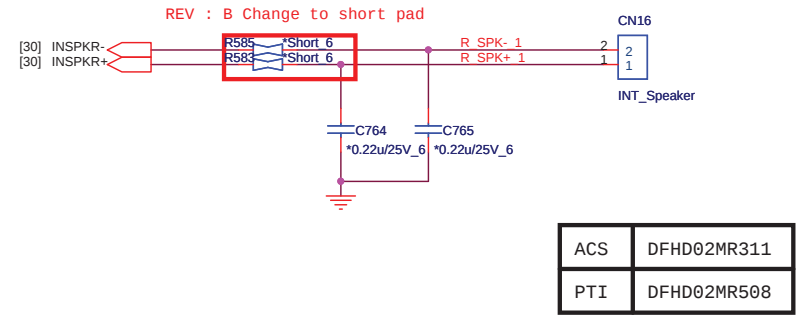

HP/SPDIF

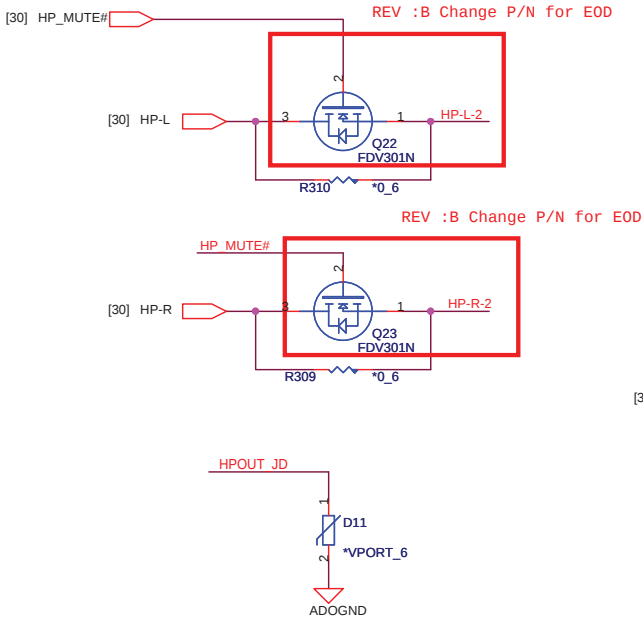

De-pop noise

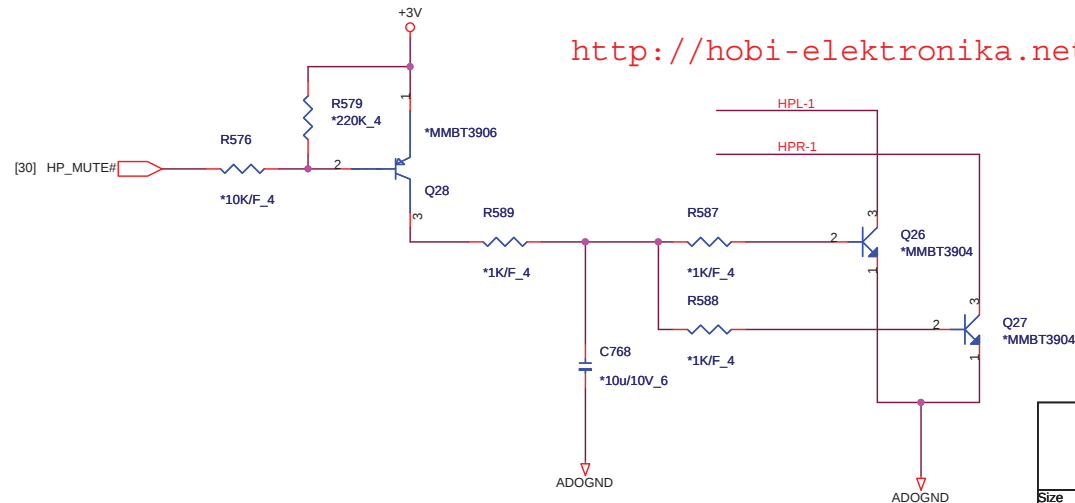


<http://hobi-elektronika.net/>



CARD READER Controller

2 IN 1 CARD READER (SD/MMC)

Clock input selection
'1' for 48MHz input [Default, Internal PU]
'0' for 12MHz input

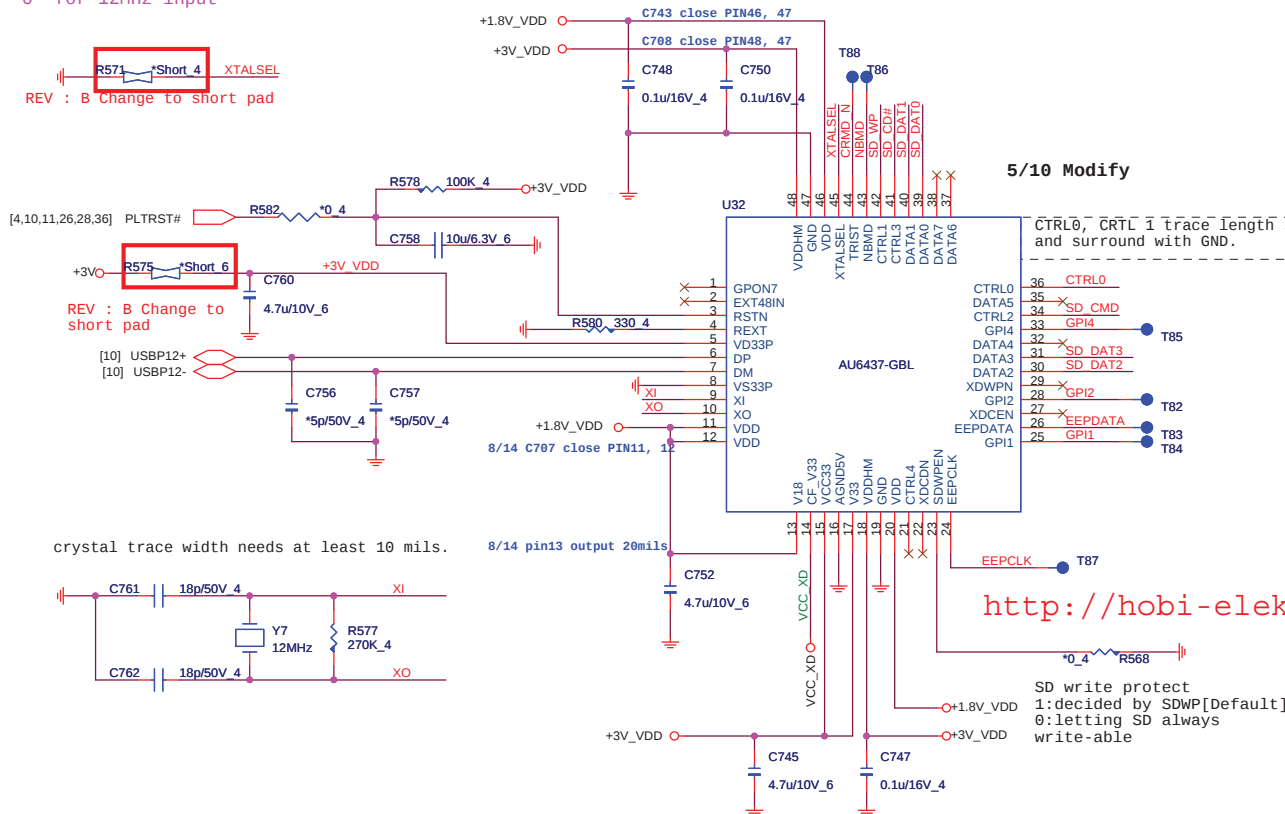

Close to connector

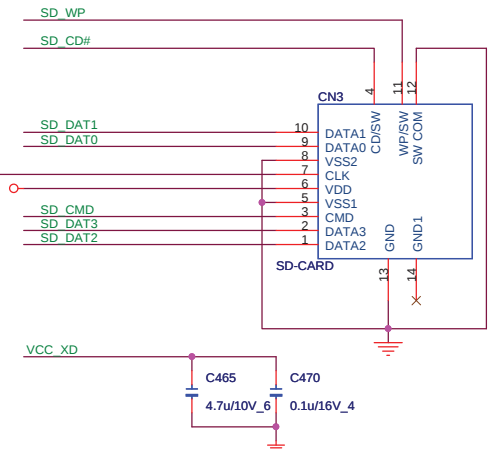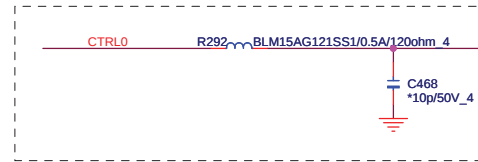

Close to CN14 pin 14 & pin23
4.7u CAP close to pin23

PNT	DFHS11FR011
PLA	DFHS11FR033

5/10 Modify

CTRL0, CTRL1 trace length shorter,
and surround with GND.

<http://hobi-elektronika.net/>


SD write protect
1:decided by SDWP[Default]
0:letting SD always
write-able

LED


Power LED




HDD

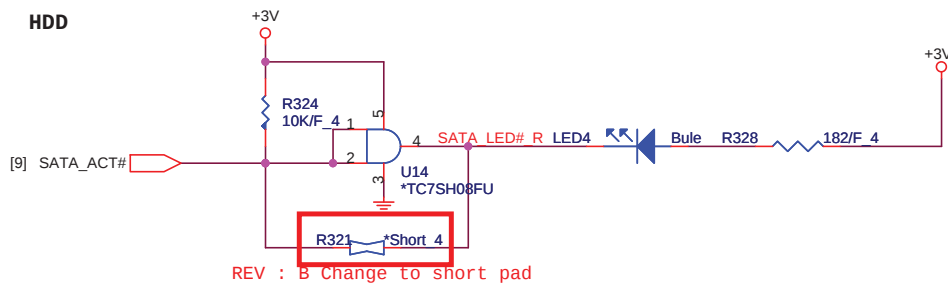


POWER

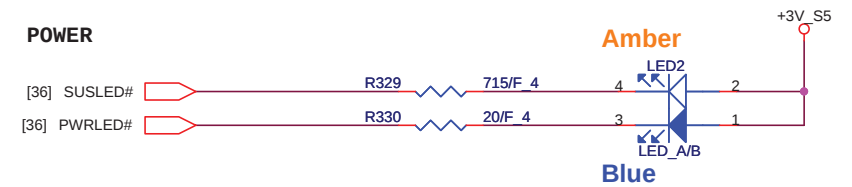


Battery

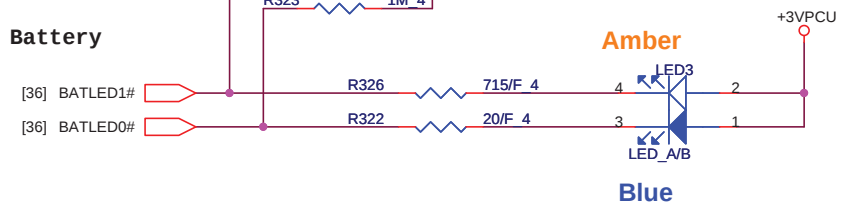


WIFI LED

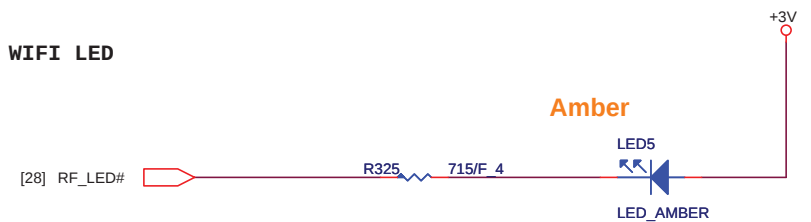


USB

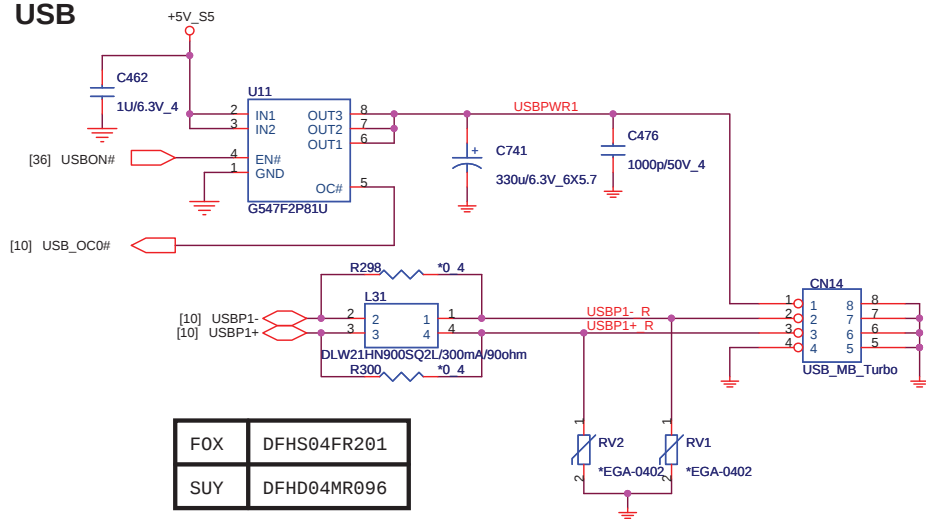

BLUETOOTH CONNECTOR

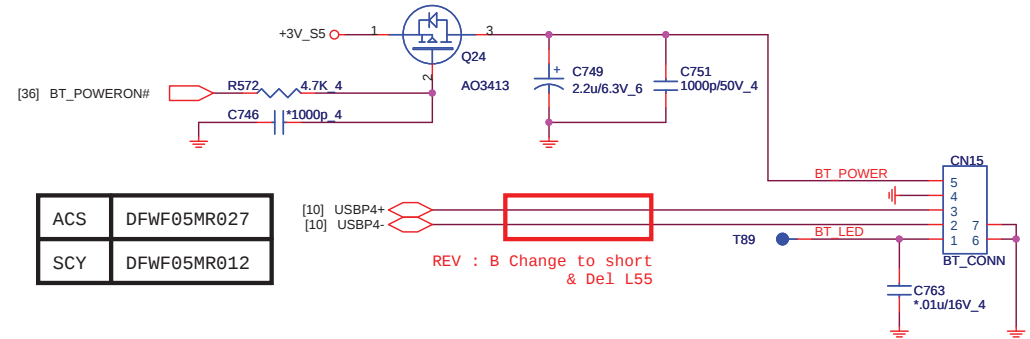

USB/B

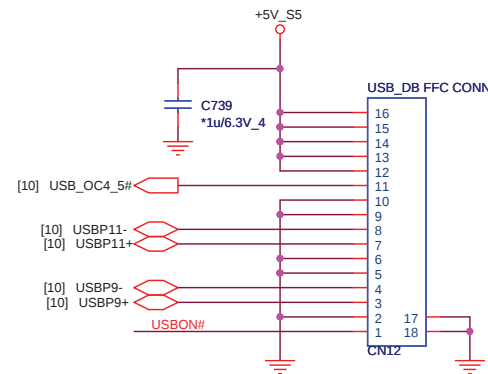




<http://hobi-elektronika.net/>




Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number	Rev
		1C
Date:	Wednesday, July 21, 2010	Sheet 34 of 46



PTI	DFFC26FR155
ACS	DFFC26FR014

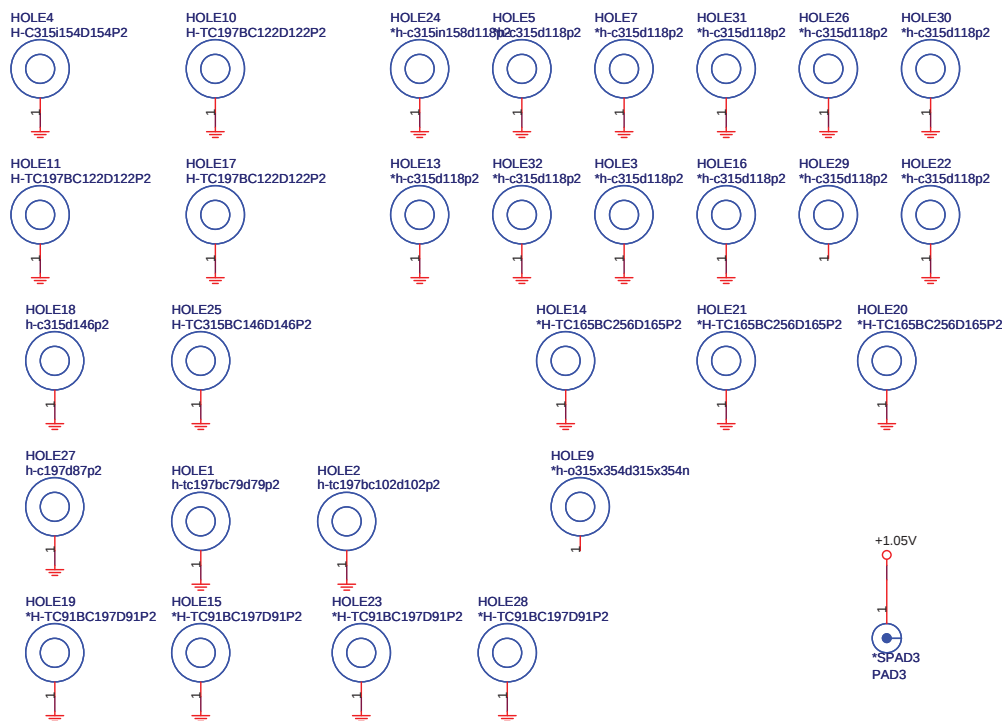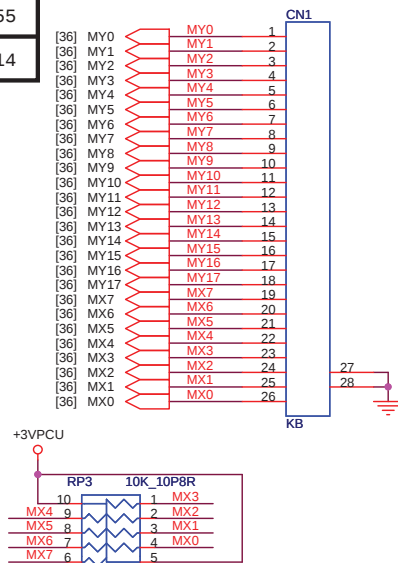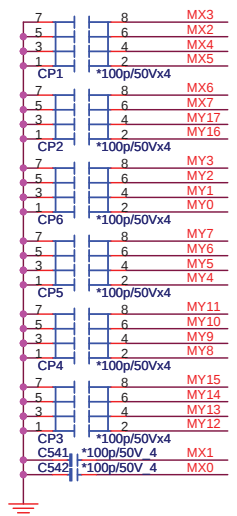

ACS	DFWF03MS091
SCY	DFWF03MS000

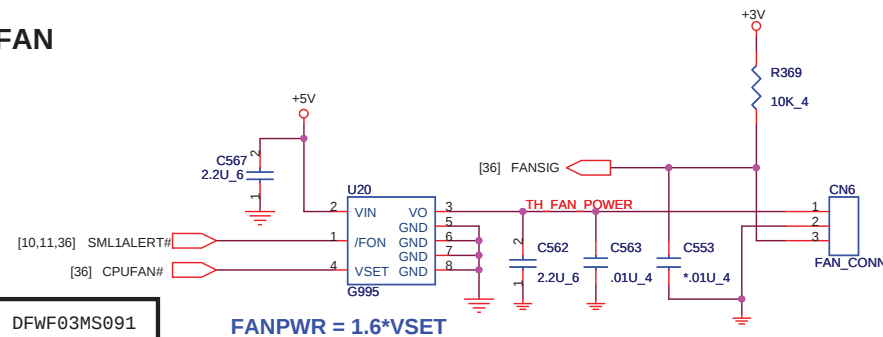


ACS	DFFC12FR017
SCY	DFFC12FR015
PTI	DFFC12FR234

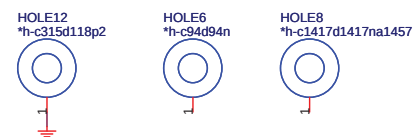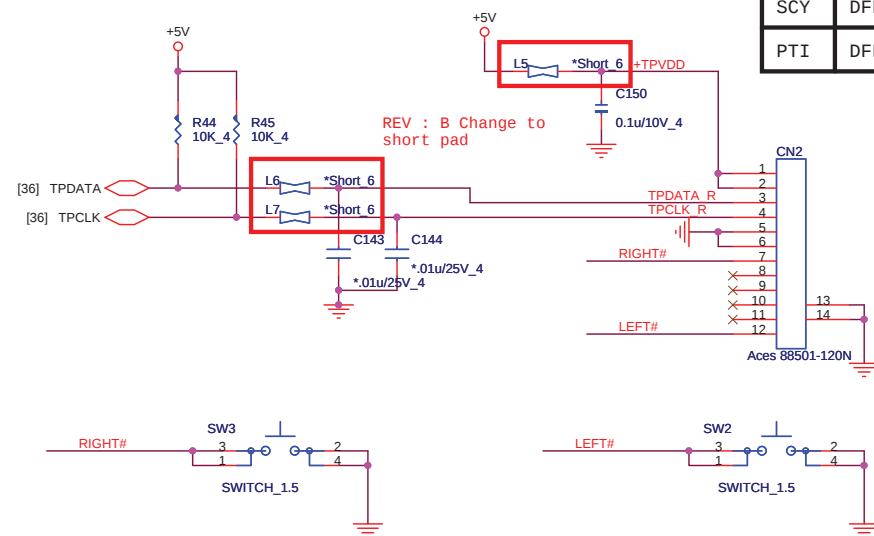

 Quanta Computer Inc. PROJECT : ZRD	
Size	Document Number
KB/FAN/TP+FP	
Date: Wednesday, July 21, 2010	Sheet 35 of 46
	Rev 1C

EC(KBC)

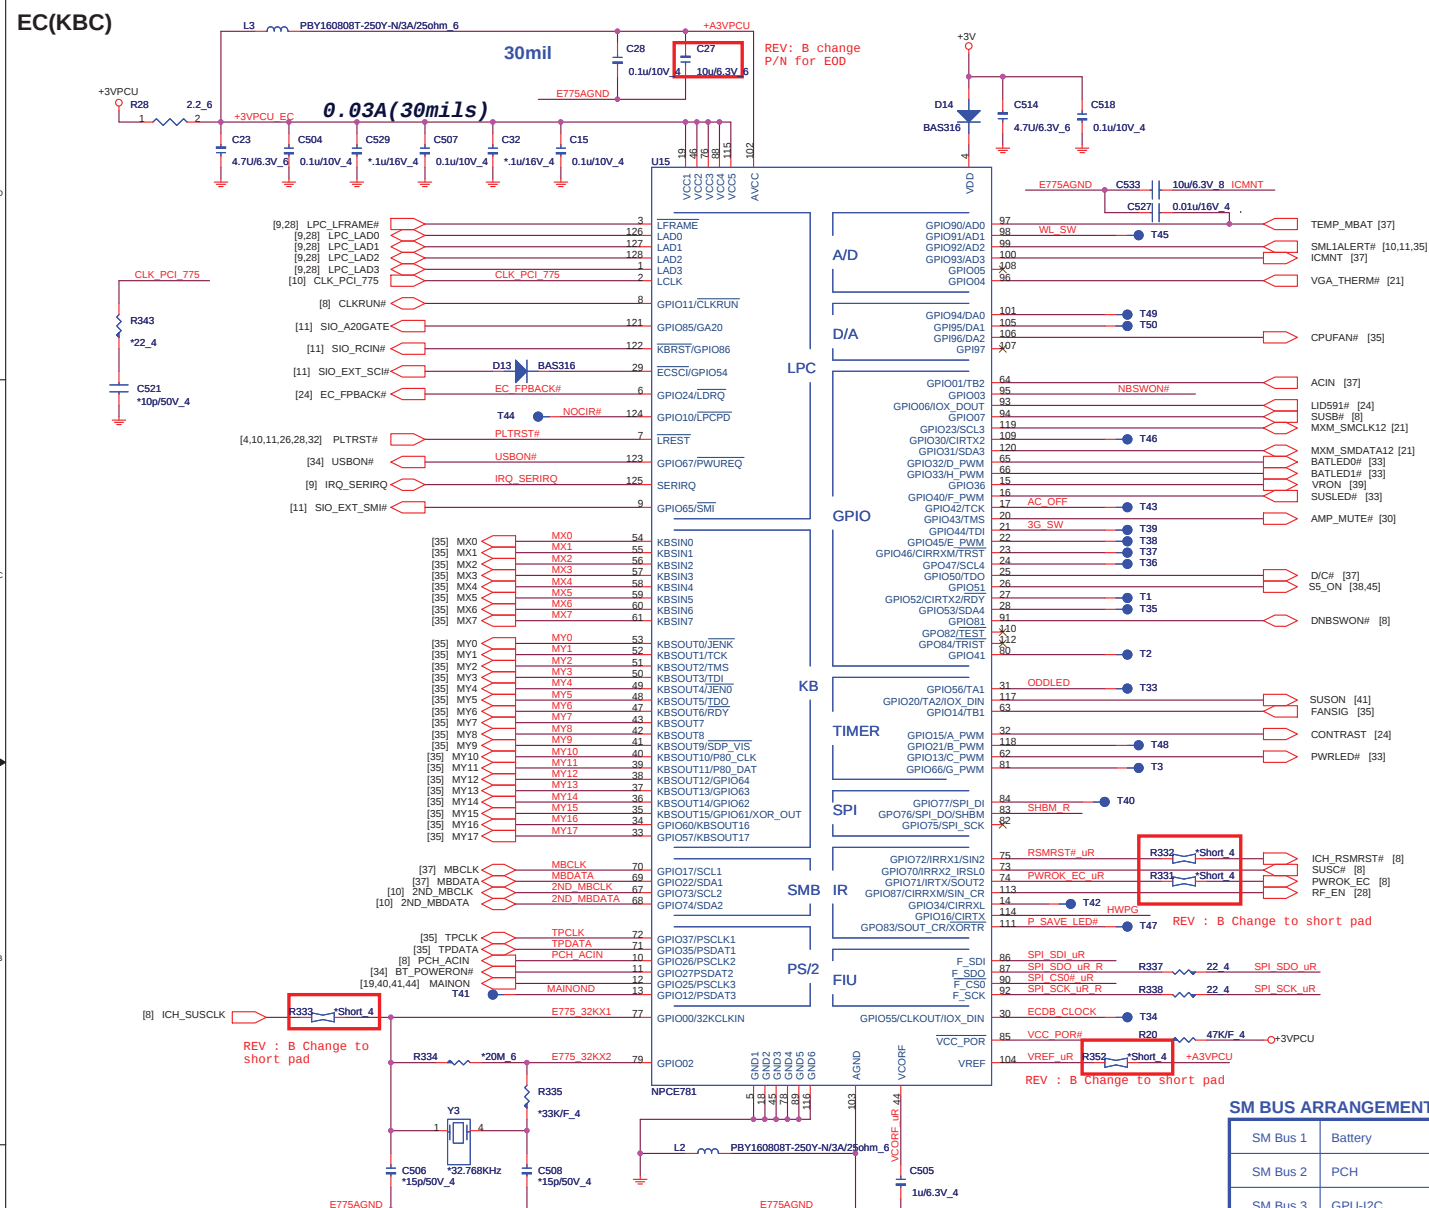


I/O ADDRESS SETTING(KBC)


SHBM=0: Enable shared memory with host BIOS



SM BUS PU(KBC)




SPI FLASH(KBC)

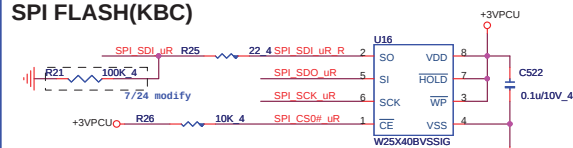


1/13 Confirm by vendor mail :
If the Southbridge enables 'Long Wait Abort' by default, the flash device should be 50MHz (or faster)

HWPG(KBC)

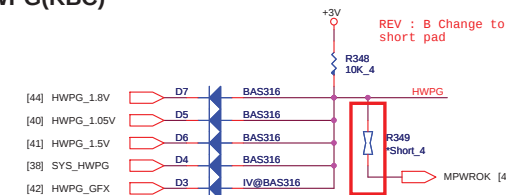

POWER-ON Switch(KBC)

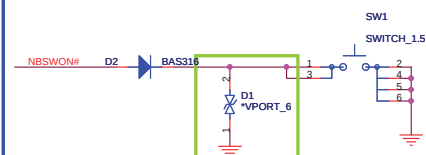


5/13 change the location

INTERNAL KEYBOARD STRIP SET(KBC)



Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number
	WPCE781 & FLASH
Date	Wednesday, July 21, 2010
Sheet	26 of 46

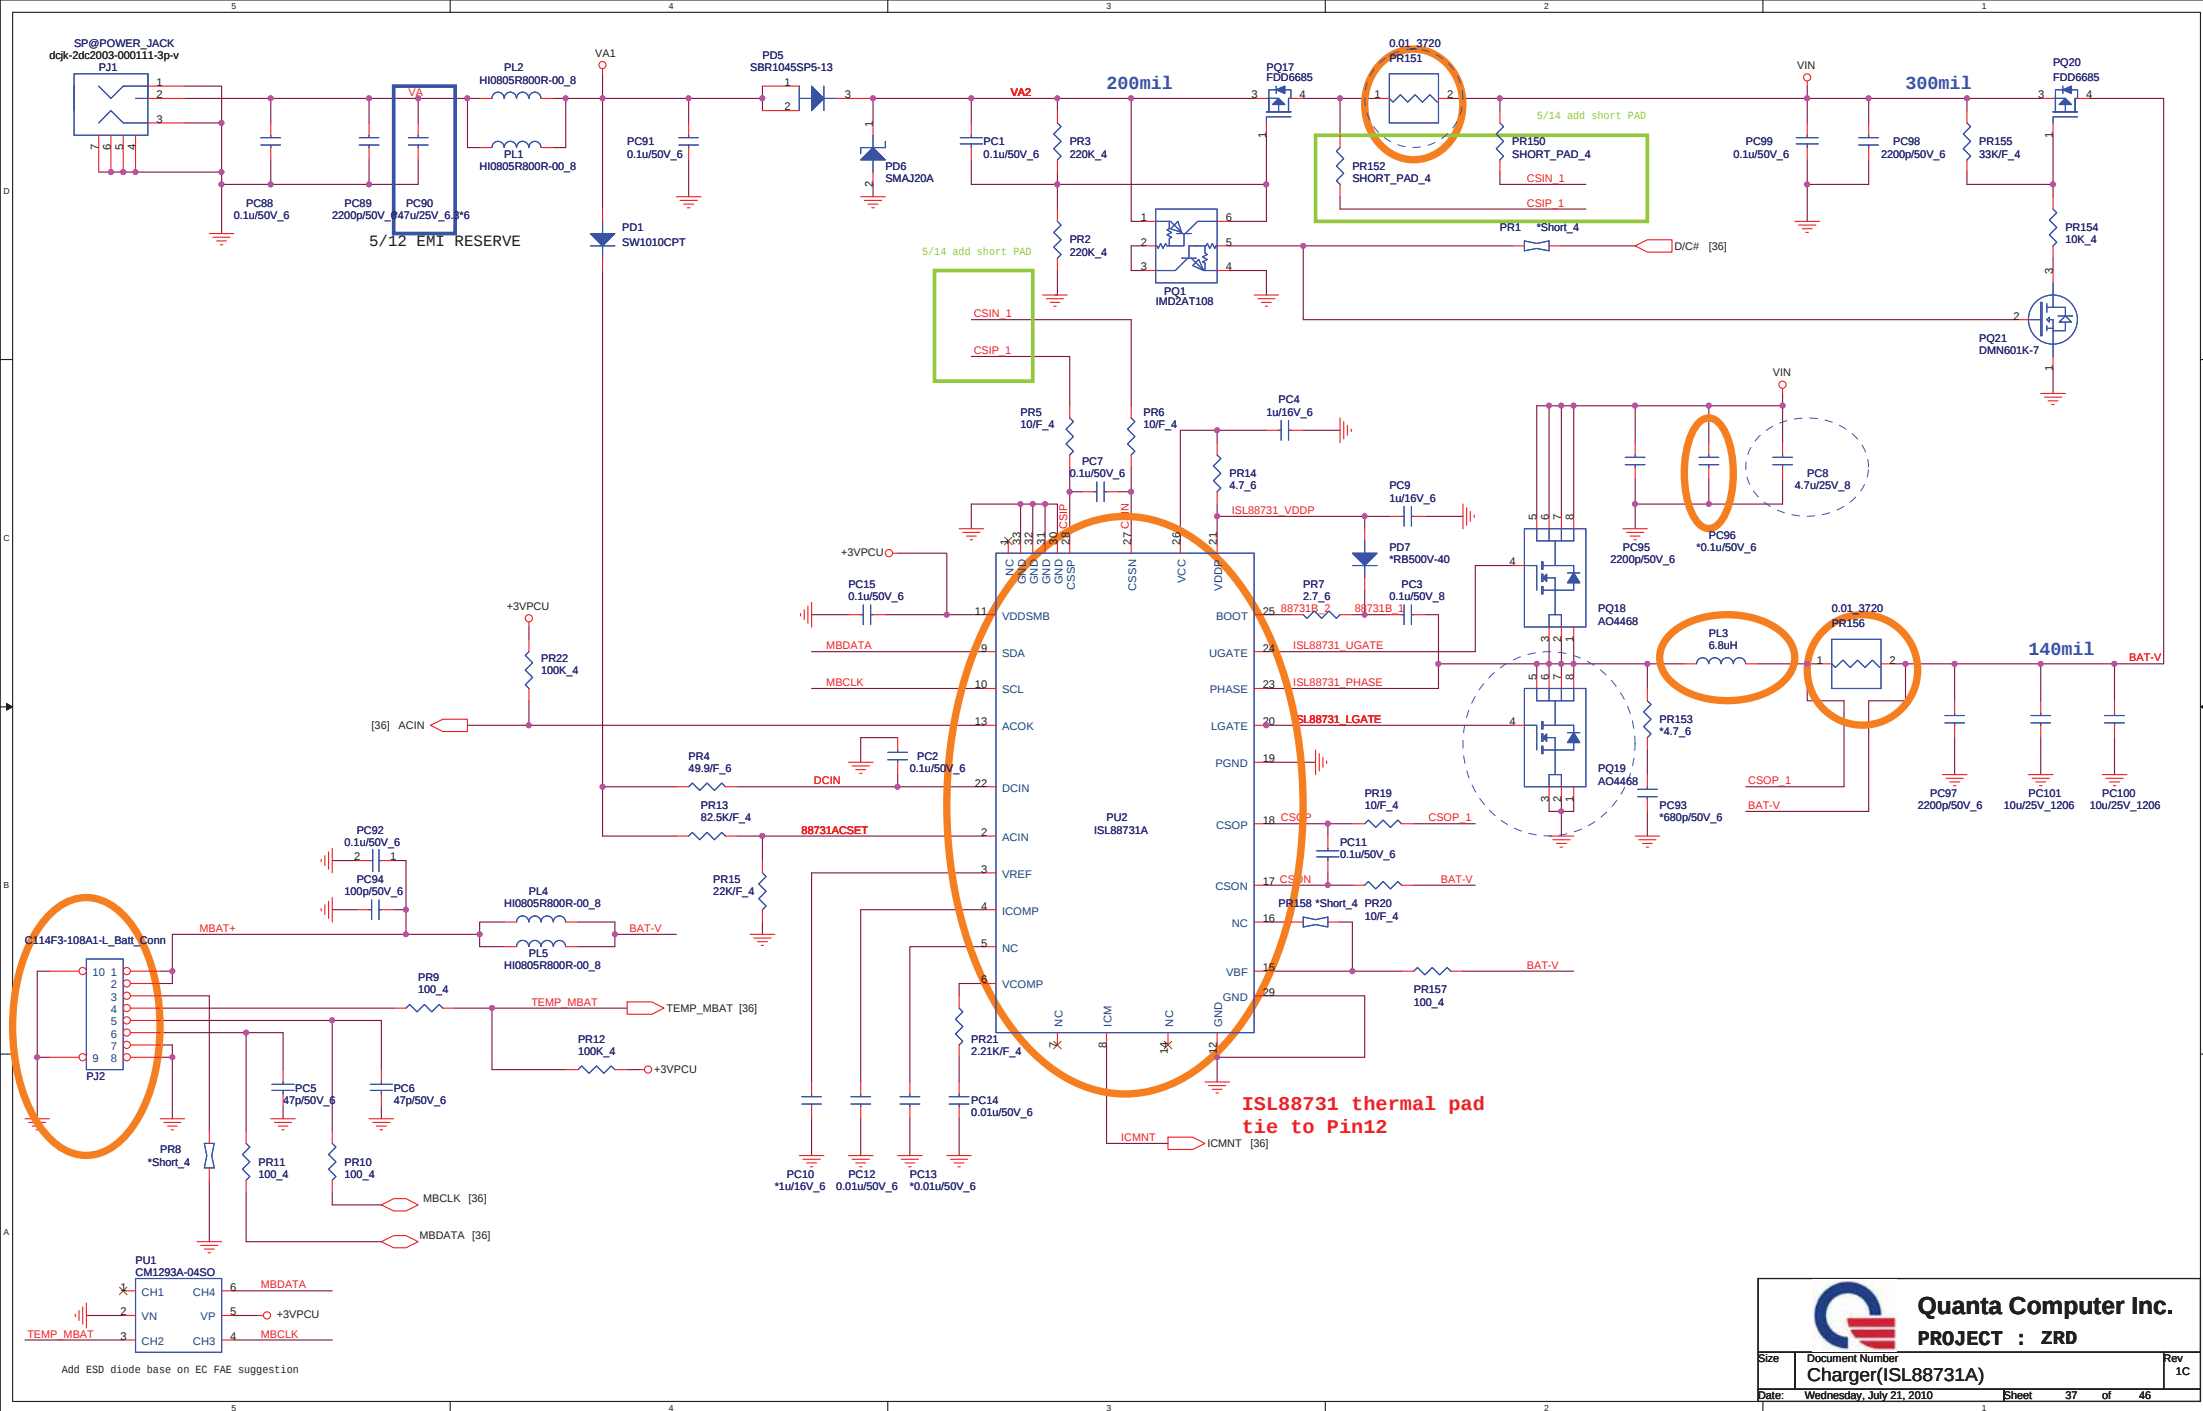

200mil
OCP: 6.5A
5A

OCP: 6.5A
 $L(\text{ripple current}) = (9-5) * 5 / (2.2u * 0.4M * 9) = 2.525A$
 $I_{ocp} = 6.5 - (2.525 / 2) = 5.24A$
 $V_{th} = 5.24A * 14.2m\Omega = 0.074V$
 $R(I_{lim}) = (0.07437V * 10) / 5uA = 148.74K$
 $I_{peak}(\text{choke}) = 10.687A$

OCP: 9A
 $L(\text{ripple current}) = (9-3.3) * 3.3 / (2.2u * 0.5M * 9) = 1.9A$
 $I_{ocp} = 9 - (1.9 / 2) = 8.05A$
 $V_{th} = 8.05A * 14.2m\Omega = 114.31mV$
 $R(I_{lim}) = (114.31mV * 10) / 5uA = 228.62K$
 $I_{peak}(\text{choke}) = 11.479A$

280mil
OCP: 9A
7A

10mil
0.23A

2.85A
114mil

2.171A
87mil


3A
107mil



Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number	Rev
	SYSTEM 5V/3V (RT8206)	1C
Date:	Wednesday, July 21, 2010	Sheet 38 of 46


VID 1.2875V

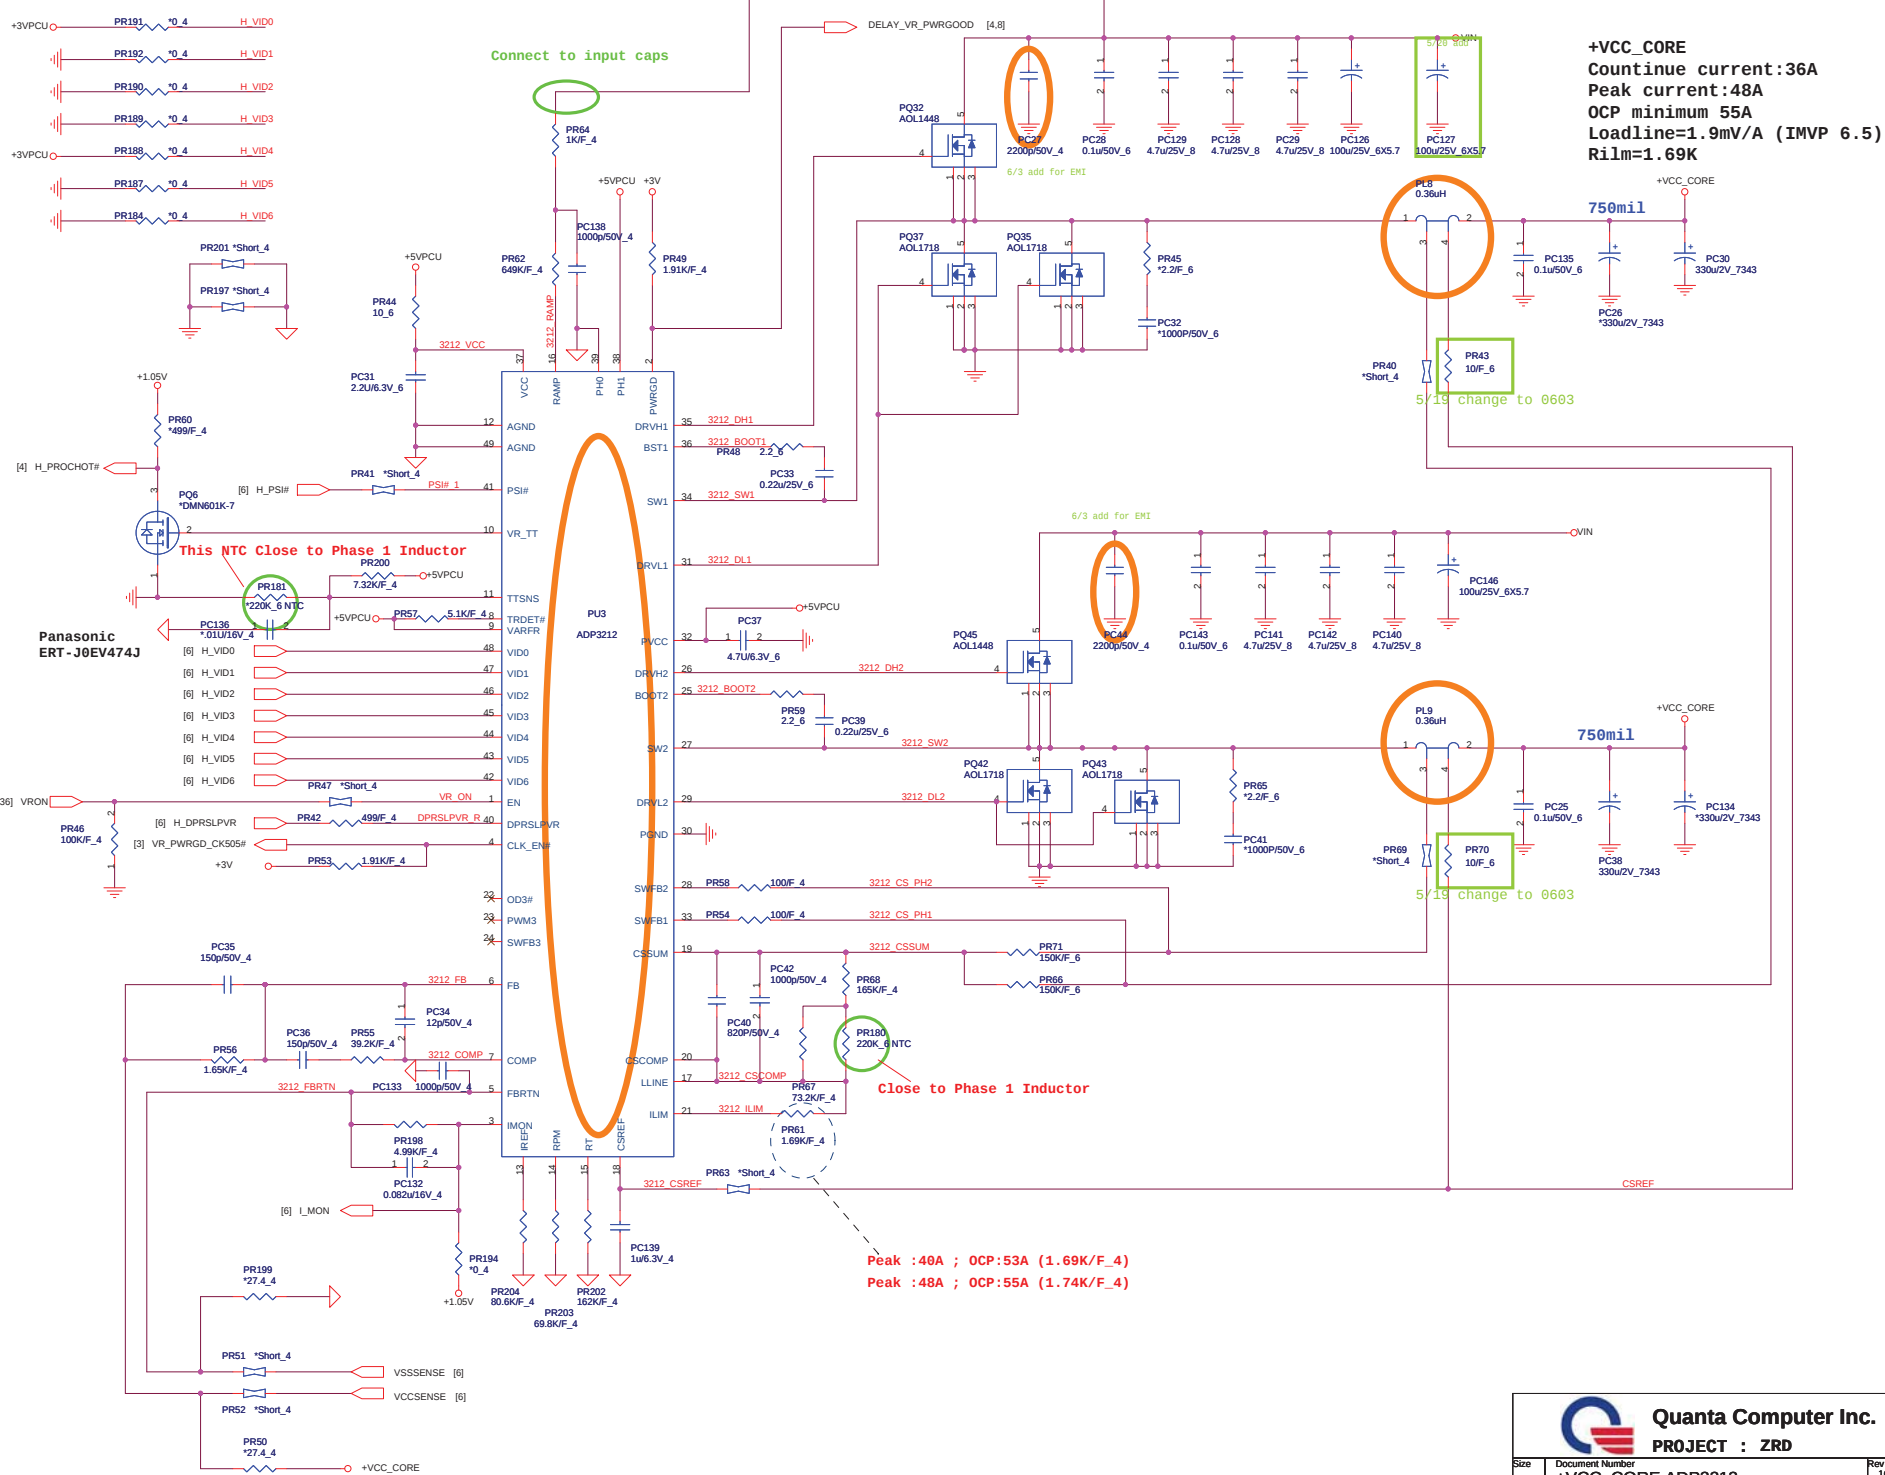

+VCC_CORE
 Countinue current:36A
 Peak current:48A
 OCP minimum 55A
 Loadline=1.9mV/A (IMVP 6.5)
 Rilm=1.69K

Peak :48A ; OCP:53A (1.69K/F_4)
 Peak :48A ; OCP:55A (1.74K/F_4)

[PWM]

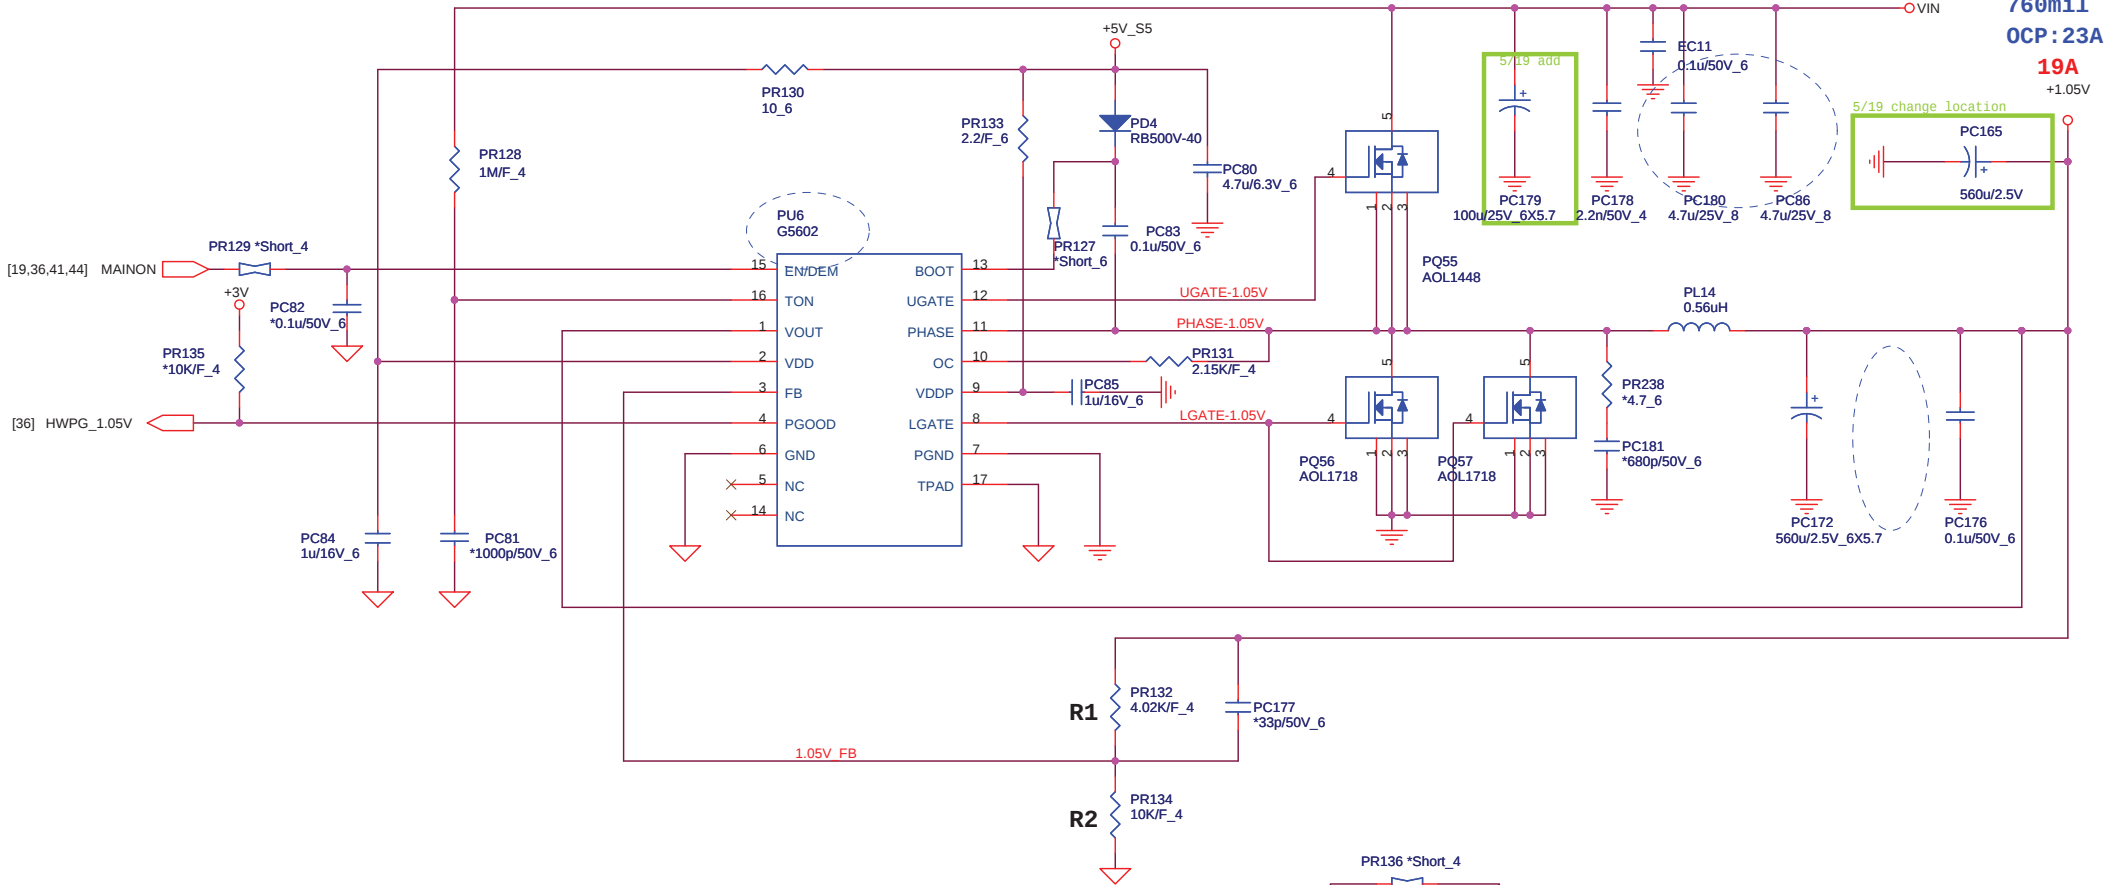

$$T_{ON} = 3.85p \cdot R_{TON} \cdot V_{out} / (V_{in} - 0.5)$$

$$Frequency = V_{out} / (V_{in} \cdot T_{ON})$$

$$T_{ON} = 3.85p \cdot 1M \cdot 1 / (V_{in} - 0.5)$$

$$Frequency = 1 / (0.0036767) = 272K$$

A01718 $R_{dson} = 3 \sim 4.3m\Omega$

$$L(\text{ripple current}) = (19 - 1.05) \cdot 1.05 / (0.56u \cdot 272k \cdot 19) \sim 6.512A$$

$$R_{ILIM} = 2.15m\Omega \cdot 23 - 3.256 / 20uA = 2.122K\Omega$$


$$I(\text{choke})_{peak} = 29.512A$$




Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number	Rev
	+VTT (UP6111A)	1C
Date:	Wednesday, July 21, 2010	Sheet 40 of 46

[PWM]

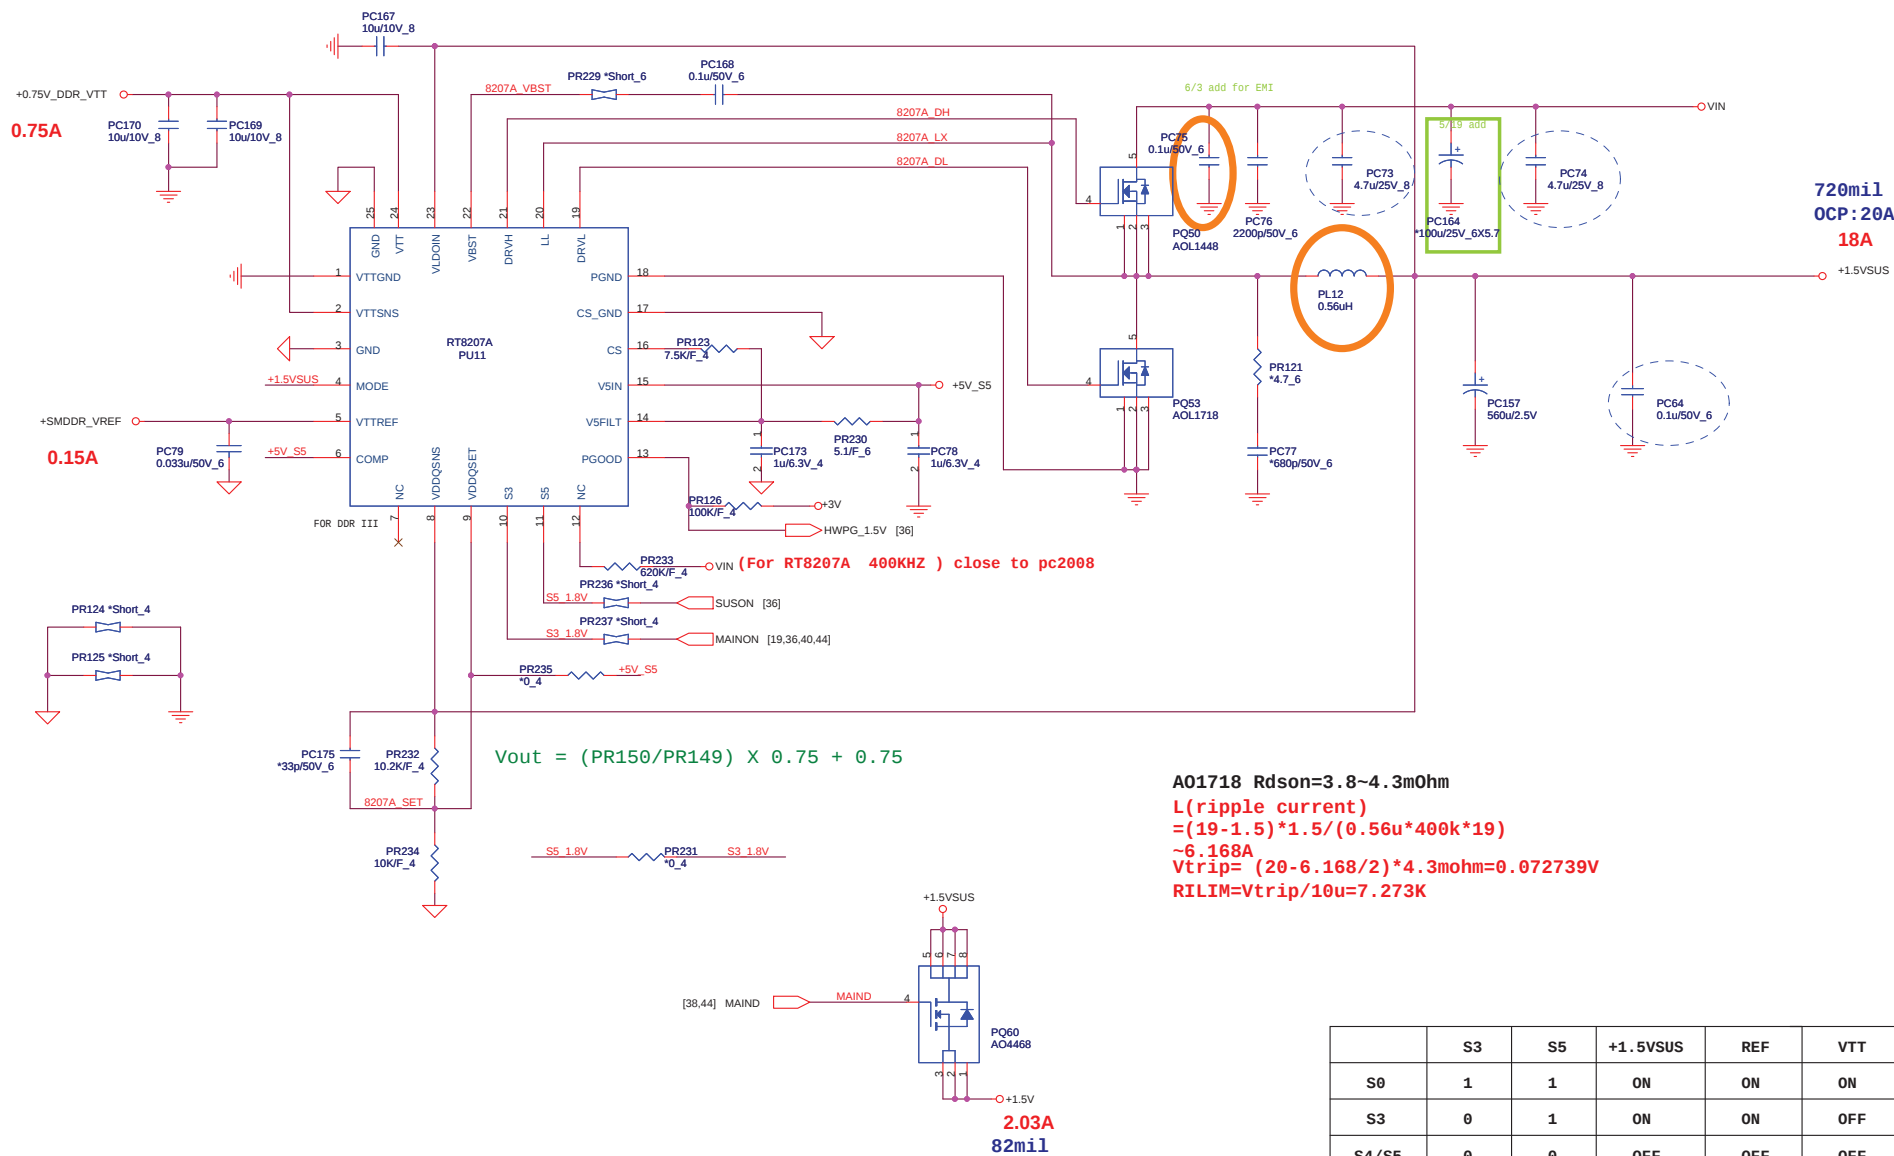

	S3	S5	+1.5VSUS	REF	VTT
S0	1	1	ON	ON	ON
S3	0	1	ON	ON	OFF
S4/S5	0	0	OFF	OFF	OFF

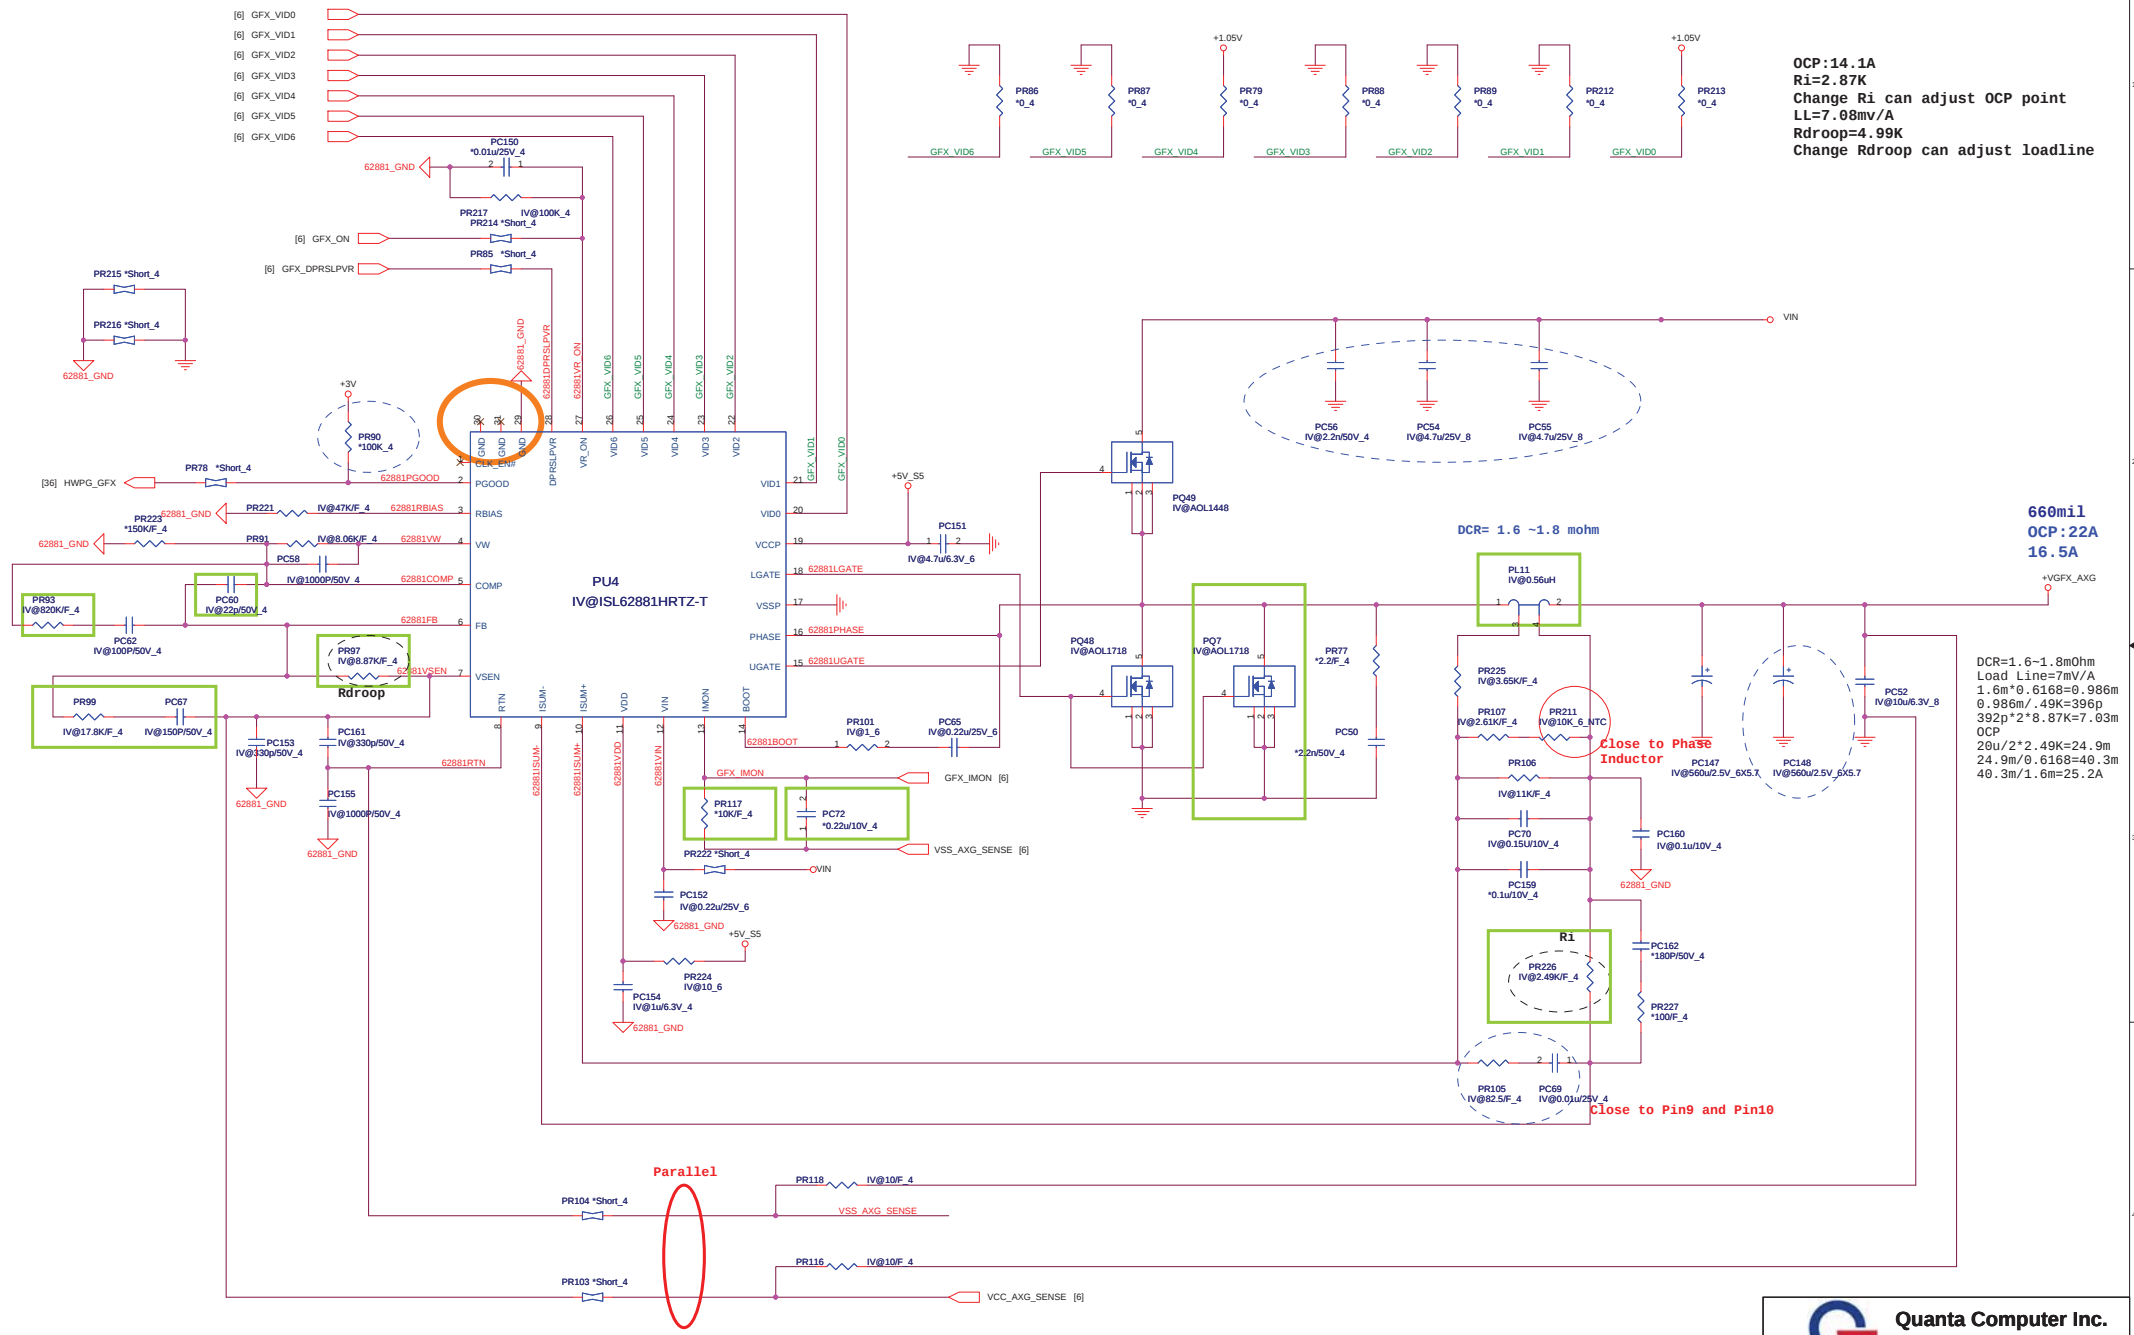



OCP:14.1A
Ri=2.87K
Change Ri can adjust OCP point
LL=7.08mV/A
Rdroop=4.99K
Change Rdroop can adjust loadline

660mil
OCP:22A
16.5A

DCR=1.6~1.8mohm
Load Line=7mV/A
1.6m*0.6168=0.986m
0.986m/.49K=396p
392p*2*8.87K=7.03m
OCP
20u/2*2.49K=24.9m
24.9m/0.6168=40.3m
40.3m/1.6m=25.2A


1.Level 1 Environment-related Substances should NEVER be used.
2.purchase link, paint, wire rds, and Molting resins only,from the business Partners that Sony approves as Green Partners.

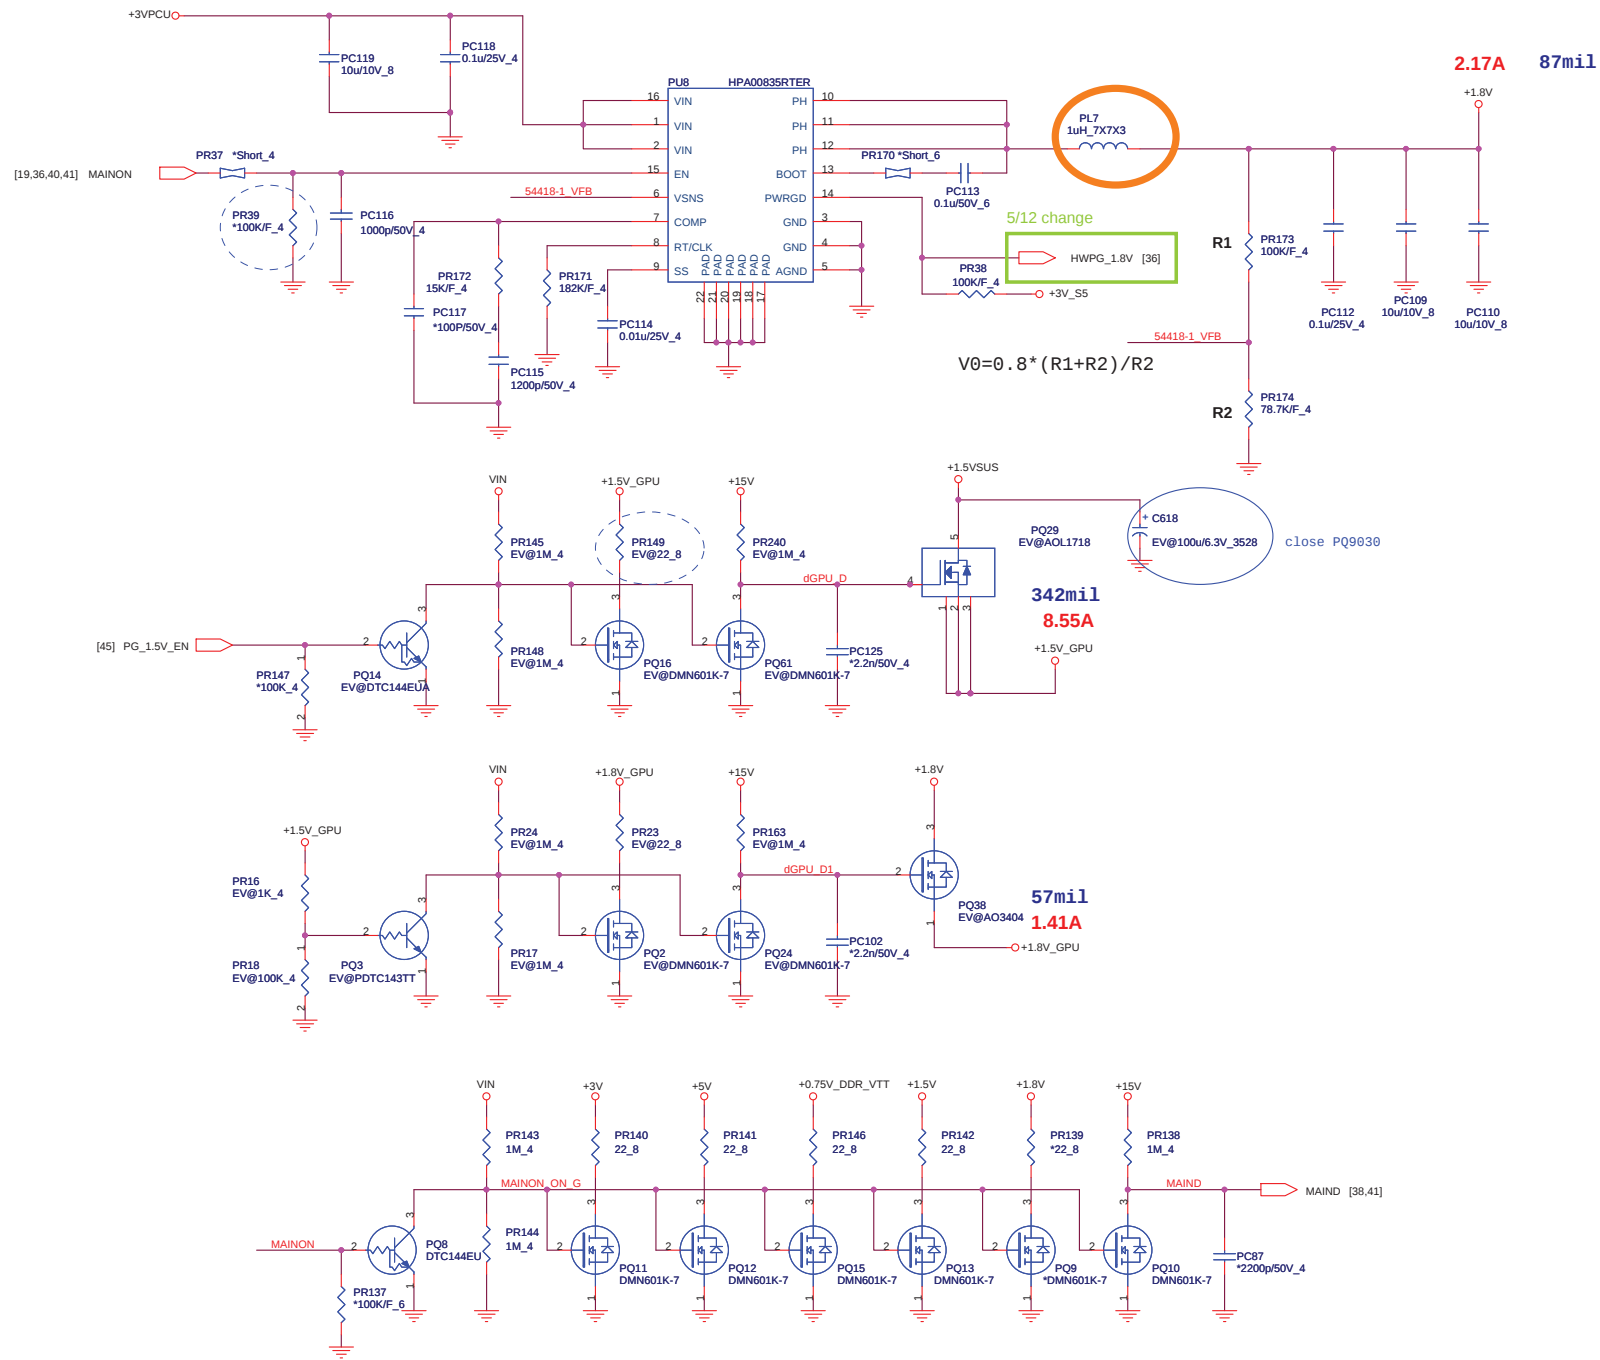

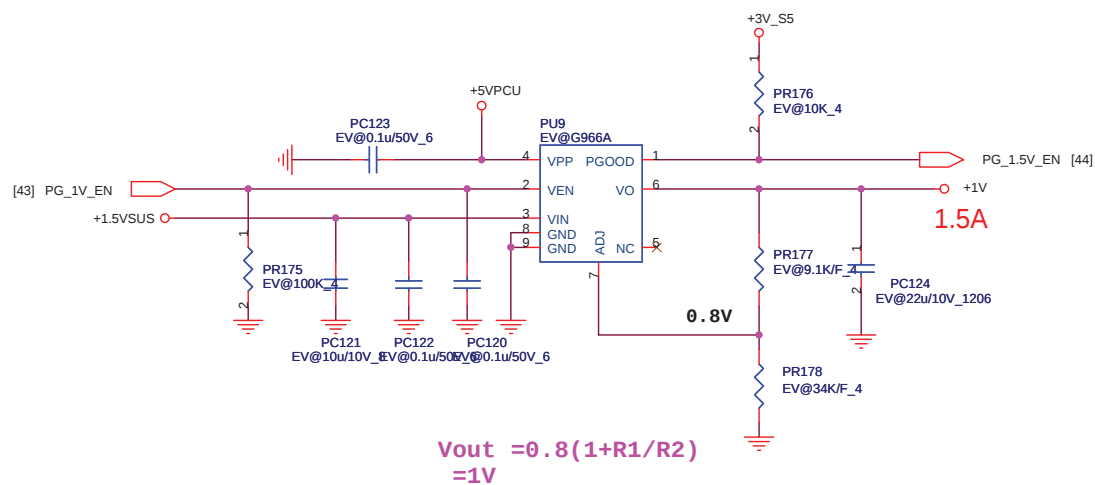

Thermal protection

For EC control thermal protection (output 3.3V)

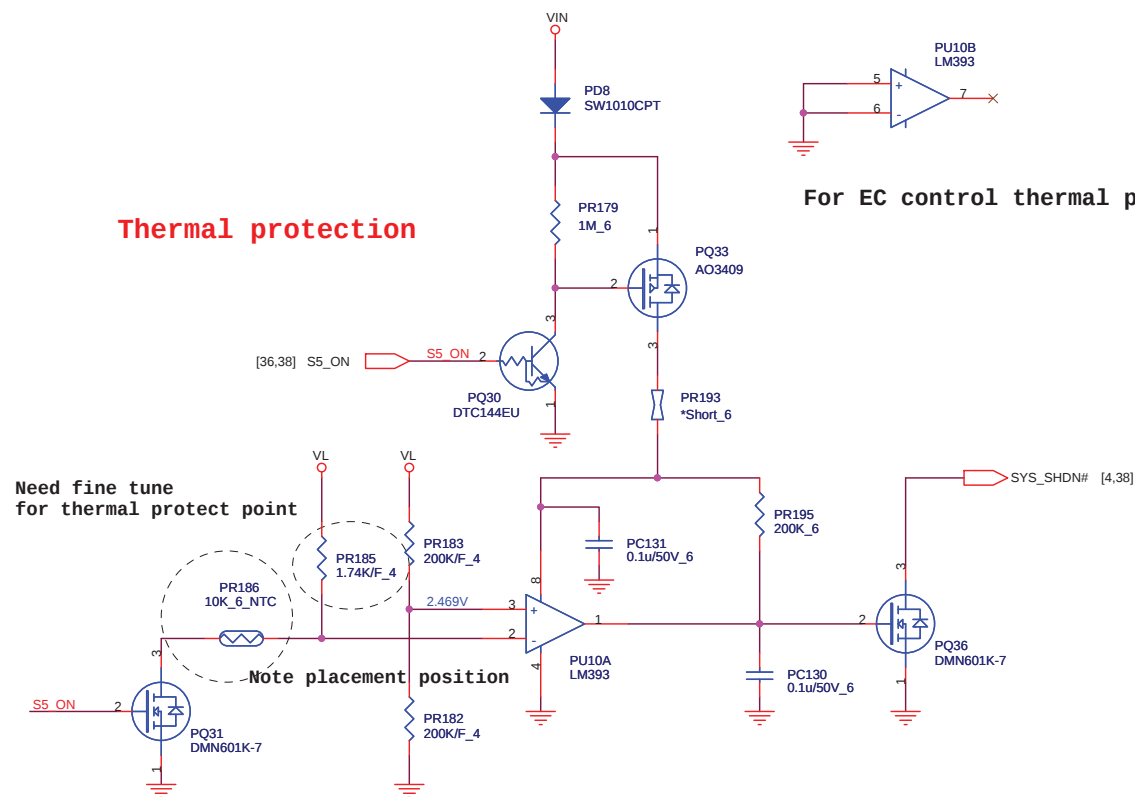

Quanta Computer Inc.
PROJECT : ZRD

Size	Document Number	Rev
		1C
Date:	Wednesday, July 21, 2010	Sheet 45 of 46

Model	REV	CHANGE LIST	MODEL	ZRD	
			FROM	To	
ZRD MB	1A	FIRST RELEASED		X	1A
	2A	Page 3 : Unstuff L54 & stuff R586 & change U31 P/N for 3V CLK gen and Switch CLK_BUF_DREFSSCLK and CLK_BUF_PCIE_3GPLL Page 4 : Q16 Change P/N for EOD part & short R116 (Del.) for 0 ohm Page 6 : Short R224 (Del.) for 0 ohm Page 10 Short R243 (Del.) for 0 ohm Page 12 Short R189 , R190 & R534 (Del.) for 0 ohm & C655 change P/N for EOD part Page 14 Del R208 & R247 for RS solution & stuff R269 , R229 , R223 & R228 for M1 solution, Stuff C372 for +1.5VSUS leakage Page 15 : Stuff C489 for +1.5VSUS leakage Page 25 Q15 , Q17 & Q18 Change P/N for ESD , CN10 Change P/N , Q14.2 & Q13.2 Change from +5V to +3V Page 27 C339 & C381 of footprint change from 0889 to 0492 for ESD Page 28 Unstuff R646 , R294 , R294 , R279 , R276 , R275 , R272 for disable debug card function Page 29 C393 & C254 change P/N for EOD , CN11 Change footprint for ME design request. Page 30 R183 change 00P circuit Page 31 R22 & R23 change P/N for EOD part. Page 34 Del L55 , CN12 Change P/N Page 36 C27 Change P/N for EOD part Page A11 : Change to short pad . Location : R458 , R452 , R537 , R533 , R144 , R155 , R191 , R140 , R201 , R224 , R461 , R136 , R197 , R206 , R219 , R212 , R166 , R174 , R188 , R202 , R209 , R184 , R168 , R185 , R448 , R447 , R5 , R10 , R9 , R6 , R263 , R288 , R544 , R436 , R563 , R570 , R569 , R584 , R299 , C738 , R311 , R585 , R583 , R571 , R582 , R575 , R576 , R579 , R333 , R352 , R331 , R332 & R349		X	1A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
				1A	2A
		1A	2A		
		1A	2A		
		1A	2A		
		1A	2A		
		1A	2A		
		1A	2A		
		1A	2A		
		1A	2A		
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			
	1A	2A			