

DJ1 Montevina UMA Schematics Document

uFCPGA Mobile Penryn

Intel GM45+ICH9M

2010-02-10

REV : A00

DY : Nopop Component

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Cover Page

Size
A3

Document Number

DJ1 Montevina UMA

Rev


A00

Date: Wednesday, February 24, 2010

Sheet 1 of 88


DJ1 Montevina UMA Block Diagram

Project code : 91.4EK01.001
PCB P/N : 48.4EK06.0SA
Revision : 09275-SA

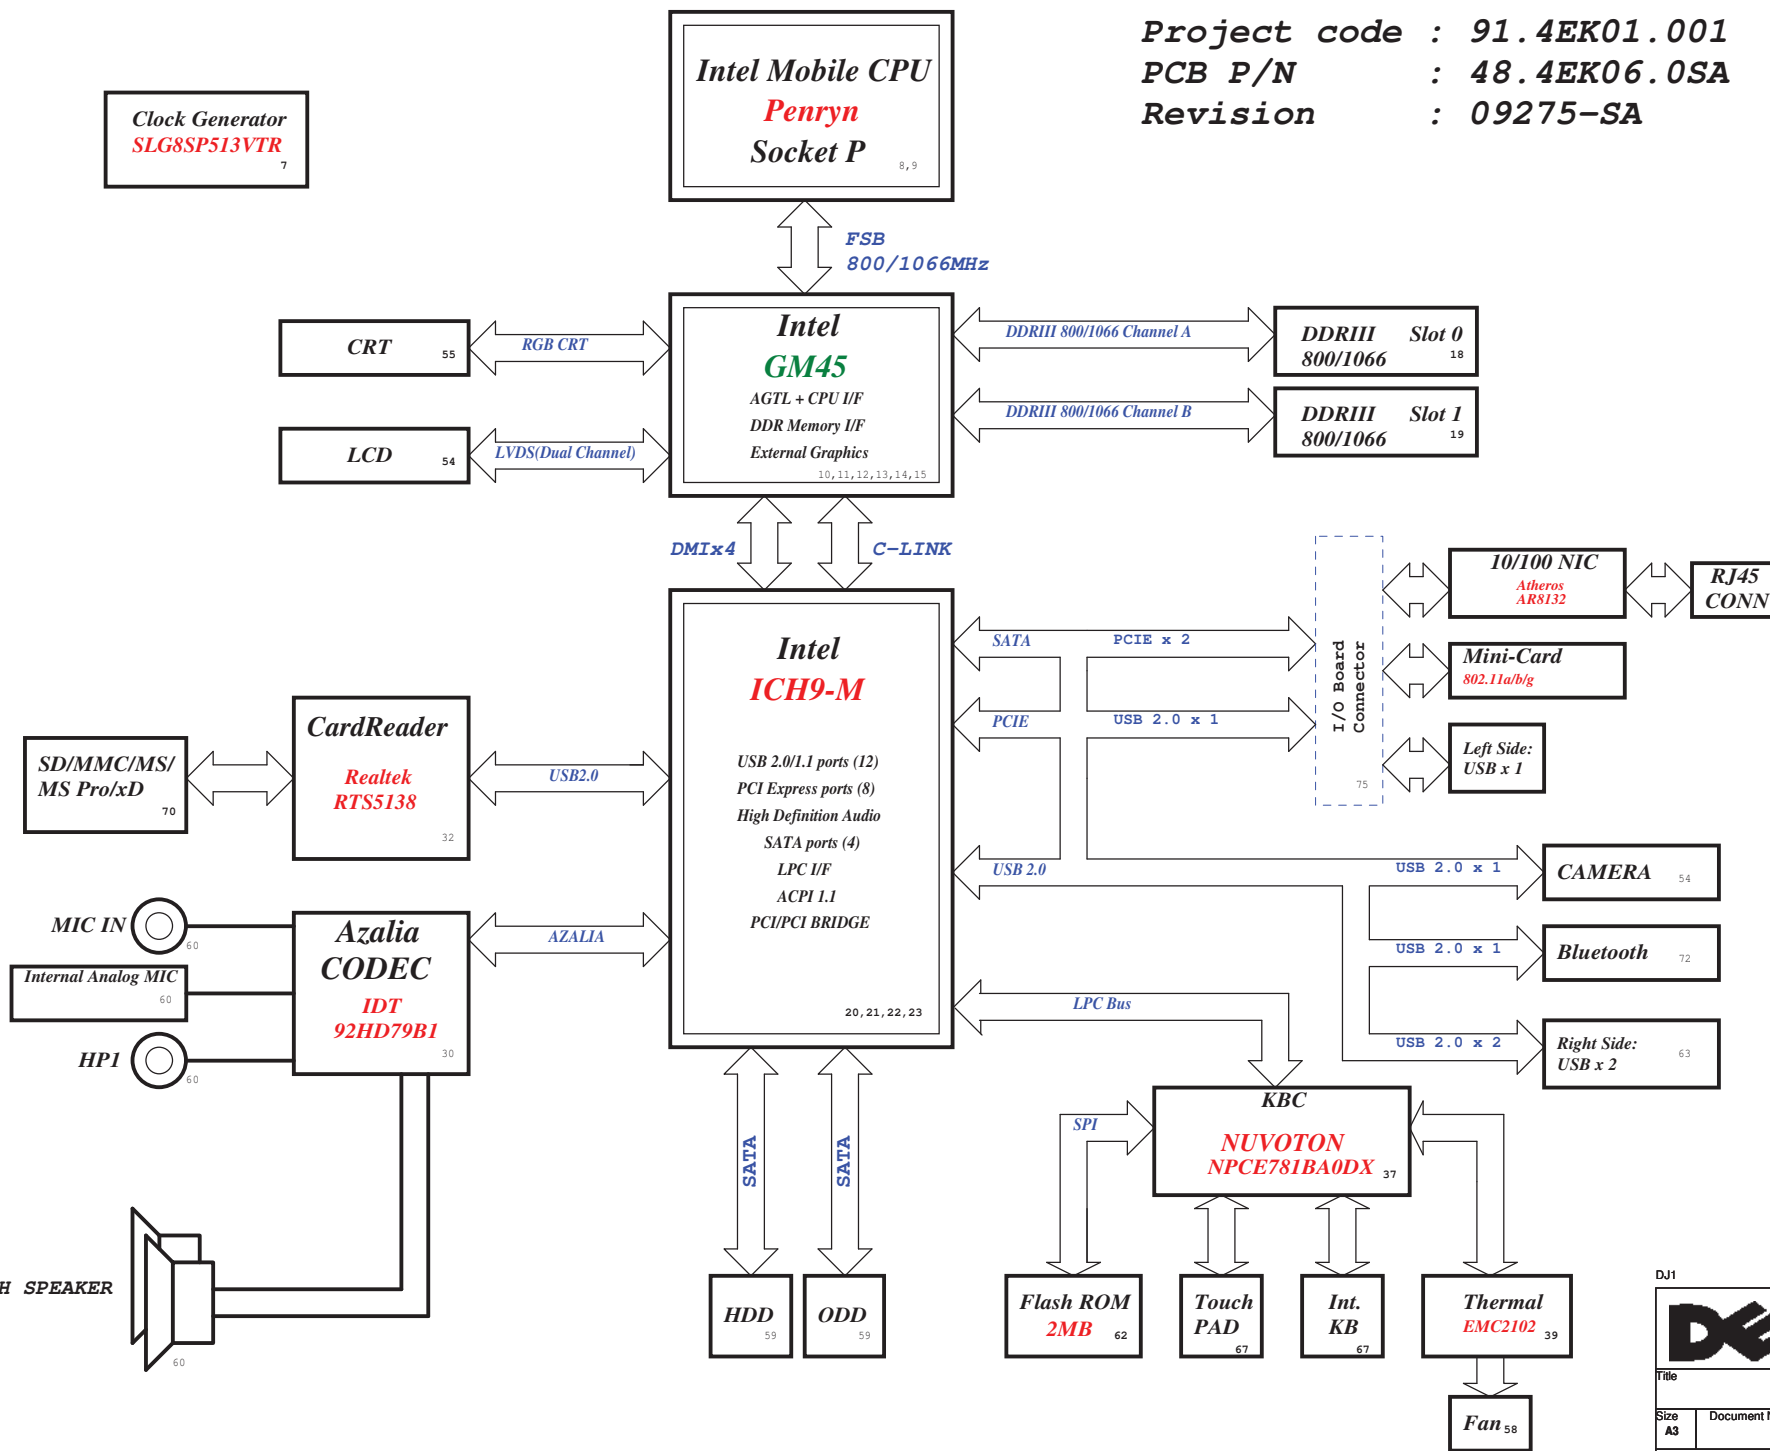

CPU DC/DC		47
TPS51620		
INPUTS	OUTPUTS	
+PWR_SRC	+VCC_CORE	
SYSTEM DC/DC		48
TPS51218		
INPUTS	OUTPUTS	
+PWR_SRC	+1.05V_VCCP	
SYSTEM DC/DC		49
TPS51125		
INPUTS	OUTPUTS	
+PWR_SRC	+5V_ALW2 +3.3V_RTC_LDO +5V_ALW +3.3V_ALW +15V_ALW	
SYSTEM DC/DC		50
TPS51116		
INPUTS	OUTPUTS	
+PWR_SRC	+1.5V_SUS +0.75V_DDR_VT +V_DDR_REF	
MAXIM CHARGER		
BQ24745		
INPUTS	OUTPUTS	
+DC_IN +PBATT	+PWR_SRC	
SYSTEM DC/DC		52
Switches		
INPUTS	OUTPUTS	
+1.5V_SUS +5V_ALW +3.3V_ALW	+1.5V_RUN +5V_RUN +3.3V_RUN	
PCB LAYER		
L1: Top		
L2: VCC		
L3: Signal		
L4: Signal		
L5: GND		
L6: Bottom		

DJ1 Montevina UMA Power Block Diagram

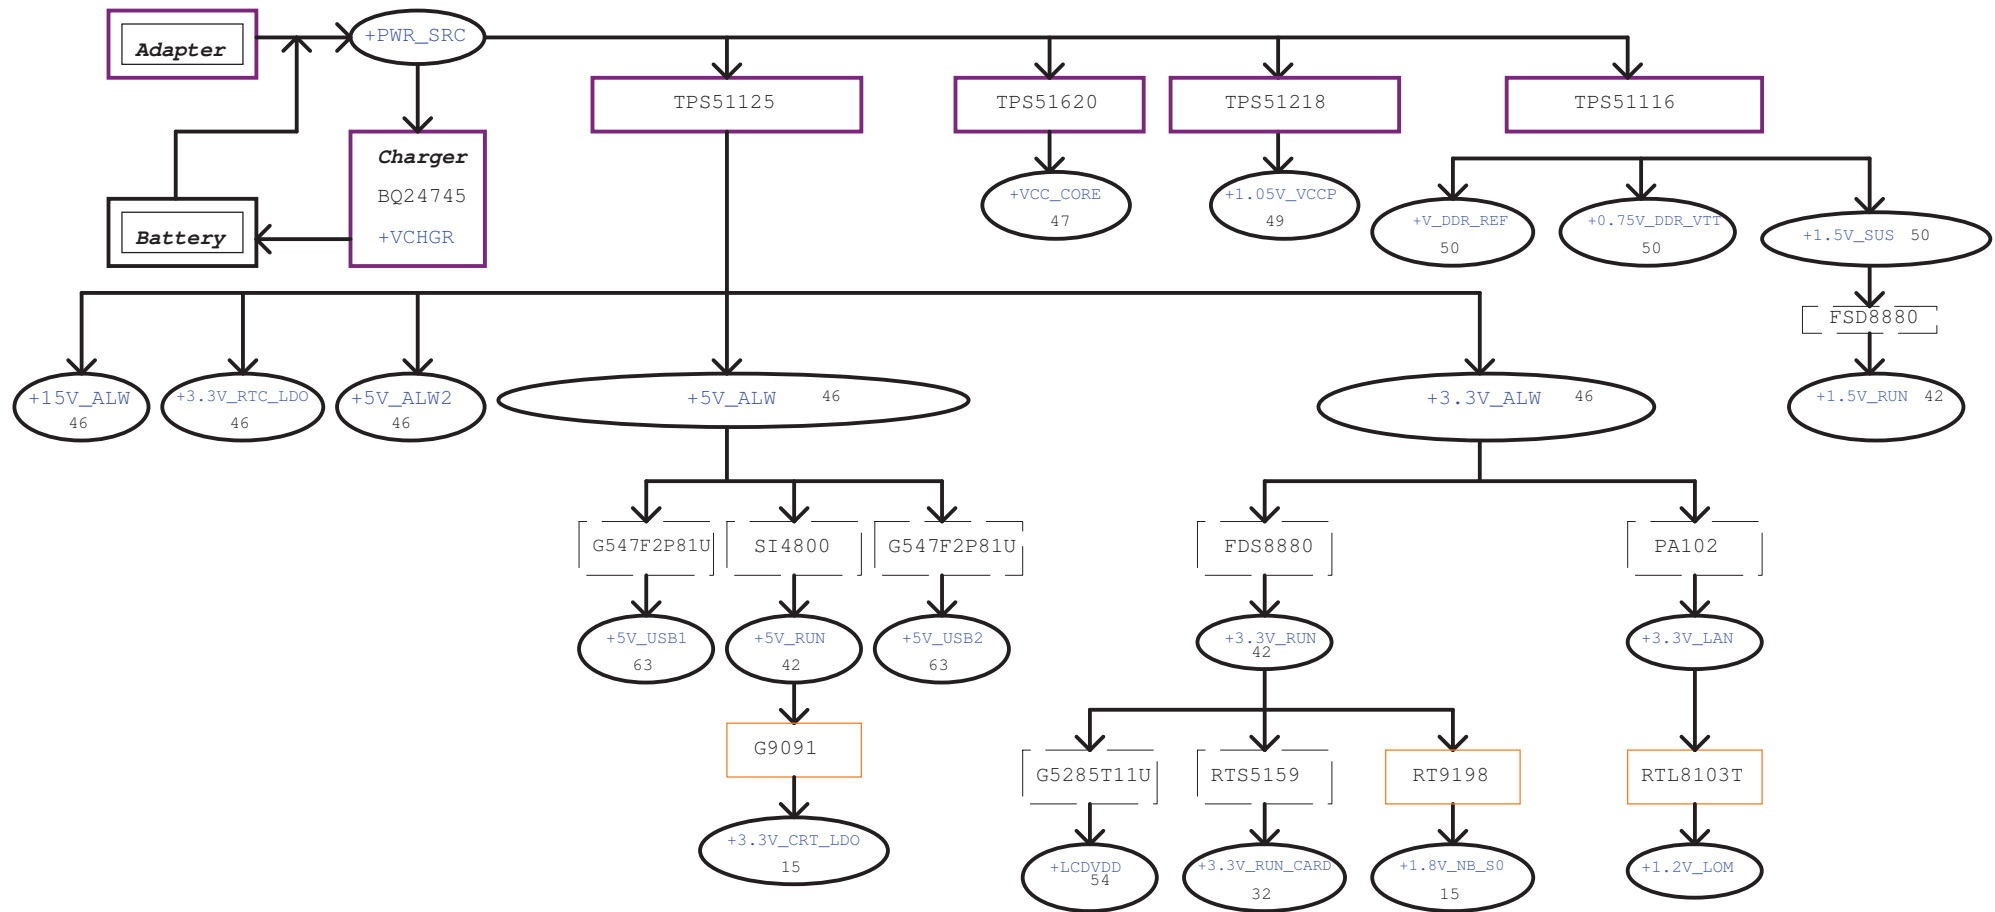

Power Shape

Regulator

LDO

Switch

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Power Block Diagram

Size
A3

Document Number

DJ1 Montevina UMA


Rev

A00


Date: Wednesday, February 24, 2010

Sheet 3 of 88


ICH SMBus Block Diagram

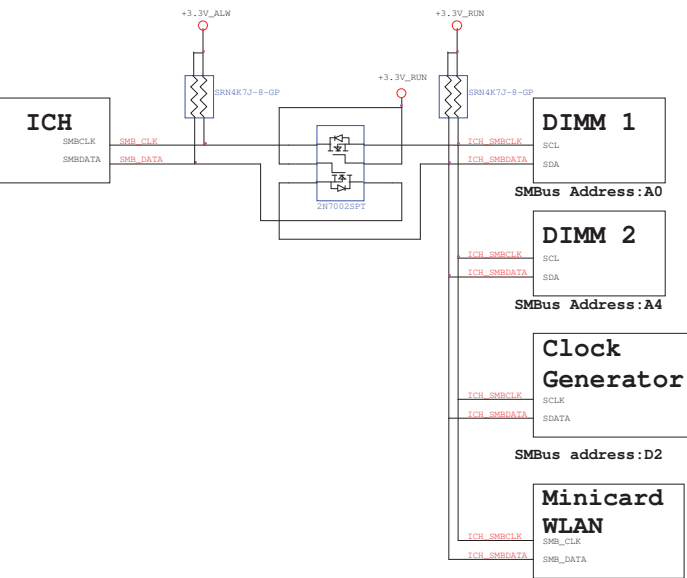


KBC SMBus Block Diagram

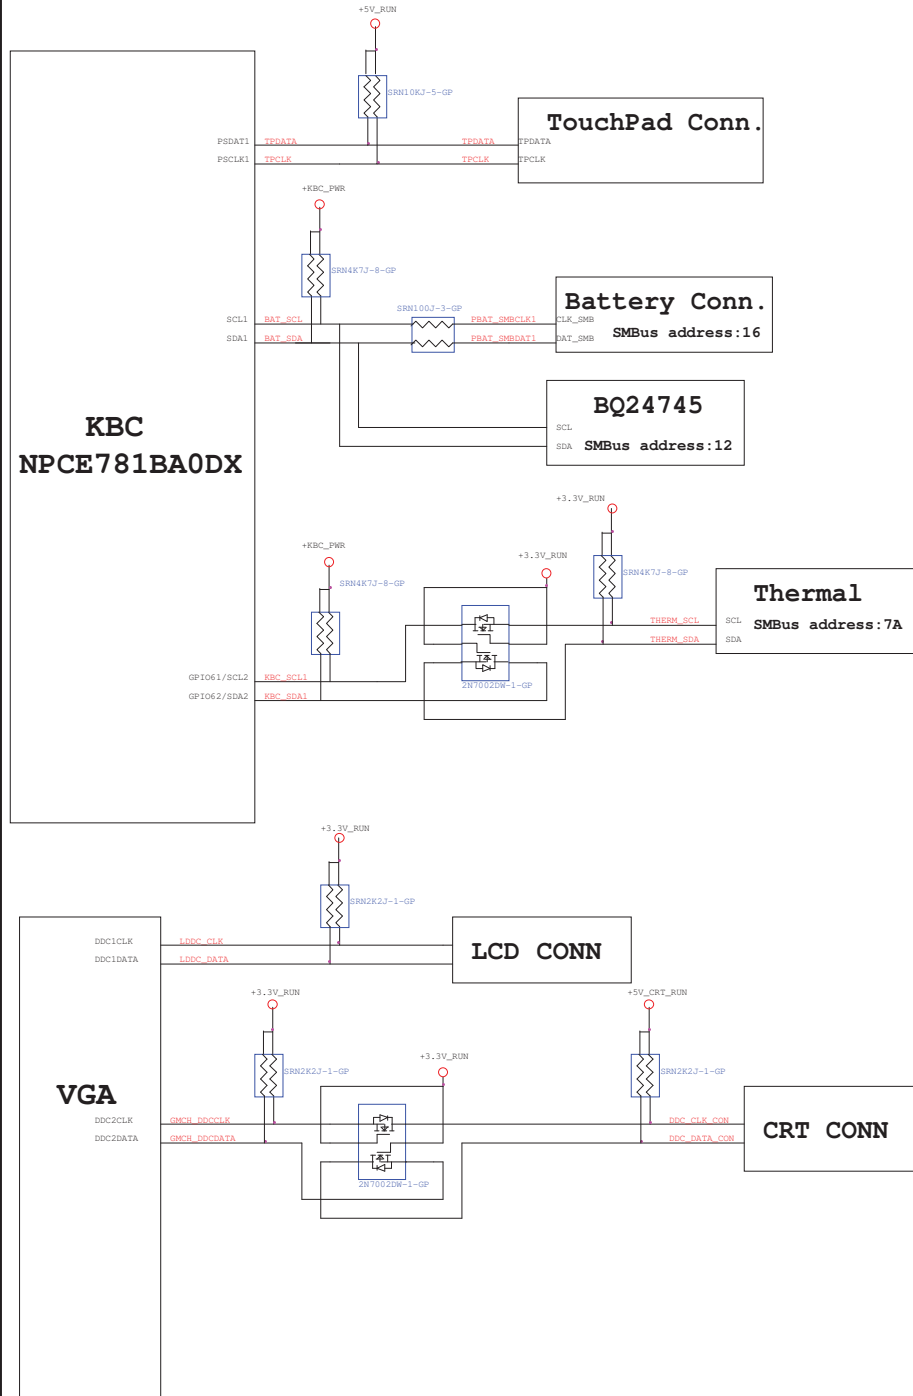

Thermal Block Diagram

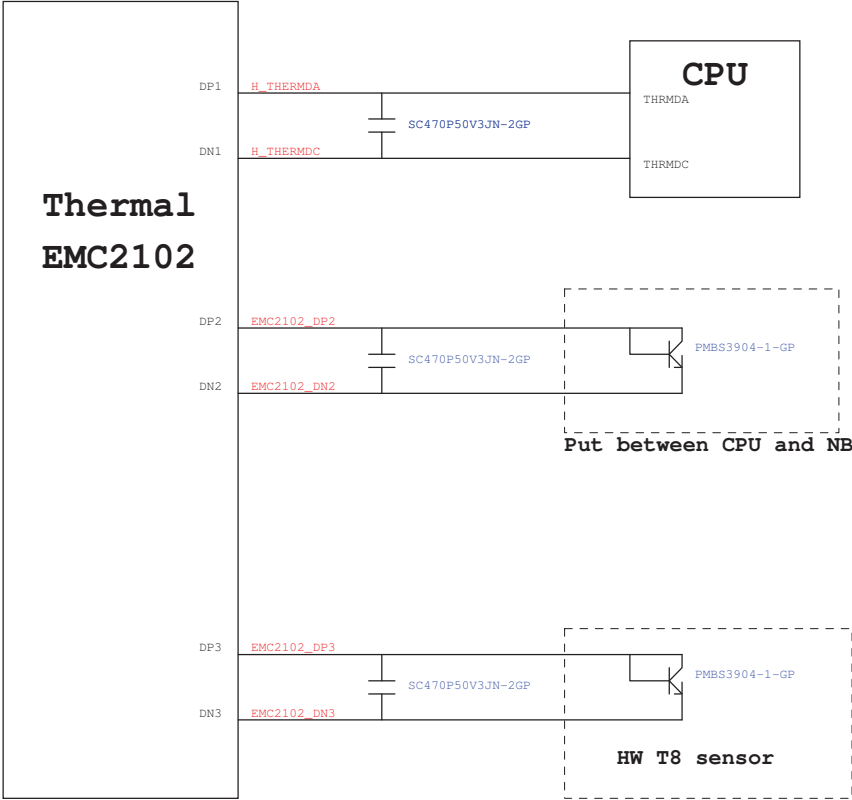

Audio Block Diagram

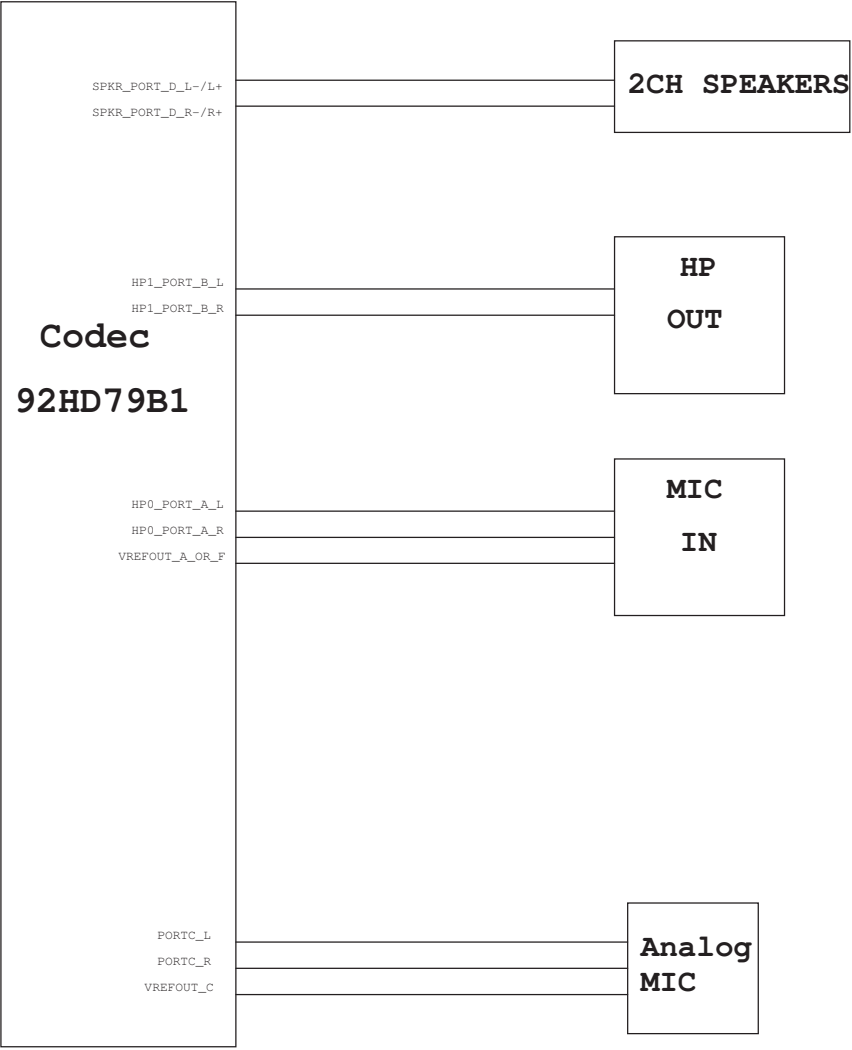

ICH9M Functional Strap Definitions

ICH9 EDS 642879 Rev.2.3

Signal	Usage/When Sampled	Comment
HDA_SDOUT	XOR Chain Entrance / PCI Express* Port Config 1 bit 1 (Port 1-4), Rising Edge of PWROK	Allows entrance to XOR Chain testing when TP3 pulled low at rising edge of PWROK. When TP3 not pulled low at rising edge of PWROK, sets bit 1 of RPC.PC (Chipset Config Registers: Offset 224h). This signal has a weak internal pull-down.
HDA_SYNC	PCI Express Port Config 1 bit 0 (Port 1-4), Rising Edge of PWROK.	This signal has a weak internal pull-down. Sets bit 0 of RPC.PC (Chipset Config Registers: Offset 224h).
GNT2# / GPIO53	PCI Express Port Config 2 bit 2 (Port 5-6), Rising Edge of PWROK	This signal has a weak internal pull-up. Sets bit 2 of RPC.PC2 (Chipset Config Registers: Offset 0224h) when sampled low.
GPIO20	Reserved, Rising Edge of PWROK	This signal has a weak internal pull-down. NOTE: This signal should not be pulled high
GNT1# / GPIO51	ESI Strap (Server Only), Rising Edge of PWROK.	Tying this strap low configures DMI for ESIncompatible operation. This signal has a weak internal pull-up. NOTE: ESI compatible mode is for server platforms only. This signal should not be pulled low for desktop and mobile.
GNT3# / GPIO55	Top-Block Swap override, Rising Edge of PWROK.	Sampled low: this indicates that the system is strapped to the "top-block swap" mode (IntelR ICH9 inverts A16 for all cycles targeting BIOS space). The status of this strap is readable via the Top Swap bit (Chipset Config Registers: Offset 3414h: bit 0). Note that software will not be able to clear the Top-Swap bit until the system is rebooted without GNT3# being pulled down.
GNT0#	Boot BIOS Destination Selection 1, Rising Edge of PWROK.	Controllable via Boot BIOS Destination bit (Chipset Config Registers: Offset 3410h: bit 11). This strap is used in conjunction with Boot BIOS Destination Selection 0 strap. Bit11 (GNT0#) Bit 10 (SPI_CS1#) Boot BIOS Destination 0 1 1 0 SPI PCI LPC Reserved
SPI_CS1# / GPIO58	Boot BIOS Destination Selection 0, Rising Edge of CLPWROK	Controllable via Boot BIOS Destination bit (Chipset Config Registers: Offset 3410h: bit 10). This strap is used in conjunction with Boot BIOS Destination Selection 1 strap. Bit11 (GNT0#) Bit 10 (SPI_CS1#) Boot BIOS Destination 0 1 1 0 SPI PCI LPC Reserved
SATALED#	PCI Express Lane Reversal (Lanes 1-4). Rising Edge of PWROK.	Signal has weak internal pull-up. Sets bit 27 of MPC.LR (Device 28: Function 0: Offset D8)
SPKR	No Reboot, Rising Edge of PWROK.	Sampled high: this indicates that the system is strapped to the "No Reboot" mode (ICH9 will disable the TCO Timer system reboot feature). The status of this strap is readable via the NO REBOOT bit (Chipset Config Registers: Offset 3410h: bit 5).
TP3	XOR Chain Entrance. Rising Edge of PWROK.	This signal should not be pull low unless using XOR Chain testing.
GPIO33 / HDA_DOCK_EN#	Flash Descriptor Security Override Strap. Rising Edge of PWROK. (Mobile Only)	Sampled low: the Flash Descriptor Security will be overridden. Sampled high: the security measures will be in effect. This strap should only be enabled in manufacturing environments.
GPIO49	DMI Termination Voltage. Rising Edge of CLPWROK.	The signal is required to be high for mobile applications.
SPI_MOSI (Mobile Only)	Integrated TPM Enable. Rising Edge of CLPWROK.	Sampled low: the Integrated TPM will be disabled. Sampled high: the MCH TPM enable strap is sampled low and the TPM Disable bit is clear, the Integrated TPM will be enabled. NOTE: This signal is required to be floating or pulled low for desktop applications.

ICH9 Integrated pull-up and pull-down Resistors

ICH9 EDS 642879 Rev.2.3

SIGNAL	Resistor Type/Value
CL_CLK[1:0]	PULL-UP 20K
CL_DATA[1:0]	PULL-UP 20K
CL_RST0#	PULL-UP 10K
DPRS1PVR/GPIO16	PULL-DOWN 20K
HDA_BIT_CLK	PULL-DOWN 20K
HDA_DOCK_EN#/GPIO33	PULL-UP 20K
HDA_RST#	PULL-DOWN 20K
HDA_SDIN[3:0]	PULL-DOWN 20K
HDA_SDOUT	PULL-DOWN 20K
HDA_SYNC	PULL-DOWN 20K
GNT0#, GNT[3:1]# / GPIO[55, 53, 51]	PULL-UP 20K
GPIO20	PULL-DOWN 20K
GPIO49	PULL-UP 20K
LAD[3:0]# / FHW[3:0]#	PULL-UP 20K
LAN_RXD[2:0]	PULL-UP 20K
LDRQ0	PULL-UP 20K
LDRQ1 / GPIO23	PULL-UP 20K
PME#	PULL-UP 20K
PWRBTN#	PULL-UP 20K
SATALED#	PULL-UP 15K
SPI_CS1# / GPIO58 (Desktop Only) / CLGPIO6 (Digital Office Only)	PULL-UP 20K
SPI_MOSI	PULL-DOWN 20K
SPI_MISO	PULL-UP 20K
SPKR	PULL-DOWN 20K
TACH[3:0]	PULL-UP 20K
TP3	PULL-UP 20K
USB[11:0] [P,N]	PULL-DOWN 15K

PCIE Routing

LANE1	
LANE2	MiniCard WLAN
LANE3	LAN

USB Table

USB Pair	Device
0	USB0 (I/O Board)
1	USB1 (I/O Board 17")
2	USB2
3	USB3
4	BLUETOOTH
5	RESERVED
6	WLAN
7	RESERVED
8	RESERVED
9	RESERVED
10	Card Reader
11	CAMERA

Cantiga chipset and ICH9M I/O controller Hub strapping configuration

Montevina Platform Design guide 355648 Rev.2.3

Pin Name	Strap Description	Configuration
CFG2:0	FSB Frequency	000 = FSB1066 010 = FSB800 011 = FSB667 Others = Reserved
CFG5	DMI x2 Select	0 = DMI x2 1 = DMI x4 (Default)
CFG6	ITPM Host Interface	0 = The iTPM Host Interface is enabled (Note 2). 1 = The iTPM Host Interface is disabled (default)
CFG7	Intel Management engine crypto strap	0 = Intel Management Engine Crypto Transport Layer Security (TLS) cipher suite with no confidentiality 1 = Intel Management Engine Crypto TLS cipher suite with confidentiality (default)
CFG9	PCIE Graphics Lane	0 = Reverse Lanes, 15->0, 14->1 etc. 1 = Normal operation (default): Lane Numbered in Order
CFG10	PCIE Loopback enable	0 = Enable (Note 3) 1 = Disable (Default)
CFG12	ALLZ	0 =ALLZ mode enabled (Note 3) 1 = Disable (Default)
CFG13	XOR	0 = XOR mode enabled (Note 3) 1 = Disable (Default)
CFG16	FSB Dynamic ODT	0 = Dynamic ODT Disabled 1 = Dynamic ODT Enabled (Default)
CFG19	DMI Lane Reversal	0 = Normal operation (Default): Lane Numbered in Order 1 = Reverse Lanes DMI x4 mode [MCH->ICH]: (3->0, 2->1, 1->2 and 0->3) DMI x2 mode [MCH->ICH]: (3->0, 2->1)
CFG20	Digital Display Port (SDVO/DP/HDMI) Concurrent with PCIE	0 = Only digital DisplayPort (SDVO/DP/HDMI) or PCIE is operational (default) 1 = Digital DisplayPort (SDVO/DP/HDMI) and PCIE are operating simultaneously via the PEG port
SDVO_CTRLDATA (Note4)	SDVO Present	0 = No SDVO/HDMI/DP interface disabled (default) 1 = SDVO/HDMI/DP interface enabled
L_DDC_DATA	Local Flat Panel (LFP) Present	0 = LFP Disabled (Default) 1 = LFP Card Present; PCIE disabled
DDPC_CTRLDATA (Note4)	Digital Display Present	0 = Digital display (HDMI/DP) device absent (default) 1 = Digital display (HDMI/DP) Device Present
CFG4:3 CFG8 CFG11 CFG14 CFG15 CFG17 CFG18	Reserved	



NOTE:

- All strap signals are sampled with respect to the leading edge of the GMCH Power OK (PWROK) signal.
- iTPM can be disabled by a 'Soft-Strap' option in the Flash-descriptor section of the Firmware. This 'Soft-Strap' is activated only after enabling iTPM via CFG6.
- Only one of the CFG10/CFG12/CFG13 straps can be enabled at any time.
- DDPC_CTRL_DATA & SDVO_CTRL_DATA straps should both be high to enable Display Port.



DJ1

 Wistron Corporation 21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.		
Title Table of Content		
Size Custom	Document Number DJ1 Montevina UMA	Rev A00
Date: Wednesday, February 24, 2010	Sheet 6	of 88

SSID = CLOCK

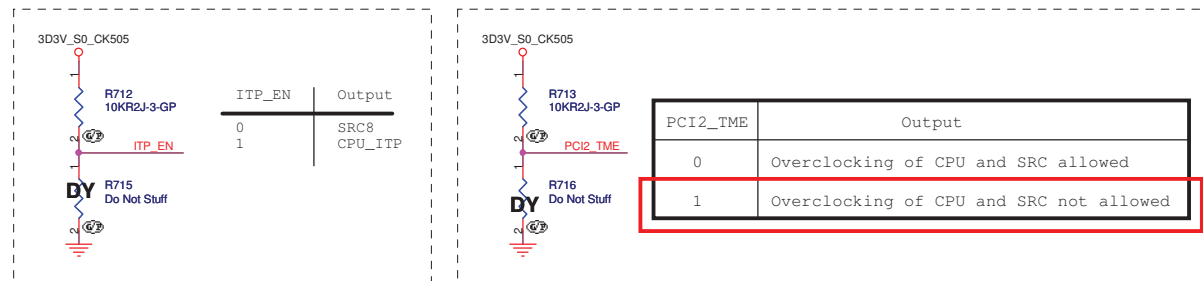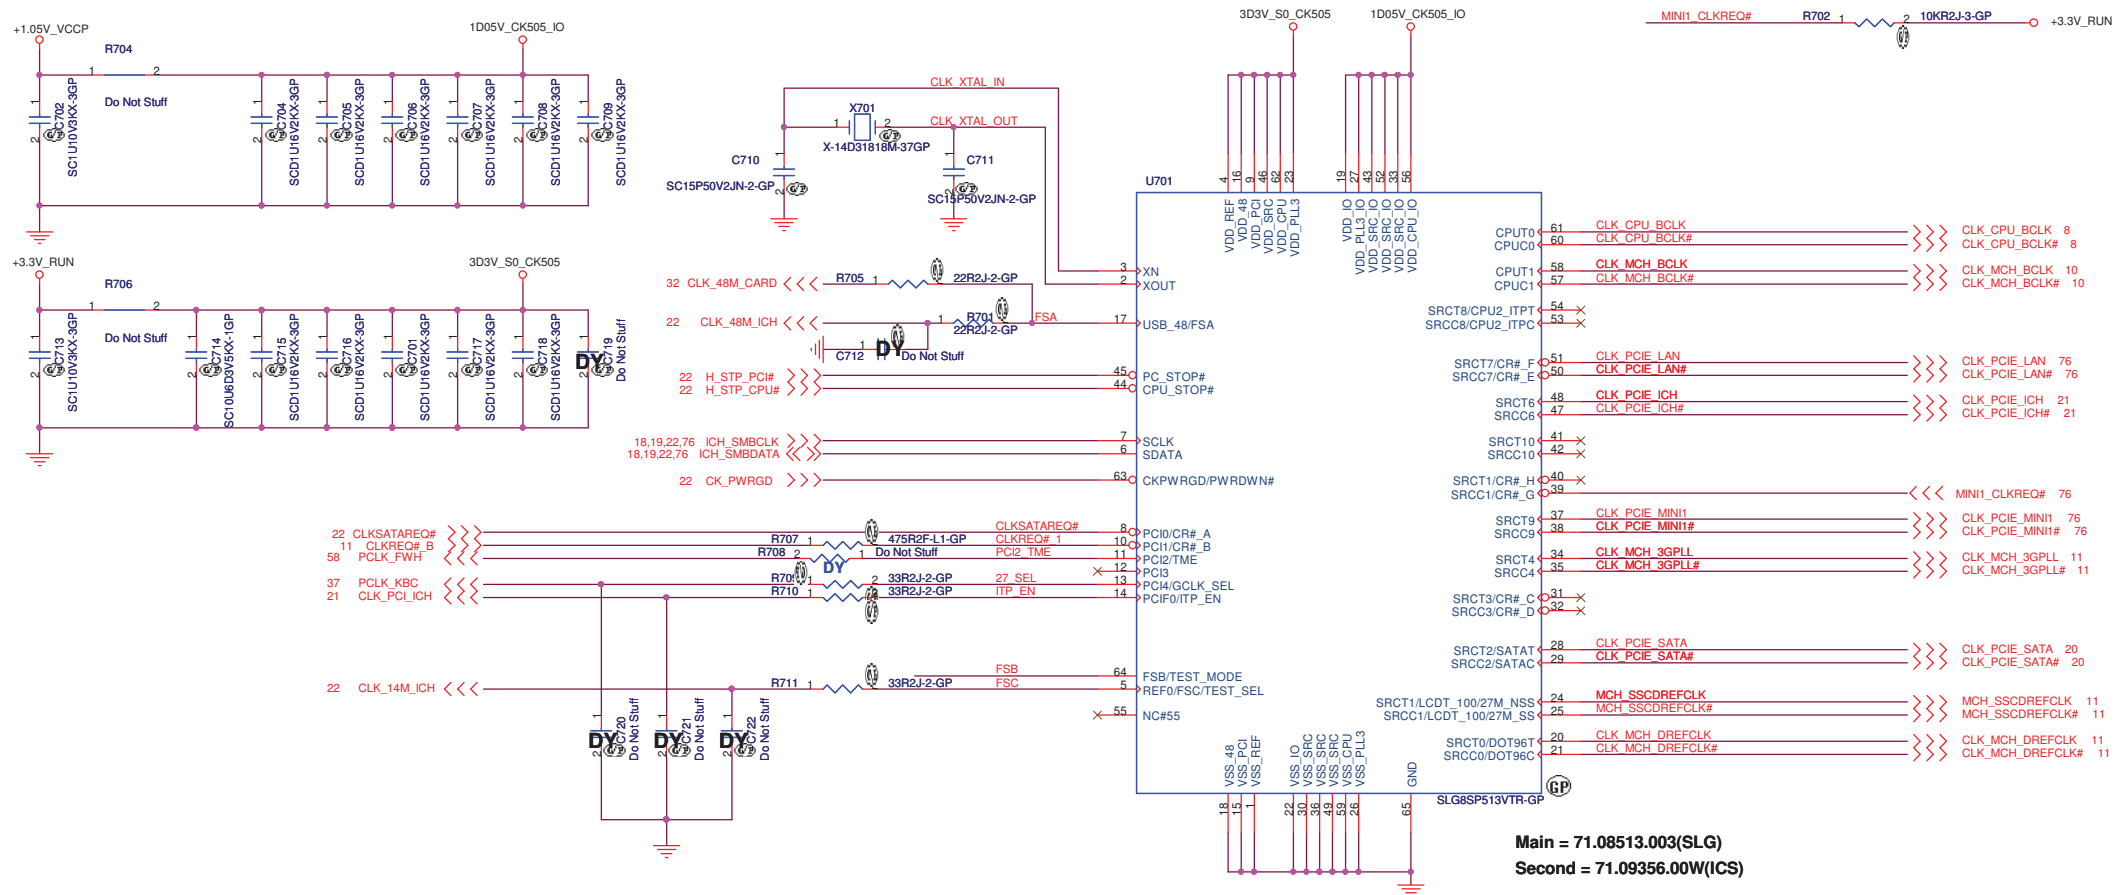


SEL2 FSC	SEL1 FSB	SEL0 FSA	CPU	FSB
1	0	1	100M	X
0	0	1	133M	533M
0	1	1	166M	667M
0	1	0	200M	800M
0	0	0	266M	1067M


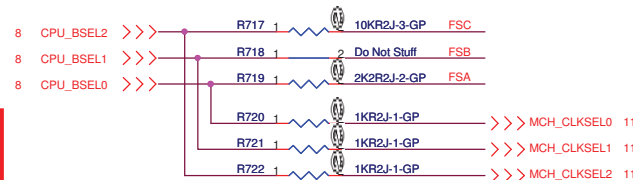


27_SEL	PIN20/21	PIN24/25
0	96M	100M
1	100M	27M

SSID = CPU



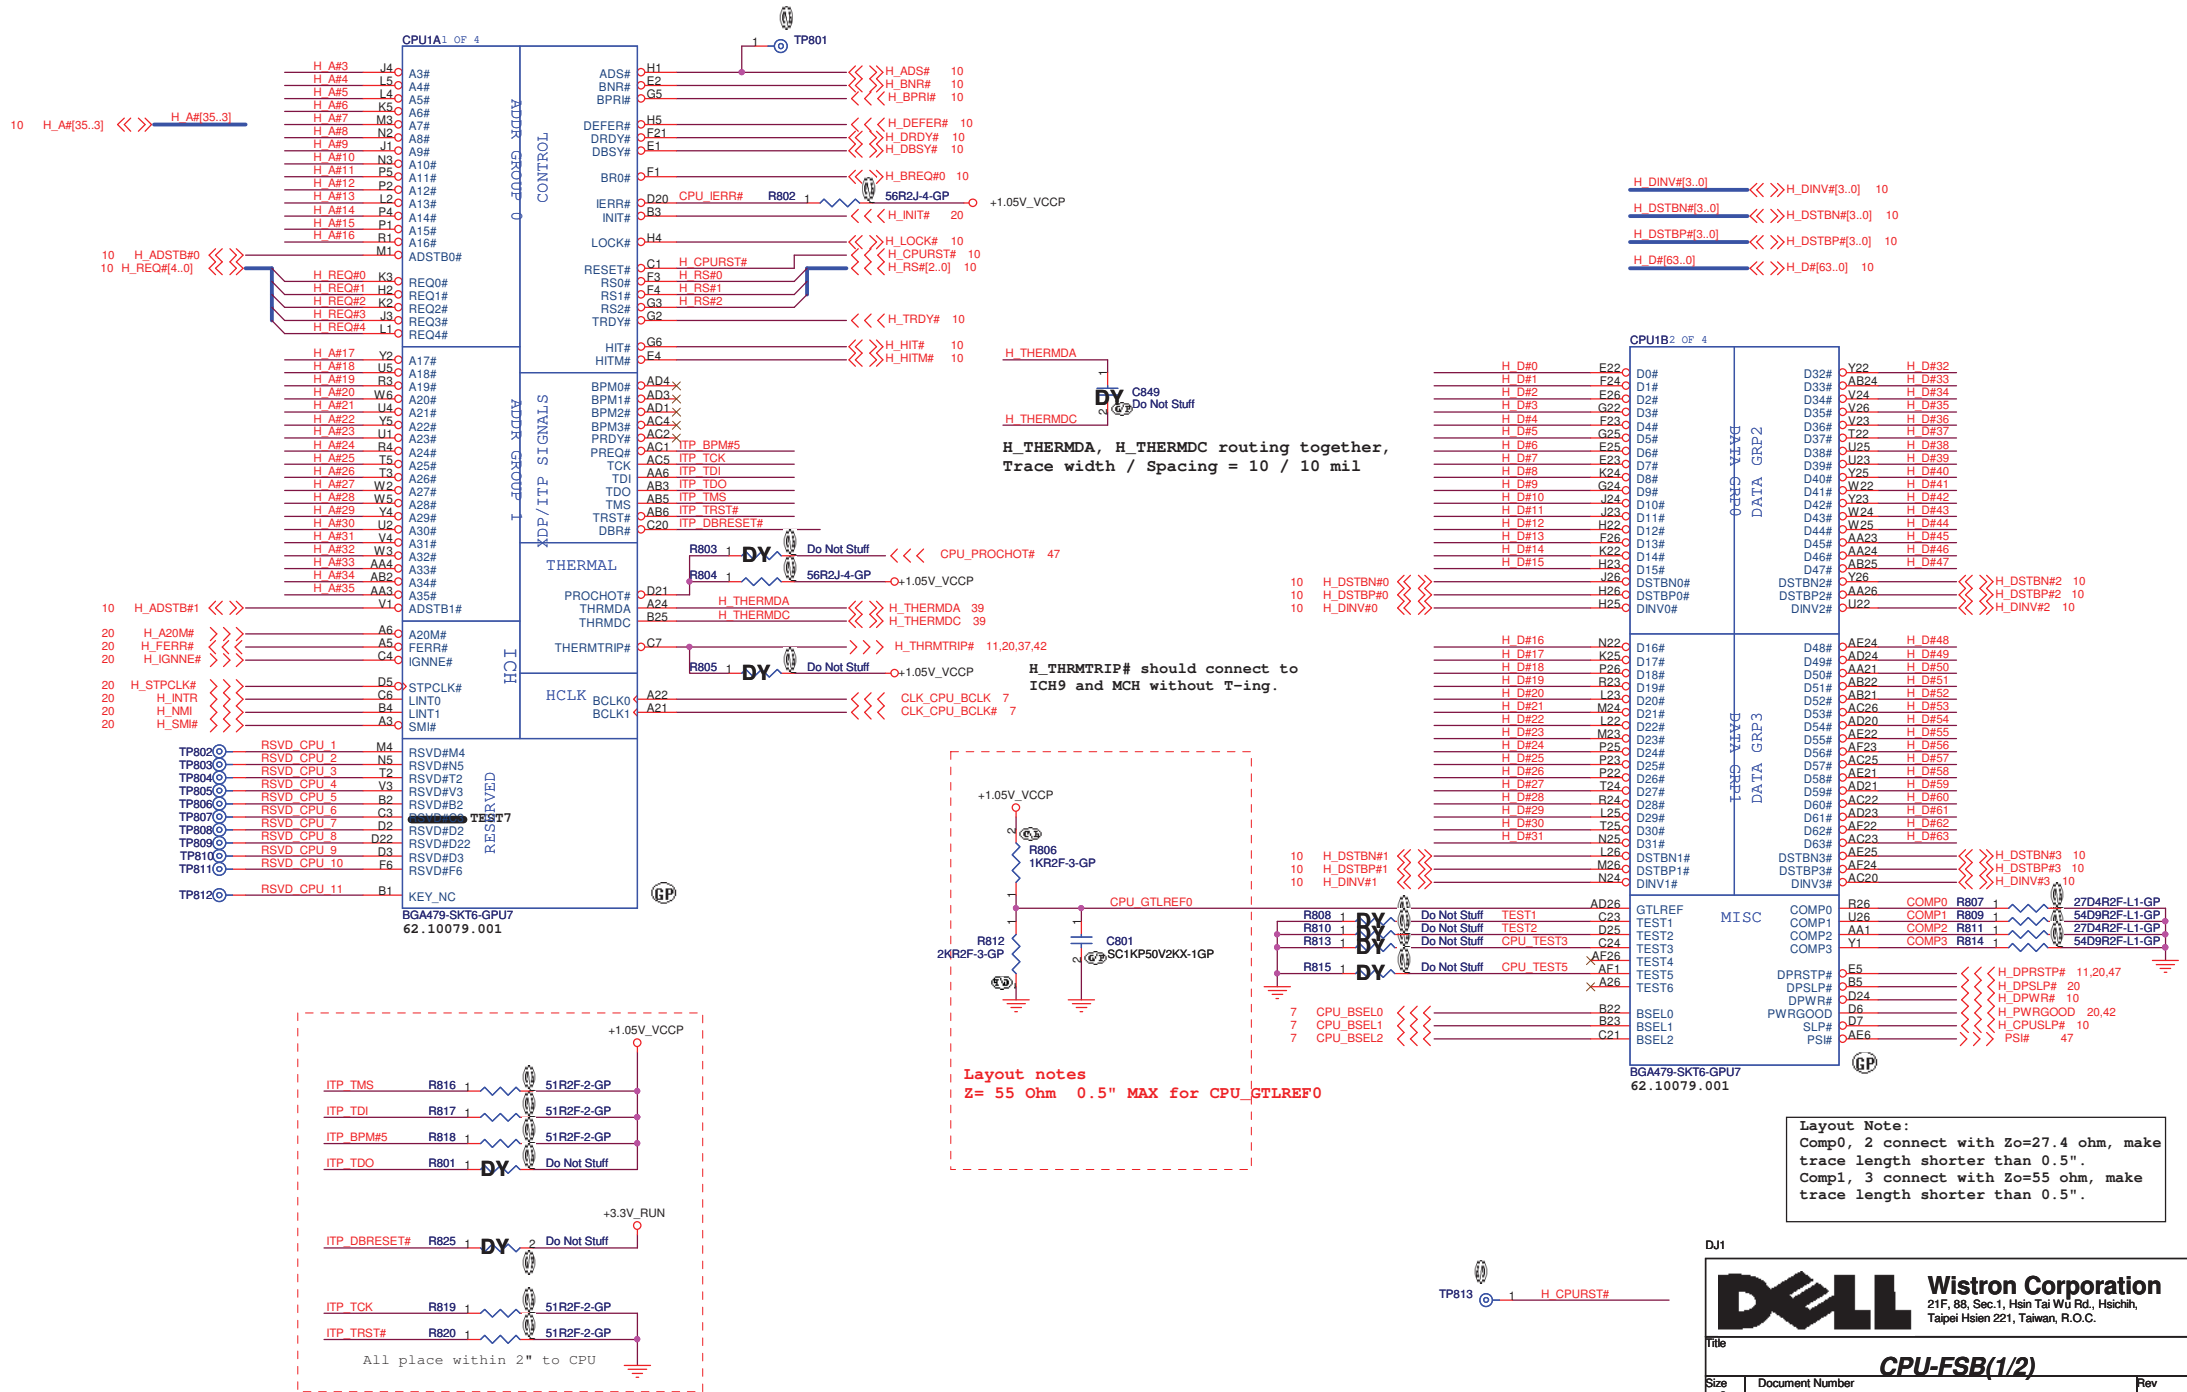


SSID = CPU

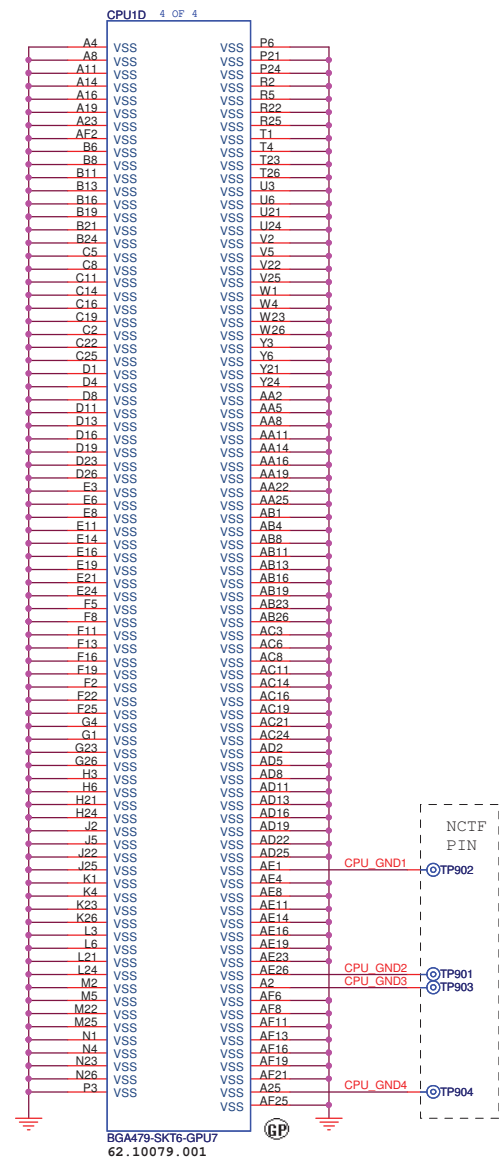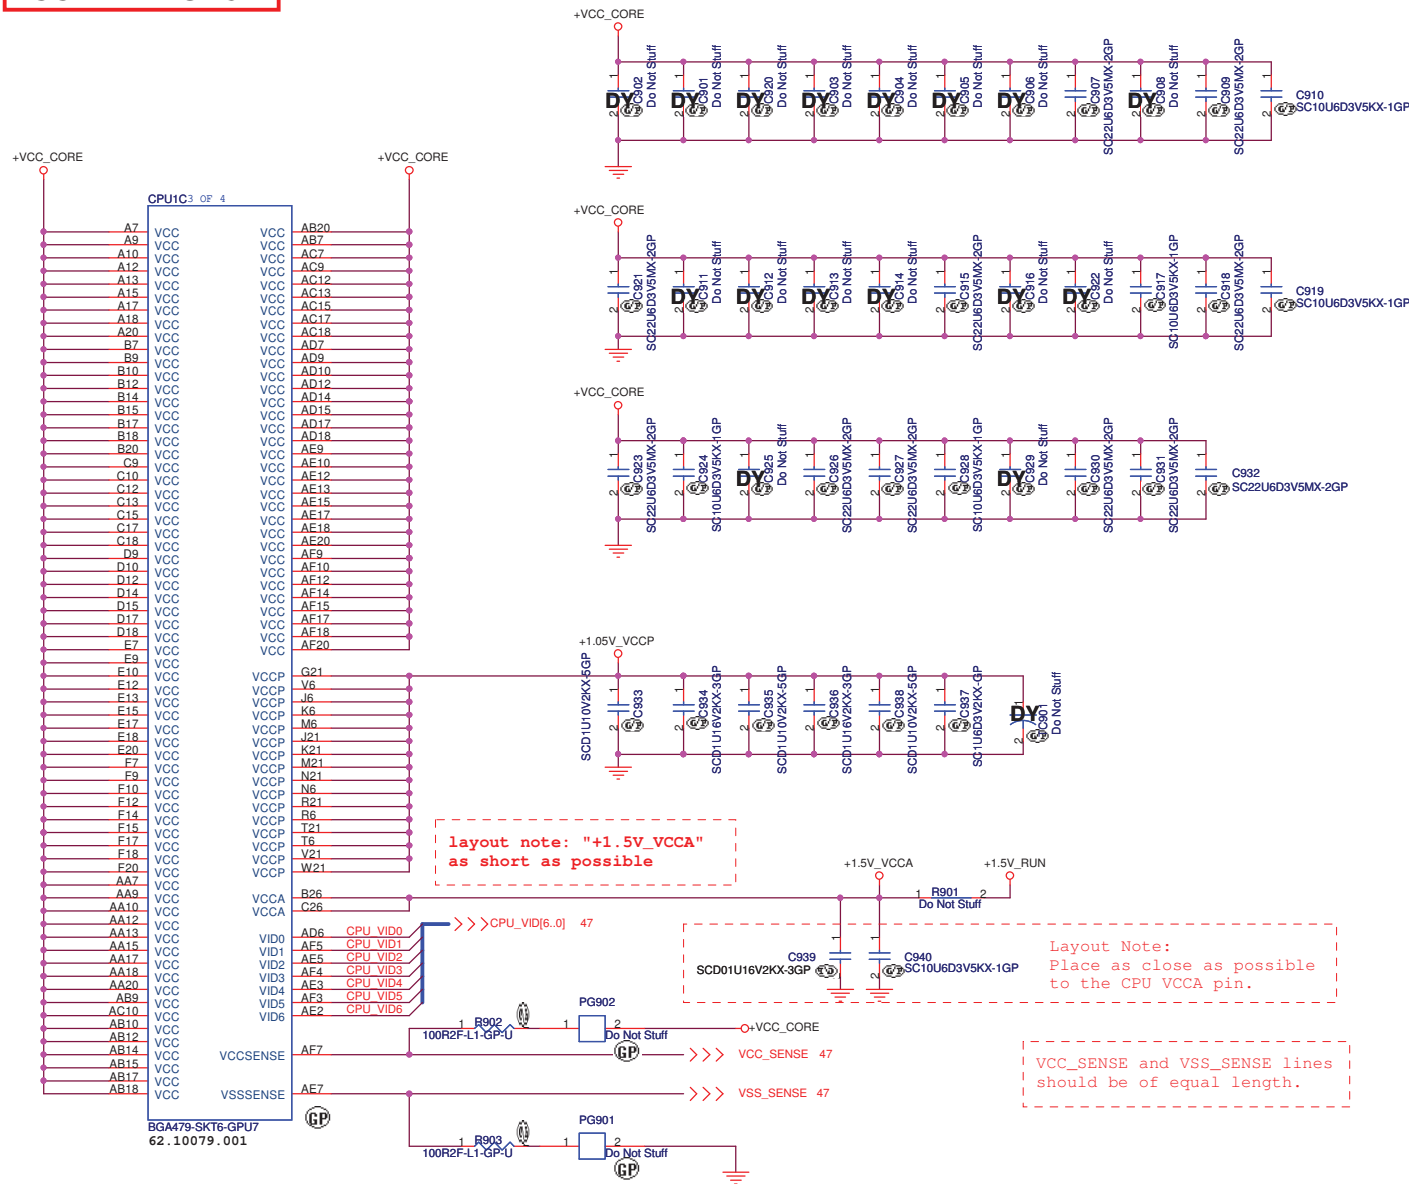


DJ1



SSID = MCH

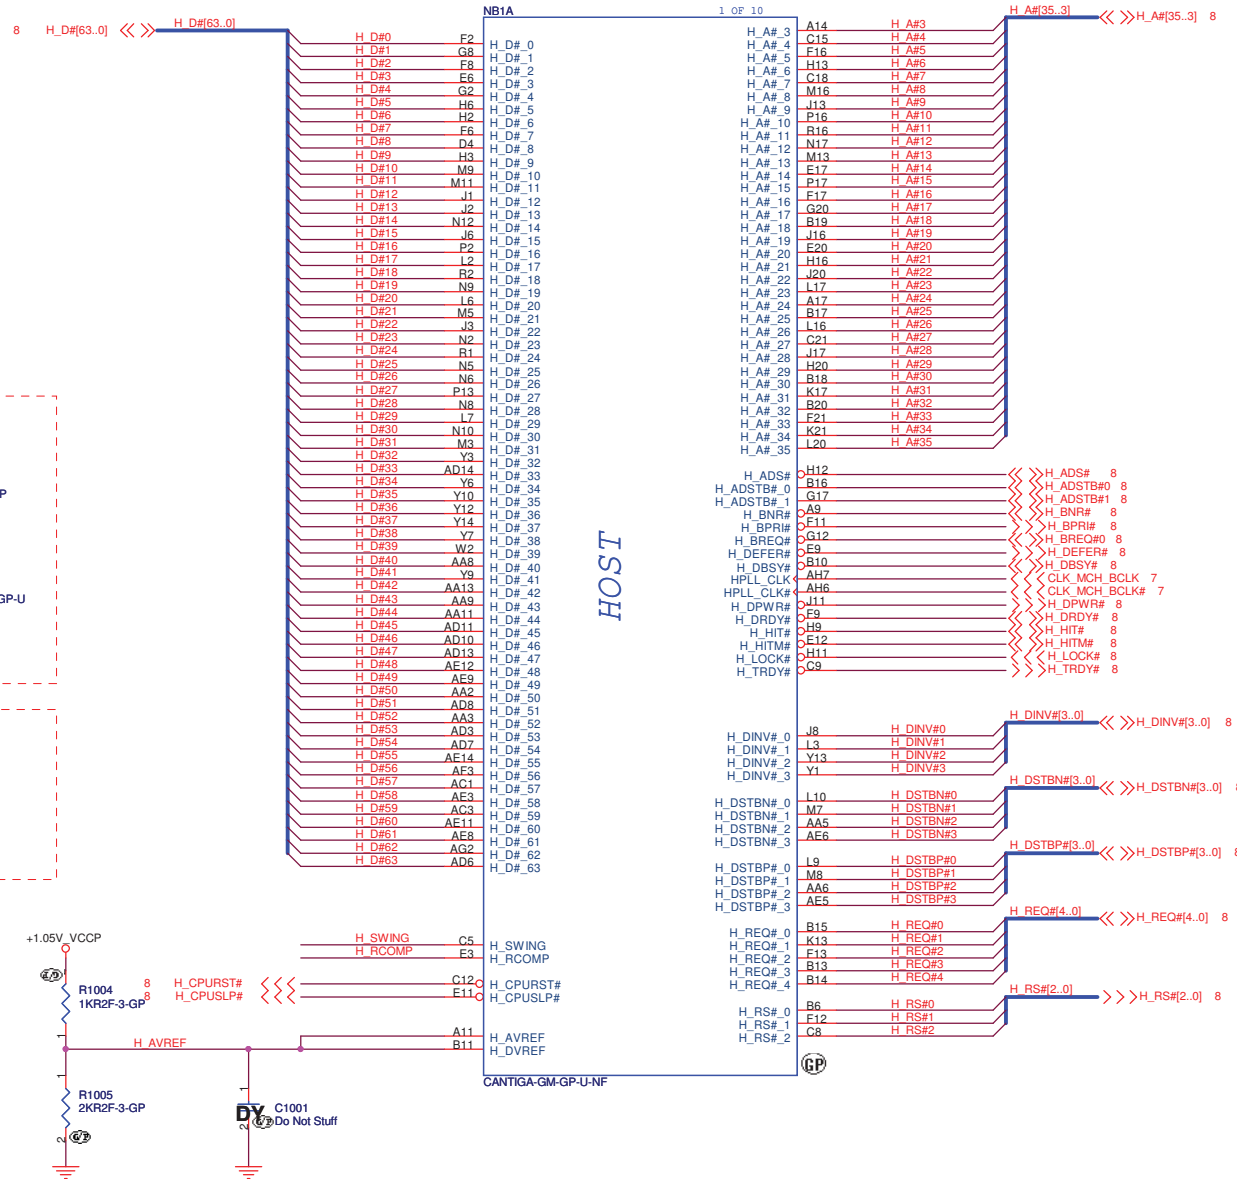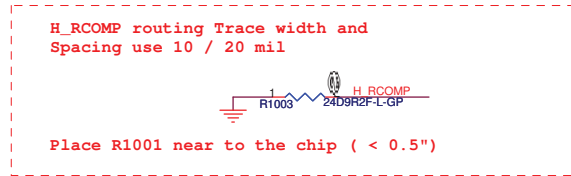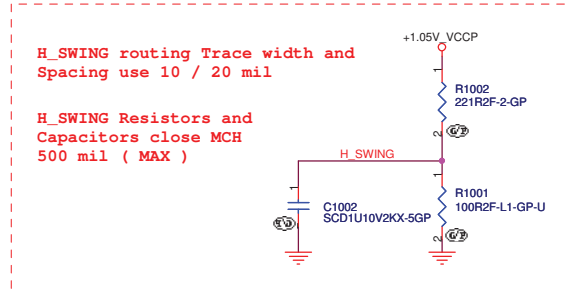


SSID = MCH

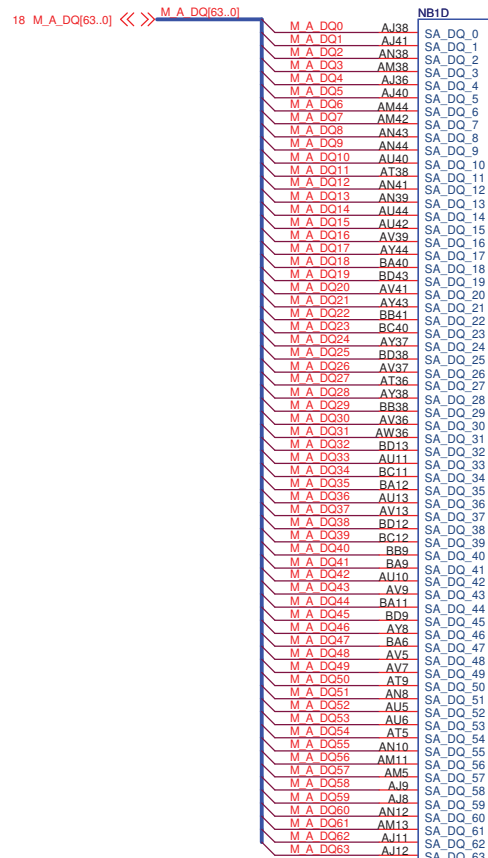

DDR SYSTEM MEMORY A

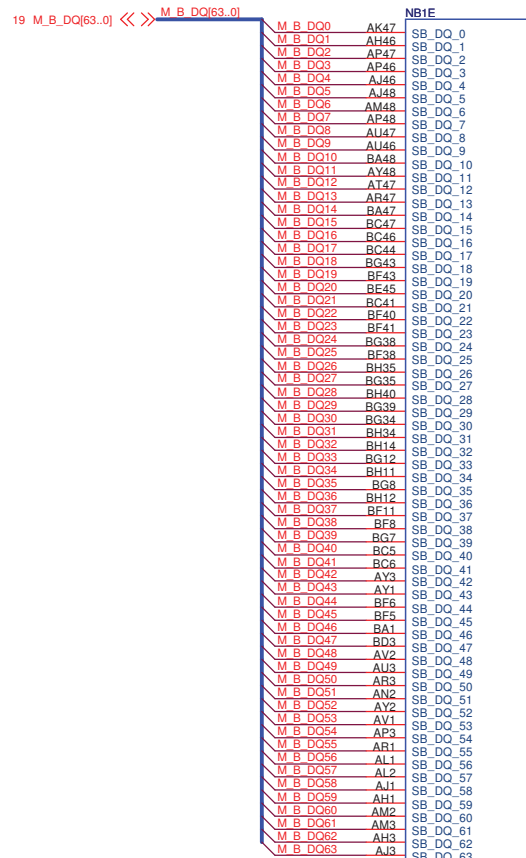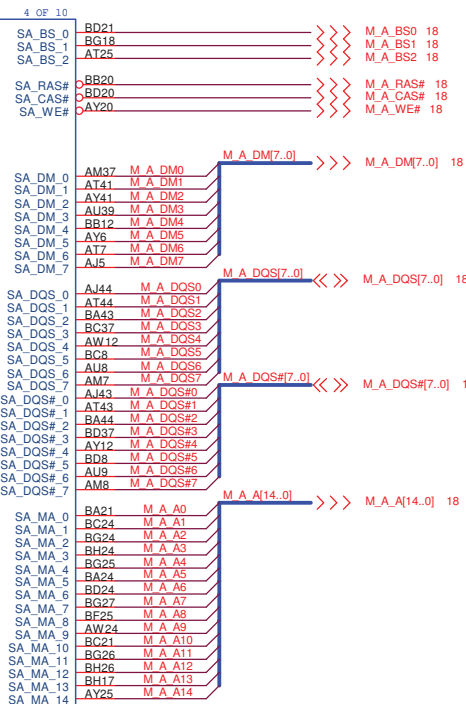


DDR SYSTEM MEMORY B

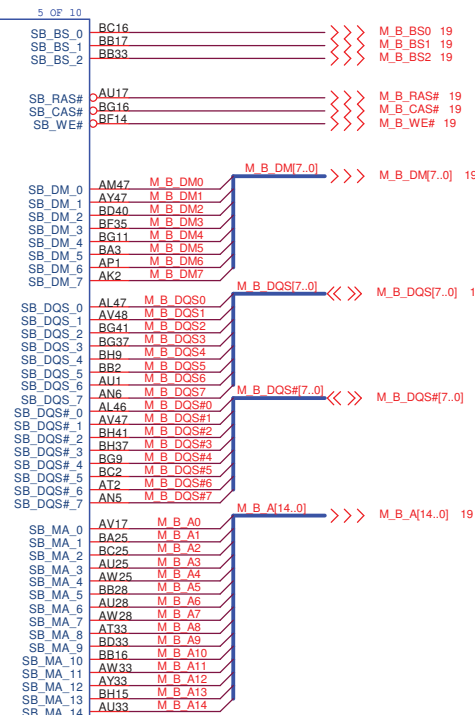


DJ1

DELL			Wistron Corporation		
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.					
Title					
Cantiga-DDR(3/6)					
Size	Document Number				Rev
Custom	DJ1 Montevina UMA				A00
Date:	Friday, February 26, 2010		Sheet	12	of 88

SSID = MCH

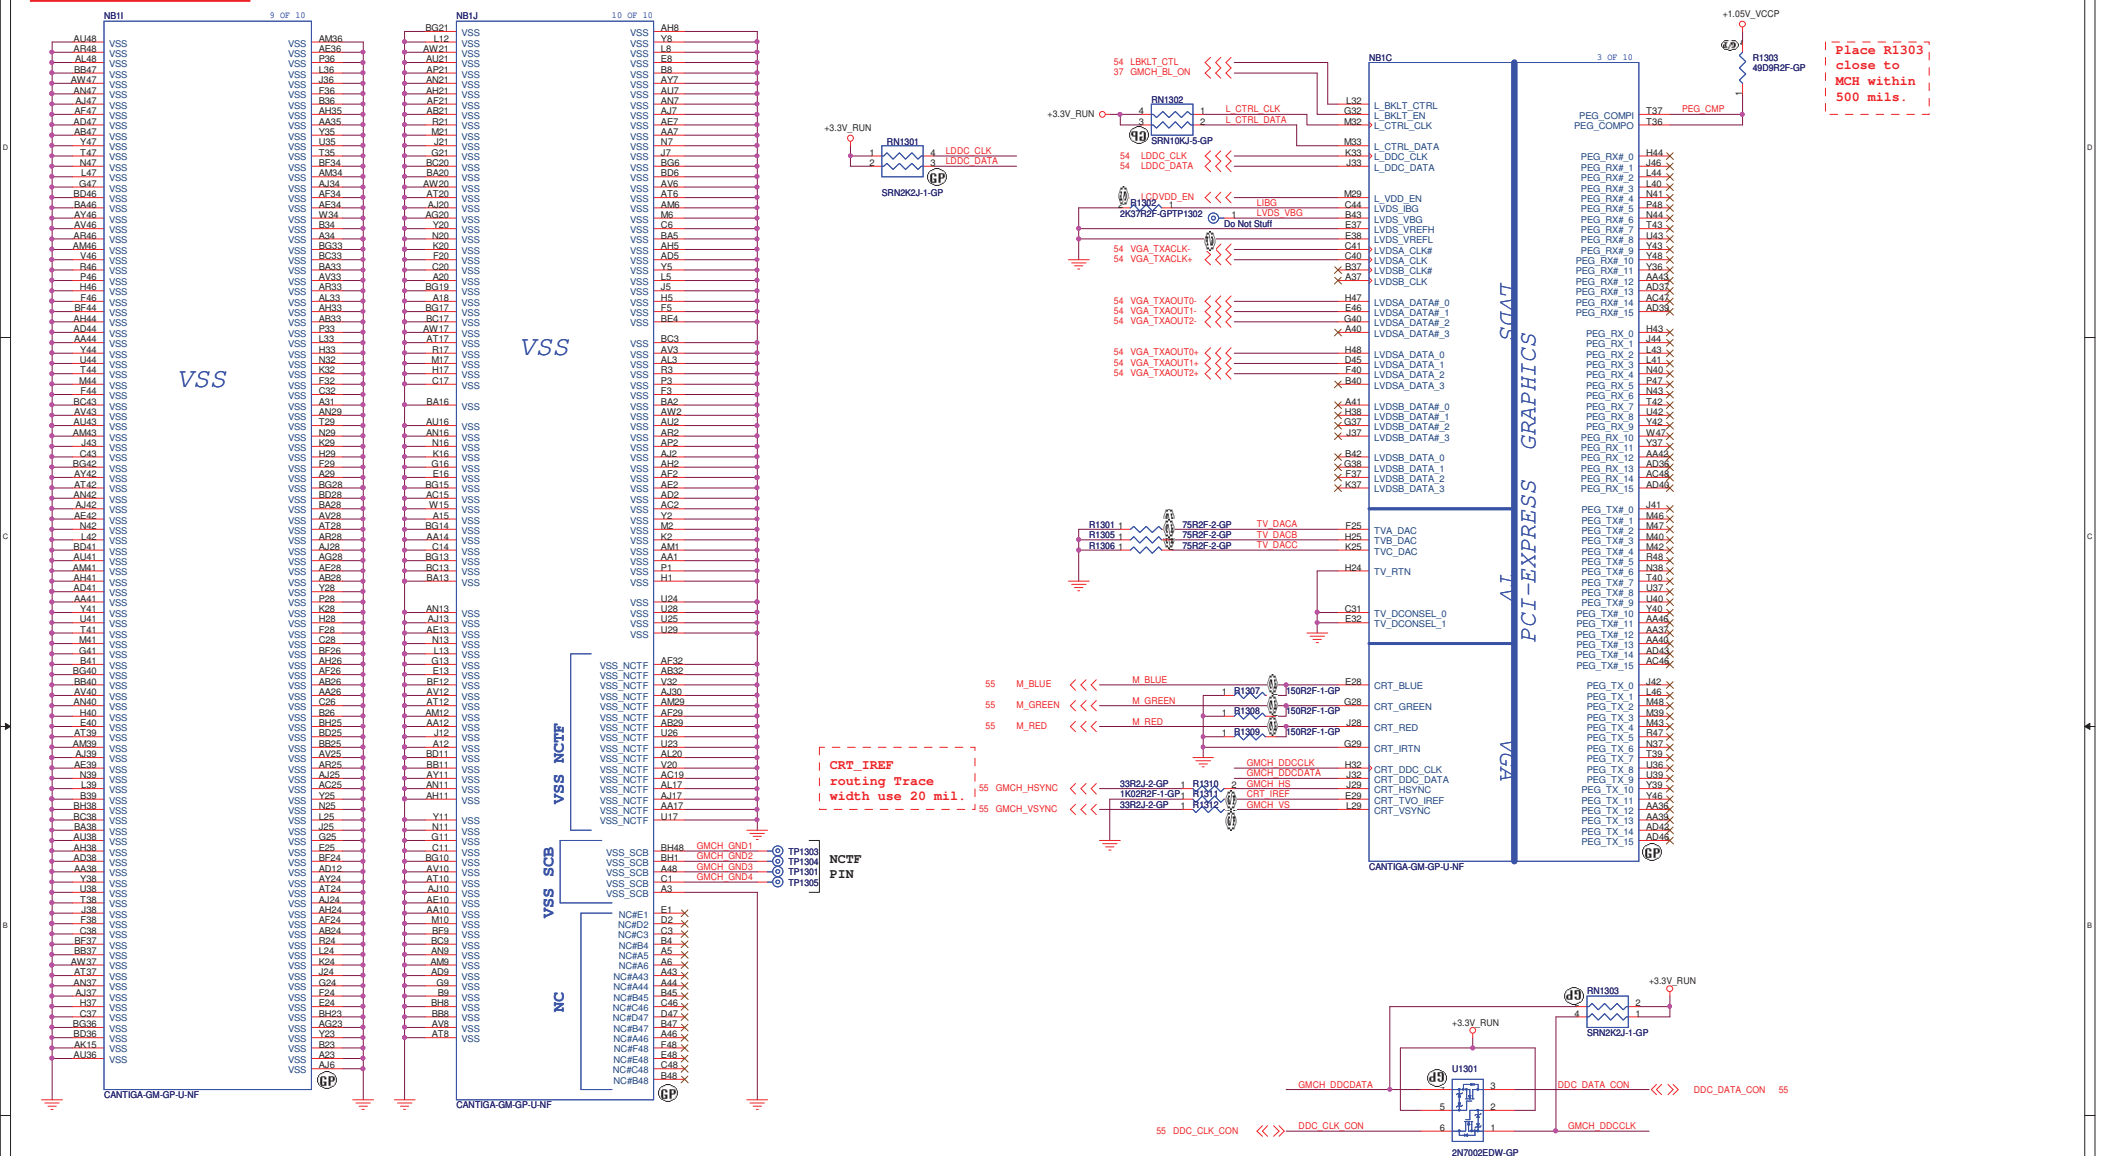

SSID = MCH

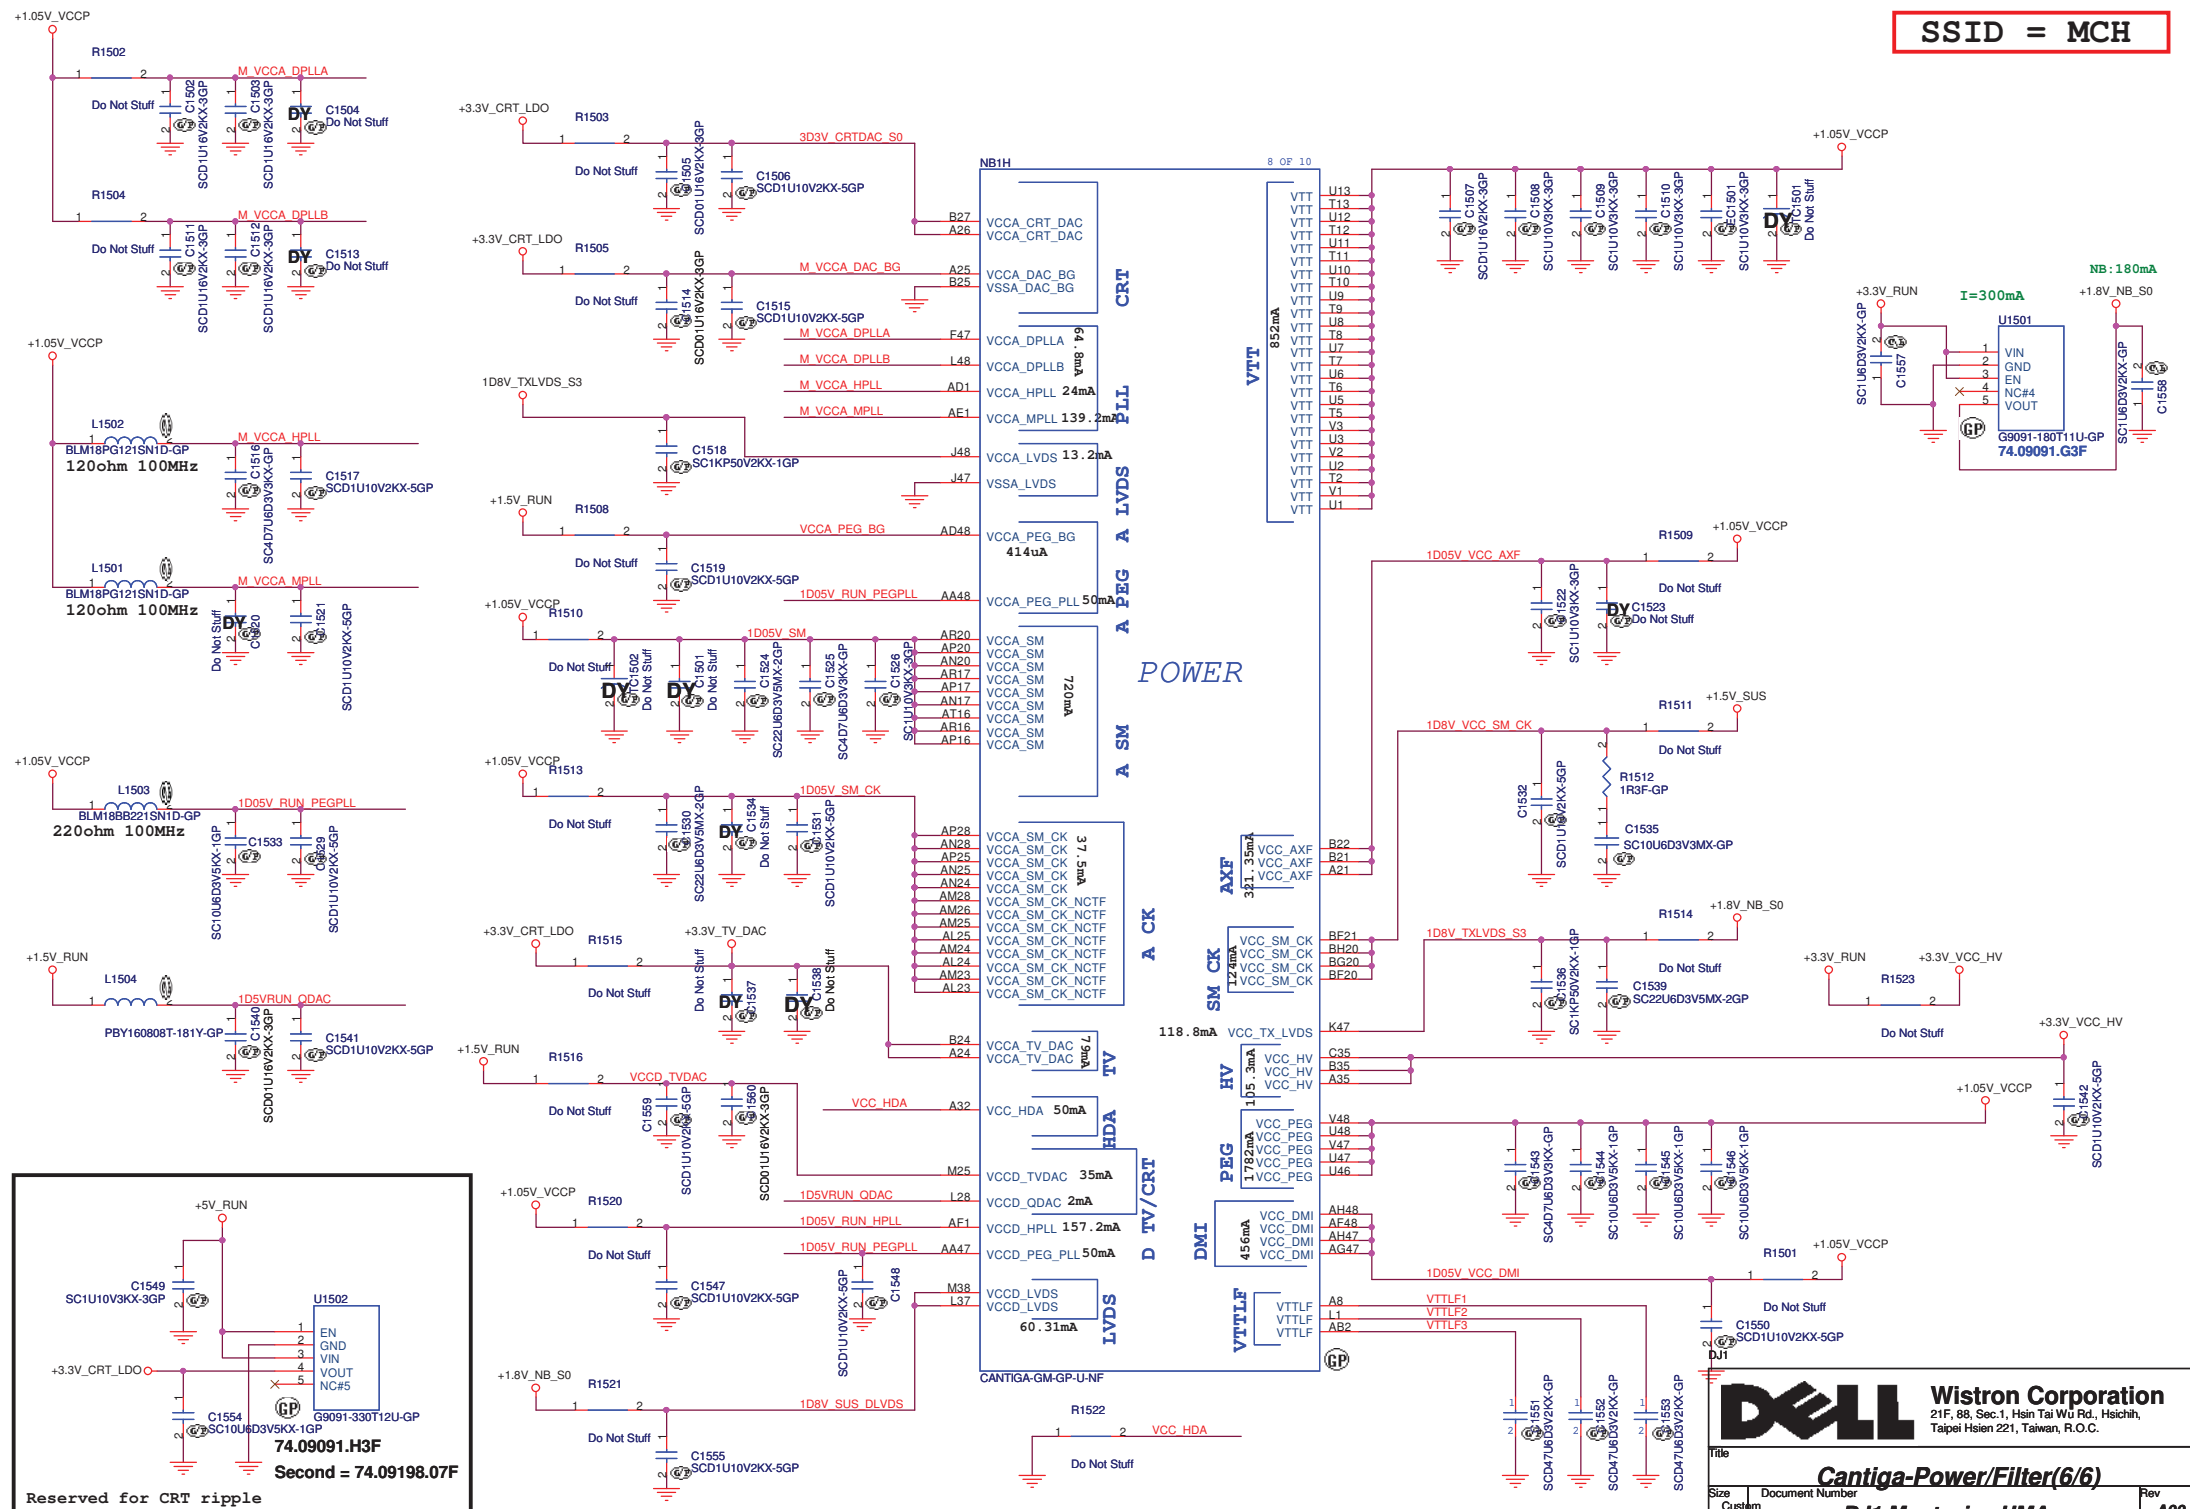

		Wistron Corporation 21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.	
Title _____			
<i>Cantiga-Power/Filter(6/6)</i>			
Size	Document Number		Rev
Custom			
<i>DJ1 Montevina UMA</i>			<i>A00</i>
Date:	Wednesday, February 24, 2010	Sheet	15 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 16 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title


Reserved


Size
A3

Document Number
DJ1 Montevina UMA




Rev
A00

Date: Wednesday, February 24, 2010Sheet 17 of 88

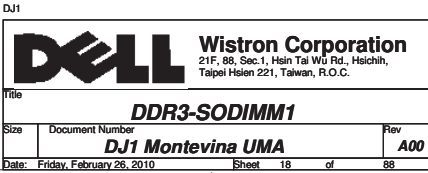


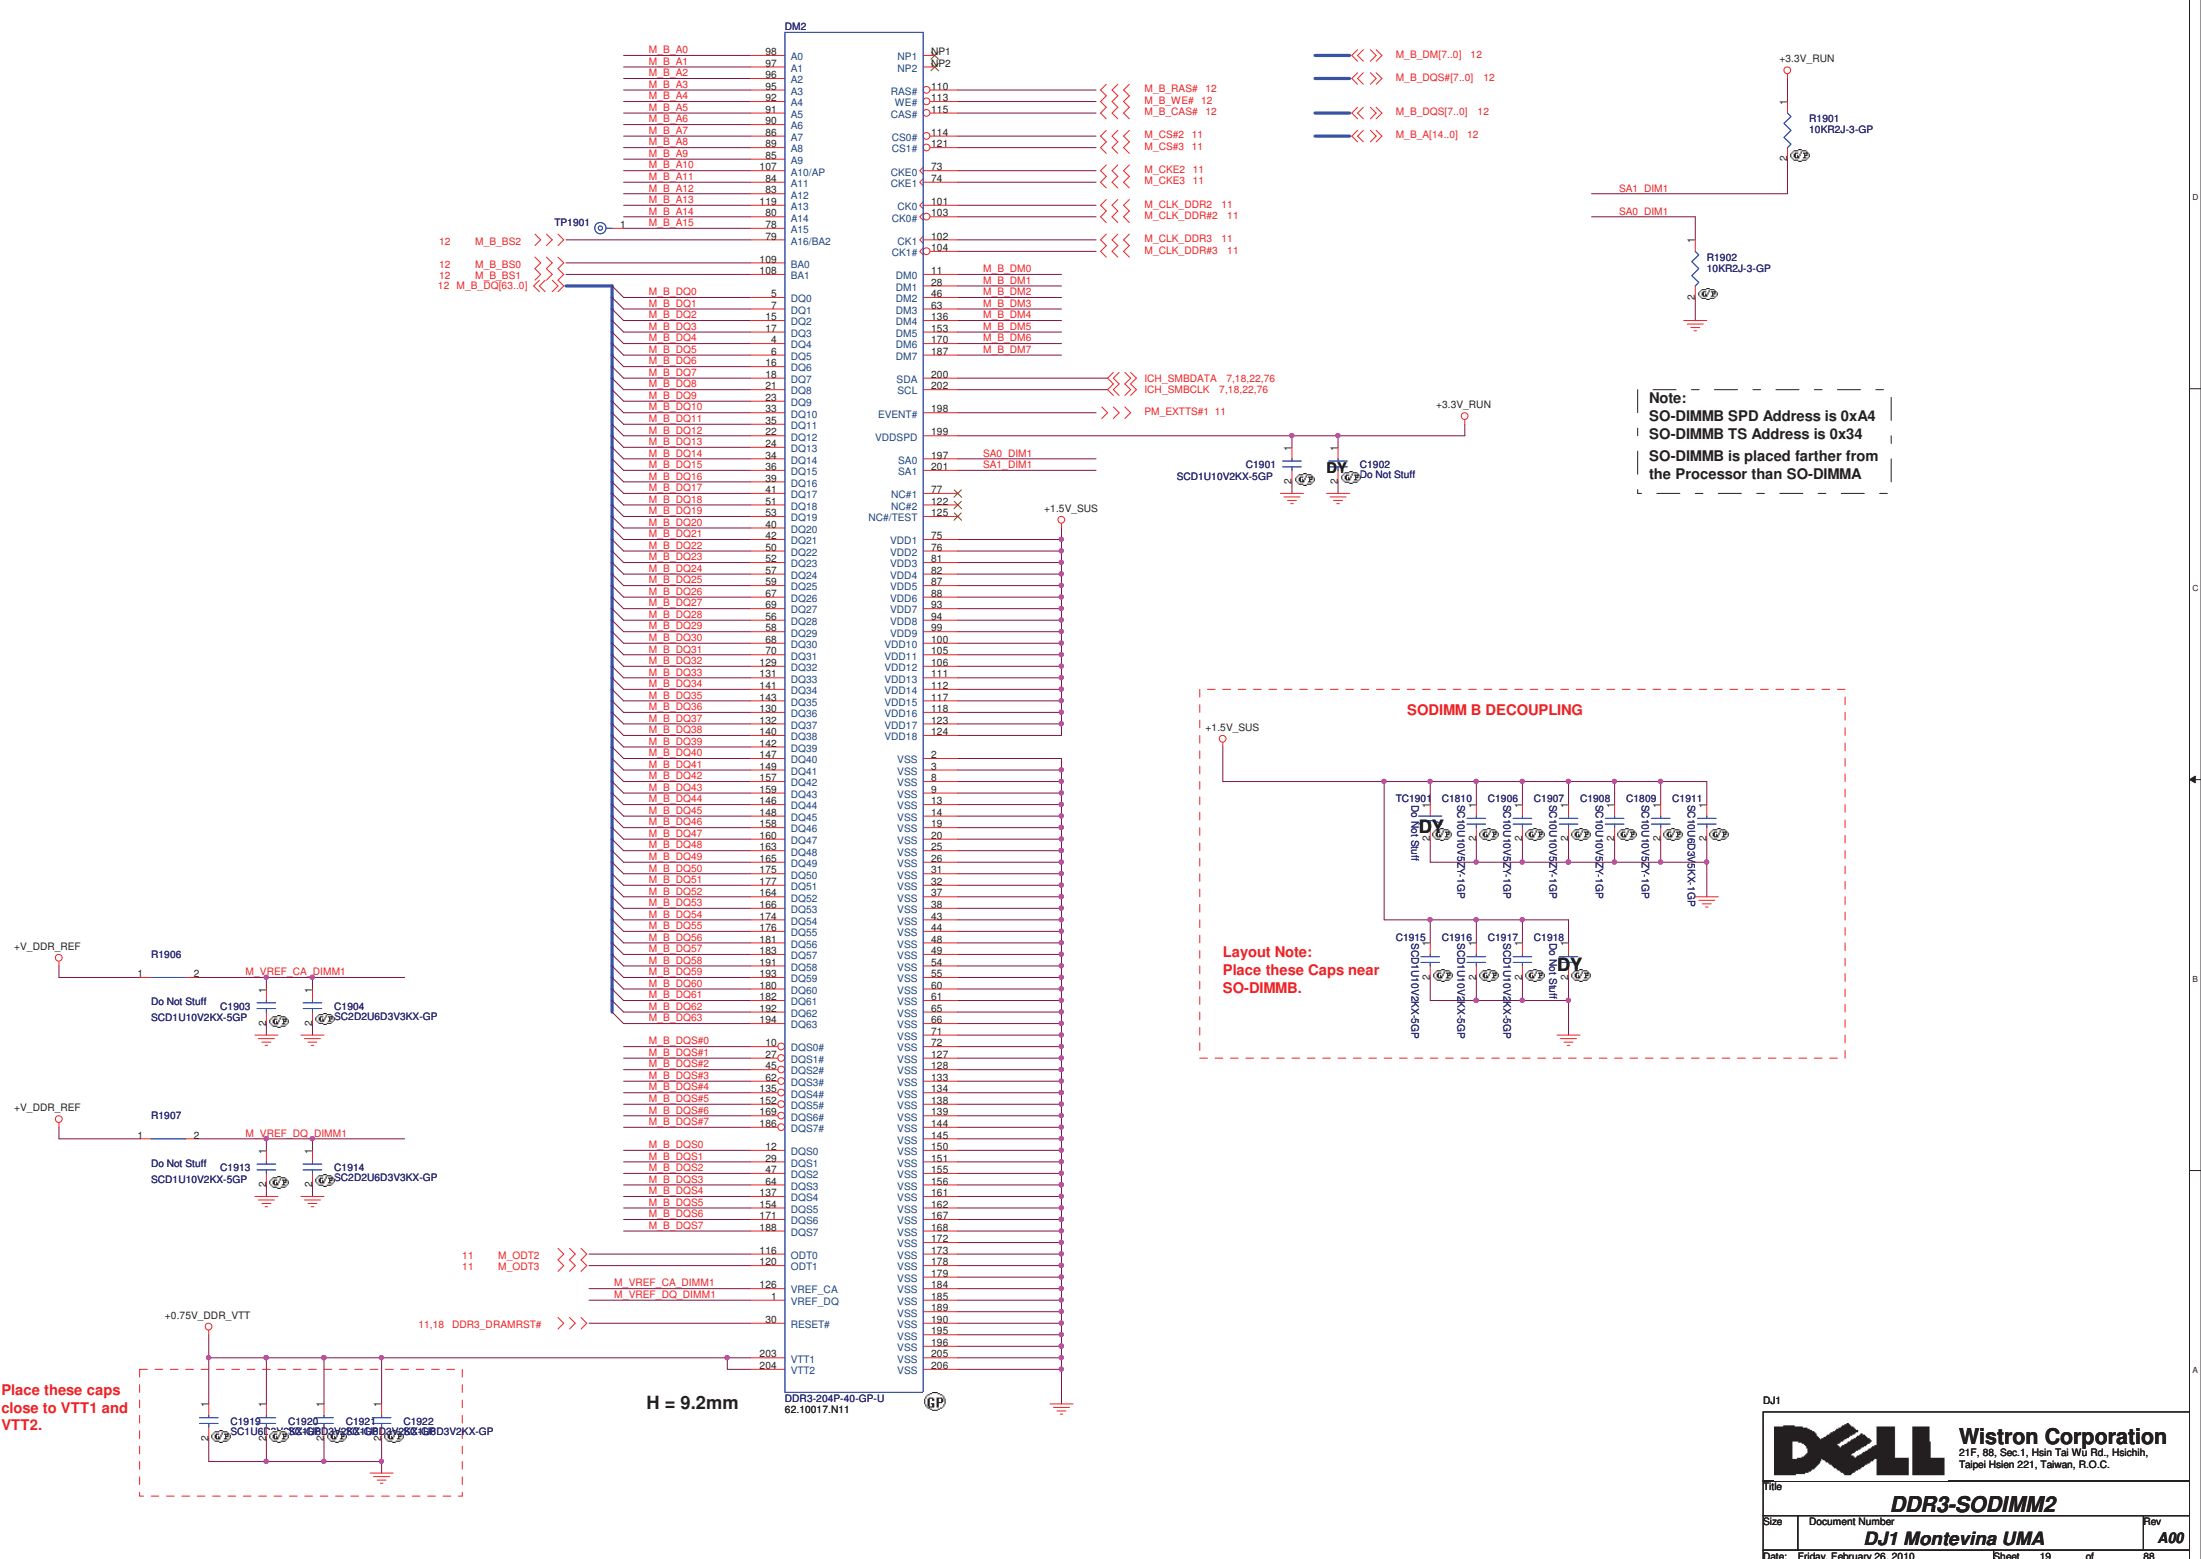


SSID = ICH

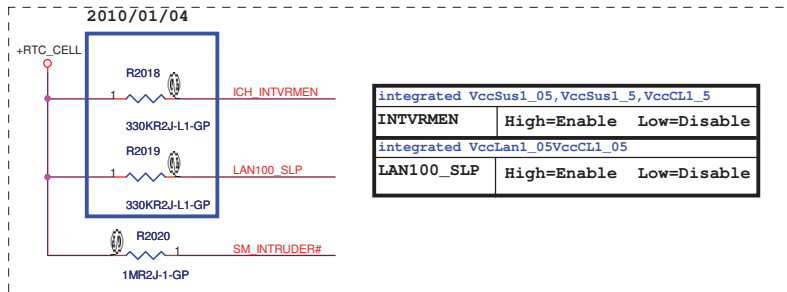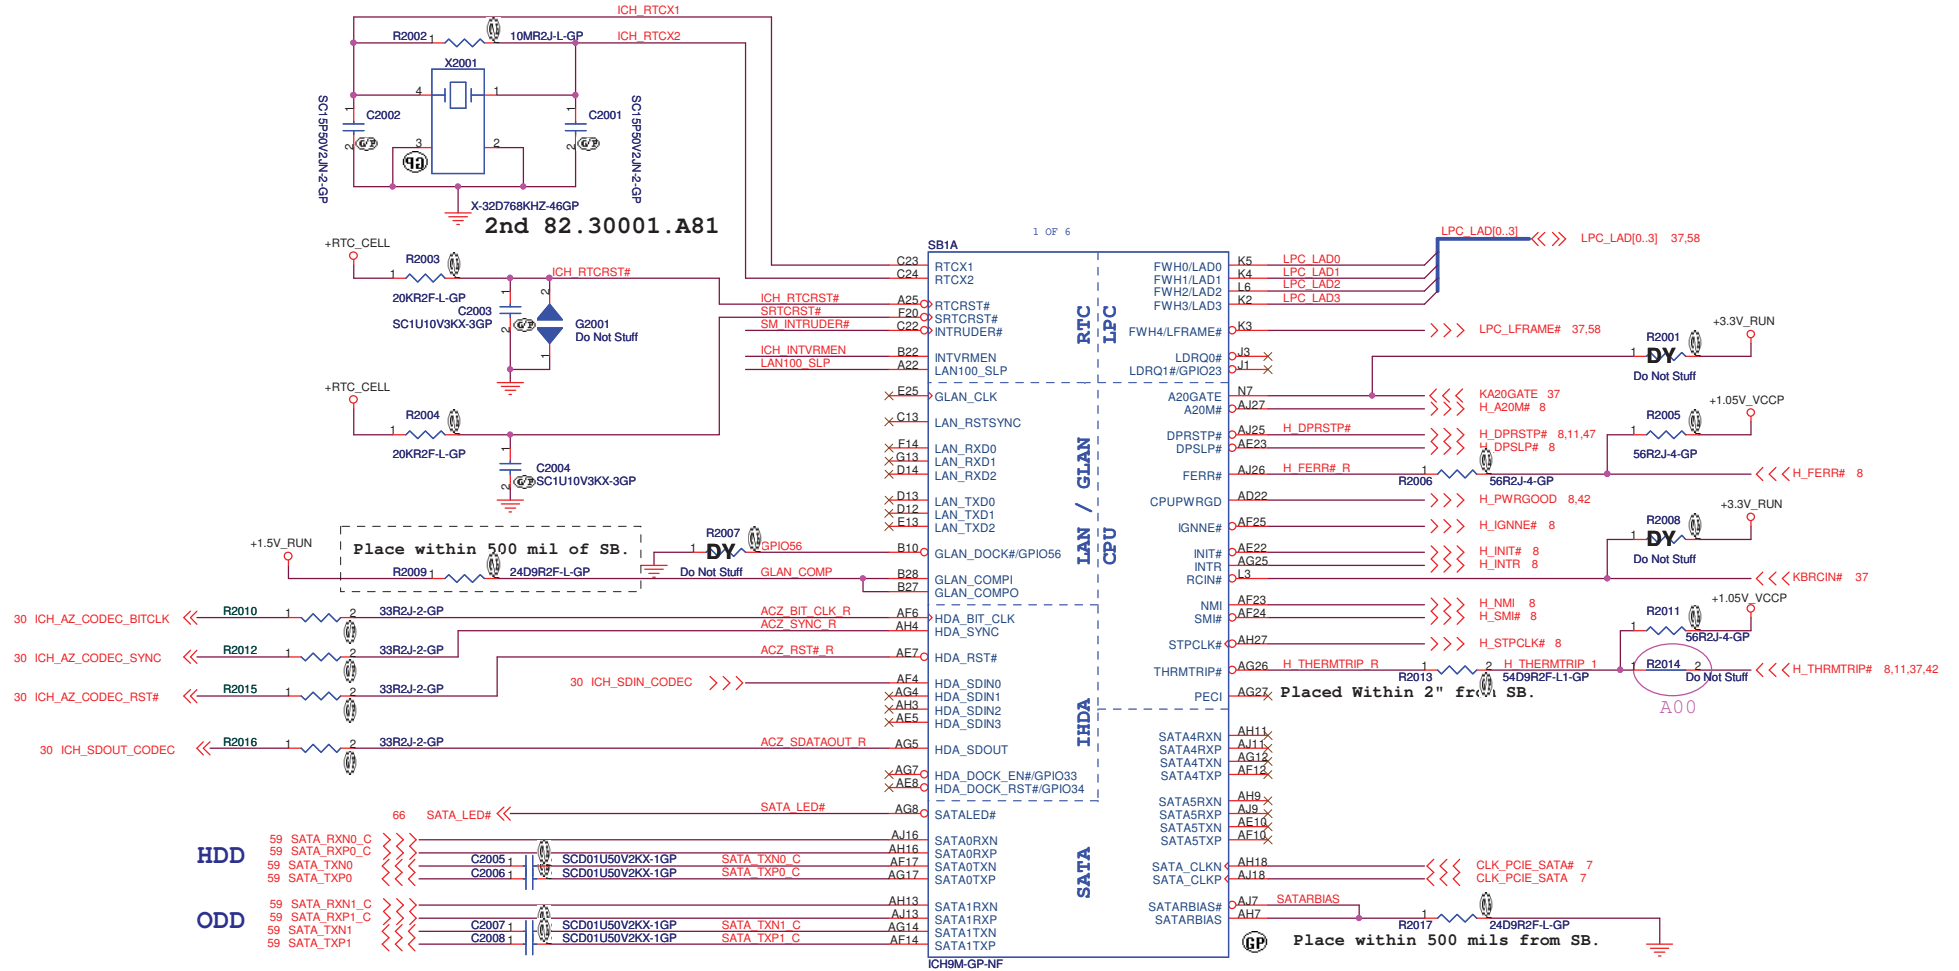


SSID = ICH

5 OF 6

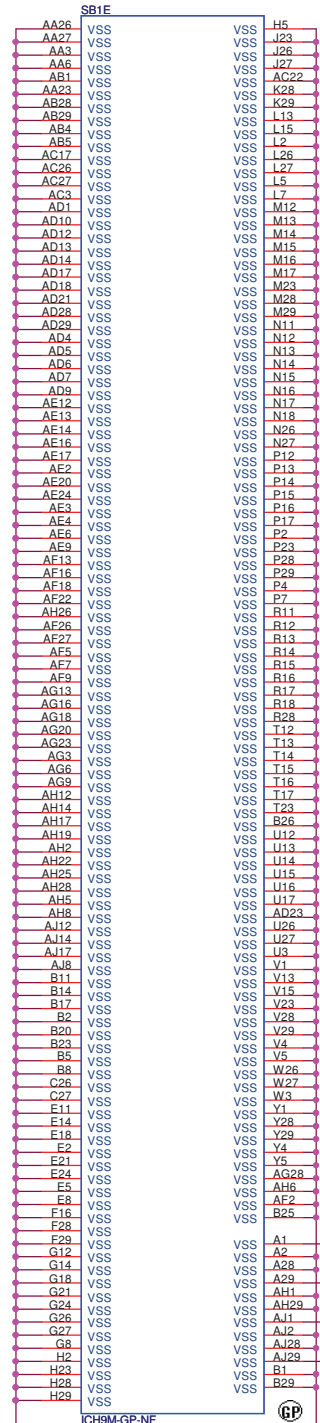


11,37,58,76 PLT_RST# <<< PLT_RST# R2102 1 2 Do Not Stuff PCI_PLTRST#

Layout Note:
Place as close as possible
to the ICH Pin



WLAN

LAN

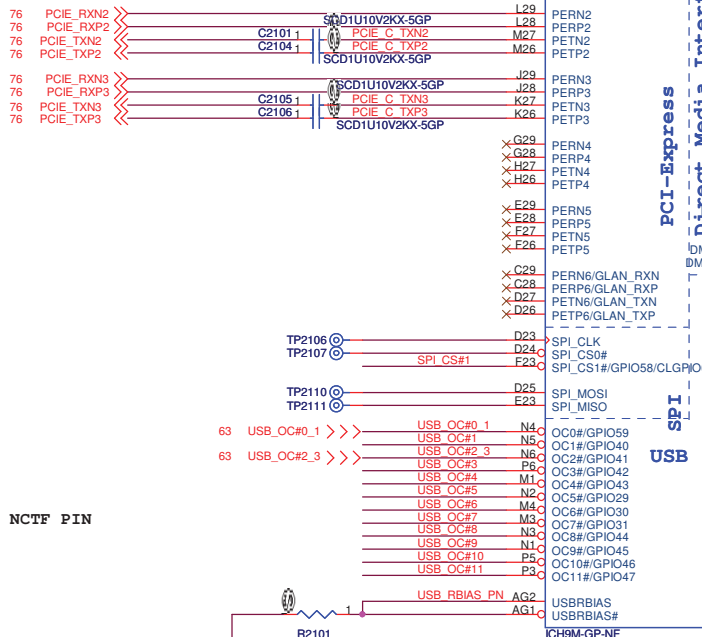

NCTF PIN




ICH9M-GP-NF


SB1B

2 OF 6

PCI

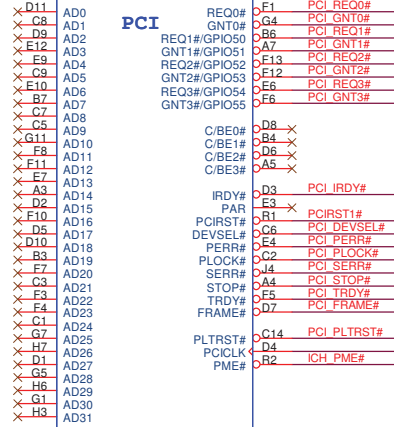


Interrupt I/F



ICH9M-GP-NF

GP



BOOT BIOS Strap		
PCI_GNT#0	SPI_CS#1	BOOT BIOS Location
0	1	SPI
1	0	PCI
1	1	LPC (Default)

A16 swap override strap

PCI_GNT#3	low = A16 swap override enable
	high = default



USB Pair	Device
0	USB0 (I/O Board)
1	RESERVED
2	USB2
3	USB3
4	BLUETOOTH
5	RESERVED
6	WLAN
7	RESERVED
8	RESERVED
9	RESERVED
10	Card Reader
11	CAMERA

DJ1




Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Model: **ICH9-PCI/PCIE/DMI/USB/GND(2/4)**
Rev: **A00**




Document Number: **DJ1 Montevina UMA**

Date: Friday, February 26, 2010 Sheet 21 of 88

SSID = ICH

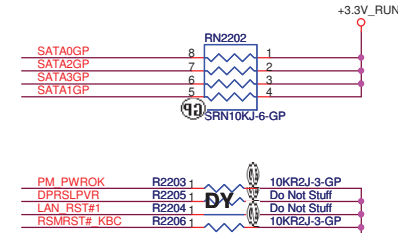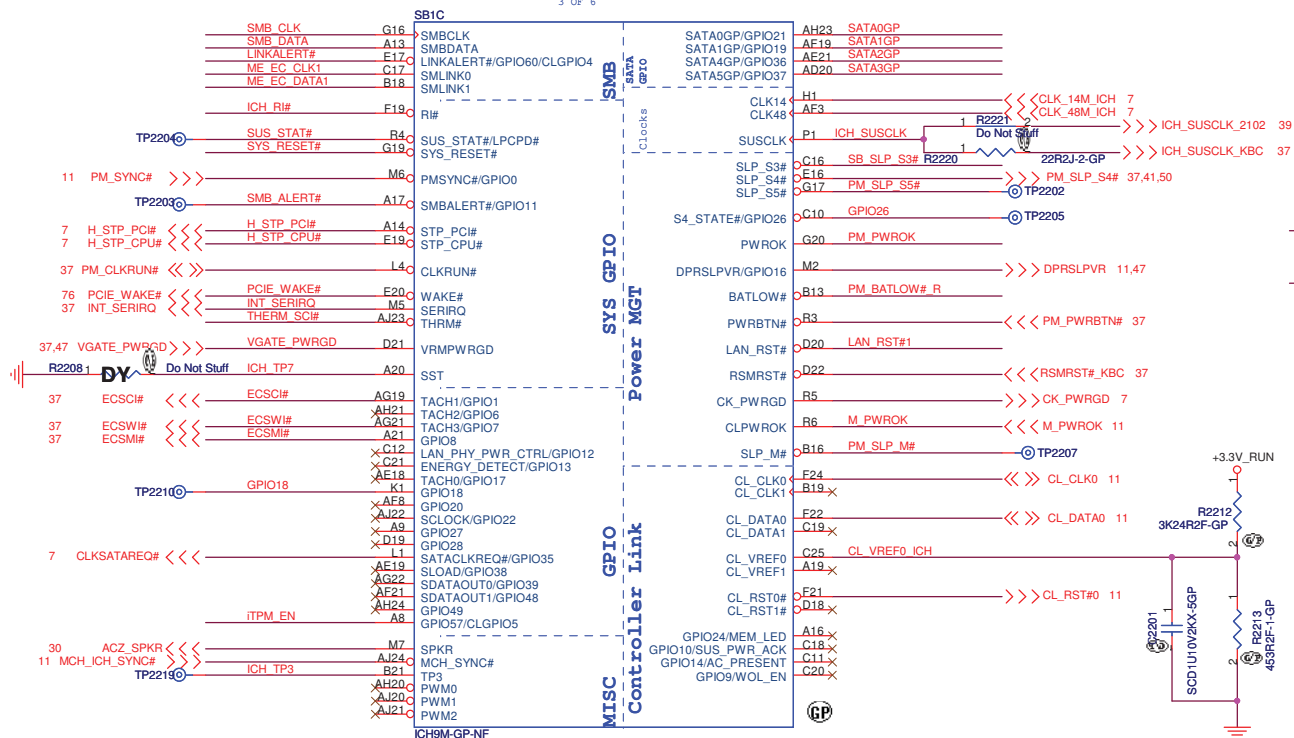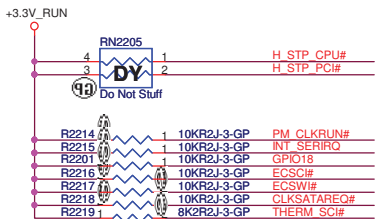

iTPM Select(Not Strap Pin)

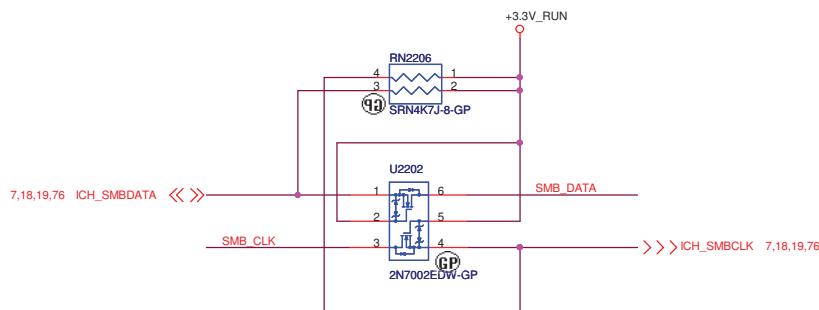

(Blanking)

DJ1

		Wistron Corporation 21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.	
Title			
Reserved			
Size	Document Number		Rev
Custom	DJ1 Montevina UMA		A00
Date:	Wednesday, February 24, 2010		Sheet 24 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
Custom

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 25 of 88

(Blanking)

DJ1

		Wistron Corporation 21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.	
Title			
Reserved			
Size	Document Number		Rev
Custom	DJ1 Montevina UMA		A00
Date:	Wednesday, February 24, 2010		Sheet 26 of 88

(Blanking)

DJ1

		Wistron Corporation 21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.	
Title			
Reserved			
Size	Document Number		Rev
Custom	DJ1 Montevina UMA		A00
Date:	Wednesday, February 24, 2010		Sheet 27 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
Custom

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 28 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3


Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 29 of 88

SSID = AUDIO

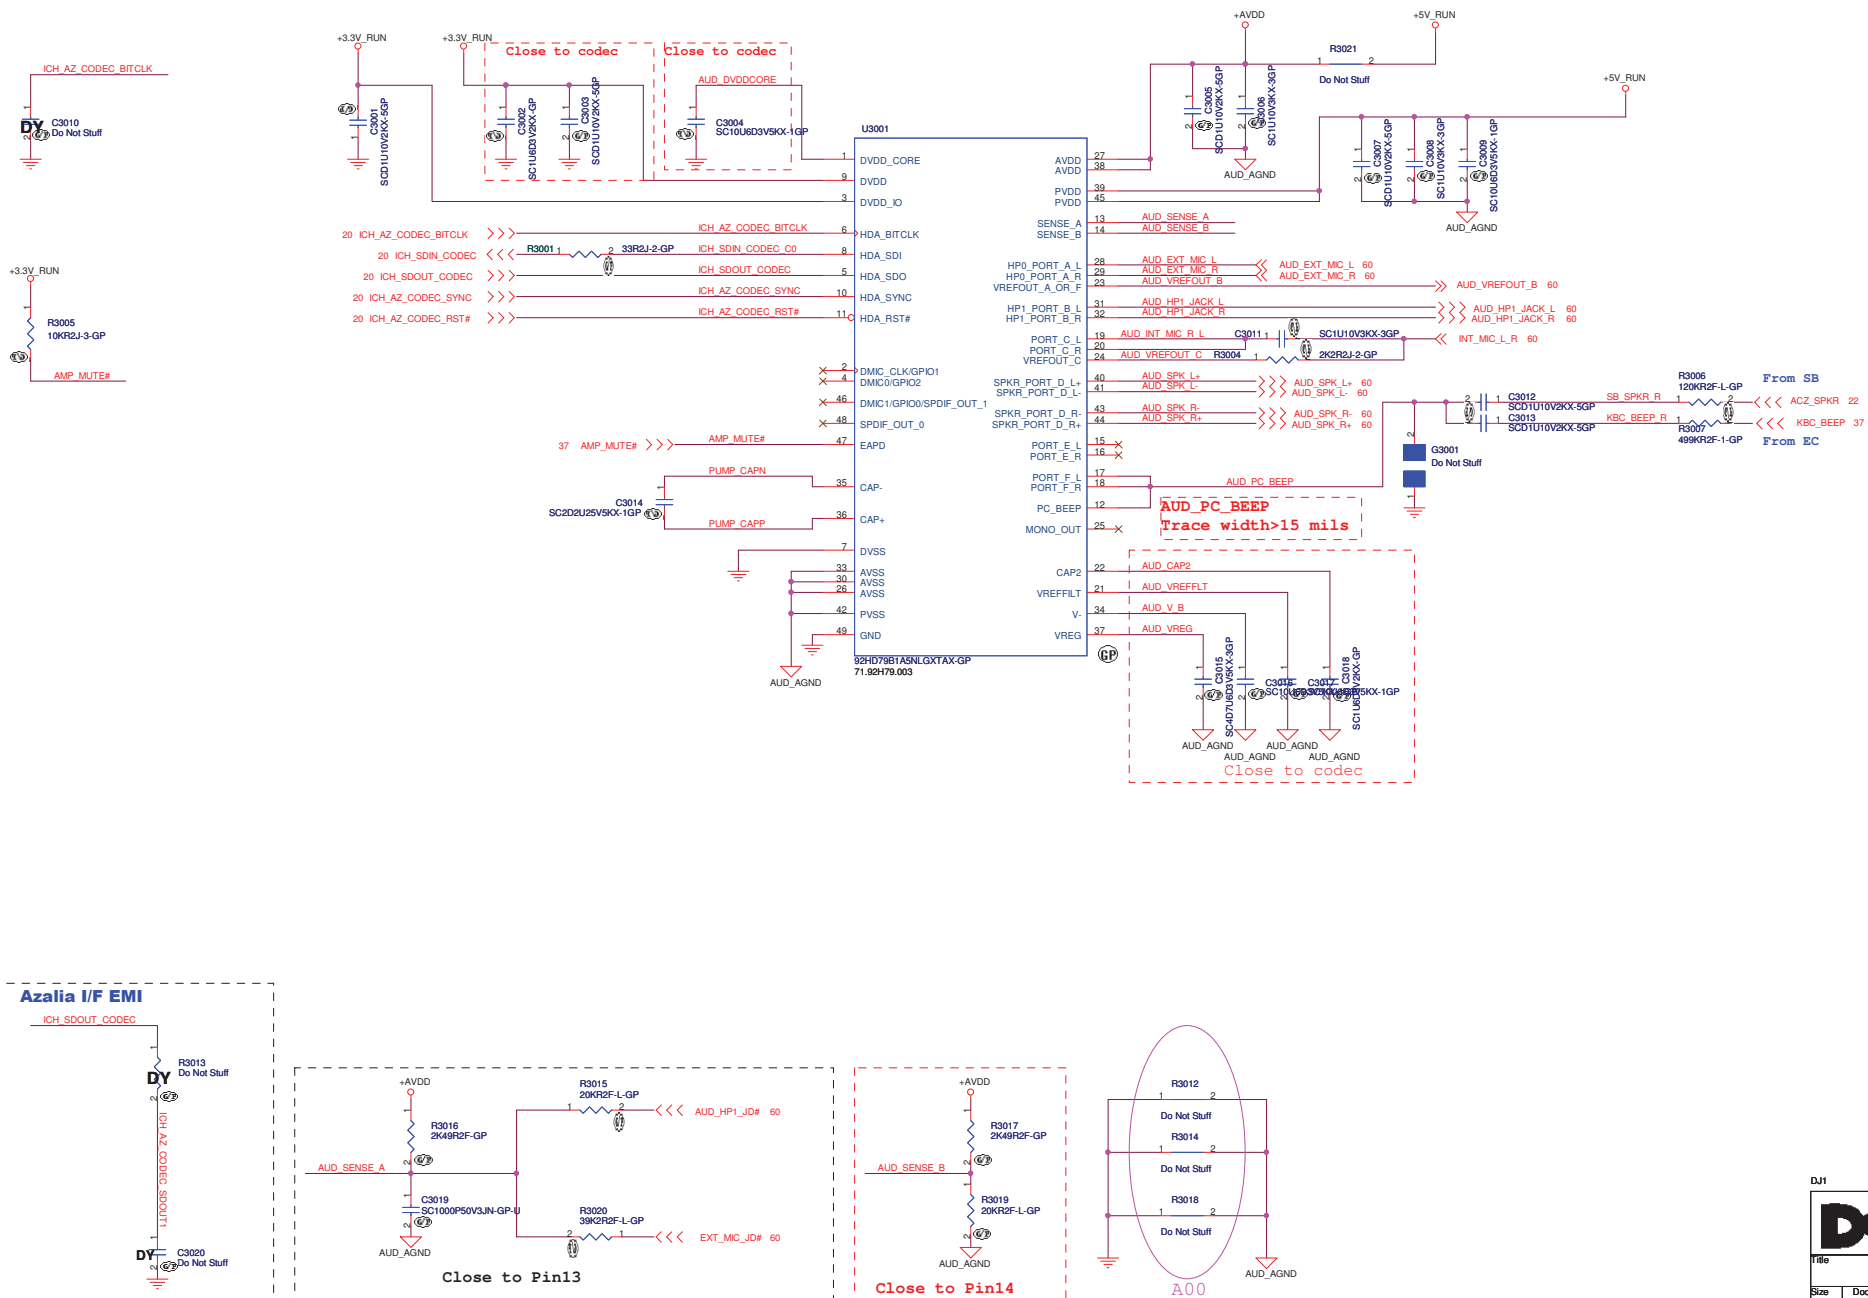

DJ1



Title	Audio Codec 92HD79B1
-------	-----------------------------

Size	Document Number	Rev
Custom	DJ1 Montevina UMA	A00
Date:	Friday, February 26, 2010	Sheet 30 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA


Date: Wednesday, February 24, 2010

Rev
A00



Sheet 31 of 88

Reserved


SSID = SDIO

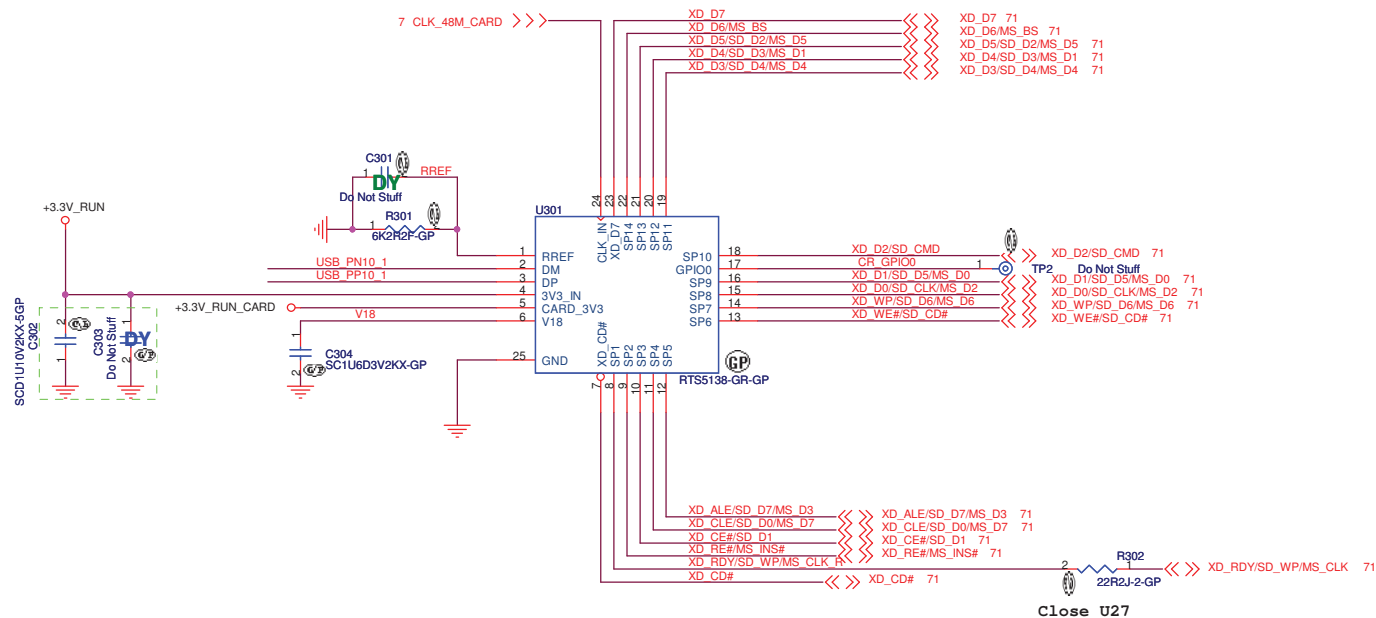

Close to U301

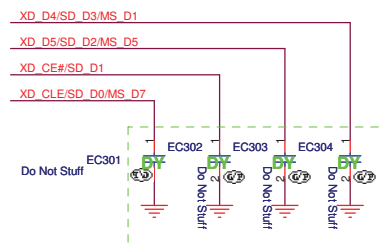

Do Not Stuff



Do Not Stuff
2010/01/05

DJ1



(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 33 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 34 of 88

(Blanking)

DJ1



Wistron Corporation

21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

(Reserved)

SizeDocument Number

DJ1 Montevina UMA

RevA00

Date: Wednesday, February 24, 2010SheetE35 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3


Document Number
DJ1 Montevina UMA

Rev
A00

Reserved

Date: Wednesday, February 24, 2010

Sheet 36 of 88

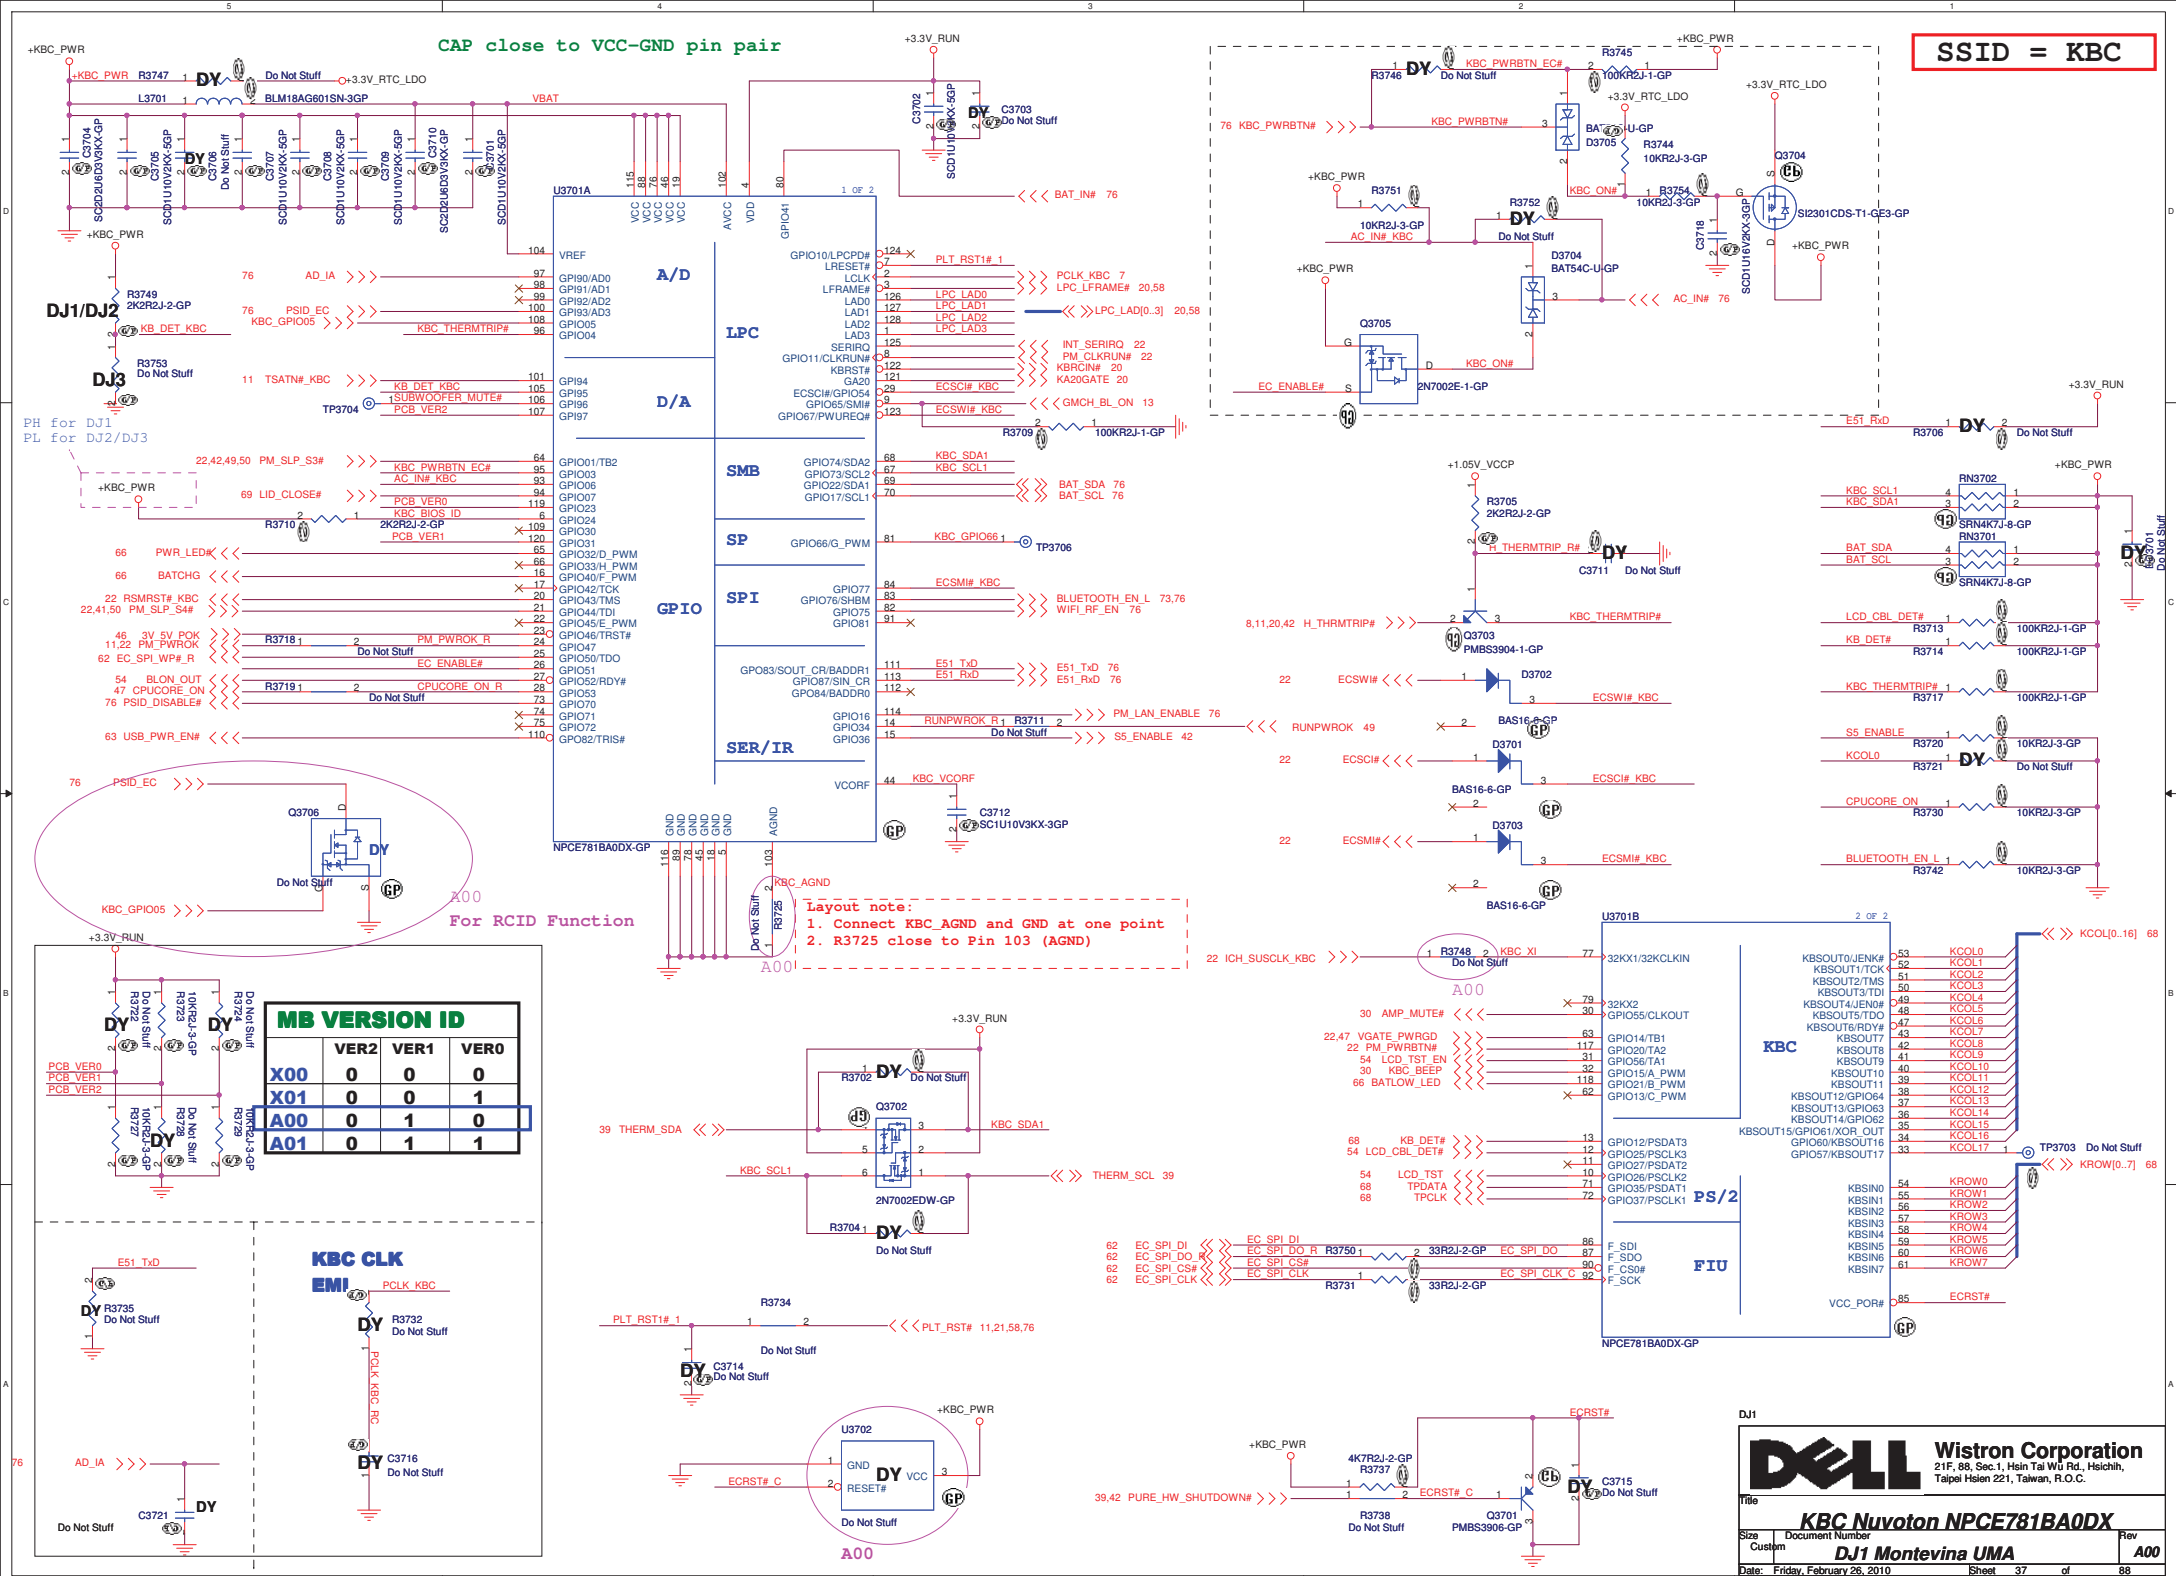

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA


Rev
A00

Date: Wednesday, February 24, 2010

Sheet 38 of 88

Reserved

SSID = Thermal

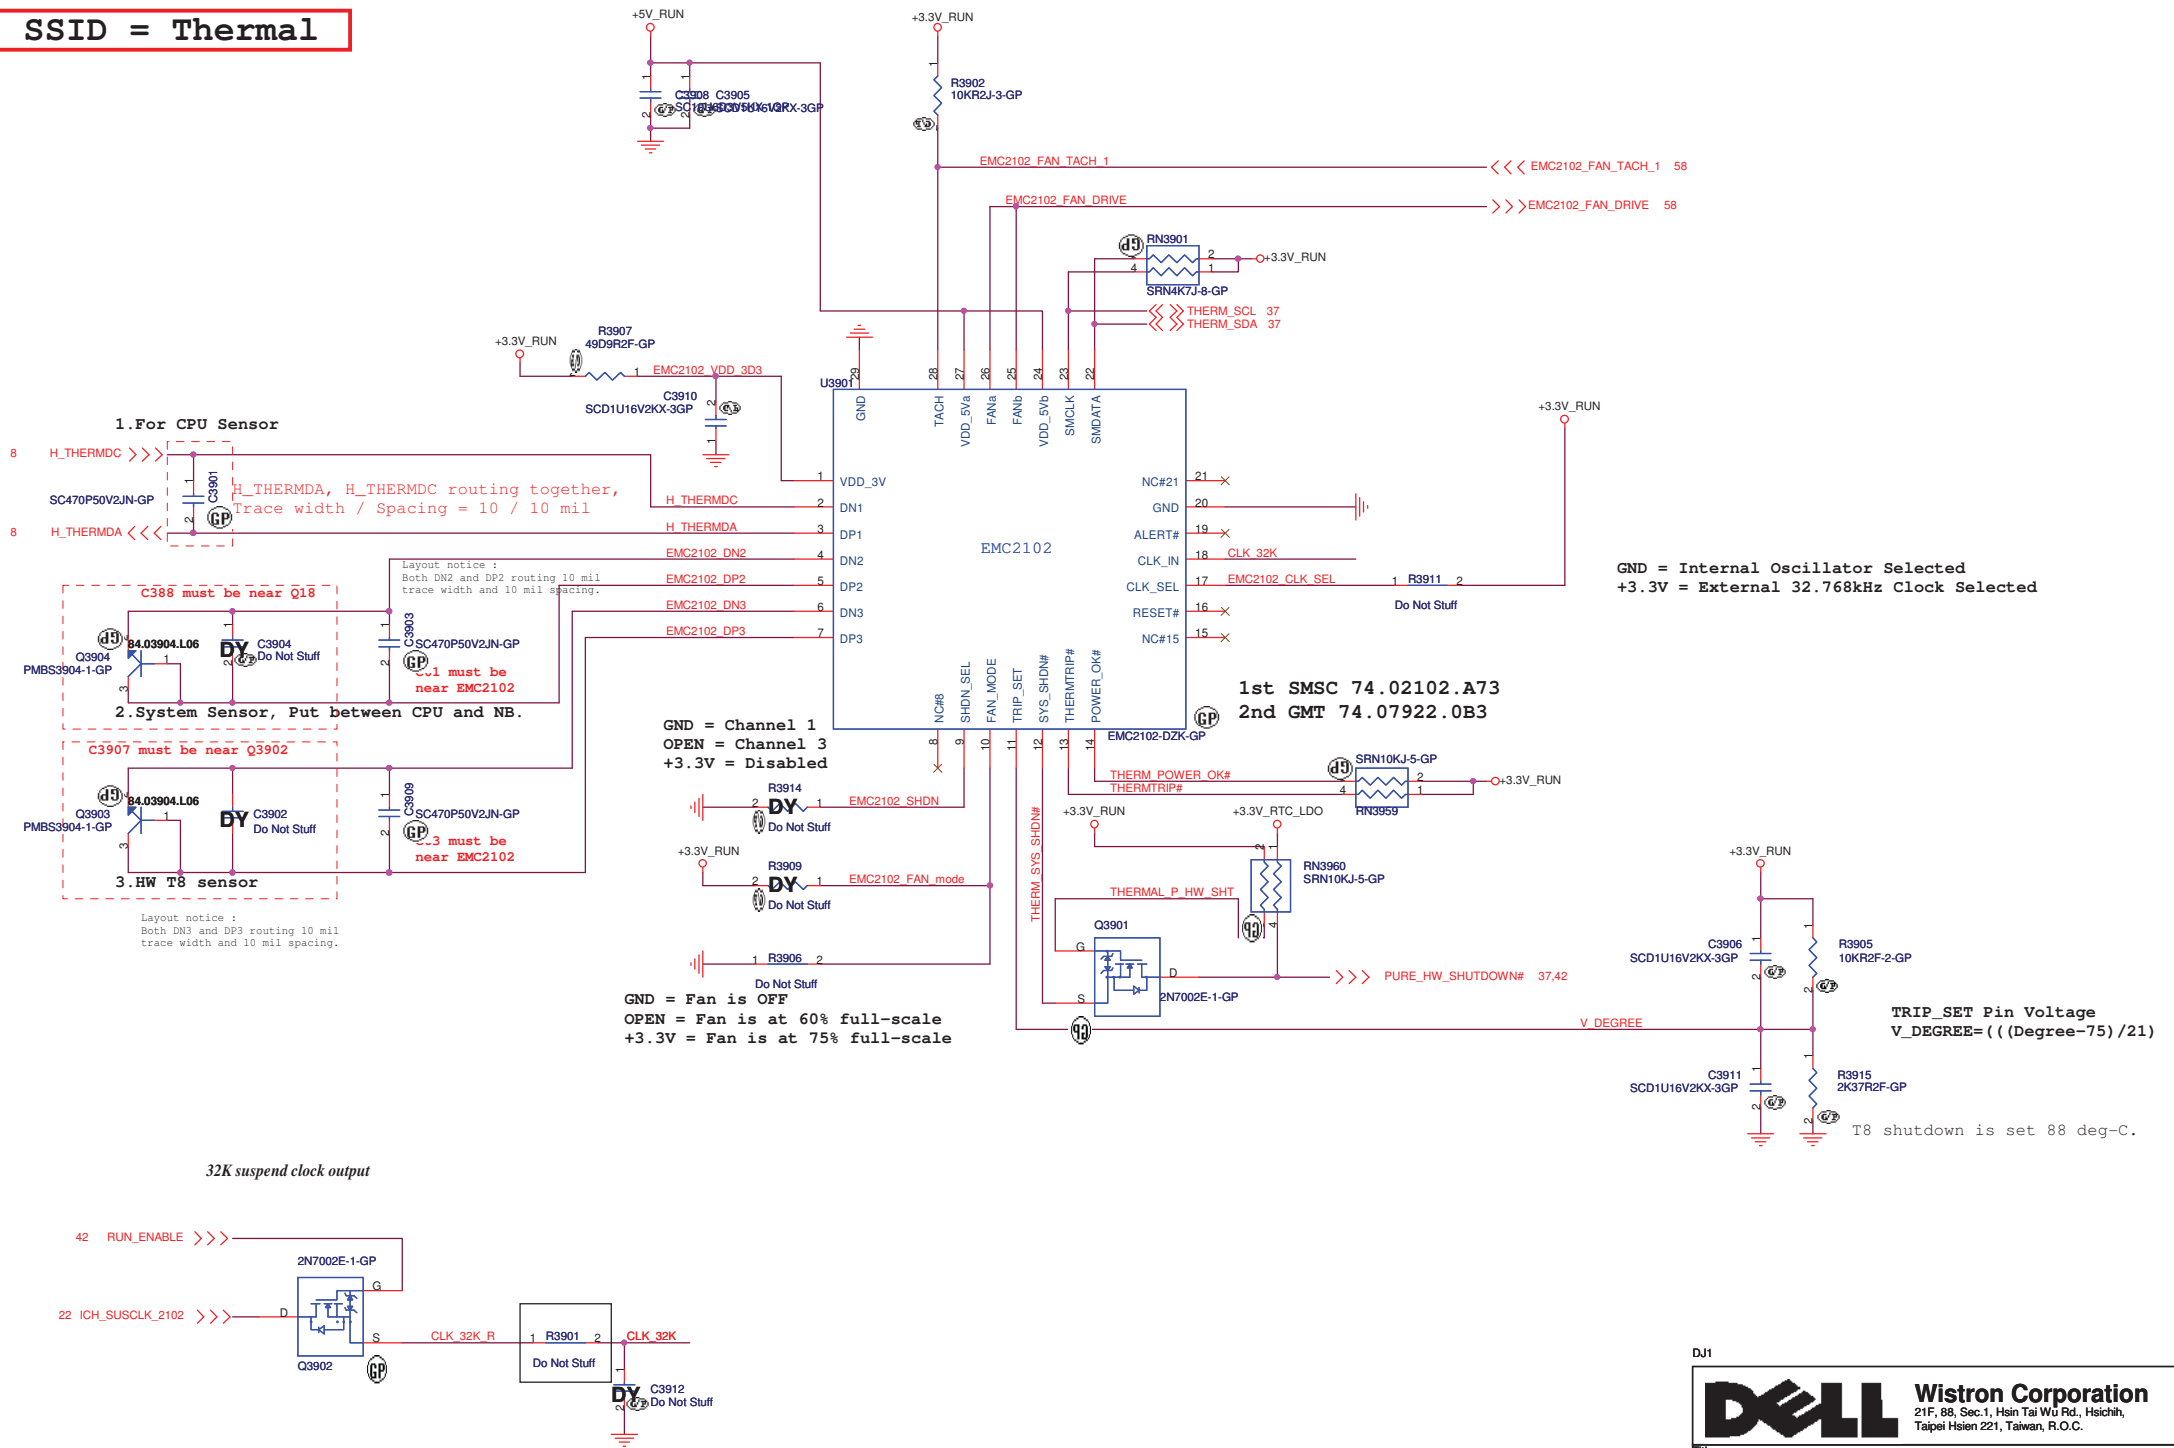

DJ1



(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Reserved

Size
A3


Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 40 of 88

SSID = Reset.Suspend

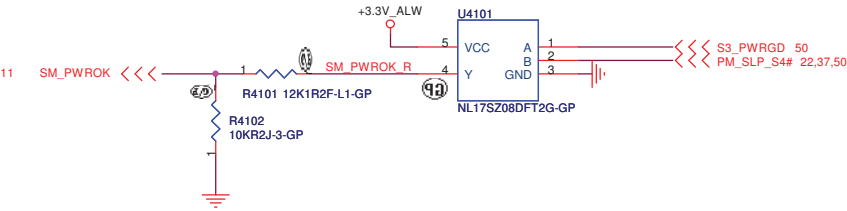

Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Power On Logic


Size A3 Document Number Rev

DJ1 Montevina UMA


A00

Date: Friday, February 26, 2010 Sheet 41 of 88

```
SSID = Reset.Suspend
```

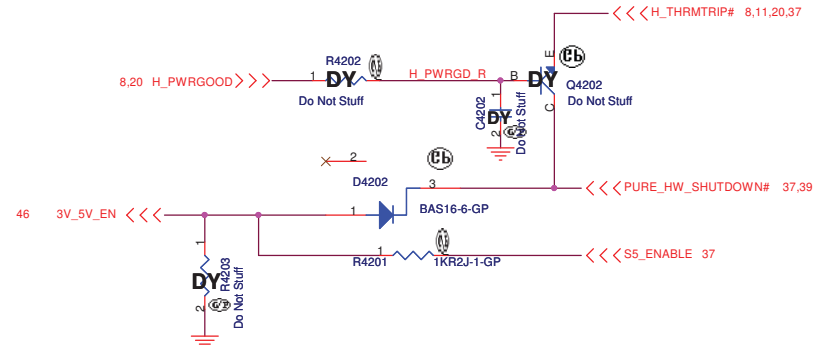

Run Power

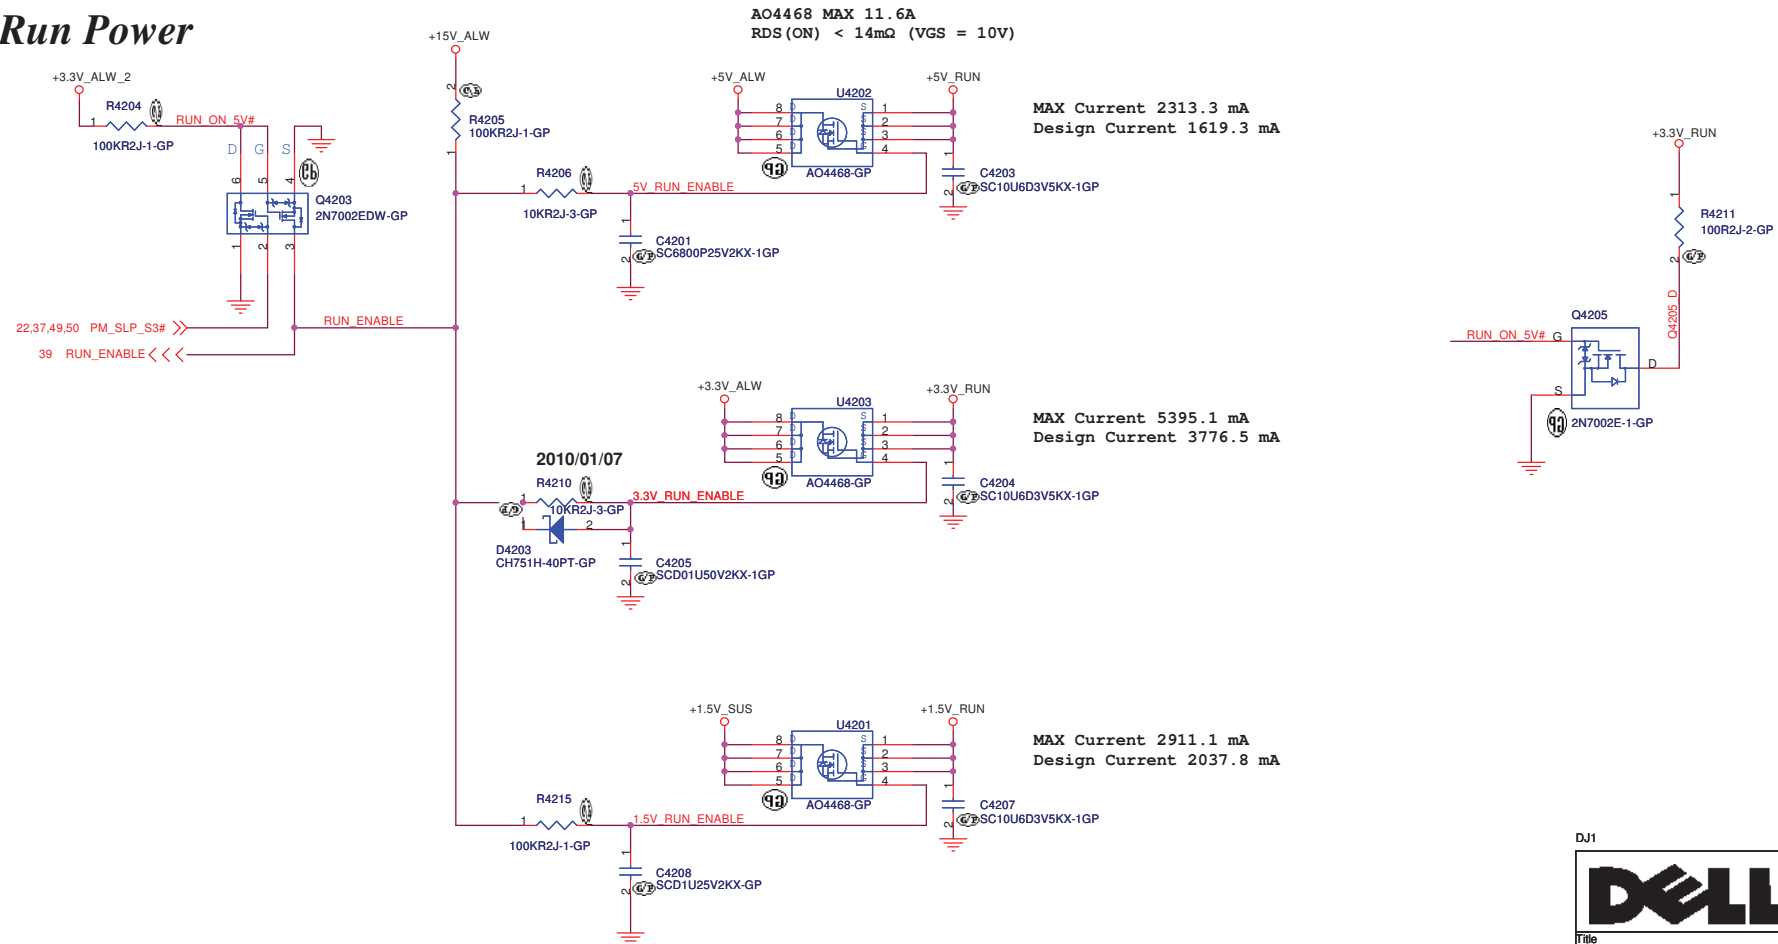

Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Power Plane Enable

Size

Document Number

DJ1 Montevina UMA

Rev

Date: Friday, February 26, 2010

Sheet 42 of

88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 43 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 44 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Reserved


Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 45 of 88

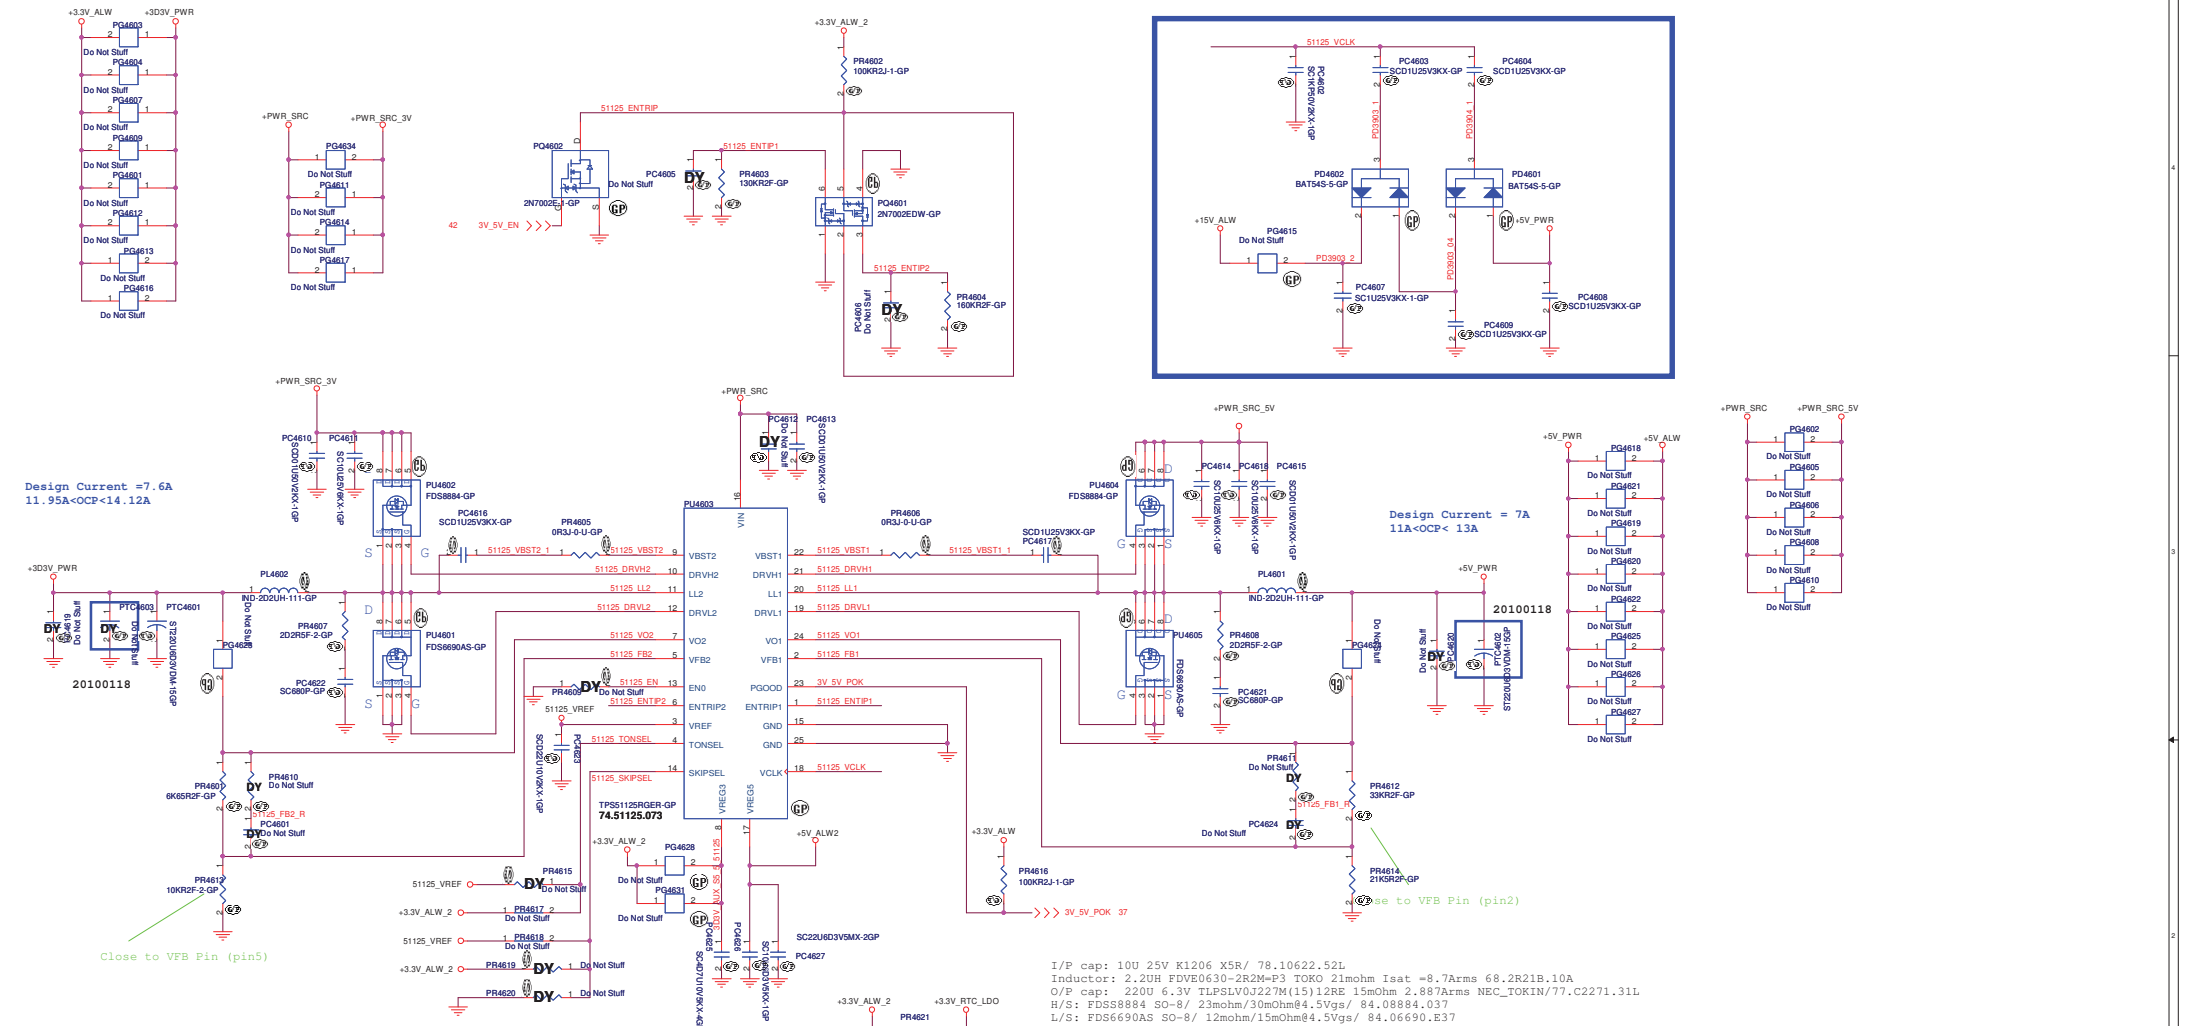

Design Current = 7.6A
11.95A < OCP < 14.12A


Design Current = 7A
11A < OCP < 13A

I/P cap: 10U 25V K1206 X5R/ 78.10622.52L
Inductor: 2.2UH FDVE0630-2R2M-P3 TOKO 21mohm Isat =8.7Arms 68.2R21B.10A
O/P cap: 220U 6.3V TPLSLVJ227M(25) 25mohm 2.236Arms NEC_TOKIN/77.C2271.00L
O/P cap: 100U 6.3V TEPSLB20J107M(45)8R 45mohm 1.374Arms NEC_TOKIN/77.C1071.081
H/S: FDS8884 SO-8/ 23mohm/30mohm@4.5Vgs/ 84.08884.037
L/S: FDS6690AS SO-8/ 12mohm/15mohm@4.5Vgs/ 84.06690.E37

I/P cap: 10U 25V K1206 X5R/ 78.10622.52L
Inductor: 2.2UH FDVE0630-2R2M-P3 TOKO 21mohm Isat =8.7Arms 68.2R21B.10A
O/P cap: 220U 6.3V TPLSLVJ227M(15)12R 15mohm 2.887Arms NEC_TOKIN/77.C2271.31L
H/S: FDS8884 SO-8/ 23mohm/30mohm@4.5Vgs/ 84.08884.037
L/S: FDS6690AS SO-8/ 12mohm/15mohm@4.5Vgs/ 84.06690.E37

TONSEL	CH1	CH2	SKIPSEL	VREG3 or VREG5	VREF(2V)	GND
GND	200kHz	265kHz	Operating Mode	ORA Auto Skip	Auto Skip	PWM only
VREF	245kHz	305kHz				
VREG3	300kHz	375kHz	EN0	Open	820kΩ to GND	GND
VREG5	365kHz	460kHz	Operating Mode	enable both LDos, VCLK on and ready to turn on switcher channels	enable both LDos, VCLK off and ready to turn on switcher channels	disable all circuit

SSID = CPU.Regulator

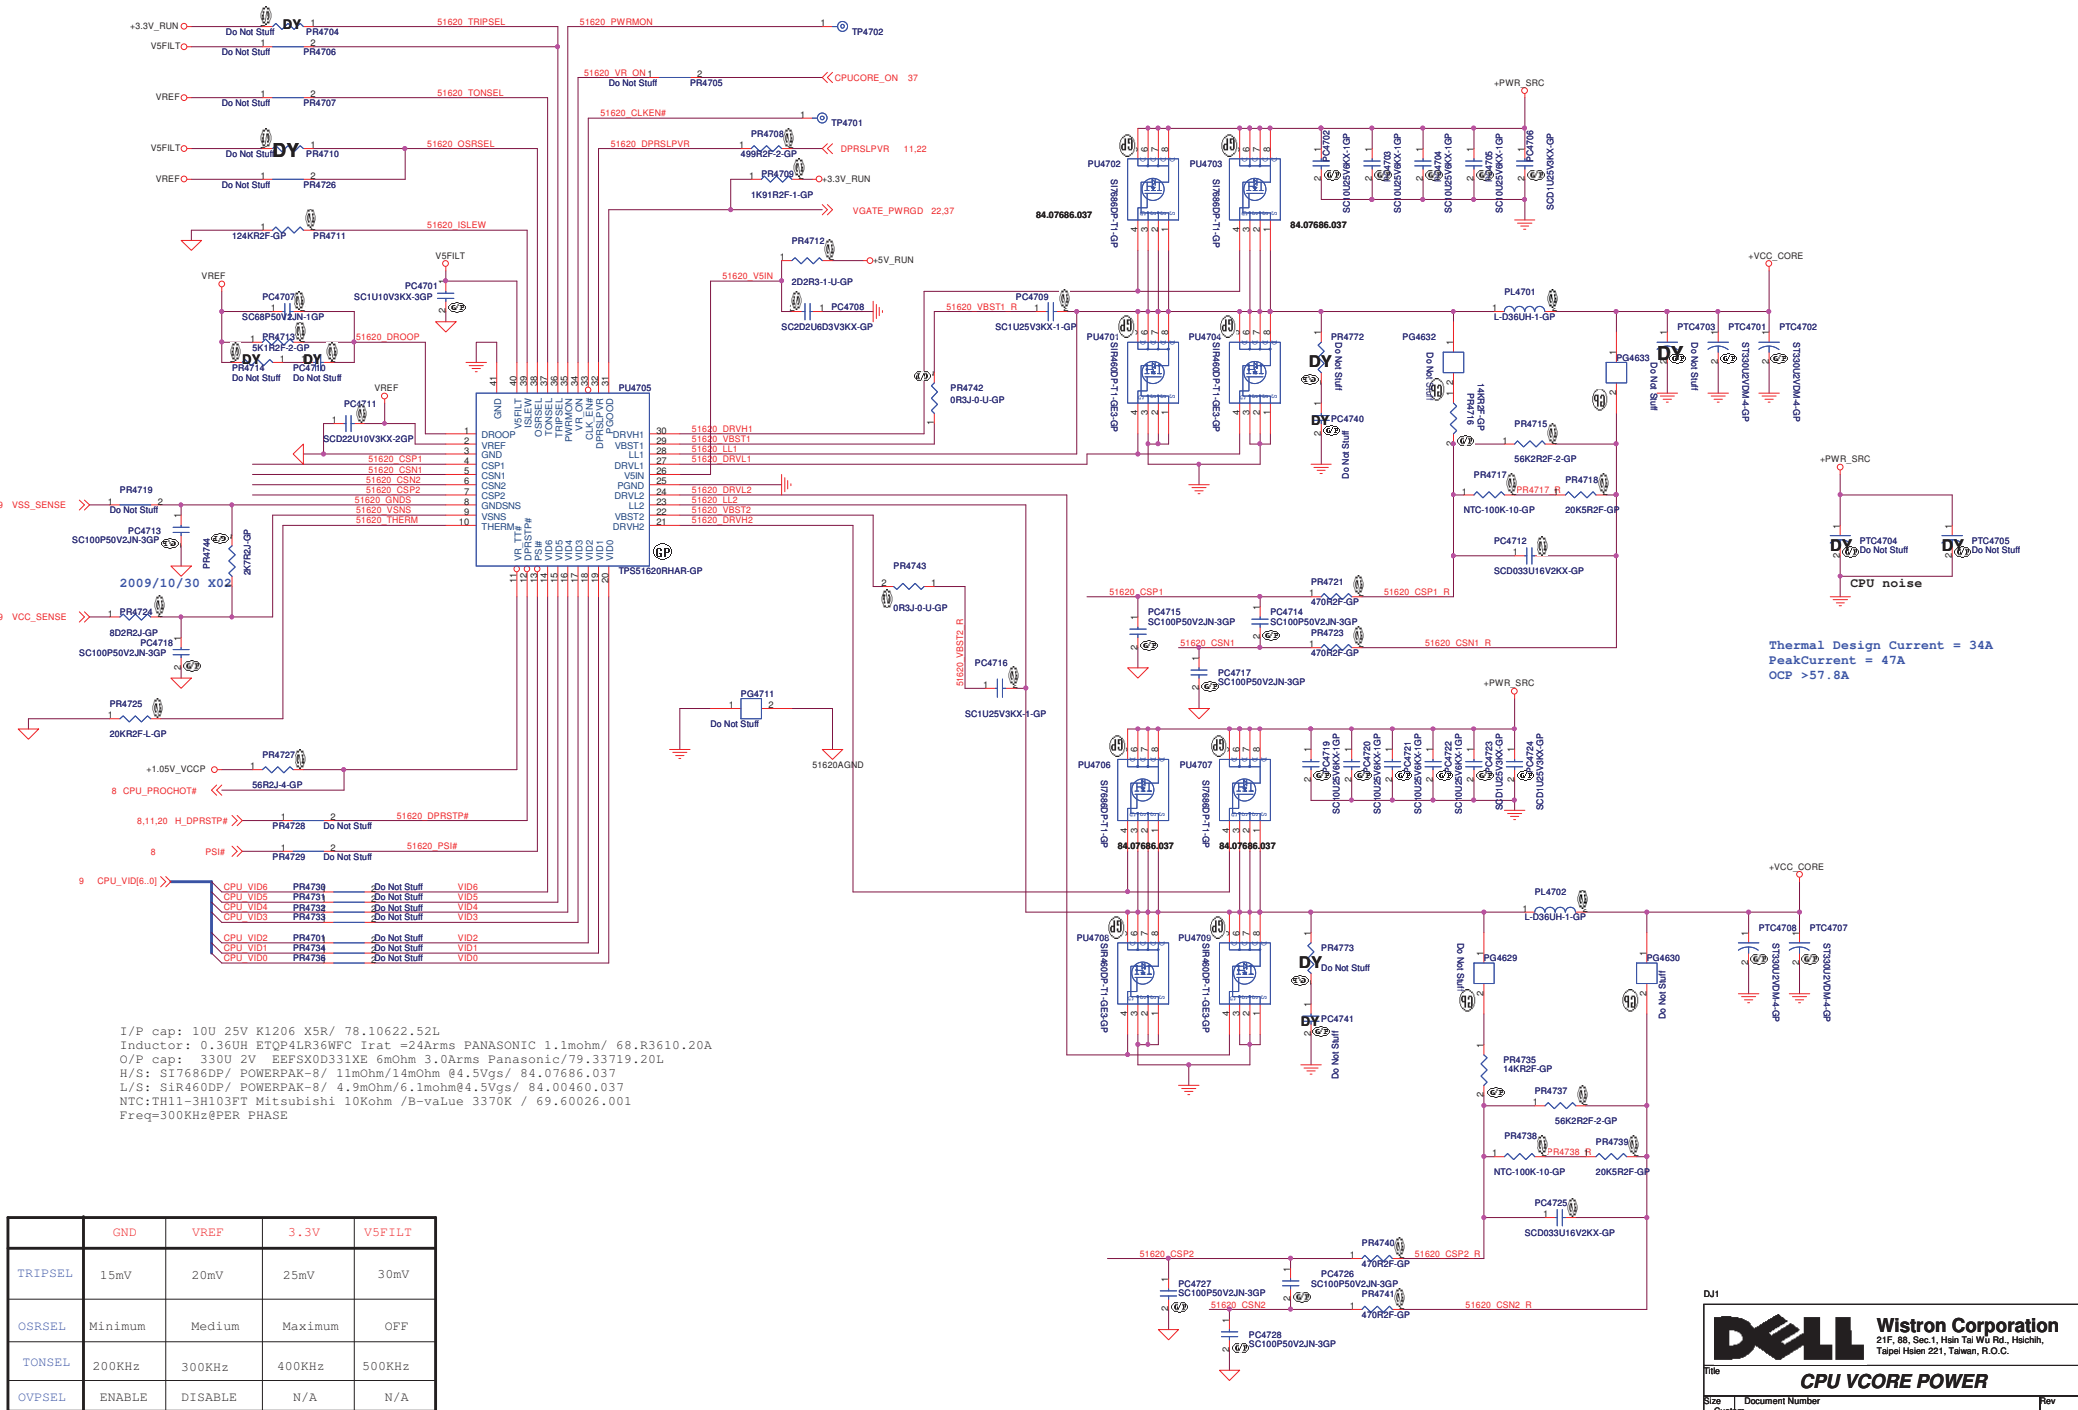

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

CPU VCORE POWER(2/2)

Size
A3


Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010Sheet 48 of 88

SSID = PWR.Plane.Regulator_1p05v

TPS51218 for +1.05V_VCCP

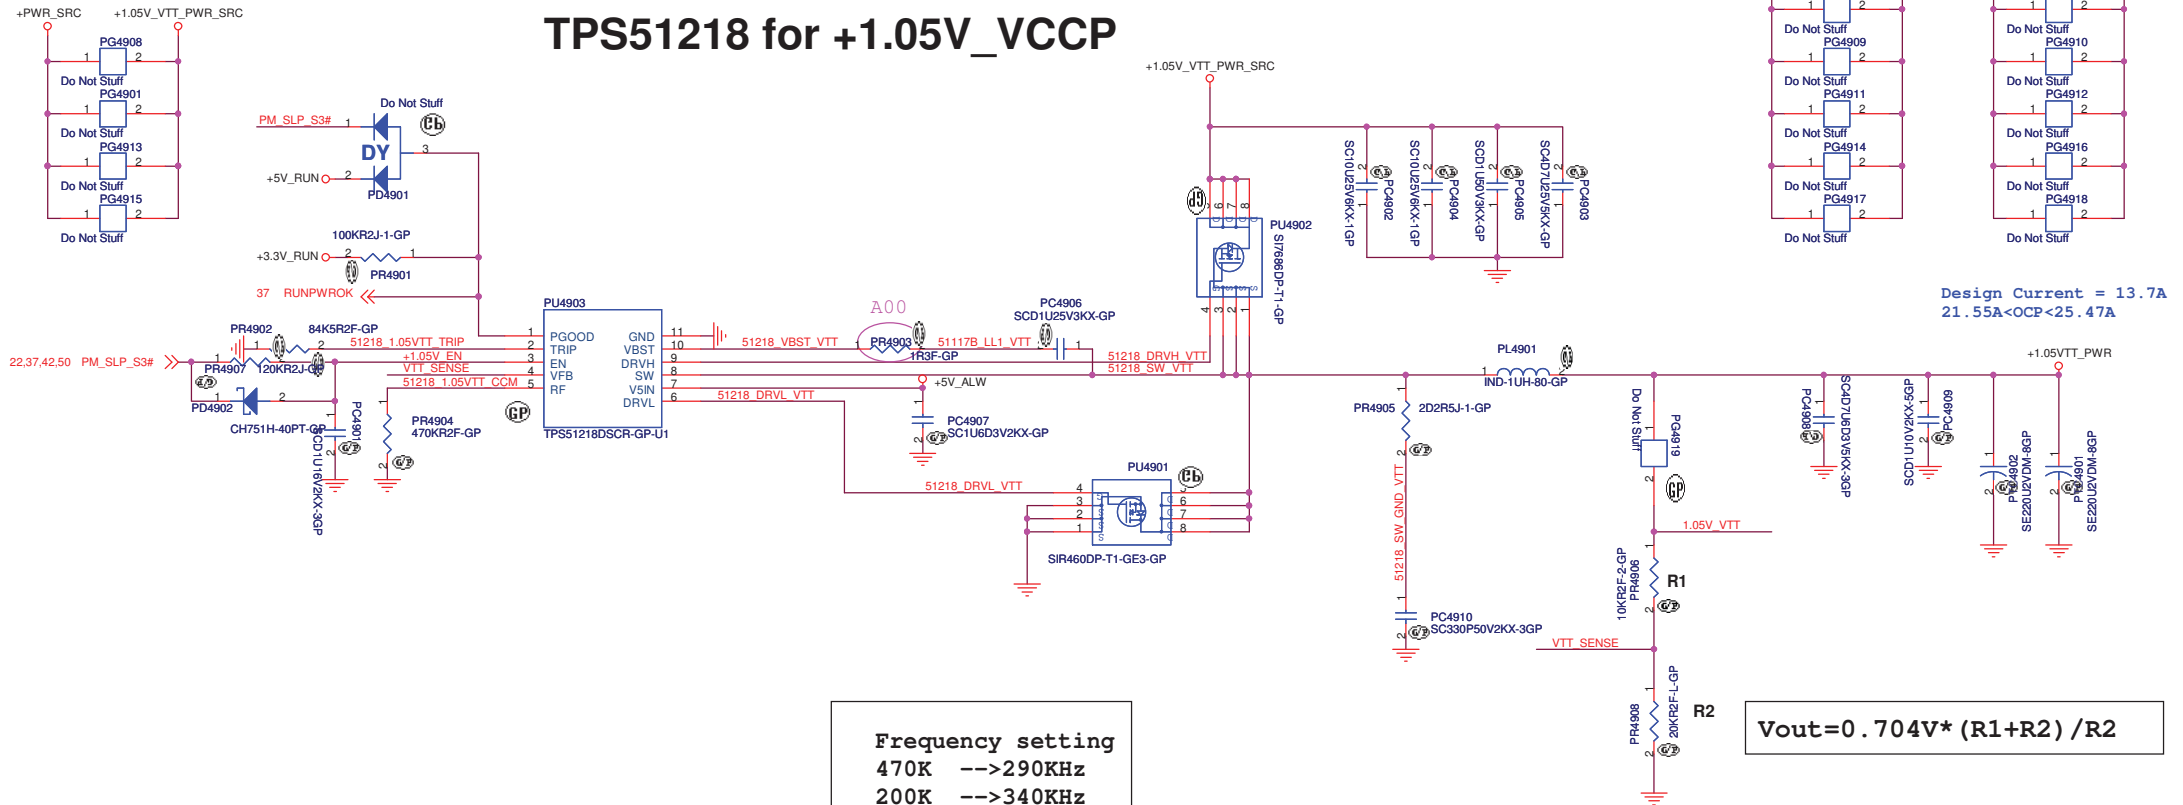


Frequency setting
470K -->290KHz
200K -->340KHz
100K -->380KHz
39K -->430KHz

$$V_{out} = 0.704V \cdot (R1 + R2) / R2$$

I/P cap: 10U 25V K1206 X5R/ 78.10622.52L
Inductor: 1uH FDUE1040D-1R0M=P3 TOKO DCR:2.35mohm Isat =17.9Arms 68.1R01B.10A
O/P cap: 220U 2V EEFCX0D221R 15mOhm 2.7Arms PANASONIC/ 79.22719.20L
H/S: SI7686DP-T1-E3/11mohm/ 14mOhm@4.5Vgs/ 84.07686.037
L/S: SIR460DP-T1-GE3-GP/4.5mOhm/6.1mohm@4.5Vgs/ 84.00460.037

DJ1

SSID = PWR.Plane.Regulator_1p5v0p75v

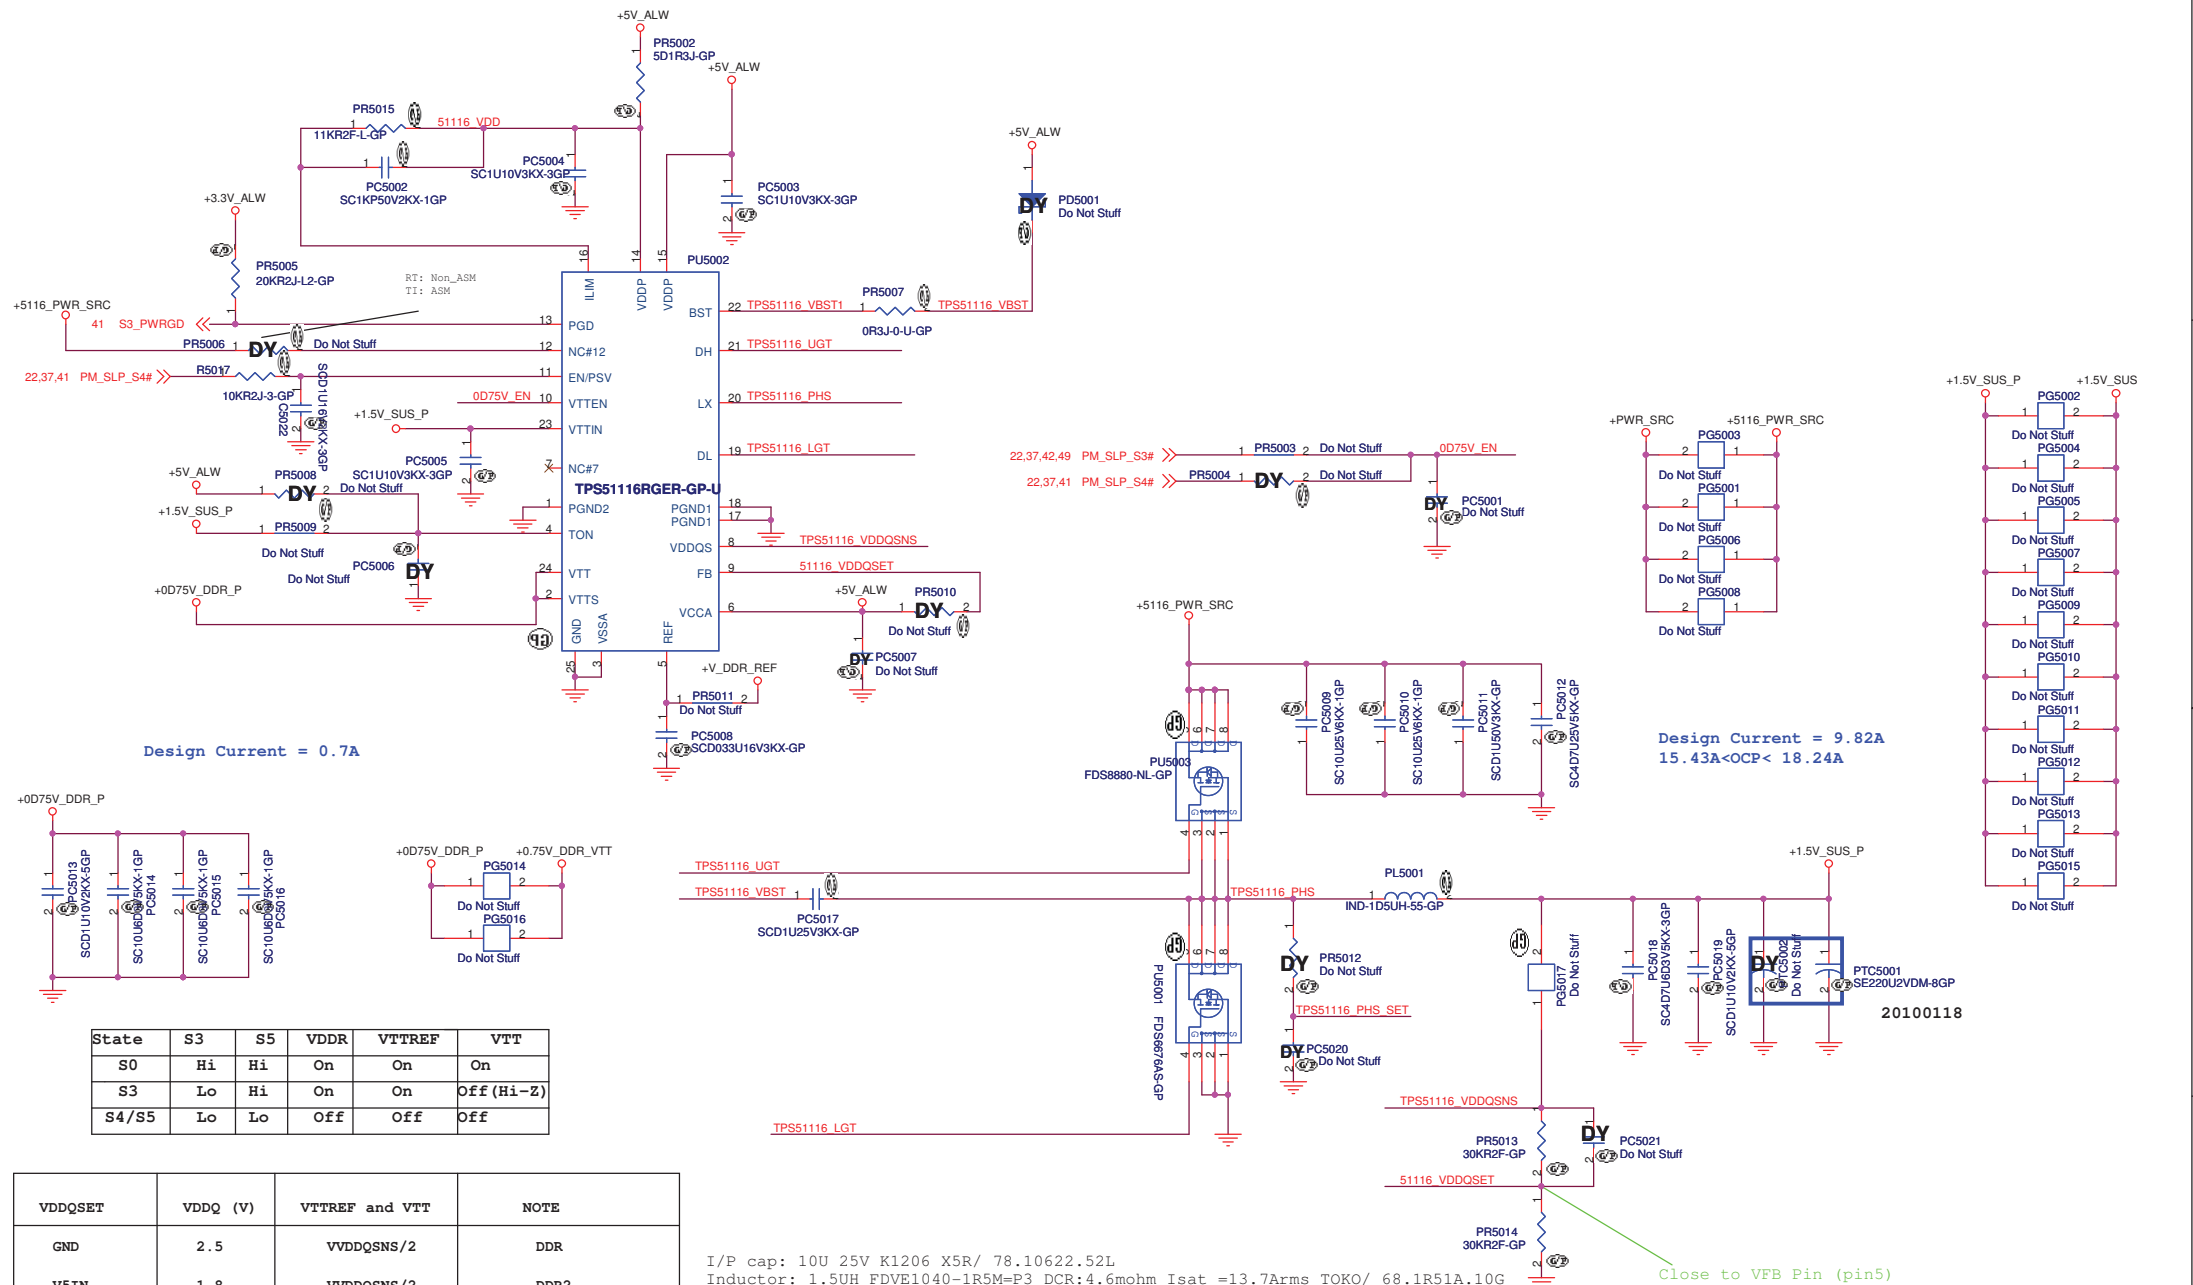

State	S3	S5	VDDR	VTTREF	VTT
S0	Hi	Hi	On	On	On
S3	Lo	Hi	On	On	Off (Hi-Z)
S4/S5	Lo	Lo	Off	Off	Off

VDDQSET	VDDQ (V)	VTTREF and VTT	NOTE
GND	2.5	VVDDQNS/2	DDR
V5IN	1.8	VVDDQNS/2	DDR2
FB Resistors	Adjustable	VVDDQNS/2	1.5 V < VVDDQ < 3 V

I/P cap: 10U 25V K1206 X5R/ 78.10622.52L
Inductor: 1.5UH FDVE1040-1R5M=P3 DCR:4.6mohm Isat =13.7Arms TOKO/ 68.1R51A.10G
O/P cap: 330U 2.5V EEFCX0E331QR 15mOhm 2.7Arms PANASONIC/ 79.3371V.20L
H/S: FDS8880 SO-8/9.6mohm/ 12mOhm@4.5Vgs/ 84.08880.037
L/S: FDS6676AS/ 5.9mOhm/7.25mohm@4.5Vgs/ 84.06676.A37
Switching freq-->400KHz

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Date: Wednesday, February 24, 2010

(Reserved)

Rev
A00

Sheet 51 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010Sheet 52 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00


Reserved

Date: Wednesday, February 24, 2010

Sheet 53 of 88


SSID = VIDEO

LVDS CONNECTOR

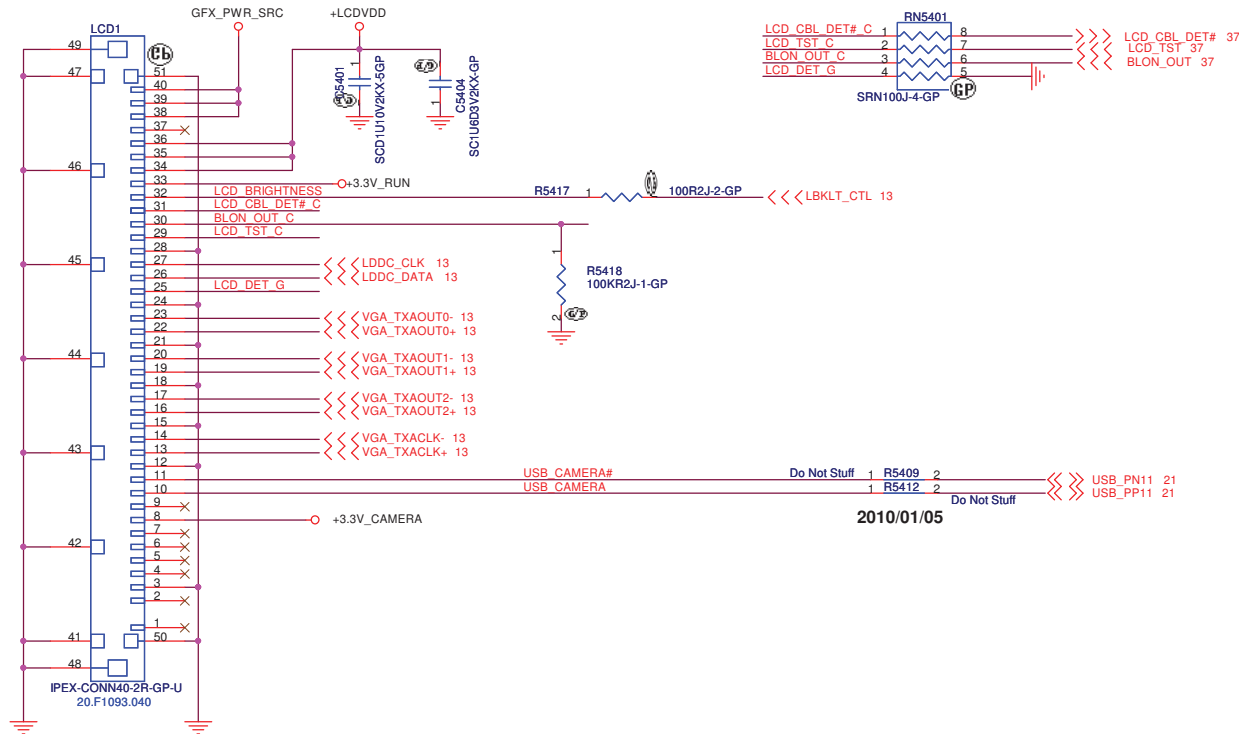


SSID = Inverter

INVERTER POWER


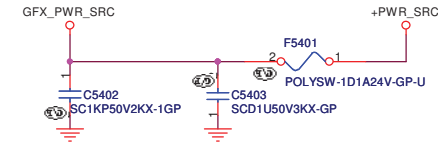


SSID = VIDEO

LCD POWER

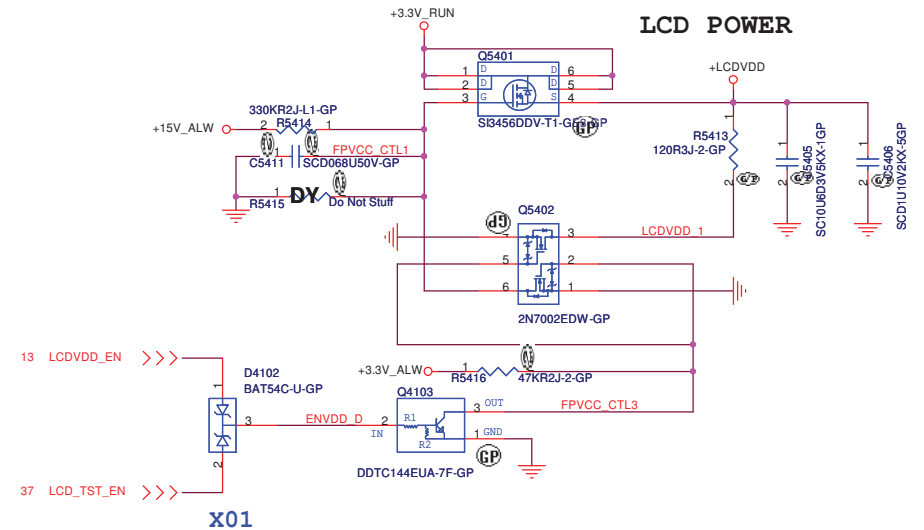

Camera Power



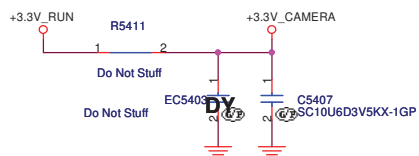


DJ1

SSID = VIDEO

Layout Note:

- *Pi-filter & 150 Ohm pull-down resistors should be as close as to CRT CONN.
- * RGB signal will hit 75 Ohm first, then pi-filter, finally CRT CONN.

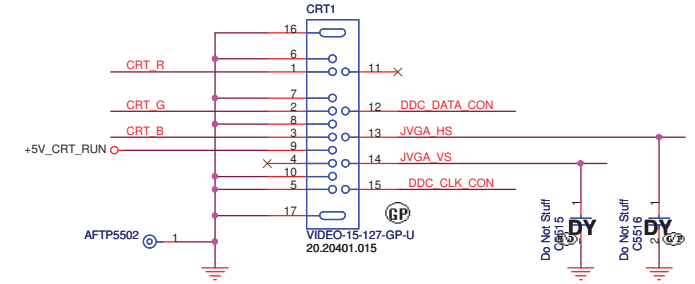
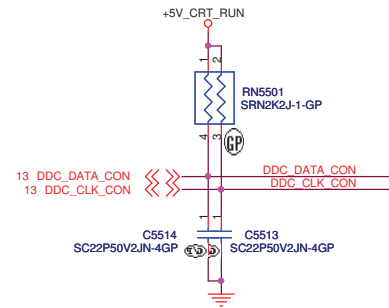
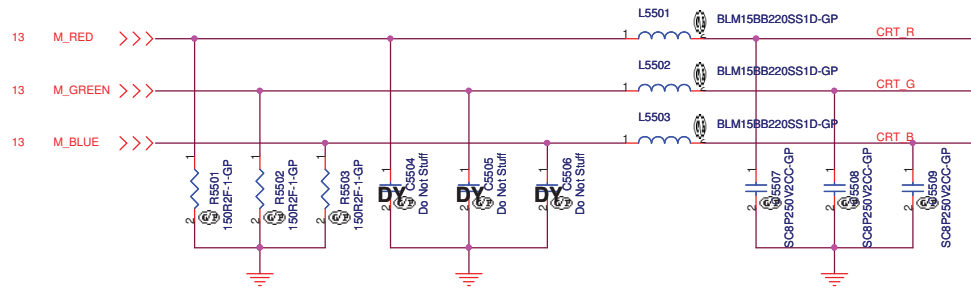


AFTP5501	1	+5V CRT RUN
AFTP5508	1	DDC DATA CON
AFTP5503	1	DDC CLK CON
AFTP5506	1	CRT R
AFTP5507	1	CRT G
AFTP5504	1	CRT B

TP5505	1	JVGA HS
TP5509	1	JVGA VS

2010/01/15

Hsync & Vsync level shift

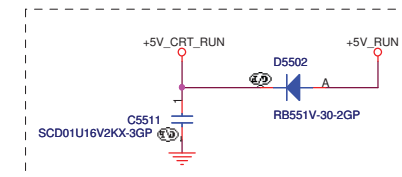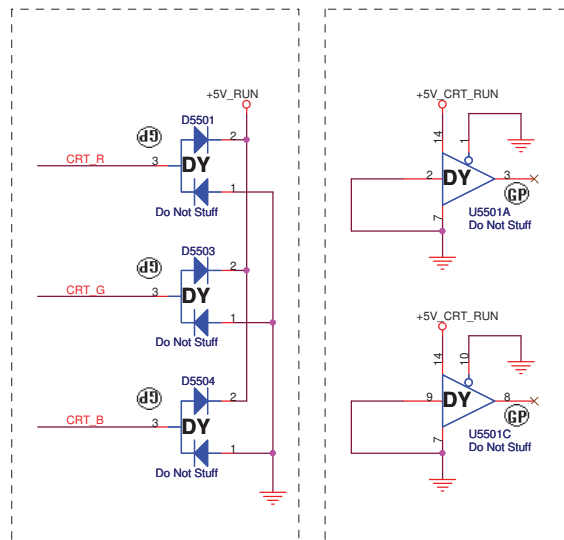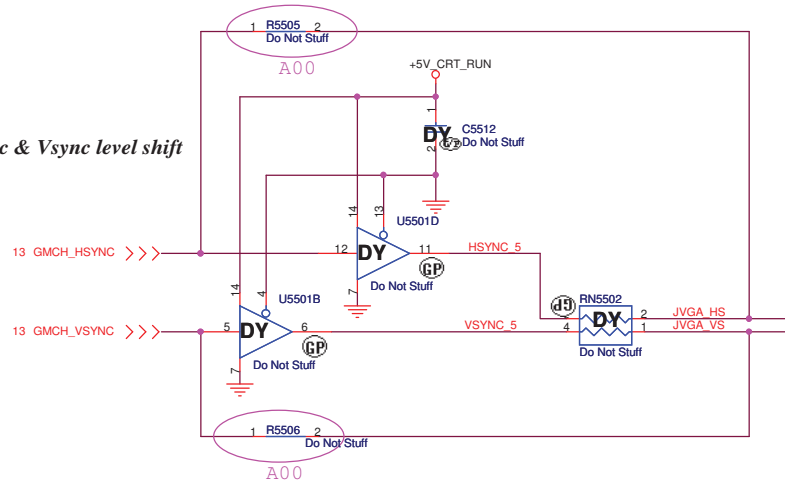

DJ1

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 10, 2010

Sheet 56 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

HDMI

Size
A3


Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010


Sheet 57 of 88

SSID = User.Interface

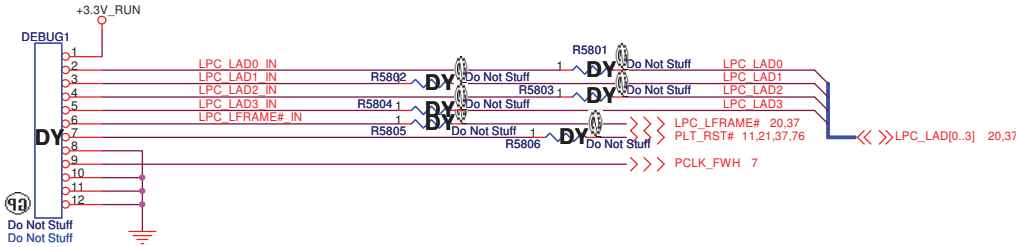



ITP Connector

H_CPURST# use pull-up Resistor close
ITP connector 500 mil (max),
others place near CPU side.

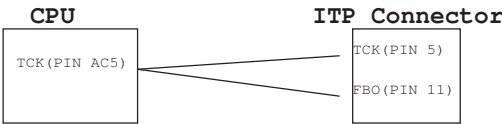


SSID = Thermal

Fan Connector

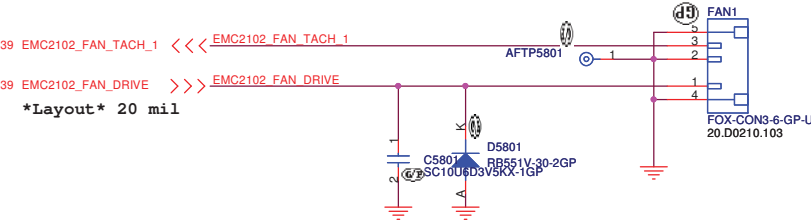


SSID = SATA

SATA HDD Connector

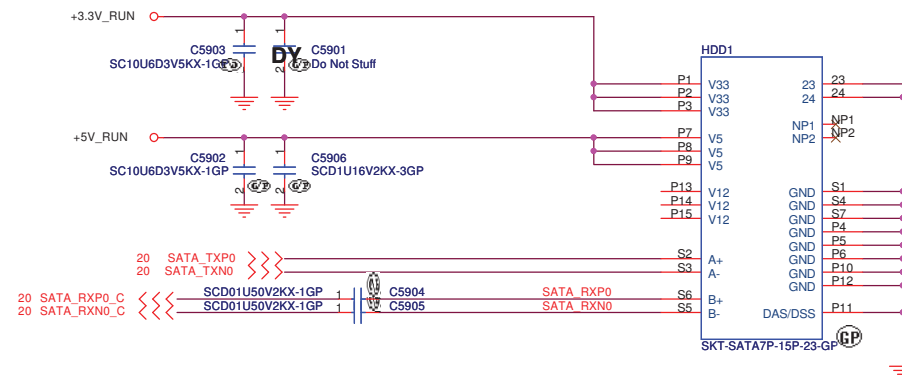

ODD Connector

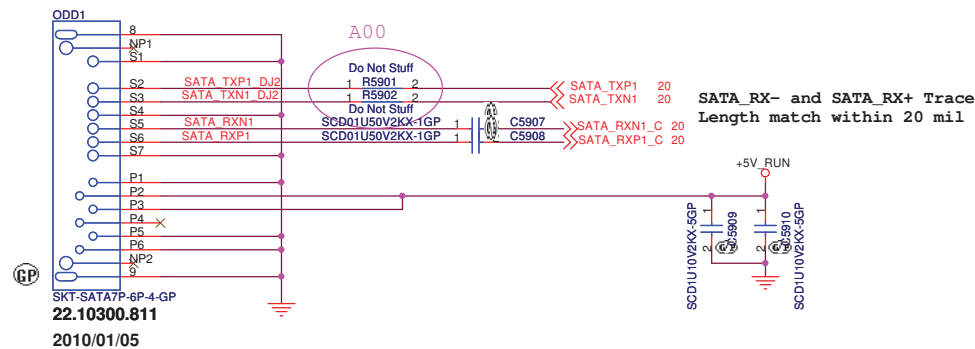

DJ1

DELL Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

HDD/ODD

Size

Document Number

DJ1 Montevina UMA

Rev


A00

Date: Friday, February 26, 2010


Sheet 59 of 88

SSID = AUDIO


Speaker Connector

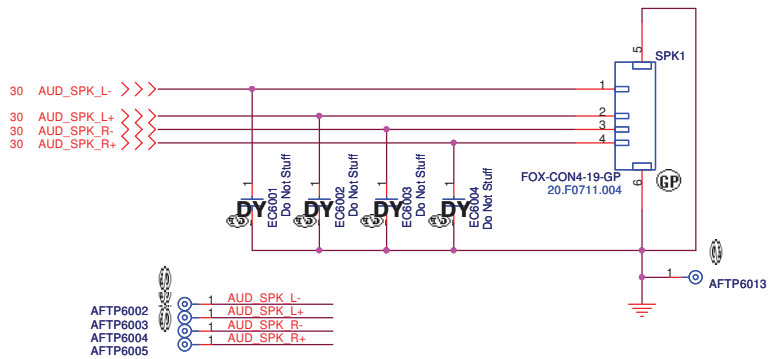


LINE OUT

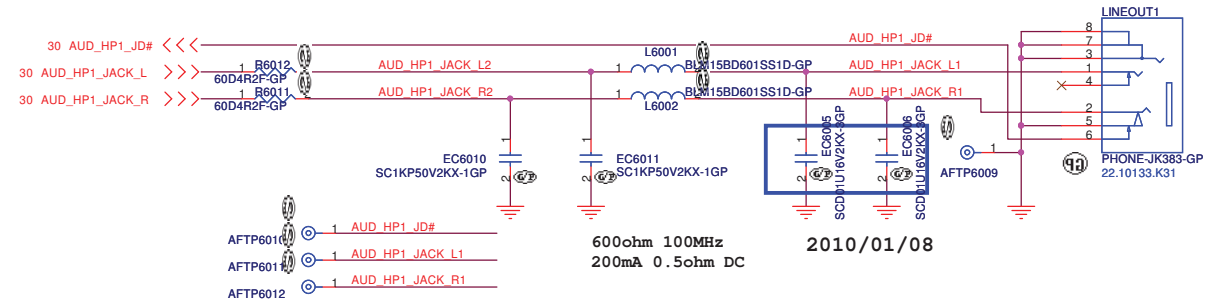

Internal Microphone

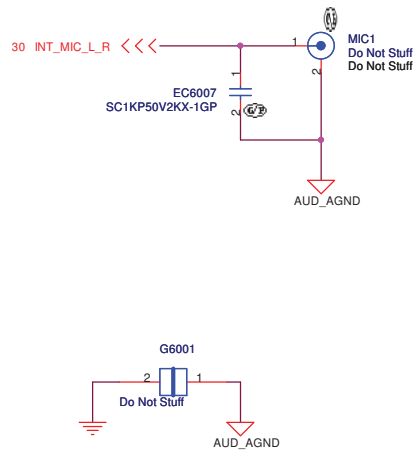

MIC IN

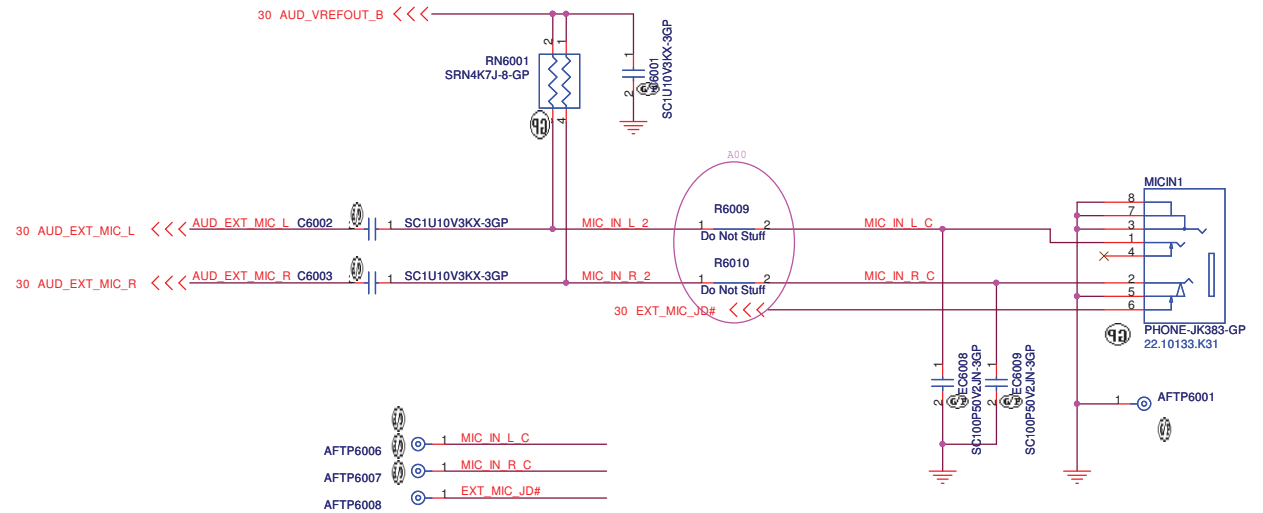

DJ1

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA


Rev
A00

Date: Wednesday, February 24, 2010

Sheet 61 of 88


```
SSID = Flash.ROM
```

SPI FLASH ROM (16M bits) for KBC

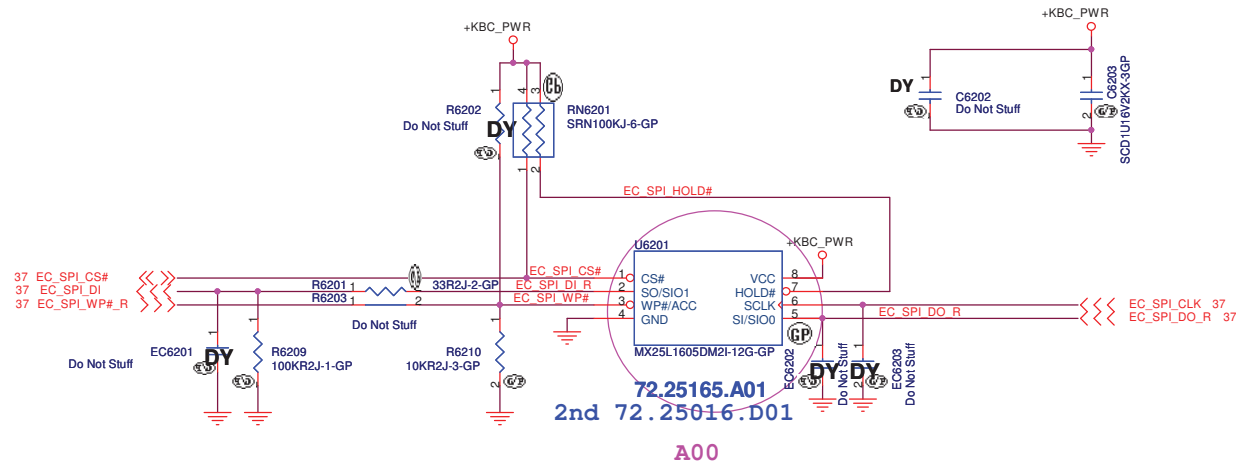


SSID = RBATT

RTC Connector

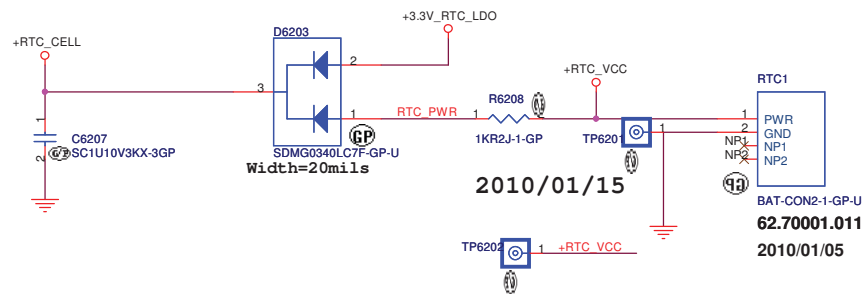


DJ1

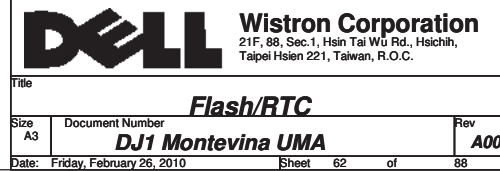


SSID = USB



IO Board USB Power

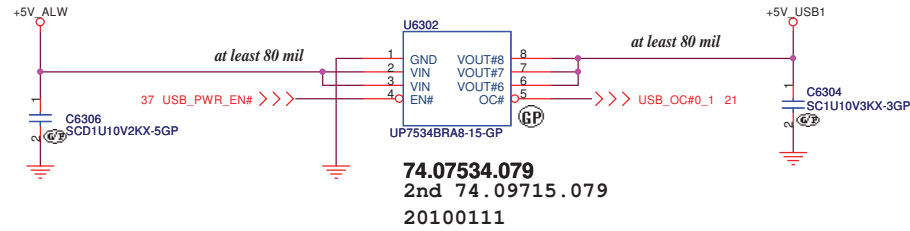


Right USB Power

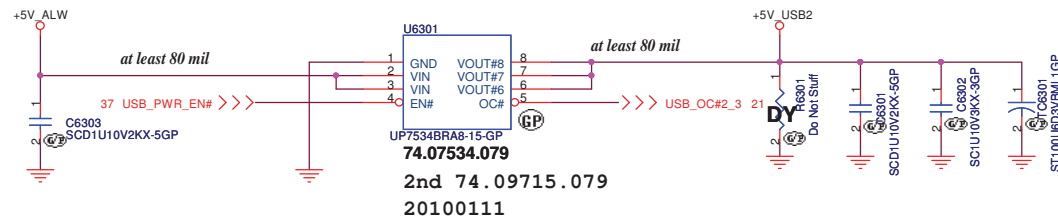

21	USB_PN2 <<>>	USB_PN2	Do Not Stuff	1	R6302	2	USB_P2-
21	USB_PP2 <<>>	USB_PP2	Do Not Stuff	1	R6303	2	USB_P2+
2010/01/05							
21	USB_PN3 <<>>	USB_PN3	Do Not Stuff	1	R6304	2	USB_P3-
21	USB_PP3 <<>>	USB_PP3	Do Not Stuff	1	R6305	2	USB_P3+



USB Socket

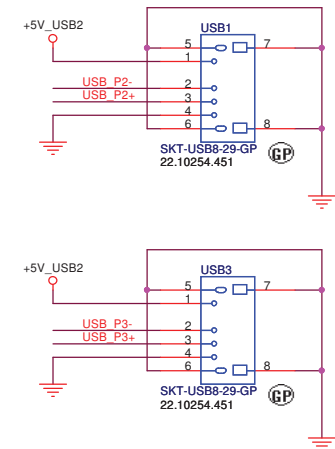

AFTP6304	1	+5V_USB2
AFTP6302	1	USB_P2-
AFTP6301	1	USB_P2+
AFTP6306	1	USB_P3-
AFTP6305	1	USB_P3+

DJ1

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Date: Wednesday, February 24, 2010

Rev
A00

Sheet 64 of 88

Reserved

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00


Date: Wednesday, February 24, 2010

Sheet 65 of 88


SSID = LED

Power button LED


Power LED

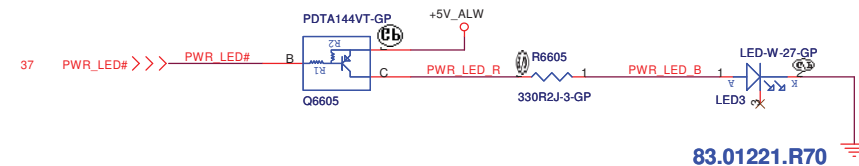

Battery LED

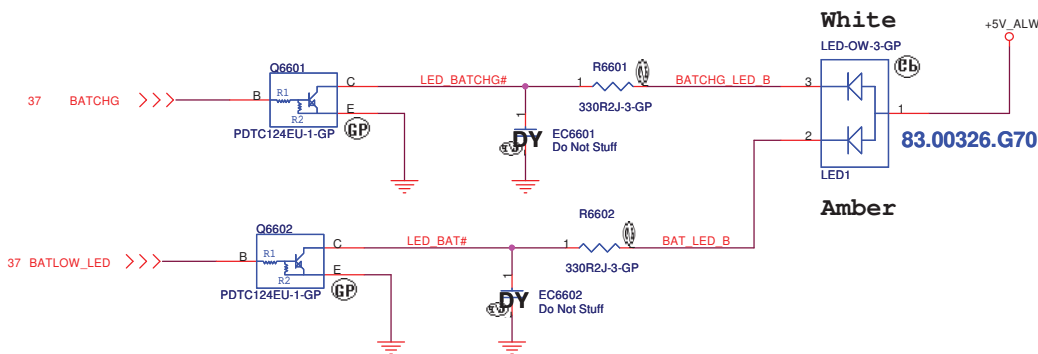

HDD LED

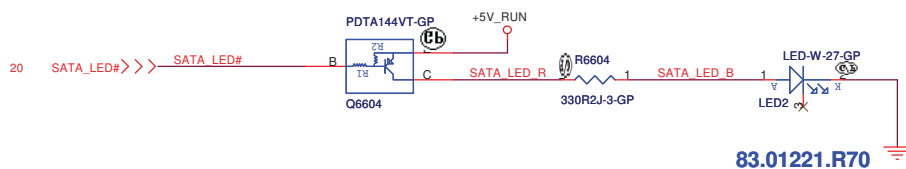

DJ1

DELL Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

LED

Size
A3

Document Number

DJ1 Montevina UMA

Rev

A00

Date: Friday, February 26, 2010

Sheet 66 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Reserved

Size
A3

Document Number
DJ1 Montevina UMA


Rev
A00

Date: Wednesday, February 24, 2010

Sheet 67 of 88


SSID = KBC


Internal KeyBoard Connector

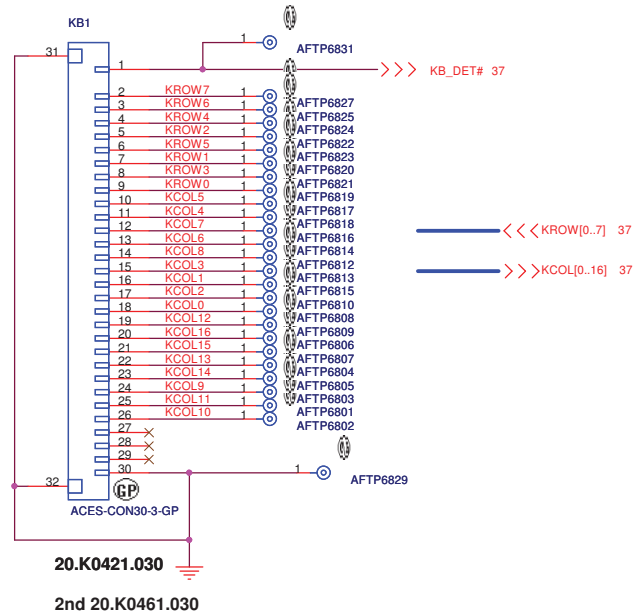

```
SSID = Touch.Pad
```

TouchPad Connector

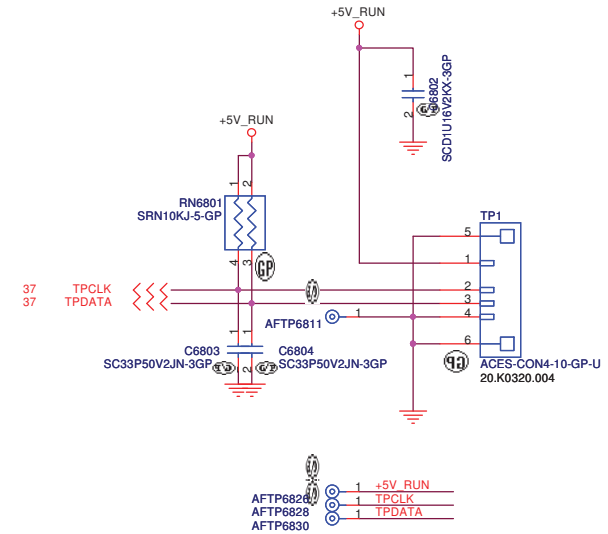

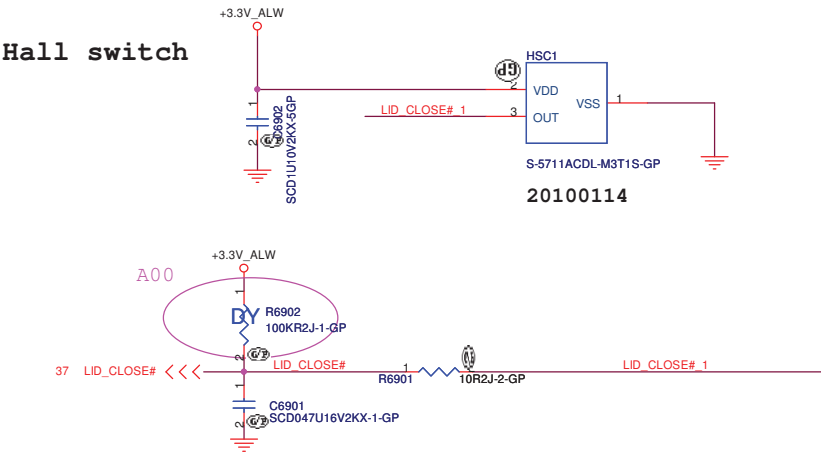

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title



Reserved

Size	Document Number	Rev
A3	DJ1 Montevina UMA	A00

Date:	Wednesday, February 24, 2010	Sheet	70	of	88
-------	------------------------------	-------	----	----	----

SSID = SDIO

SD/XD/MS Card Reader

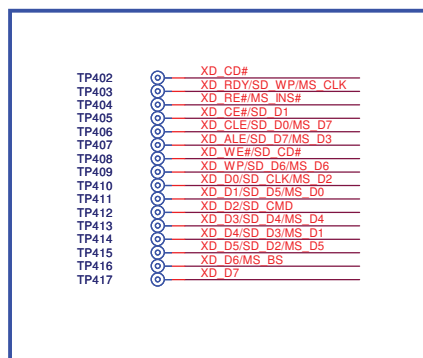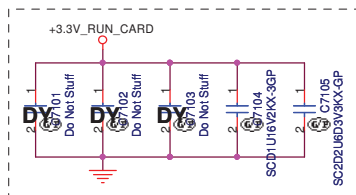

2010/01/15

2010/01/15



32 XD_D0/SD_CLK/MS_D2
32 XD_D1/SD_D5/MS_D0
32 XD_D2/SD_CMD
32 XD_D3/SD_D4/MS_D4
32 XD_D4/SD_D3/MS_D1
32 XD_D5/SD_D2/MS_D5
32 XD_D6/MS_BS
32 XD_D7

32 XD_RDY/SD_WP/MS_CLK
32 XD_RE#/MS_INS#
32 XD_CE#/SD_D1
32 XD_CLE/SD_D0/MS_D7
32 XD_ALE/SD_D7/MS_D3
32 XD_WE#/SD_CD#
32 XD_WP/SD_D6/MS_D6
32 XD_CD#

+3.3V_RUN_CARD

CARD1

SD_VCC
MS_VCC
XD_VCC

8 XD_D0
9 XD_D1
26 XD_D2
27 XD_D3
28 XD_D4
30 XD_D5
31 XD_D6
32 XD_D7

1 XD_R/B
2 XD_RE
3 XD_CE
4 XD_CLE
5 XD_ALE
6 XD_WE
7 XD_WP
34 XD_CD_SW

NP1
NP2

NP1
NP2

CARDBUS36P-1-GP

20.I0109.001

SD_DAT0
SD_DAT1
SD_DAT2
SD_DAT3

SD_CMD
SD_CLK
SD_CD_SW
SD_WP_SW

MS_DATA0
MS_DATA1
MS_DATA2
MS_DATA3

MS_BS
MS_INS
MS_SCLK

4IN1_GND
4IN1_GND
4IN1_GND
4IN1_GND

>>> XD_CLE/SD_D0/MS_D7 32
>>> XD_CE#/SD_D1 32
>>> XD_D5/SD_D2/MS_D5 32
>>> XD_D4/SD_D3/MS_D1 32

>>> XD_D2/SD_CMD 32
>>> XD_D0/SD_CLK/MS_D2 32
>>> XD_WE#/SD_CD# 32
>>> XD_RDY/SD_WP/MS_CLK 32

>>> XD_D1/SD_D5/MS_D0 32
>>> XD_D4/SD_D3/MS_D1 32
>>> XD_D0/SD_CLK/MS_D2 32
>>> XD_ALE/SD_D7/MS_D3 32

>>> XD_D6/MS_BS 32
>>> XD_RE#/MS_INS# 32
>>> XD_RDY/SD_WP/MS_CLK 32

13
22
38
37

GP

2010/01/15

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

CARD Reader Connector

Size

Document Number

DJ1 Montevina UMA

Rev

A00

Date: Friday, February 26, 2010

Sheet 71 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3



Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 72 of 88

SSID = User.Interface

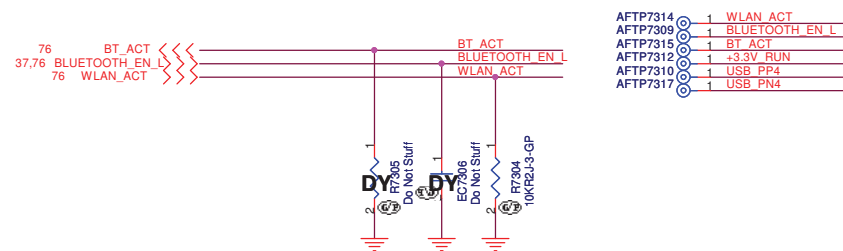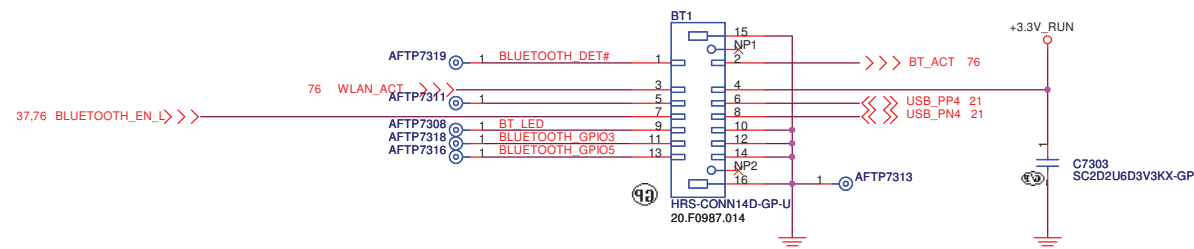

DJ1

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Reserved

Date: Wednesday, February 24, 2010Sheet 74 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA


Rev
A00

Date: Wednesday, February 24, 2010


Sheet 75 of 88

Reserved

SSID = PWR.Support

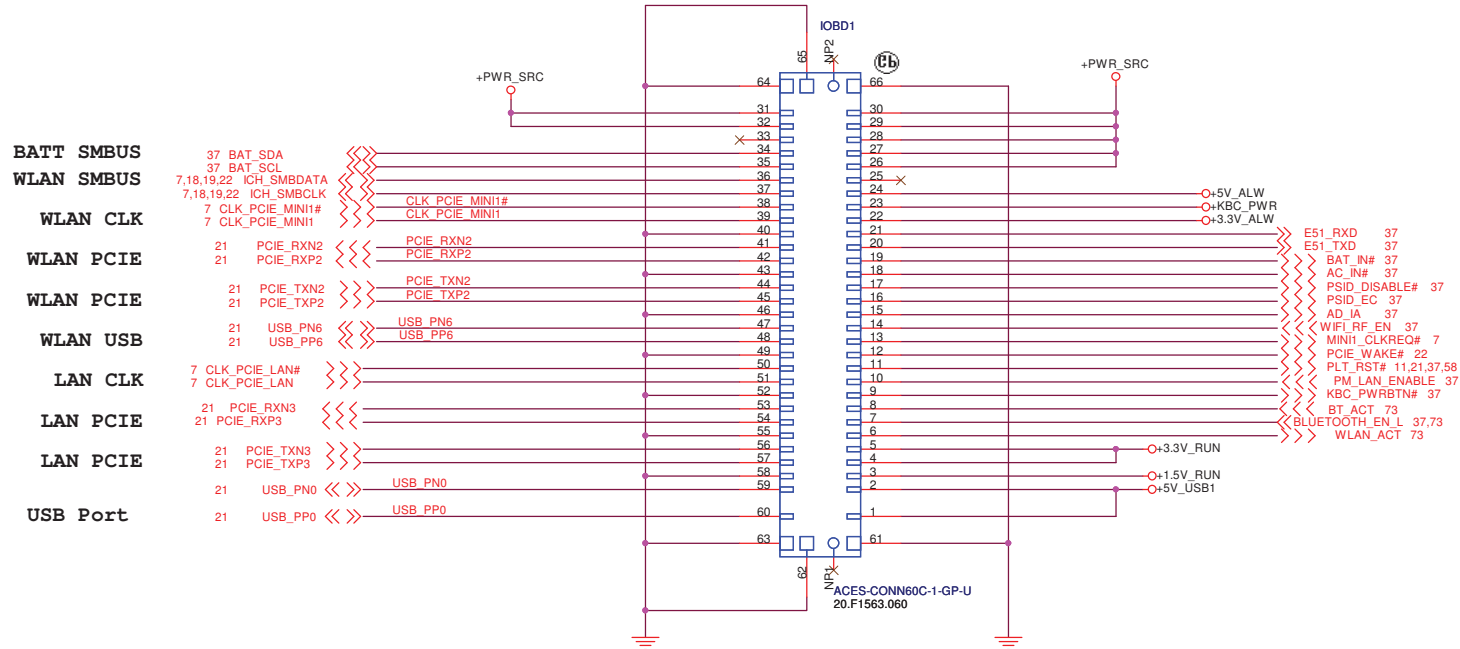

Close to IOBD Conn

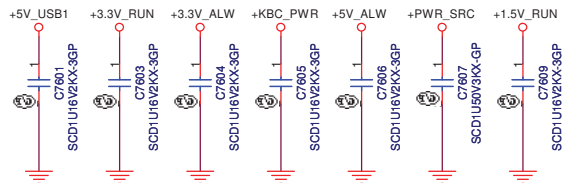

DJ1

DELL		Wistron Corporation 21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.	
Title: IO Board Connector			
Size: A3	Document Number: DJ1 Montevina UMA	Rev: A00	
Date: Friday, February 26, 2010	Sheet 76 of 88		

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size
A3

Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 77 of 88

Reserved

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Reserved

Size
A3




Document Number
DJ1 Montevina UMA

Rev
A00

Date: Wednesday, February 24, 2010

Sheet 78 of 88

SSID = Mechanical

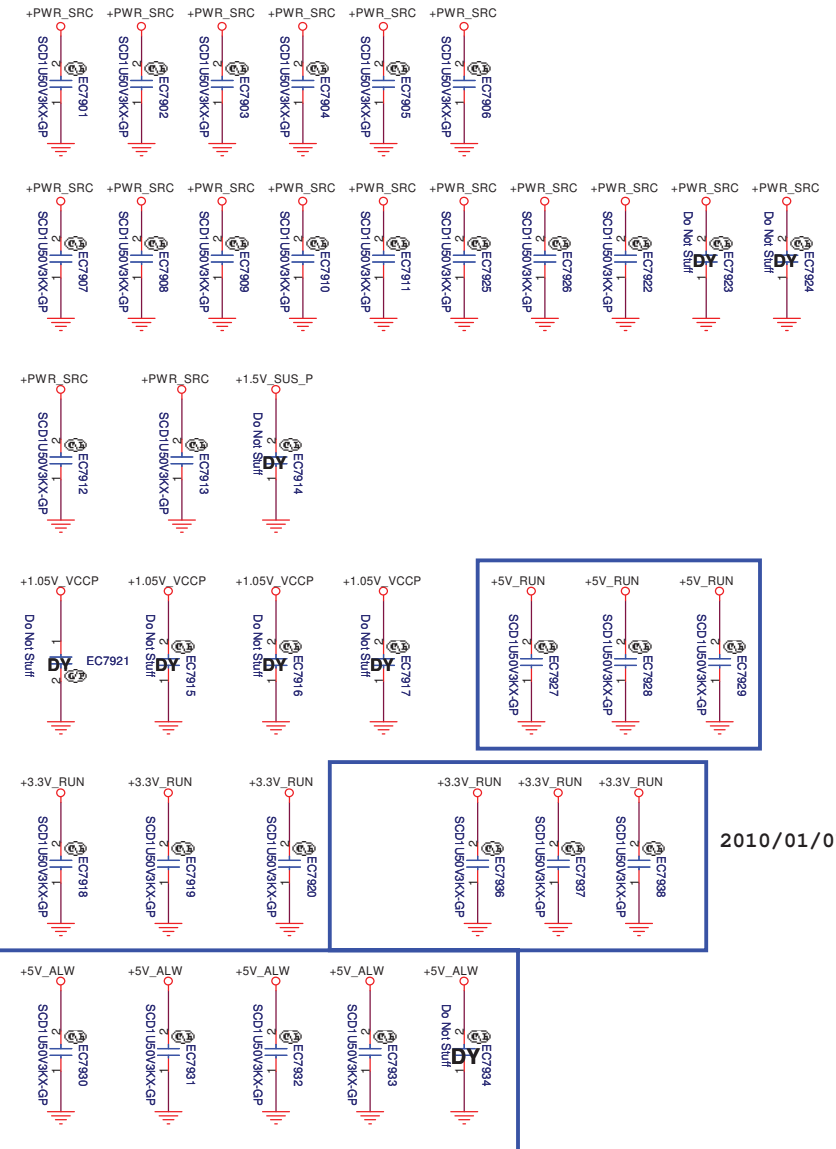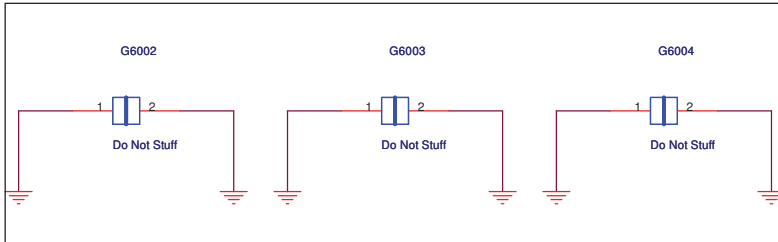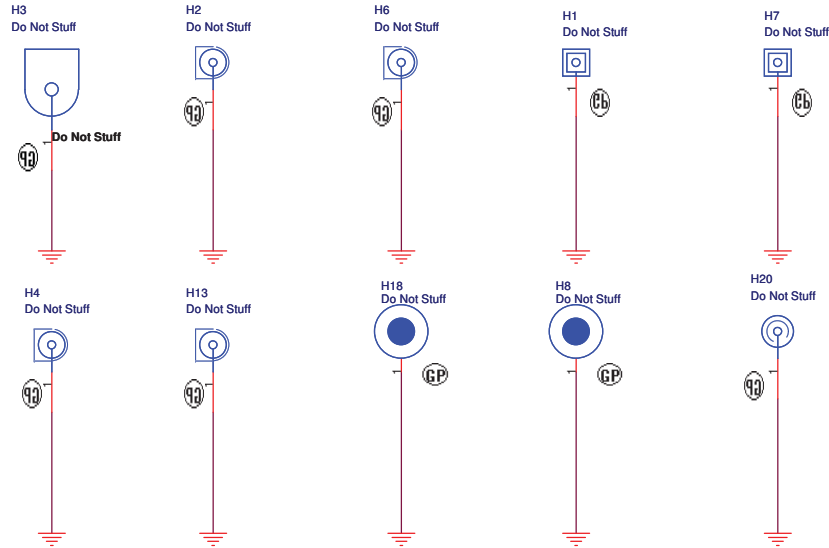

EMI Request

2010/01/07

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size

A3

Document Number

DJ1 Montevina UMA

Rev

A00

Date: Wednesday, February 24, 2010

Sheet 80 of 88

(Blanking)

(Blanking)

(Blanking)

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

Size

Document Number

Rev

Custom

DJ1 Montevina UMA

A00

Date: Wednesday, February 24, 2010

Sheet 84 of 88

(Blanking)

DJ1



Wistron Corporation

21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

(Reserved)

Size	Document Number	Rev
Custom	DJ1 Montevina UMA	A00

Date: Wednesday, February 24, 2010	Sheet 85 of 88
------------------------------------	----------------

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

(Reserved)

Size
A3

Document Number
DJ1 Montevina UMA

Date: Wednesday, February 24, 2010

Rev
A00

Sheet 86 of 88

(Blanking)

DJ1



Wistron Corporation
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

(Reserved)

SizeA3

Document NumberDJ1 Montevina UMA

RevA00

Date: Wednesday, February 24, 2010Sheet 87 of 88

Item	Page#	Date	Request By	Issue description	Solution Description	Rev.
1	20	2010/01/04	Wistron	R2018.R2019 to J accuracy	Change R2018 R2019 to 63.33434.1DL	X01
2	54	2010/01/04	Wistron	D4102 Change	D4102 change to 83.00054.Q81	X01
3	37	2010/01/04	Wistron	MB version chang to X01	Change R3722 pop,R3727 dummy.	X01
4	59	2009/01/06	Wistron	ME change ODD&RTC Conn	Change ODD Conn to 22.10300.811 Change RTC Conn to 62.70001.011	X01
5	79	2009/01/07	Wistron	EMI Request	Add EC7927 EC7928 EC7929 EC7936 EC7937 EC7938 EC7930 EC7931 EC7932 EC7933 EC7934 POP EC7913 EC7912 EC7925 EC7922 EC7926 PC4610 PC4615	X01
6	54 32 63	2010/01/07	Wistron	USB layout change	Del TR5401 TR3201 TR6301 TR6302 Change R5409 R5412 R3211 R3210 R6302 R6303 R6304 R6305 to 0ohm	X01
7	42	2010/01/07	Wistron	Change R4210 for POP noise	Change R4210 to 10K 63.10334.1DL	X01
8	60	2010/01/08	IDT	IDT Request change EMI CAP to 0.01u	EC6005 EC6006 change to 0.01u 78.10321.2FL	X01
9	63	2010/01/11	Wistron	USB power switch change	Change U6301 U6302 to 74.07534.079	X01
10	37	2010/01/12	Wistron	Prevent BIOS damage	POP U3702 74.00690.I7B	X01
11	37	2010/01/12	DELL	Add one capacitor for IPCC function	Add C3721 close KBC Pin AD_IA	X01
12	69	2010/01/14	Wistron	SMT issue	Change HSC1 layout symbol to Seiko 74.05711.07B	X01
13	47 49 50	2010/01/16	Wistron	Power team request	change PC4740 PC4741 PC4910 PC5020to 78.33124.2FL	X01
14	46	2010/01/18	Wistron	Power team request	DY PTC4603.change PTC5001 PTC4602	X01
15	37	2010/02/10	Wistron	U3702 reset timing is too long	DY U3702	A00
16	37	2010/02/10	Wistron	Change PCB version from X01 to A00	DY R3722 and R3728, stuff R3727 and R3723	A00
17	20 37 55	2010/02/24	Wistron	Change 0ohm to short pad.	Change R2014 R3725 R3748 R5505 R5506 R3012 R3014 R3018 RN5901 R6009 R6010	A00
18	37	2010/02/24	DELL	Add one FET for RCID function	Reserve Q3706	A00
19	69	2010/02/25	Wistron	Do not stuff R6902	Reserve R6902	A00



Wistron Corporation

21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

Title

Change History

Size A3

Document Number

Rev A00

Date: Thursday, February 25, 2010

Sheet 88 of 88