




Customer Care Europe, Middle East & Africa	DCT-4 Common Baseband	Version 4.0 Approved
Technical Services / SCCE Training Group	NHL-10 (6600)	(PWB) NH4_051.v05a / HWID 8101/8102
© 2004 Nokia Corporation Only for training and service purposes	18.02.2004	Changes for NH4_055 / HWID 8210 in red




Table of Contents	Page
DCT-4 Common Baseband	1
UEM, Bottom Connector, SIM	2
UPP,, Bluetooth, Irda, Camera	3
FLASH, SDRAM	4
UI-, Display Connector, Vibra, Illumination driver	5
BB-RF Connection Overview	6
RF GSM	7
Signal Overview	8
Component Finder NH4_051.v05a	9
Component Finder NH4_055	10

! Changes for PWB version NH4_055 are marked in red square !

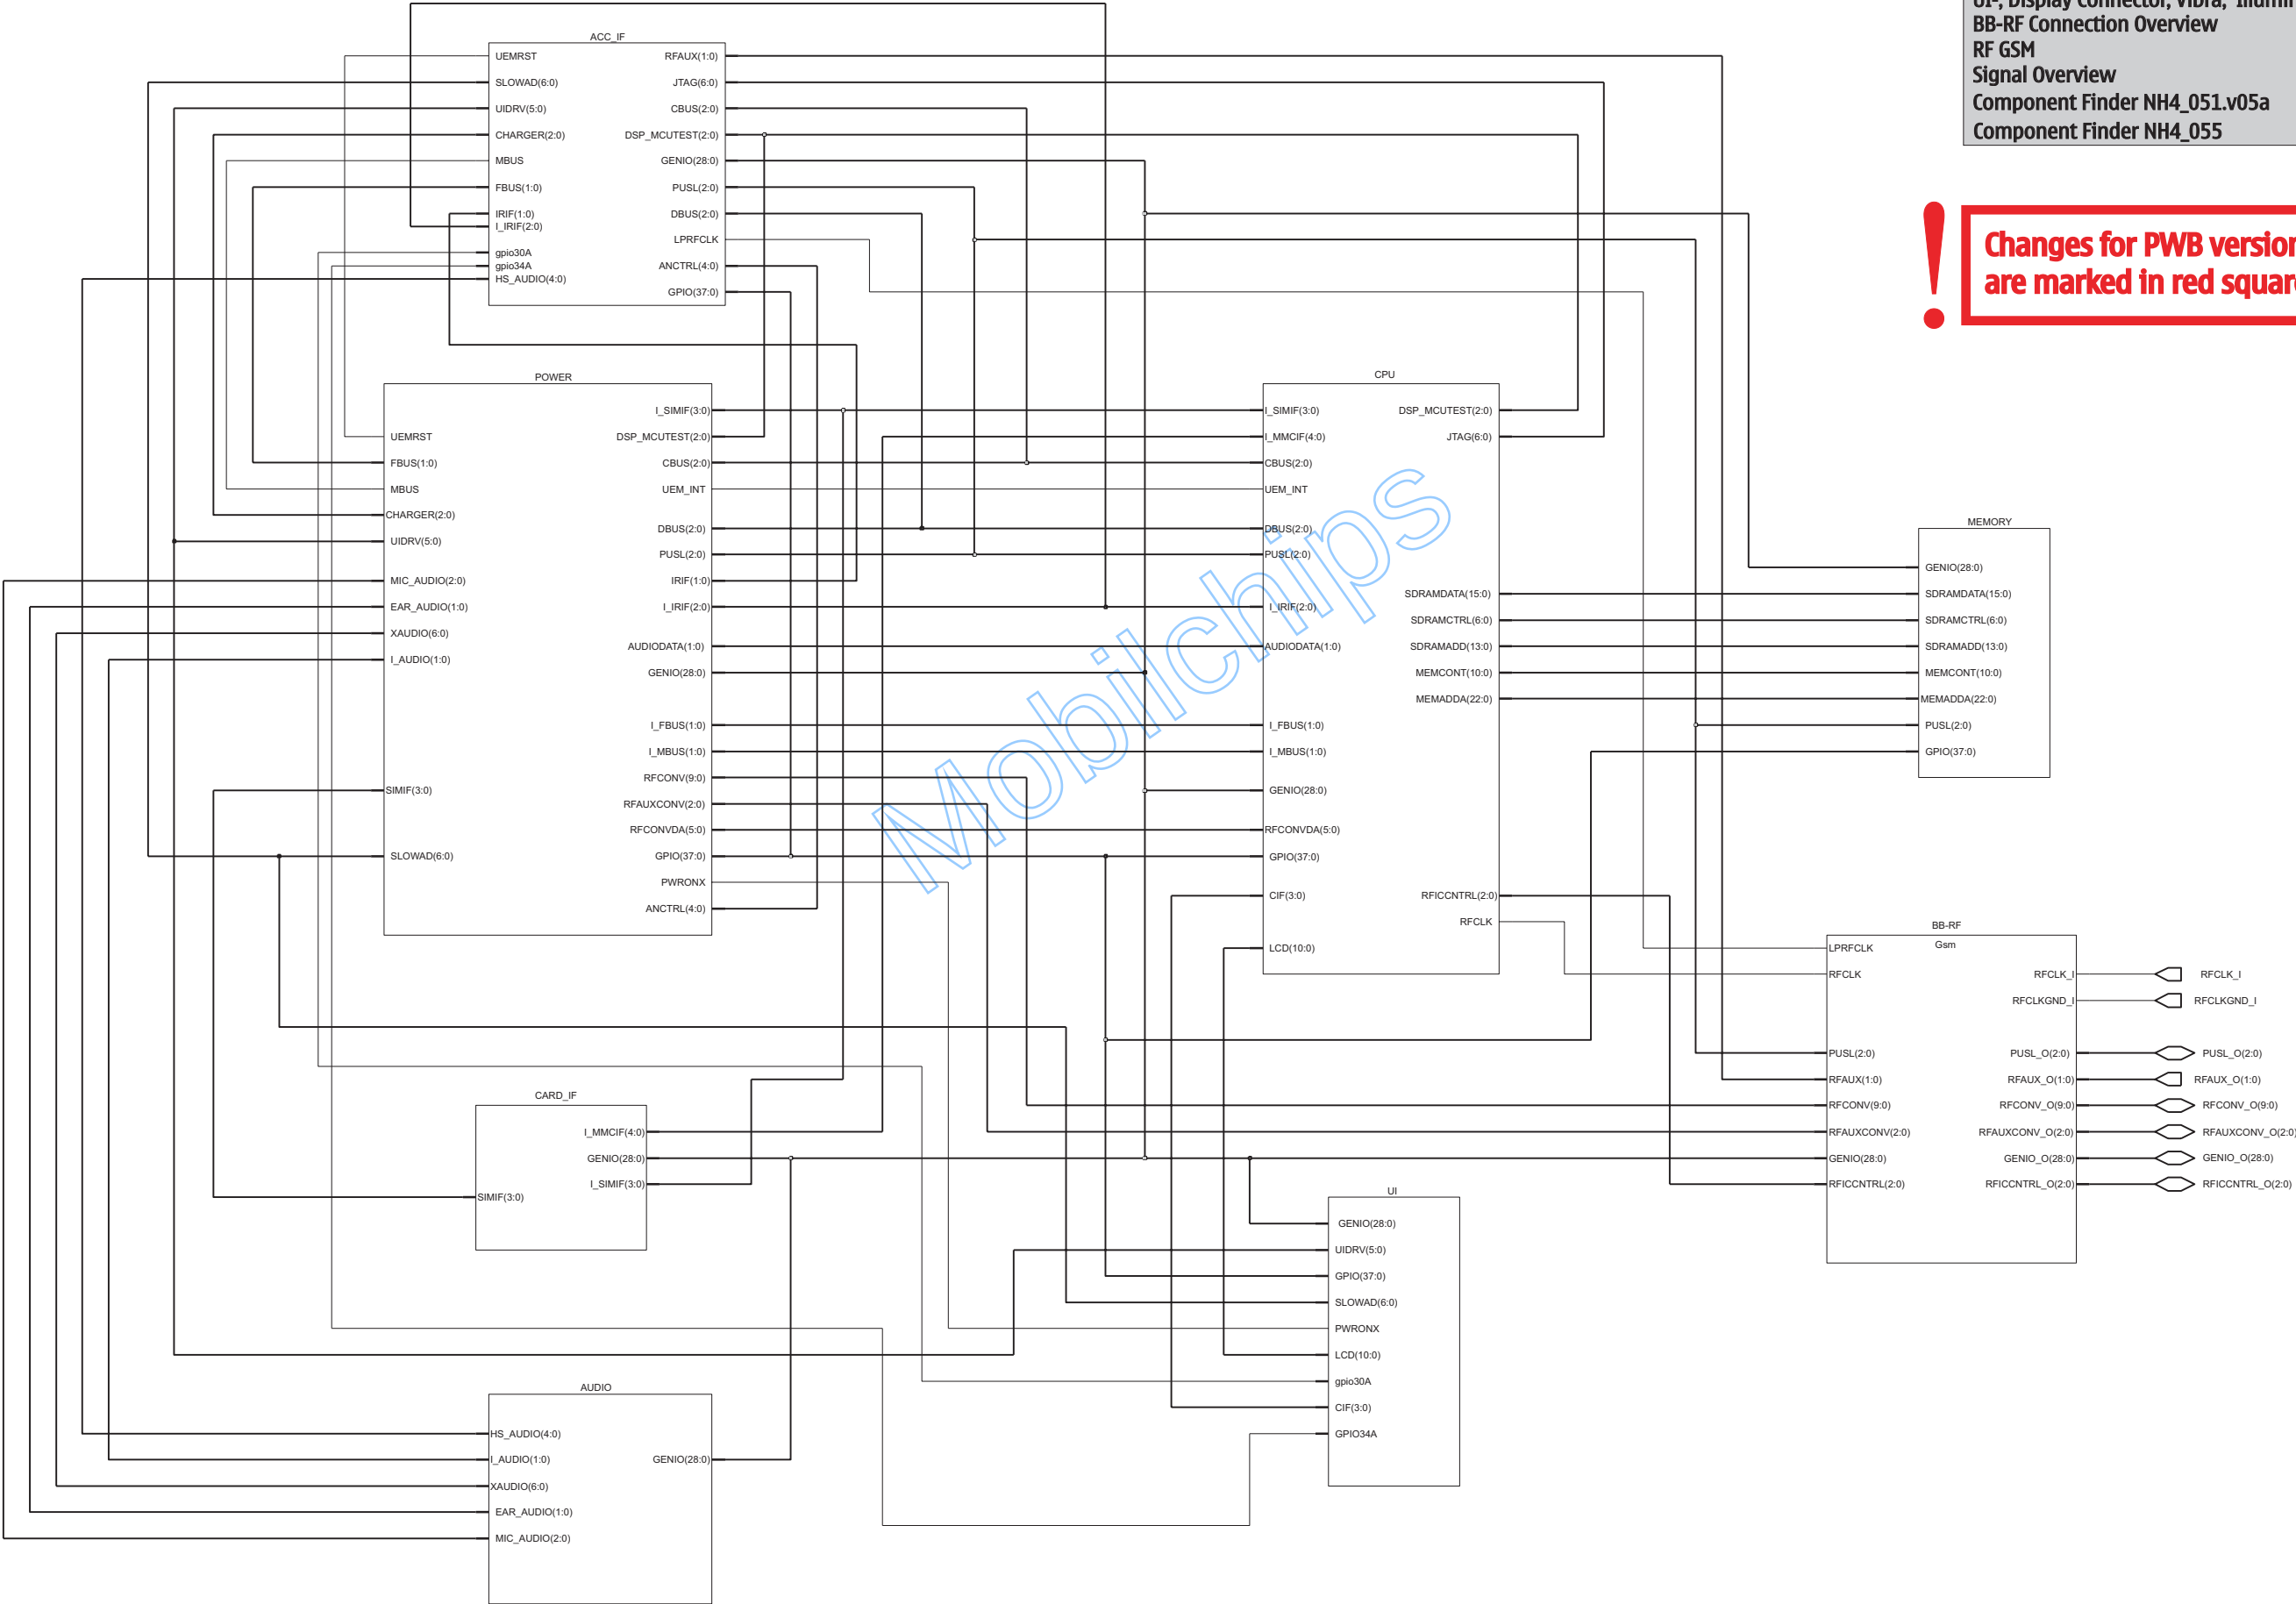


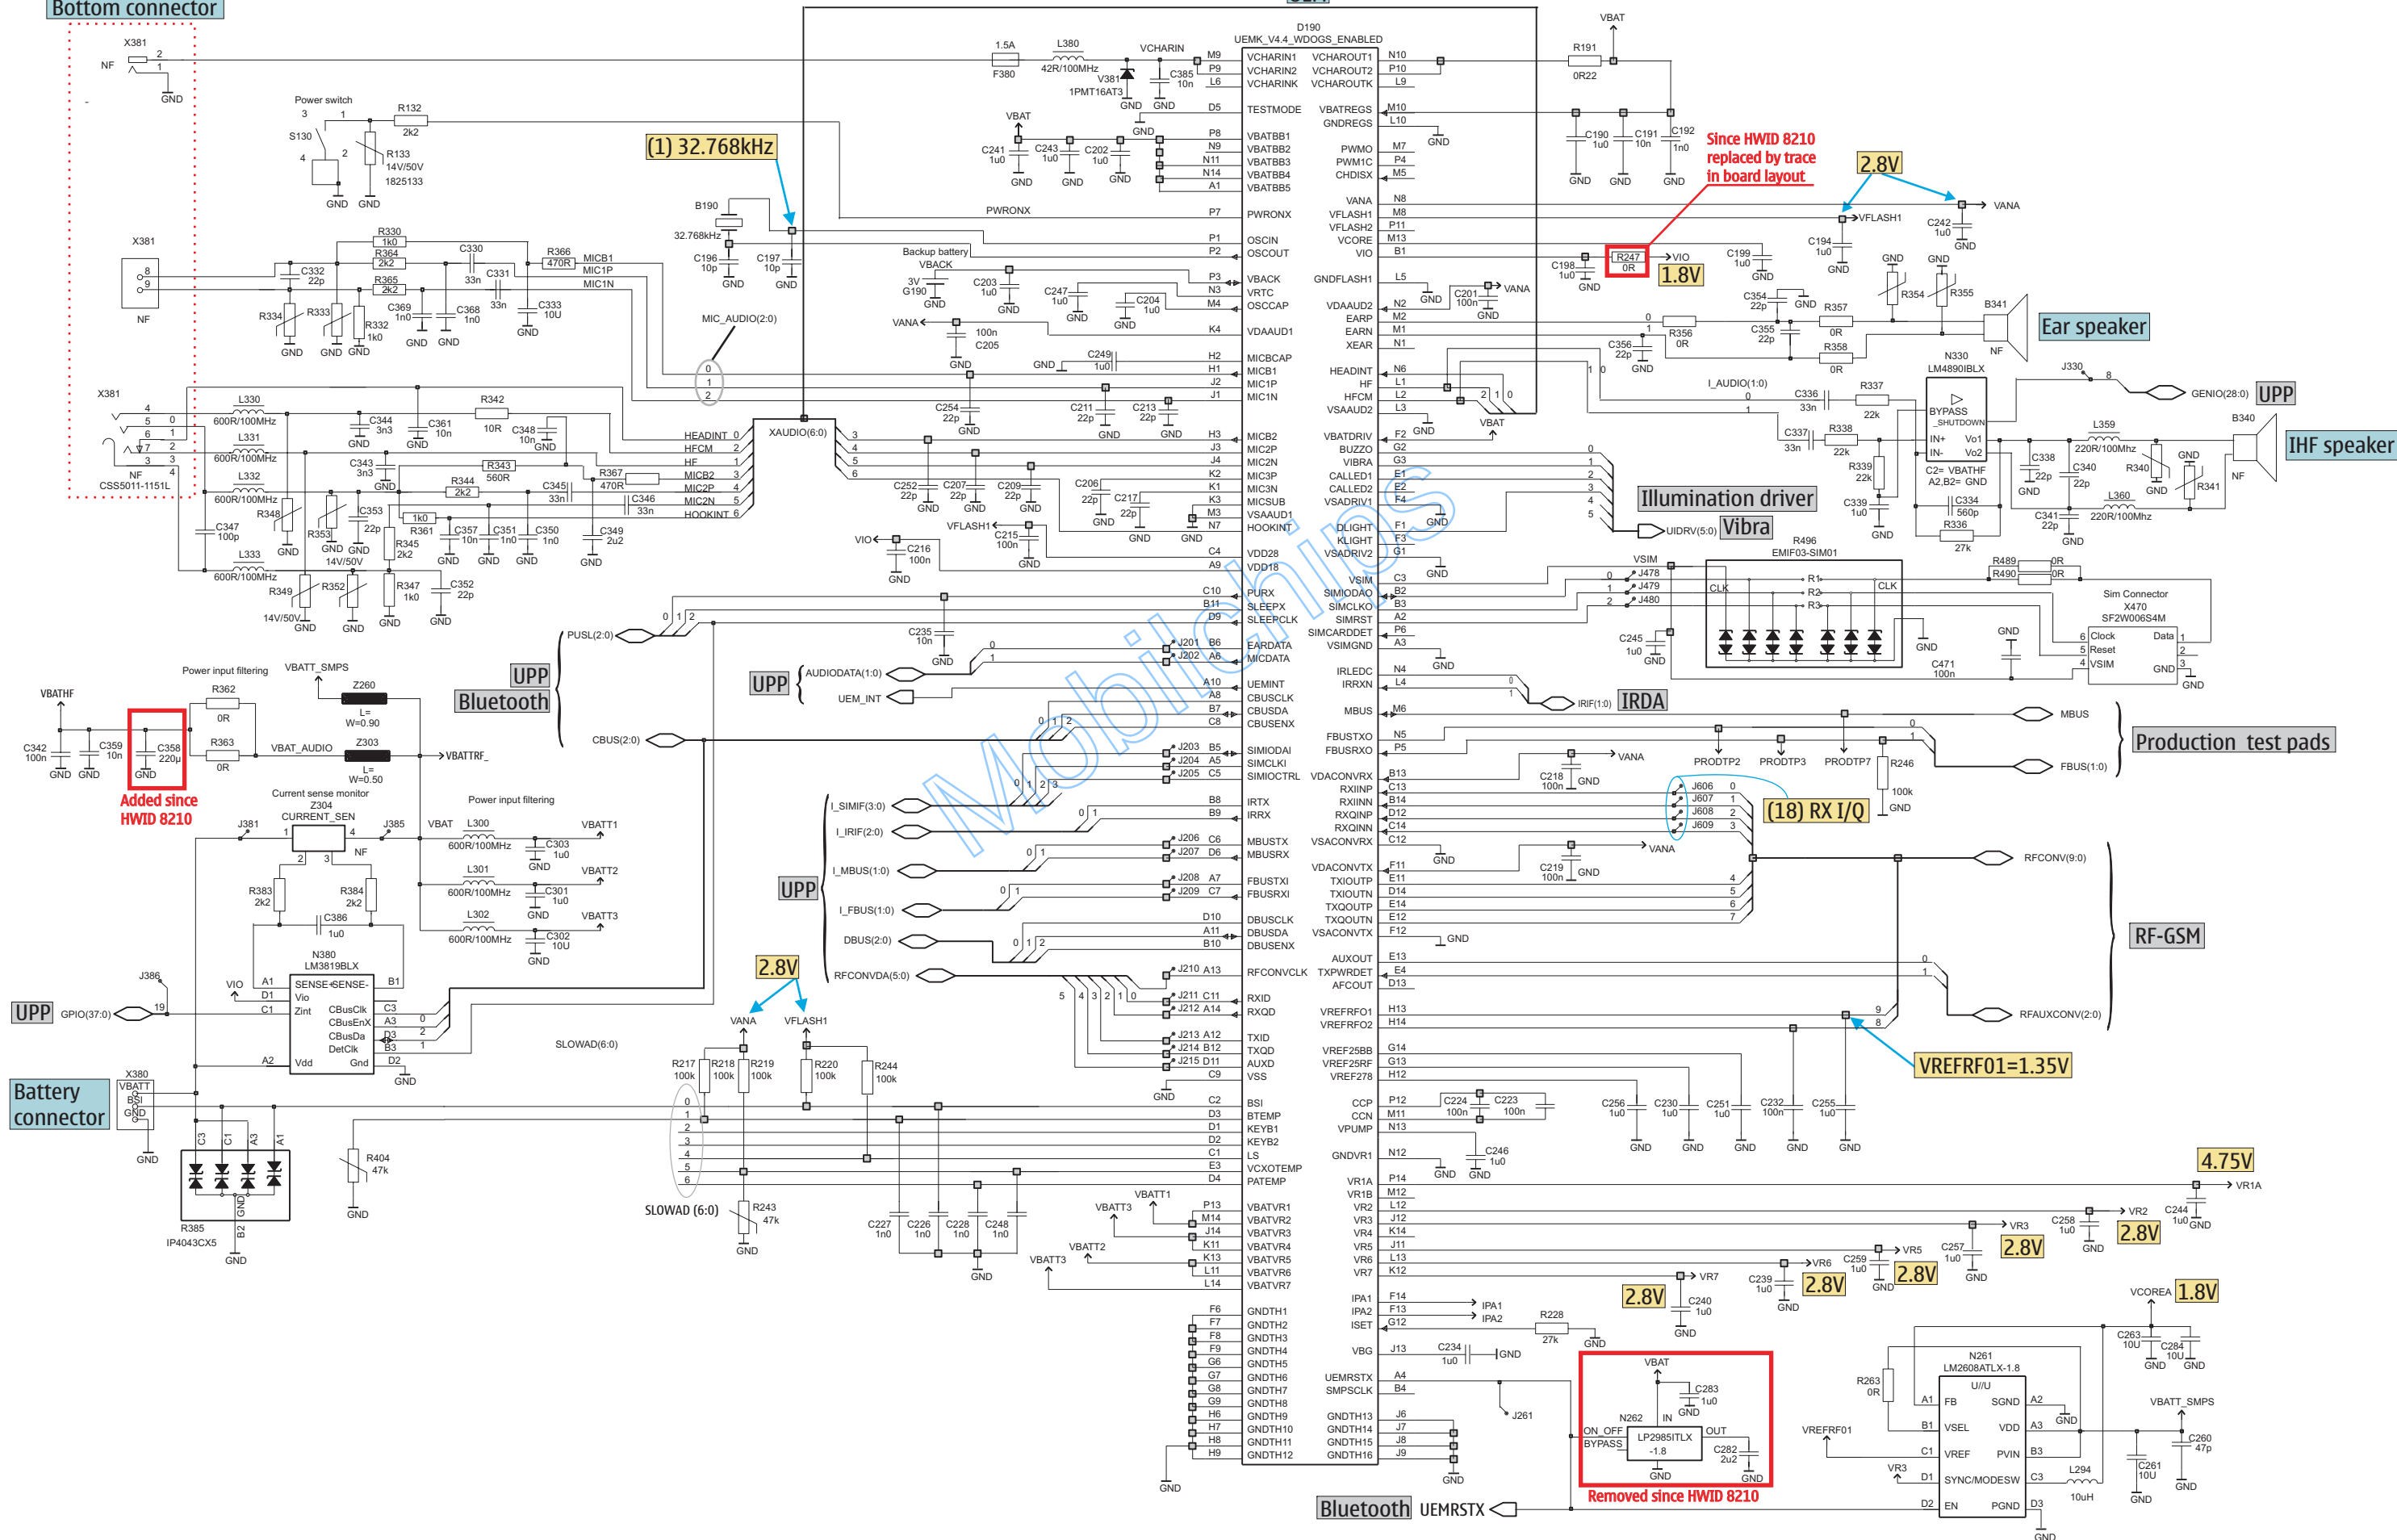


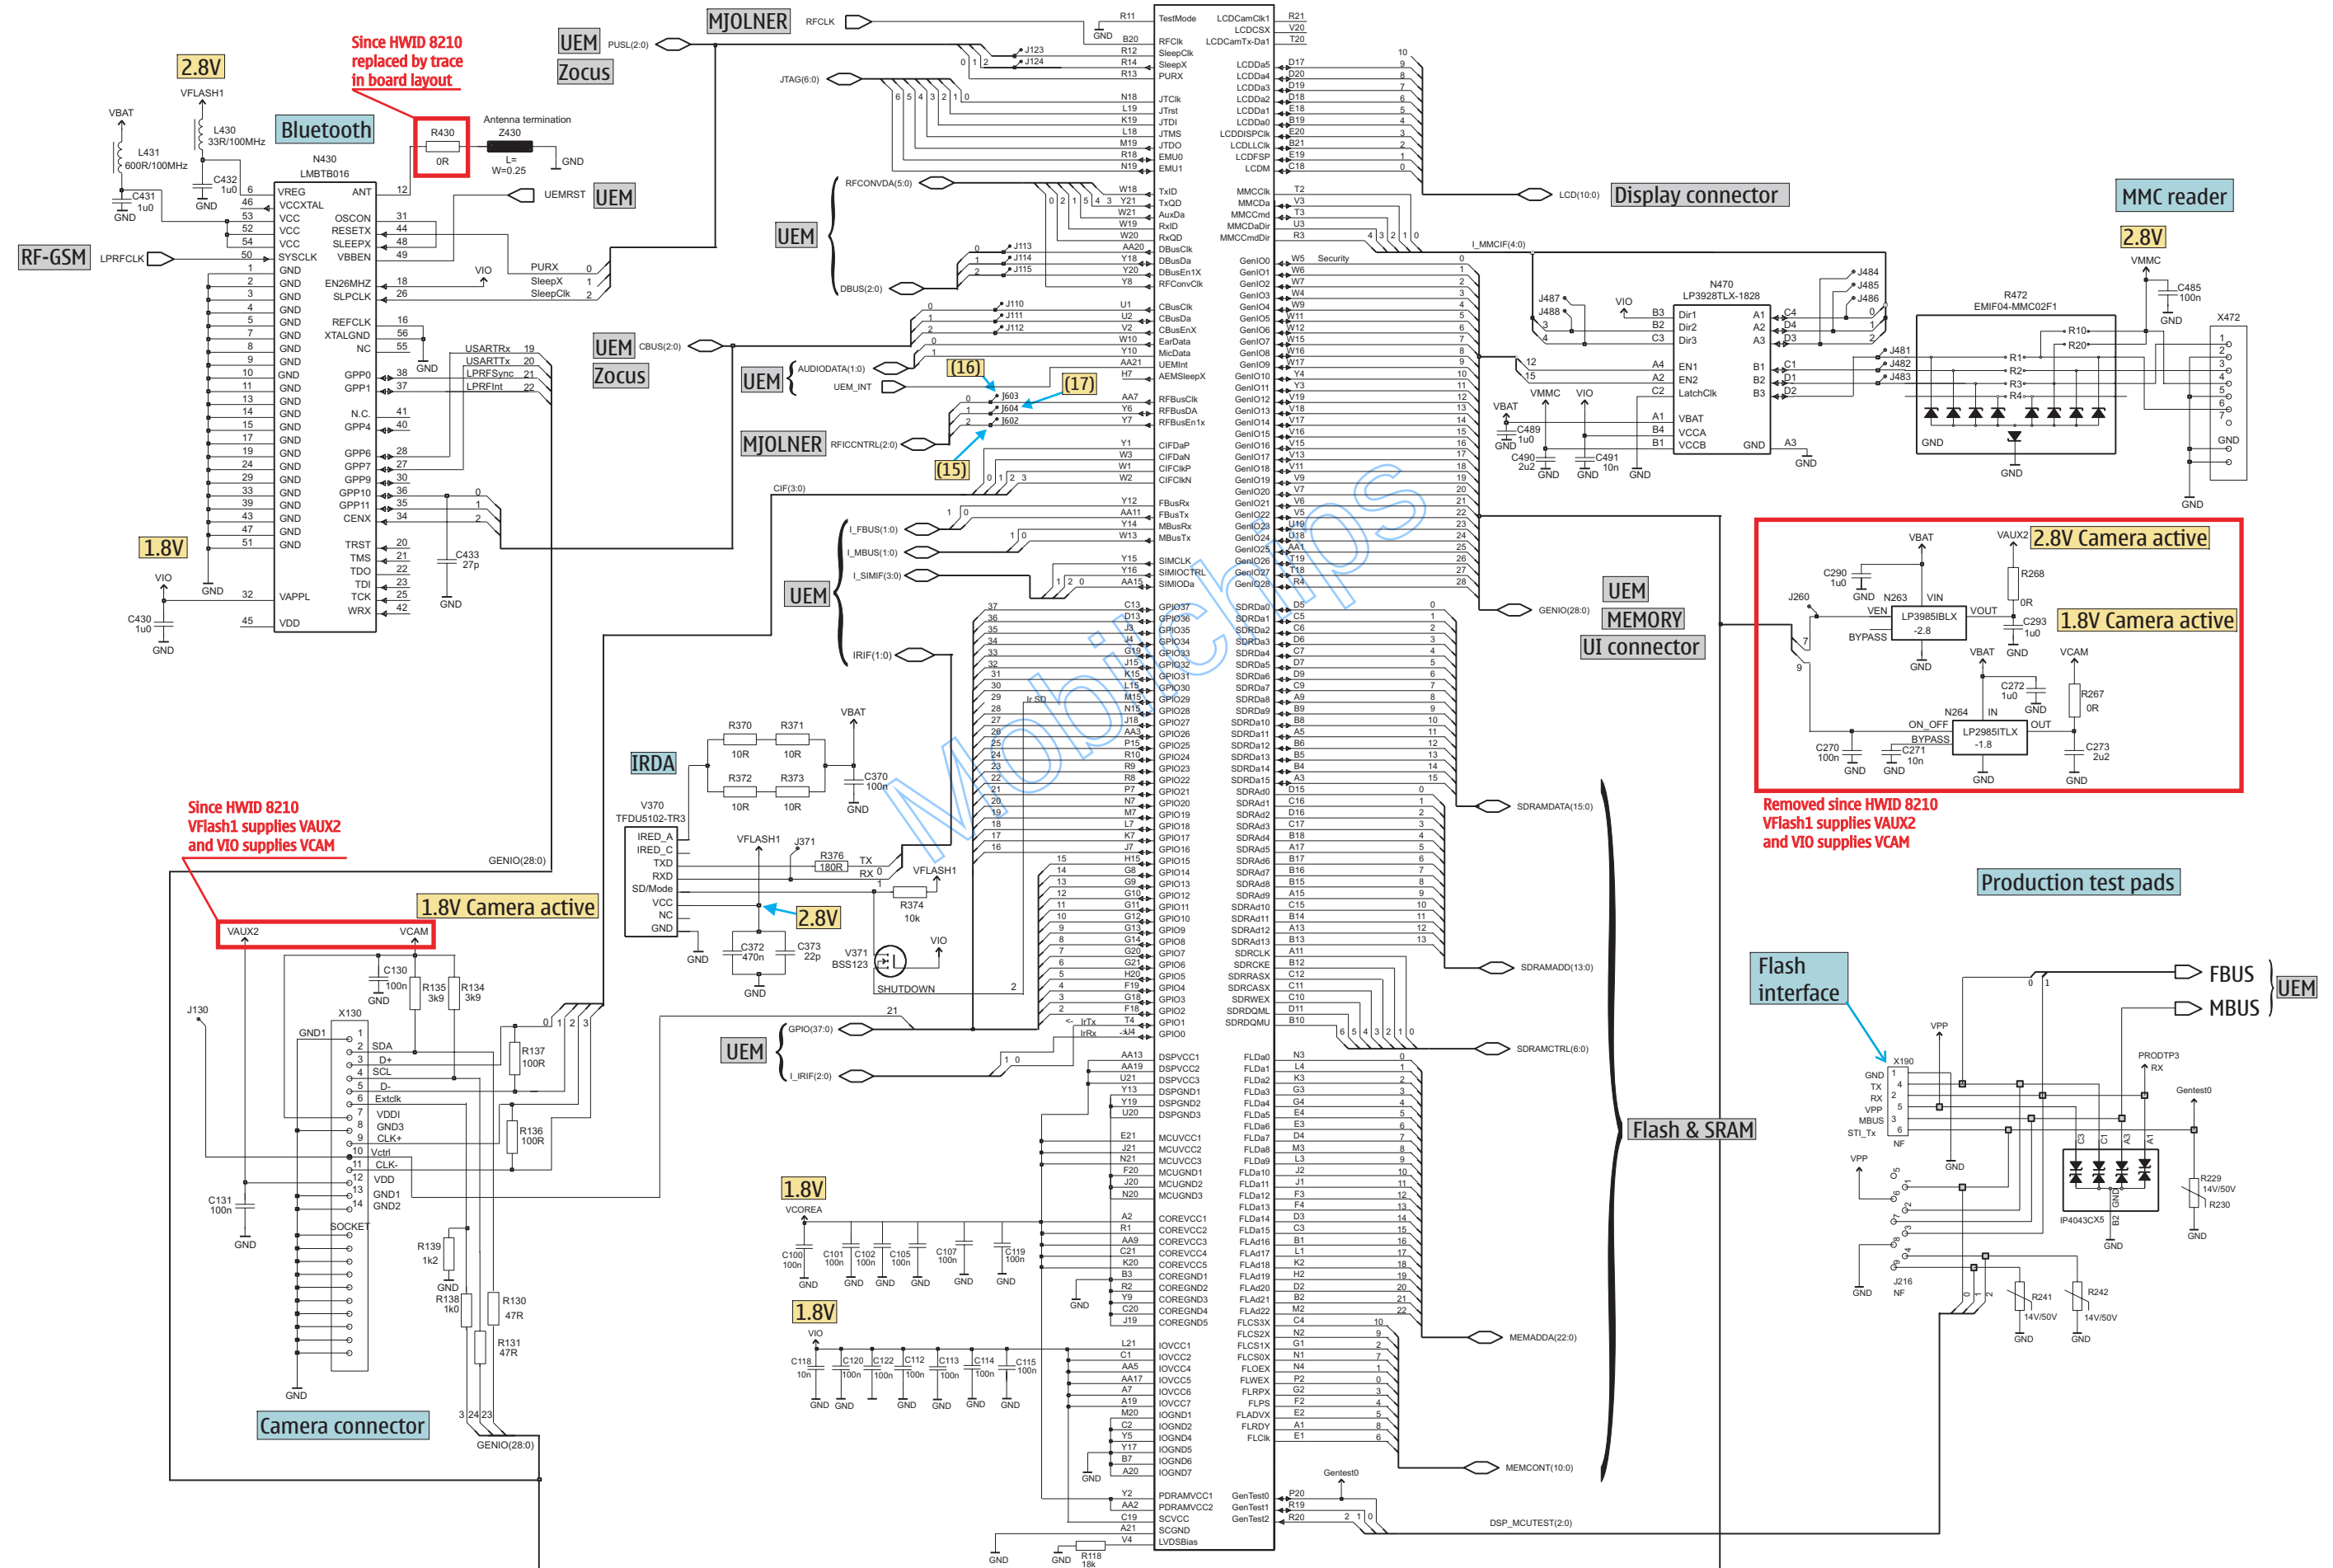

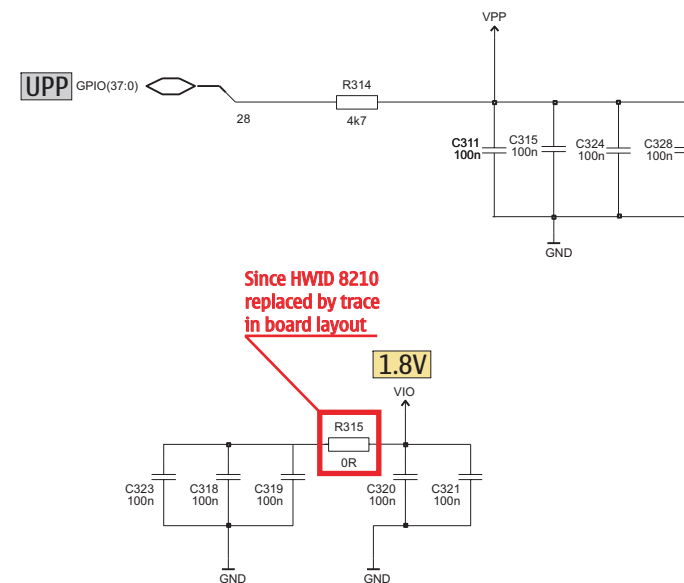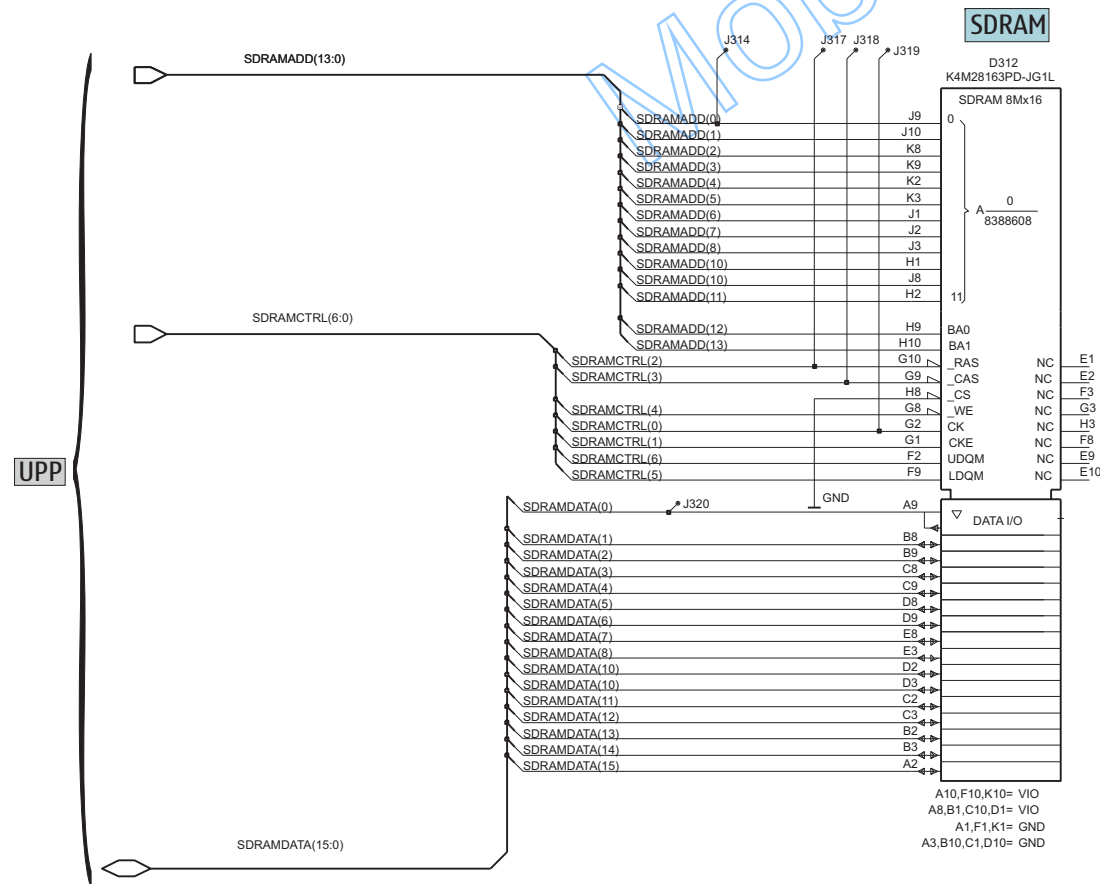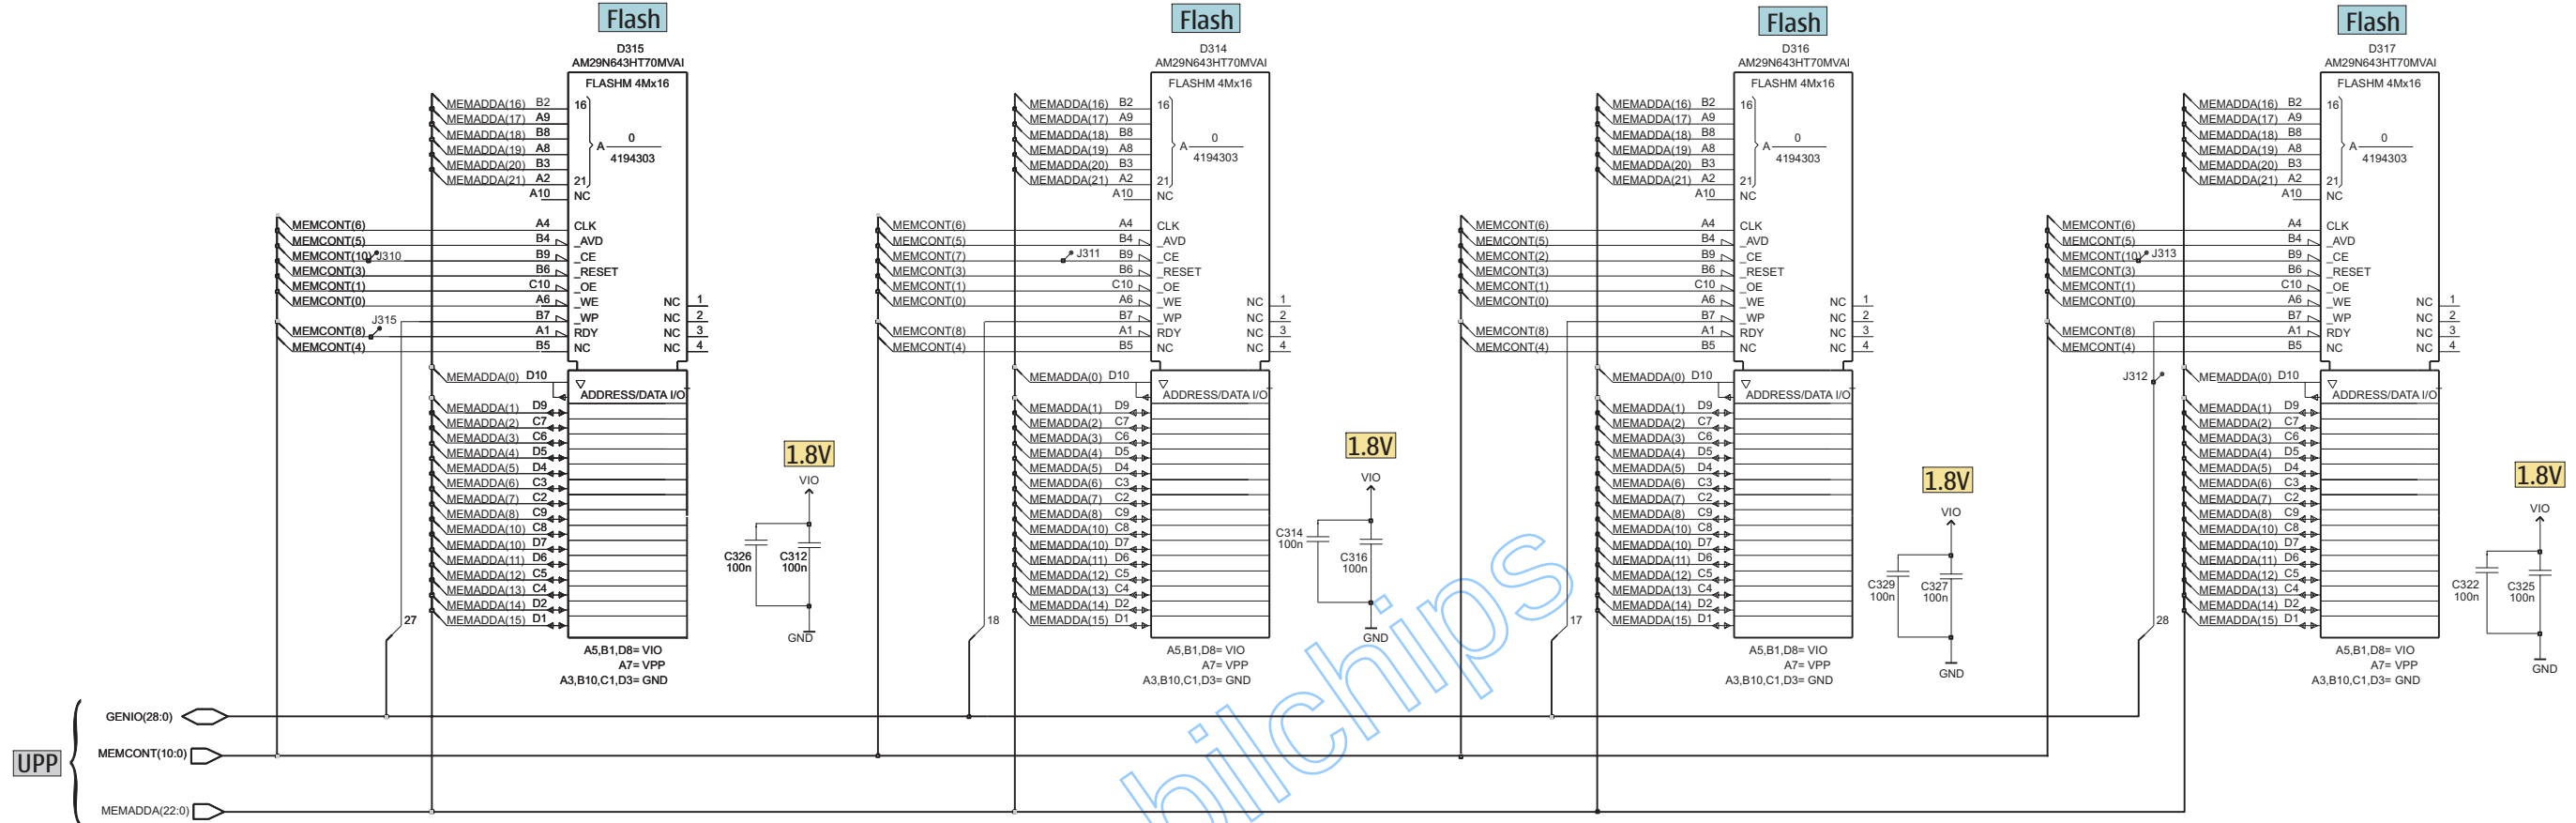


Since HWID 8210 replaced by trace in board layout

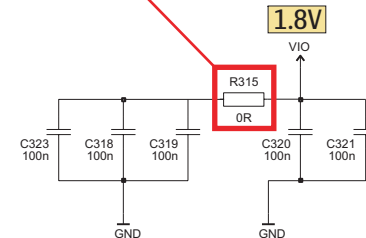

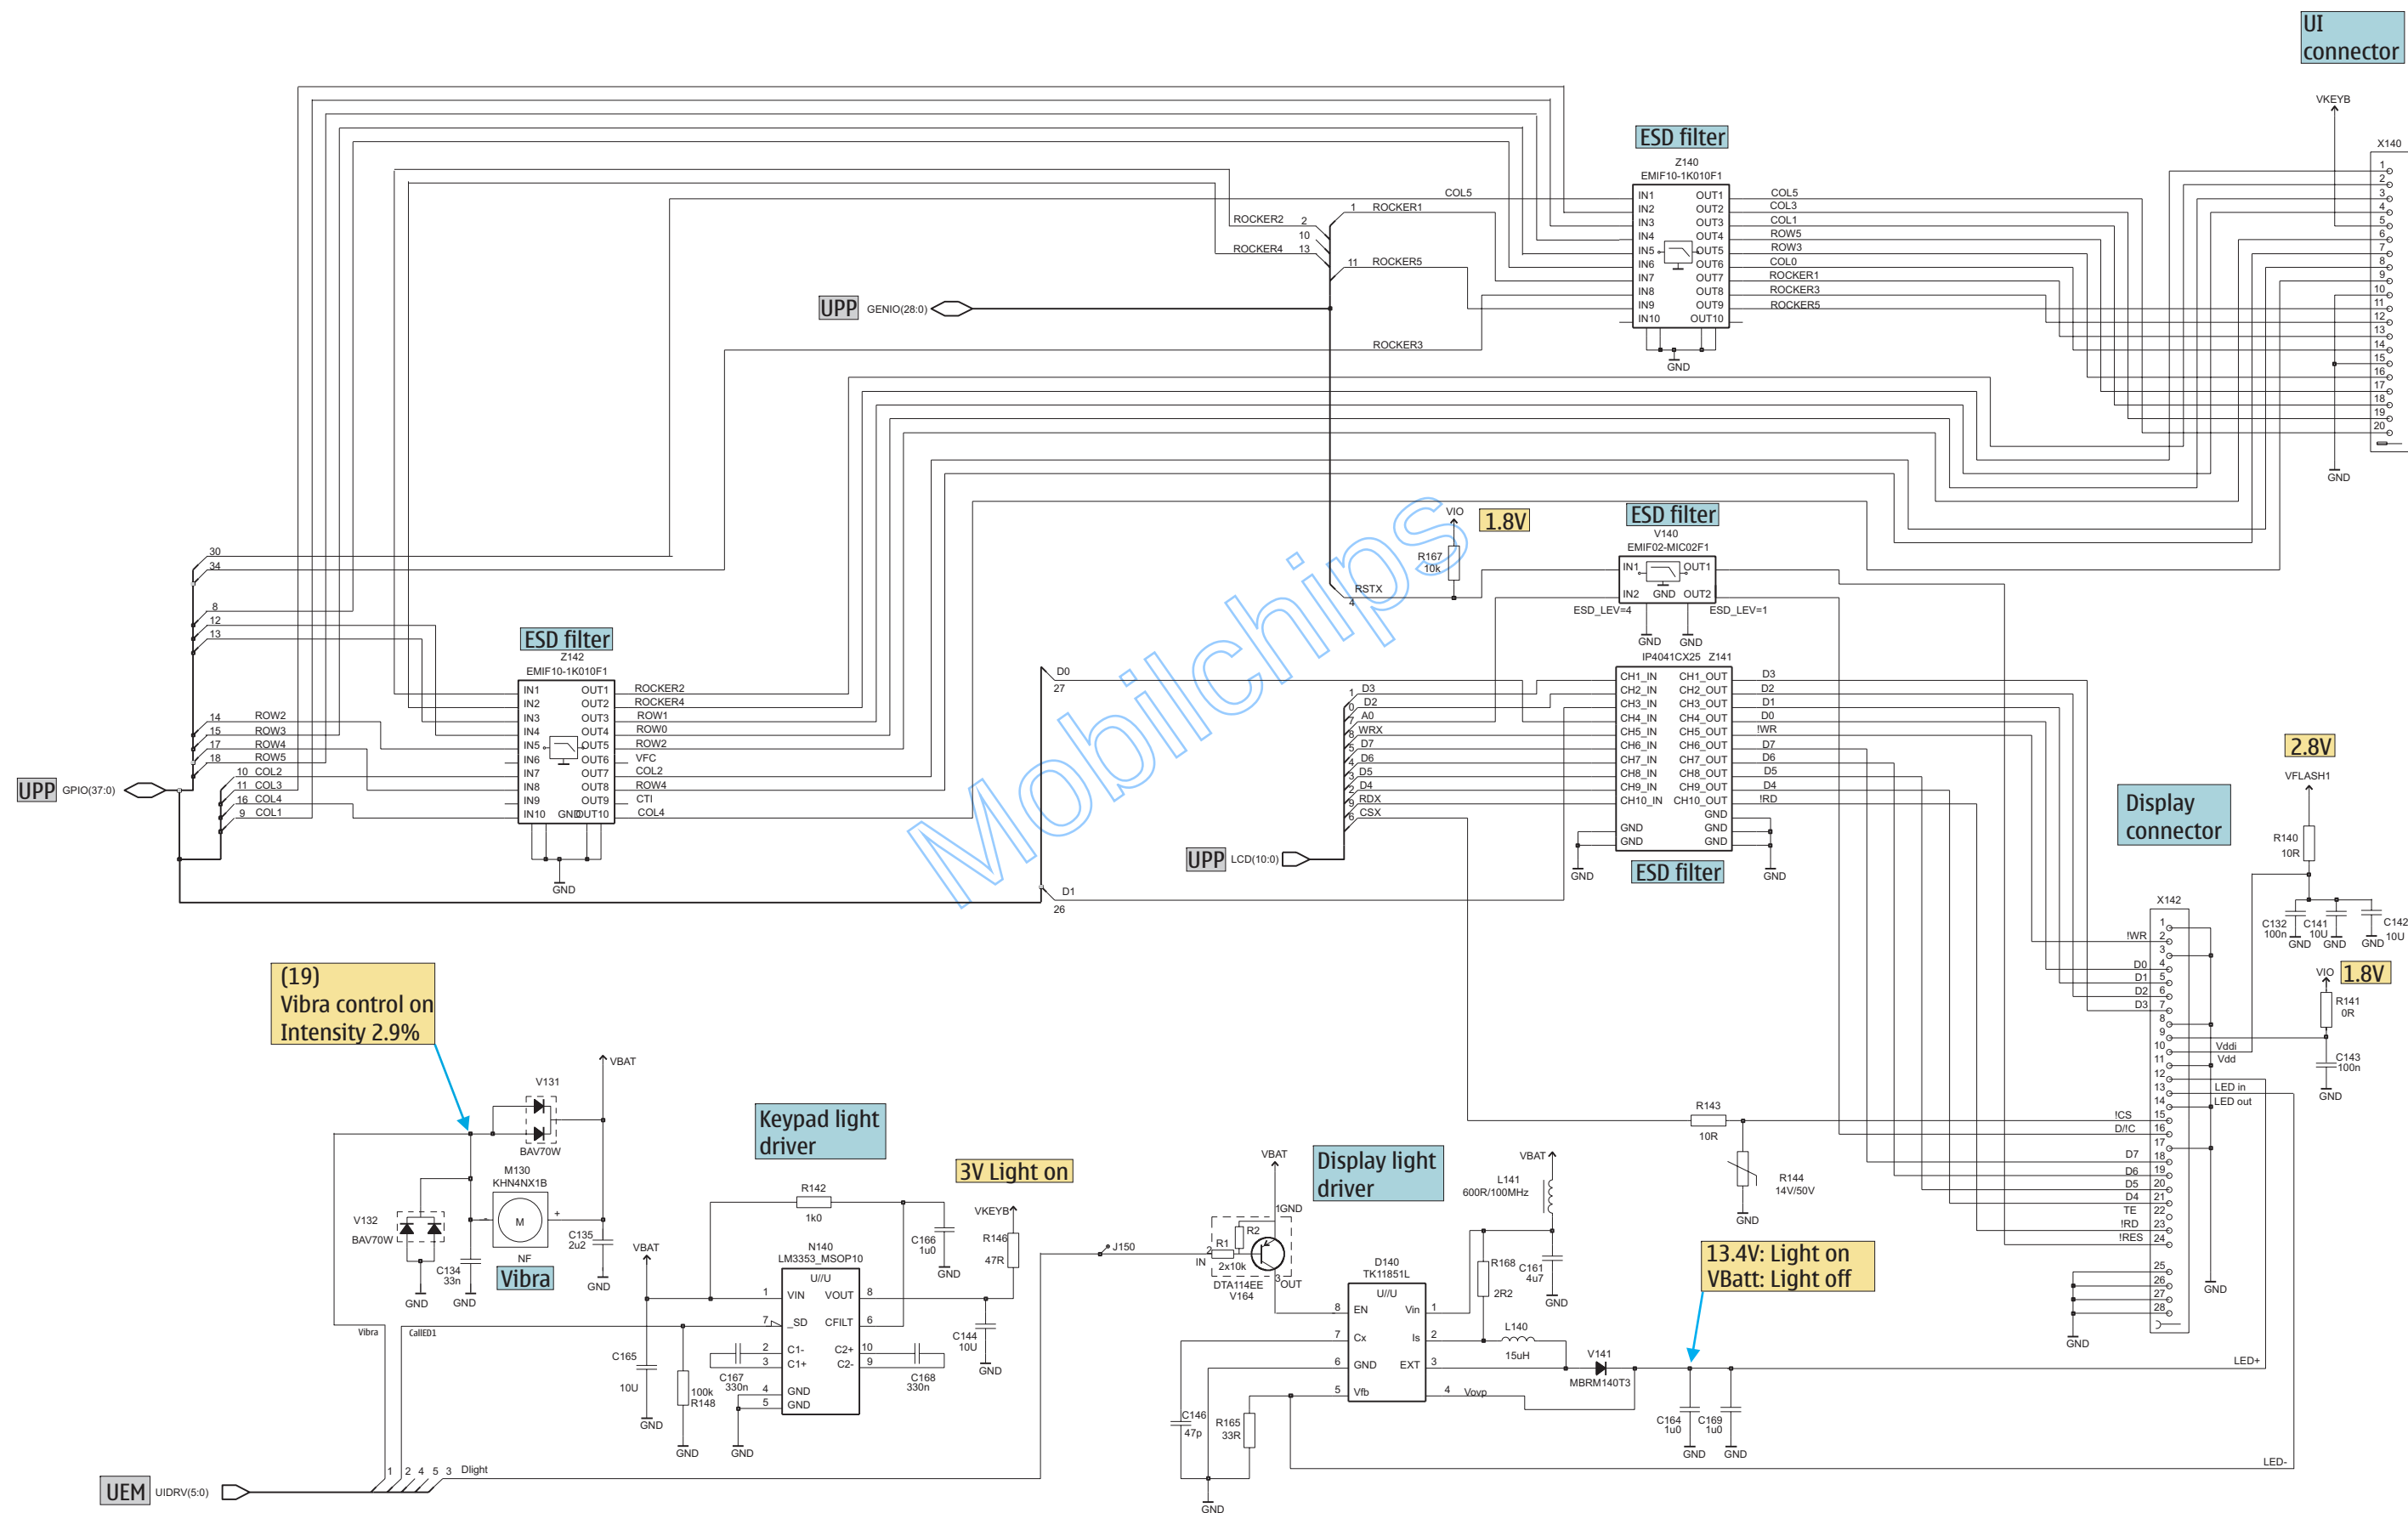

Customer Care Europe, Middle East & Africa	BB - RF Connection Overview	Version 4.0 Approved
Technical Services / SCCE Training Group	NHL-10 (6600)	(PWB) NH4_051.v05a / HWID 8101/8102
© 2004 Nokia Corporation Only for training and service purposes	18.02.2004	

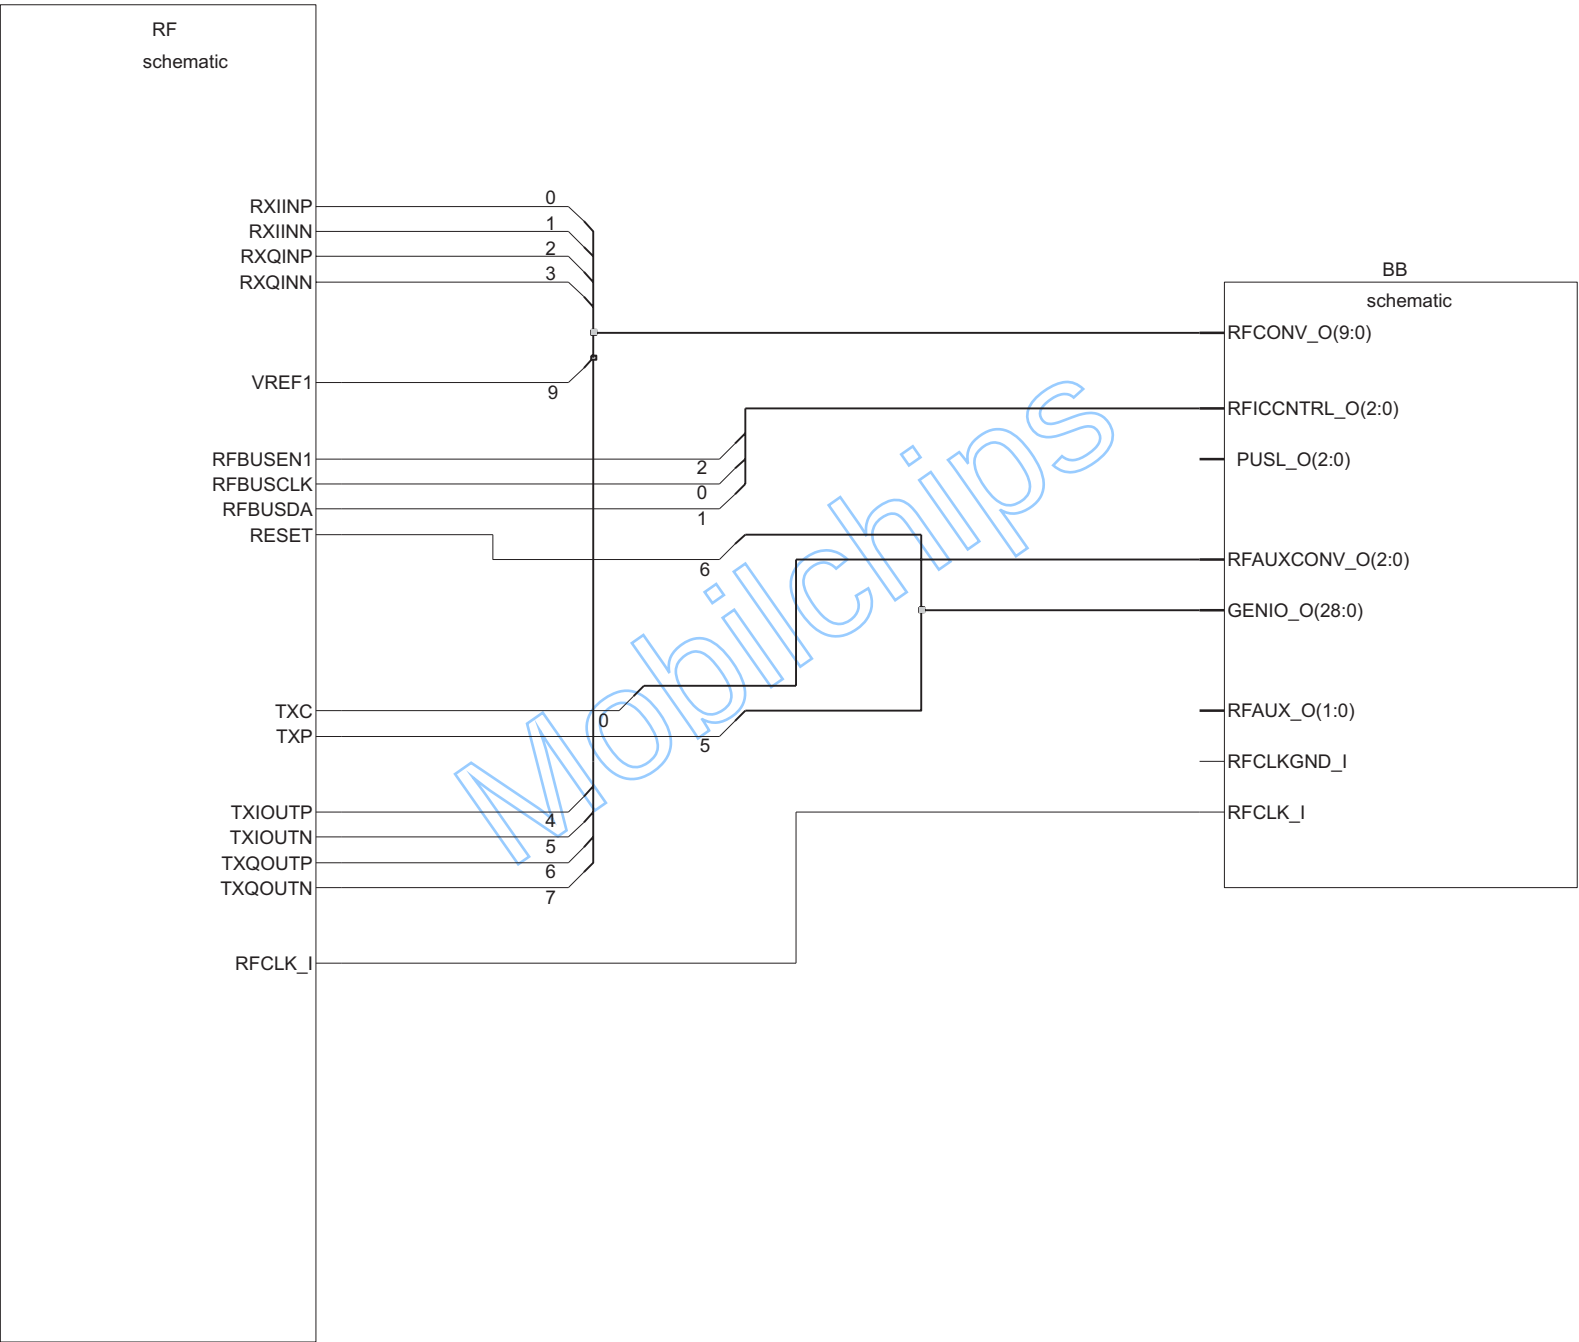

Band	Channel	RX	VCO/RX	VC/RX	TX	VCO/TX	VC/TX
EGSM 900	37	942,4MHz	3769,6MHz	~2,58V	897,4MHz	3589,6MHz	~1,8V
GSM 1800	700	1842,8MHz	3685,6MHz	~2,2V	1747,8MHz	3495,6MHz	~1,4V
GSM 1900	661	1960MHz	3920MHz	~3,2V	1880MHz	3760MHz	~2,54V

